

LED 8" and 12" Traffic Signal Module IL6-P3/P2 Series Incandescent Look Arrow

Leading the LED Industry Since 1992
With over 7,000,000 units installed globally



12 inch




8 inch

Superior Performance and Reliability





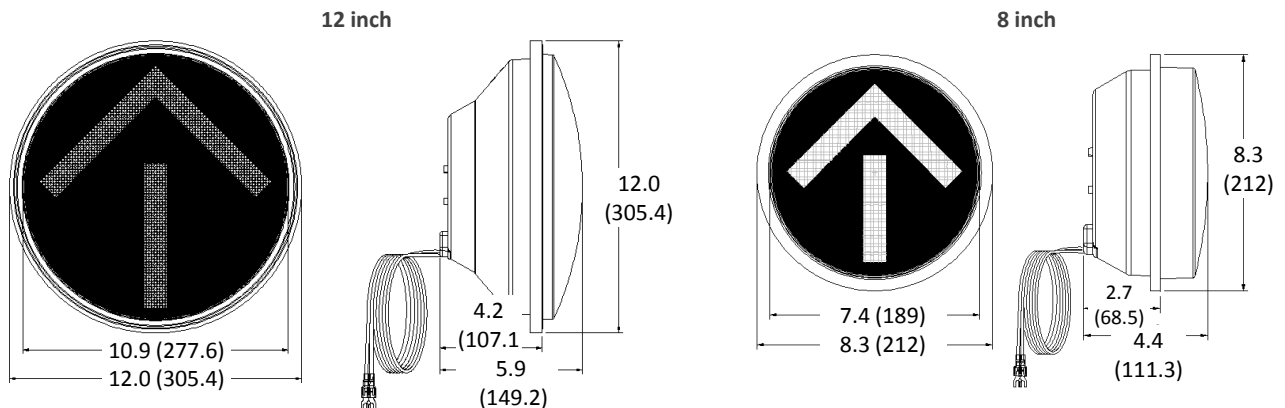







- Intertek ETL verified
- Meets and/or exceeds all ITE standards ITE VTCSH LED Arrow Signal Supplement dated July 1, 2007
- Easy installation into existing signal housings
- Patented innovative optical technology
- Wider viewing angle and enhanced uniformity
- Maintains 70% of the initial lumen intensity after 100,000 hours of operation
- Overmolded electrical connectors provide fully-weatherized seal
- Excellent moisture and dust resistance
- Utilizes constant current source to maintain consistent light output
- Superior thermal management
- Energy efficient and environmentally friendly
- 5-year limited warranty

Mechanical Dimensions [in(mm)]



Model Specifications and Ordering Options

Operating Temperature:	-40°F to 165°F (-40°C to 74°C)	Turn-On/Turn-Off Time:	< 75msec
Operating Voltage:	80 - 135Vac	Turn-Off Voltage:	> 35Vac
Power Factor:	> 0.90	Total Harmonic Distortion (THD):	< 20%

	Model Number and Color	Wattage Drawn	Voltage	Dominant Wavelength	Maintained Intensity (cd) Min.	Standard
IL6-P3	8 inch arrow					
	TSL-08RA-IL6-A1-P3 	5.5	80-135Vac	626	N/A	N/A
	TSL-08YA-IL6-A1-P3 	6	80-135Vac	589	N/A	N/A
	TSL-08GA-IL6-A1-P3 	6	80-135Vac	500	N/A	N/A
	12 inch arrow					
	TSL-12RA-IL6-A1-P3 	5.5	80-135Vac	626	58.4	ITE 2007/ETL
	TSL-12YA-IL6-A1-P3 	7.3	80-135Vac	589	145.6	ITE 2007/ETL
	TSL-12GA-IL6-A1-P3 	6	80-135Vac	500	76.0	ITE 2007/ETL
IL6-P2	8 inch arrow					
	TSL-08RA-IL6-A1 	6	80-135Vac	626	N/A	N/A
	TSL-08YA-IL6-A1 	6.8	80-135Vac	589	N/A	N/A
	TSL-08GA-IL6-A1 	6	80-135Vac	500	N/A	N/A
	12 inch arrow					
	TSL-12RA-IL6-A1 	7	80-135Vac	626	58.4	ITE 2007/ETL
	TSL-12YA-IL6-A1 	12.5	80-135Vac	589	145.6	ITE 2007/ETL
	TSL-12GA-IL6-A1 	7	80-135Vac	500	76.0	ITE 2007/ETL

Please note: Tinted lens standard, clear lens optional. When ordering clear lens, please add “-CLR” to model number. Both tinted and clear lens are Intertek ETL Verified, for the 12” signal only.

Standard Conformance

- FCC Compliant for Electrical Noise
- MIL-STD-810F Moisture Resistant
- MIL-STD-883 Mechanical Vibration
- NEMA TS2 Transient Voltage Protection over 2000V

ITE VTCSH Compliance - LED Circular Signal Supplement – July 1, 2007

- Conditioning ITE 6.4.2 • Luminous Intensity ITE 6.4.4.1-4
- Mechanical Vibration ITE 6.4.3.1 • Chromaticity ITE 6.4.4.6
- Temperature Cycling ITE 6.4.3.2 • Current Consumption ITE 6.4.6.1

