

GT1™ LED Pedestrian Signals

12 inch - Full Hand, Full Person,
Overlay, Countdown



Excellent Appearance & Visibility

- Robust LED system design enables high luminous intensity over long product life
- Efficient optical system minimizes power consumption while providing excellent uniformity and viewing angles
- Single piece transparent front window with internal masking to prevent:
 - icons display from being readily visible when not in operation
 - scratches and abrasions compared with external silk screen technology
- Bright and clear icons
- New or retrofit use
- Fully uniform look

Outstanding Reliability & Robust Operation

- Individual power supply drives each display to ensure proper indication



Meets Rigorous Certification & Testing Standards

- Intertek ETL Verified compliant
- DOE compliant
- Using MIL-STD-810F for environmental robustness, passed reliability and qualification testing including high temperature, high humidity cycling (HTHH for 1,000 hours)
- Production quality compliant to GE Six Sigma requirements
- Compliant with the ITE PTCI LED Signal Modules - version dated August 2010



imagination at work




The Greatest Signals Stand the Test of Time.™

GT1™ LED Pedestrian Signals

- 12 inch module

Mechanical Outline

Dimensions in inches. (mm) indicates metric equivalent

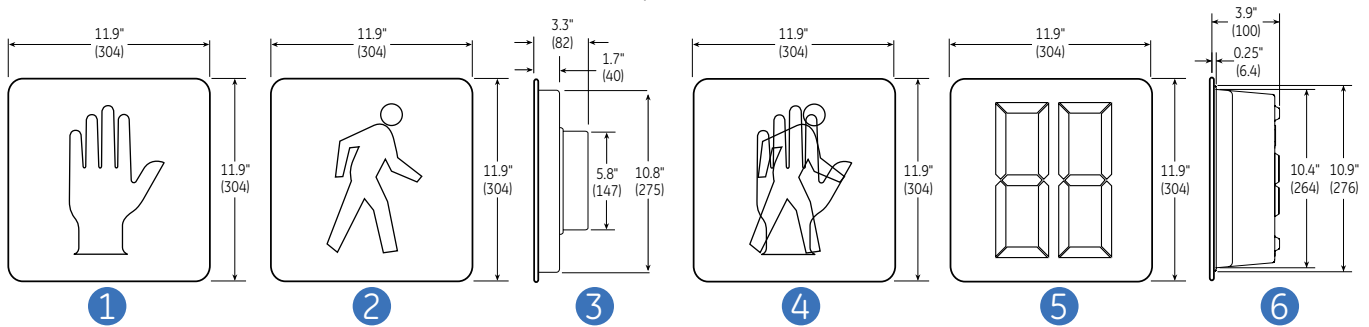

Design Compliance

| Test type | Compliance |
|------------------------------|--|
| Luminous Intensity | ITE PTCSI LED Signal Modules Version dated August 2010 |
| Chromaticity | ITE PTCSI LED Signal Modules Version dated August 2010 |
| Moisture Resistance | Blown Wind Rain MIL-STD-810F Test Method 506.4, Procedure 1 |
| Mechanical Vibration | MIL-STD-883 Method 2007 |
| Electronic Noise | FCC Title 47 Sec 15 Sub. B ¹ |
| Transient Voltage Protection | ITE PTCSI LED Signal Modules Version dated August 2010 |
| Controller Compatibility | Nema TS-2-2003 |
| Wiring | NFPA 70, National Electric Code |
| Digits | MUTCD 2003, Section 4E.07, Countdown Numbers Minimum 9" Height & 7" Width |

Operating Specifications

| Parameter | Rating |
|---------------------------------|--|
| Operating Temperature Range* | -40 to +74°C (-40 to +165°F) |
| Operating Voltage Range | 80 to 135 V (60Hz AC) |
| Power Factor (PF) | > 90 % |
| Total Harmonic Distortion (THD) | < 20 % |
| Voltage Turn-Off (VTO) | 35 V |
| Start-up Time | < 75msec |
| Lens & Shell Material | UV Stabilized Polycarbonate |
| Wiring | 16 AWG, Color Coded with Strain Relief |
| LED Color | Hand: Portland Orange Person: Lunar White |

* Performed in compliance with ITE test method described in the technical notes

Product Information

| Model Number | Dimensions | Symbol | AC Voltage Nominal | Power (W) ¹ | Beam Pattern Degrees | Mechanical Outline |
|------------------------------|---------------|-----------------------------------|-----------------------|------------------------|-------------------------|-----------------------|
| PS6-WFM3-26A | 12 in x 12 in | Full Person | 120V - 60Hz | 5 | 26 | 2 and 3 |
| PS6-PFH1-26A | 12 in x 12 in | Full Hand | 120V - 60Hz | 5 | 26 | 1 and 3 |
| PS6-CFL1-26A | 12 in x 12 in | Full Person / Full Hand / Overlay | 120V - 60Hz | 5 | 26 | 4 and 6 |
| PS6-PFD1-26A | 12 in x 12 in | Countdown | 120V - 60Hz | 5 | 26 | 5 and 6 |
| PS6-PFD1-26A-H3 ² | 12 in x 12 in | Countdown Full/Half Cycle Jumper | 120V - 60Hz | 5 | 26 | 5 and 6 |

Test Condition: T_a = 25°C. All values are design or typical values when measured under laboratory conditions.

¹ Class A

² CSA approved

Distributed by:



GE Lighting Solutions • **1-888-MY-GE-LED** • www.gelightsolutions.com

1 - 8 8 8 - 6 9 - 4 3 - 5 3 3

GE Lighting Solutions, LLC is a subsidiary of the General Electric Company. GT1 and "The Greatest Signals Stand the Test of Time" are trademarks of GE Lighting Solutions, LLC. The GE brand and logo are trademarks of the General Electric Company. © 2013 GE Lighting Solutions, LLC. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.

TRAF012-R050913