


HMSC[®] HIGH MAST CUTOFF SERIES LUMINAIRE

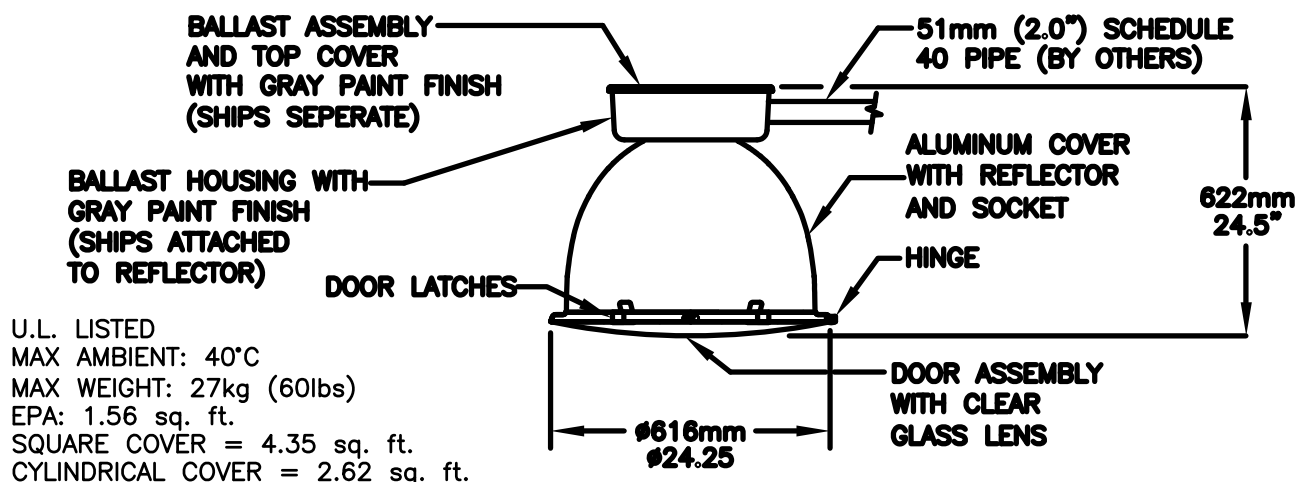

U.L. LISTED
 MAX AMBIENT: 40°C
 MAX WEIGHT: 27kg (60lbs)
 EPA: 1.56 sq. ft.
 SQUARE COVER = 4.35 sq. ft.
 CYLINDRICAL COVER = 2.62 sq. ft.

105°C Supply wire required for ALL 1000W HPS

CATALOG NO. HMSC

HIGH MAST CUTOFF SERIES LUMINAIRE	SOURCE AND WATTAGE	VOLTAGE	DISTRIBUTION	BEAM ANGLE
	400HP=400W HPS	12=120V	A=NARROW ASYMMETRIC	7=LOW
	40RHP=400W HPS	20=208V	BEAM ANGLES 7 & 9 ONLY	8=MEDIUM
	MAG. REG.	24=240V	B=WIDE ASYMMETRIC	9=HIGH
	750HP=750W HPS	27=277V	BEAM ANGLES 7 & 9 ONLY	
	(NOT CSA LISTED)	34=347V	C=SYMMETRIC	
	C10HP=1000W HPS	48=480V		
	400MH=400W MH **	MT=MULTIVOLT		
(E) 400PM=400W PM		120, 208, 240 &		
C10MH=1000W MH		277, NOT AVAILABLE WITH 750HP		

OPTIONS: (ADD TO CATALOG NUMBER)

FD1=SINGLE FUSIBLE DISCONNECT FOR 120V, 240V,
 277V AND 347V (NOT AVAILABLE WITH 750HPS 347V)
 FD2=DOUBLE FUSIBLE DISCONNECT FOR 208V, 240V
 AND 480V
 R=PHOTOCONTROL RECEPTACLE
 PS=PROTECTED STARTER FOR 400HP, 40RHP AND
 C10HP UNITS ONLY

ACCESSORIES: (SHIPS SEPARATE)

LAMP
 J=ROUND DECORATIVE COVER BLACK
 L=ROUND DECORATIVE COVER BRONZE
 M=SQUARE DECORATIVE COVER BLACK
 N=SQUARE DECORATIVE COVER BRONZE
 F1=SINGLE FUSING FOR 120V, 240V, 277V & 347V
 F2=DOUBLE FUSING FOR 208V, 240V & 480V

**** NOT AVAILABLE FOR SHIPMENT IN US TO
 DUE TO EISA 2007 LEGISLATION**



ORDER NO: _____
 TYPE: _____

DRAWING NO. MA-4653
 CAD MODEL: HMSC.DWG
 DATE: 11-03-09
 Sheet 1 of 1