

HIGHWAY WORK PROPOSALWisconsin Department of Transportation
DT1502 10/2010 s.66.29(7) Wis. Stats.

Proposal Number:

16

<u>COUNTY</u>	<u>STATE PROJECT ID</u>	<u>FEDERAL PROJECT ID</u>	<u>PROJECT DESCRIPTION</u>	<u>HIGHWAY</u>
St. Croix	1021-01-70	WISC 2016 351	Baldwin - Menomonie STH 128 Bridge B-55-0266	IH 94

This proposal, submitted by the undersigned bidder to the Wisconsin Department of Transportation, is in accordance with the advertised request for proposals. The bidder is to furnish and deliver all materials, and to perform all work for the improvement of the designated project in the time specified, in accordance with the appended Proposal Requirements and Conditions.

Proposal Guaranty Required, \$ 100,000.00
Payable to: Wisconsin Department of Transportation

Attach Proposal Guaranty on back of this PAGE.

Bid Submittal Due
Date: November 8, 2016
Time (Local Time): 9:00 AM

Firm Name, Address, City, State, Zip Code

SAMPLE
NOT FOR BIDDING PURPOSES

Contract Completion Time
Two-hundred and twenty-five (225) Calendar Days

Assigned Disadvantaged Business Enterprise Goal

8%

This contract is exempt from federal oversight.

This certifies that the undersigned bidder, duly sworn, is an authorized representative of the firm named above; that the bidder has examined and carefully prepared the bid from the plans, Highway Work Proposal, and all addenda, and has checked the same in detail before submitting this proposal or bid; and that the bidder or agents, officer, or employees have not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of free competitive bidding in connection with this proposal bid.

Do not sign, notarize, or submit this Highway Work Proposal when submitting an electronic bid on the Internet.

Subscribed and sworn to before me this date _____

(Signature, Notary Public, State of Wisconsin)

(Bidder Signature)

(Print or Type Name, Notary Public, State Wisconsin)

(Print or Type Bidder Name)

(Date Commission Expires)

(Bidder Title)

Notary Seal

For Department Use Only

Type of Work

Removing the old Structure B-55-0021, reconstructing new Structure B-55-0266, excavation common, borrow, base aggregate dense, HMA pavement, steel plate beam guard, storm sewer, culvert pipe, concrete sidewalk, concrete curb and gutter, erosion control, traffic control, pavement marking and permanent signing.

Notice of Award Dated

Date Guaranty Returned

**PLEASE ATTACH
PROPOSAL GUARANTY HERE**

Effective with November 2007 Letting

PROPOSAL REQUIREMENTS AND CONDITIONS

The bidder, signing and submitting this proposal, agrees and declares as a condition thereof, to be bound by the following conditions and requirements.

If the bidder has a corporate relationship with the proposal design engineering company, the bidder declares that it did not obtain any facts, data, or other information related to this proposal from the design engineering company that was not available to all bidders.

The bidder declares that they have carefully examined the site of, and the proposal, plans, specifications and contract forms for the work contemplated, and it is assumed that the bidder has investigated and is satisfied as to the conditions to be encountered, as to the character, quality, and quantities of work to be performed and materials to be furnished, and as to the requirements of the specifications, special provisions and contract. It is mutually agreed that submission of a proposal shall be considered conclusive evidence that the bidder has made such examination.

The bidder submits herewith a proposal guaranty in proper form and amount payable to the party as designated in the advertisement inviting proposals, to be retained by and become the property of the owner of the work in the event the undersigned shall fail to execute the contract and contract bond and return the same to the office of the engineer within fourteen (14) days after having been notified in writing to do so; otherwise to be returned.

The bidder declares that they understand that the estimate of quantities in the attached schedule is approximate only and that the attached quantities may be greater or less in accordance with the specifications.

The bidder agrees to perform the said work, for and in consideration of the payment of the amount becoming due on account of work performed, according to the unit prices bid in the following schedule, and to accept such amounts in full payment of said work.

The bidder declares that all of the said work will be performed at their own proper cost and expense, that they will furnish all necessary materials, labor, tools, machinery, apparatus, and other means of construction in the manner provided in the applicable specifications and the approved plans for the work together with all standard and special designs that may be designed on such plans, and the special provisions in the contract of which this proposal will become a part, if and when accepted. The bidder further agrees that the applicable specifications and all plans and working drawings are made a part hereof, as fully and completely as if attached hereto.

The bidder, if awarded the contract, agrees to begin the work not later than ten (10) days after the date of written notification from the engineer to do so, unless otherwise stipulated in the special provisions.

The bidder declares that if they are awarded the contract, they will execute the contract agreement and begin and complete the work within the time named herein, and they will file a good and sufficient surety bond for the amount of the contract for performance and also for the full amount of the contract for payment.

The bidder, if awarded the contract, shall pay all claims as required by Section 779.14, Statutes of Wisconsin, and shall be subject to and discharge all liabilities for injuries pursuant to Chapter 102 of the Statutes of Wisconsin, and all acts amendatory thereto. They shall further be responsible for any damages to property or injury to persons occurring through their own negligence or that of their employees or agents, incident to the performance of work under this contract, pursuant to the Standard Specifications for Road and Bridge Construction applicable to this contract.

In connection with the performance of work under this contract, the contractor agrees to comply with all applicable state and federal statutes relating to non-discrimination in employment. No otherwise qualified person shall be excluded from employment or otherwise be subject to discrimination in employment in any manner on the basis of age, race, religion, color, gender, national origin or ancestry, disability, arrest or conviction record (in keeping with s.111.32), sexual orientation, marital status, membership in the military reserve, honesty testing, genetic testing, and outside use of lawful products. This provision shall include, but not be limited to the following: employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation, and selection for training, including apprenticeship. The contractor further agrees to ensure equal opportunity in employment to all applicants and employees and to take affirmative action to attain a representative workforce.

The contractor agrees to post notices and posters setting forth the provisions of the nondiscrimination clause, in a conspicuous and easily accessible place, available for employees and applicants for employment.

If a state public official (section 19.42, Stats.) or an organization in which a state public official holds at least a 10% interest is a party to this agreement, this contract is voidable by the state unless appropriate disclosure is made to the State of Wisconsin Ethics Board.

Effective with August 2015 Letting

BID PREPARATION

Preparing the Proposal Schedule of Items

A General

- (1) Obtain bidding proposals as specified in [section 102](#) of the standard specifications prior to 11:45 AM of the last business day preceding the letting. Submit bidding proposals using one of the following methods:
 1. Electronic bid on the internet.
 2. Electronic bid on a printout with accompanying diskette or CD ROM.
 3. Paper bid under a waiver of the electronic submittal requirements.
- (2) Bids submitted on a printout with accompanying diskette or CD ROM or paper bids submitted under a waiver of the electronic submittal requirements govern over bids submitted on the internet.

- (3) The department will provide bidding information through the department's web site at:
<http://wisconsindot.gov/Pages/doing-bus/contractors/hcci/bid-let.aspx>

The contractor is responsible for reviewing this web site for general notices as well as information regarding proposals in each letting. The department will also post special notices of all addenda to each proposal through this web site no later than 4:00 P.M. local time on the Thursday before the letting. Check the department's web site after 5:00 P.M. local time on the Thursday before the letting to ensure all addenda have been accounted for before preparing the bid. When bidding using methods 1 and 2 above, check the Bid Express™ on-line bidding exchange at <http://www.bidx.com/> after 5:00 P.M. local time on the Thursday before the letting to ensure that the latest schedule of items Expedite file (*.ebs or *.00x) is used to submit the final bid.

- (4) Interested parties can subscribe to the Bid Express™ on-line bidding exchange by following the instructions provided at the www.bidx.com web site or by contacting:

Info Tech Inc.
5700 SW 34th Street, Suite 1235
Gainesville, FL 32608-5371
email: <mailto:customer.support@bidx.com>

- (5) The department will address equipment and process failures, if the bidder can demonstrate that those failures were beyond their control.
- (6) Contractors are responsible for checking on the issuance of addenda and for obtaining the addenda. Notice of issuance of addenda is posted on the department's web site at:
<http://wisconsindot.gov/Pages/doing-bus/contractors/hcci/bid-let.aspx>

or by calling the department at (608) 266-1631. Addenda can ONLY be obtained from the departments web site listed above or by picking up the addenda at the Bureau of Highway Construction, Room 601, 4802 Sheboygan Avenue, Madison, WI, during regular business hours.

- (7) Addenda posted after 5:00 PM on the Thursday before the letting will be emailed to the eligible bidders for that proposal. All eligible bidders shall acknowledge receipt of the addenda whether they are bidding on the proposal or not. Not acknowledging receipt may jeopardize the awarding of the project.

B Submitting Electronic Bids

B.1 On the Internet

- (1) Do the following before submitting the bid:
 1. Have a properly executed annual bid bond on file with the department.
 2. Have a digital ID on file with and enabled by Info Tech Inc. Using this digital ID will constitute the bidder's signature for proper execution of the bidding proposal.
- (2) In lieu of preparing, delivering, and submitting the proposal as specified in 102.6 and 102.9 of the standard specifications, submit the proposal on the internet as follows:
 1. Download the latest schedule of items reflecting all addenda from the Bid ExpressTM web site.
 2. Use ExpediteTM software to enter a unit price for every item in the schedule of items.
 3. Submit the bid according to the requirements of ExpediteTM software and the Bid ExpressTM web site. Do not submit a bid on a printout with accompanying diskette or CD ROM or a paper bid. If the bidder does submit a bid on a printout with accompanying diskette or a paper bid in addition to the internet submittal, the department will disregard the internet bid.
 4. Submit the bid before the hour and date the Notice to Contractors designates.
 5. Do not sign, notarize, and return the bidding proposal described in 102.2 of the standard specifications.
- (3) The department will not consider the bid accepted until the hour and date the Notice to Contractors designates.

B.2 On a Printout with Accompanying Diskette or CD ROM

- (1) Download the latest schedule of items from the Wisconsin pages of the Bid ExpressTM web site reflecting the latest addenda posted on the department's web site at:
<http://wisconsindot.gov/Pages/doing-bus/contractors/hcci/bid-let.aspx>
Use ExpediteTM software to prepare and print the schedule of items. Provide a valid amount for all price fields. Follow instructions and review the help screens provided on the Bid ExpressTM web site to assure that the schedule of items is prepared properly.
- (2) Staple an 8 1/2 by 11 inch printout of the ExpediteTM generated schedule of items to the other proposal documents submitted to the department as a part of the bidder's sealed bid. As a separate submittal not in the sealed bid envelop but due at the same time and place as the sealed bid, also provide the ExpediteTM generated schedule of items on a 3 1/2 inch computer diskette or CD ROM. Label each diskette or CD ROM with the bidder's name, the 4 character department-assigned bidder identification code from the top of the bidding proposal, and a list of the proposal numbers included on that diskette or CD ROM as indicated in the following example:

Bidder

Name

BN00

Proposals: 1, 12, 14, & 22

- (3) If bidding on more than one proposal in the letting, the bidder may include all proposals for that letting on one diskette or CD ROM. Include only submitted proposals with no incomplete or other files on the diskette or CD ROM.
- (4) The bidder-submitted printout of the ExpediteTM generated schedule of items is the governing contract document and must conform to the requirements of section 102 of the standard specifications. If a printout needs to be altered, cross out the printed information with ink or typewriter and enter the new information and initial it in ink. If there is a discrepancy between the printout and the diskette or CD ROM, the department will analyze the bid using the printout information.

- (5) In addition to the reasons specified in [section 102](#) of the standard specifications, proposals are irregular and the department may reject them for one or more of the following:
1. The check code printed on the bottom of the printout of the ExpediteTM generated schedule of items is not the same on each page.
 2. The check code printed on the printout of the ExpediteTM generated schedule of items is not the same as the check code for that proposal provided on the diskette or CD ROM.
 3. The diskette or CD ROM is not submitted at the time and place the department designates.

C Waiver of Electronic Submittal

- (1) The bidder may request a waiver of the electronic submittal requirements. Submit a written request for a waiver in lieu of bids submitted on the internet or on a printout with accompanying diskette or CD ROM. Use the waiver that was included with the paper bid document sent to the bidder or type up a waiver on the bidder's letterhead. The department will waive the electronic submittal requirements for a bidding entity (individual, partnership, joint venture, corporation, or limited liability company) for up to 4 individual proposals in a calendar year. The department may allow additional waivers for equipment malfunctions.
- (2) Submit a schedule of items on paper conforming to [section 102](#) of the standard specifications. The department charges the bidder a \$75 administrative fee per proposal, payable at the time and place the department designates for receiving bids, to cover the costs of data entry. The department will accept a check or money order payable to: "Wisconsin, Dept. of Transportation."
- (3) In addition to the reasons specified in [section 102](#) of the standard specifications, proposals are irregular and the department may reject them for one or more of the following:
 1. The bidder fails to provide the written request for waiver of the electronic submittal requirements.
 2. The bidder fails to pay the \$75 administrative fee before the time the department designates for the opening of bids unless the bidder requests on the waiver that they be billed for the \$75.
 3. The bidder exceeds 4 waivers of electronic submittal requirements within a calendar year.
- (4) In addition to the reasons specified in [section 102](#) of the standard specifications, the department may refuse to issue bidding proposals for future contracts to a bidding entity that owes the department administrative fees for a waiver of electronic submittal requirements.

PROPOSAL BID BOND

DT1303 1/2006

Wisconsin Department of Transportation

Proposal Number	Project Number	Letting Date
Name of Principal		
Name of Surety	State in Which Surety is Organized	

We, the above-named Principal and the above-named Surety, are held and firmly bound unto the State of Wisconsin in the sum equal to the Proposal Guaranty for the total bid submitted for the payment to be made; we jointly and severally bind ourselves, our heirs, executors, administrators, successors and assigns. The condition of this obligation is that the Principal has submitted a bid proposal to the State of Wisconsin acting through the Department of Transportation for the improvement designated by the Proposal Number and Letting Date indicated above.

If the Principal is awarded the contract and, within the time and manner required by law after the prescribed forms are presented for signature, enters into a written contract in accordance with the bid, and files the bond with the Department of Transportation to guarantee faithful performance and payment for labor and materials, as required by law, or if the Department of Transportation shall reject all bids for the work described, then this obligation shall be null and void; otherwise, it shall be and remain in full force and effect. In the event of failure of the Principal to enter into the contract or give the specified bond, the Principal shall pay to the Department of Transportation **within 10 business days of demand** a total equal to the Proposal Guaranty as liquidated damages; the liability of the Surety continues for the full amount of the obligation as stated until the obligation is paid in full.

The Surety, for value received, agrees that the obligations of it and its bond shall not be impaired or affected by any extension of time within which the Department of Transportation may accept the bid; and the Surety does waive notice of any such extension.

IN WITNESS, the Principal and Surety have agreed and have signed by their proper officers and have caused their corporate seals to be affixed this date: **(DATE MUST BE ENTERED)**

PRINCIPAL

(Company Name) **(Affix Corporate Seal)**

(Signature and Title)

(Company Name)

(Signature and Title)

(Company Name)

(Signature and Title)

(Company Name)

(Signature and Title)

NOTARY FOR PRINCIPAL

(Date)

State of Wisconsin)
) ss.
_____ County)

On the above date, this instrument was acknowledged before me by the named person(s).

(Signature, Notary Public, State of Wisconsin)

(Print or Type Name, Notary Public, State of Wisconsin)

(Date Commission Expires)

Notary Seal

(Name of Surety) **(Affix Seal)**

(Signature of Attorney-in-Fact)

NOTARY FOR SURETY

(Date)

State of Wisconsin)
) ss.
_____ County)

On the above date, this instrument was acknowledged before me by the named person(s).

(Signature, Notary Public, State of Wisconsin)

(Print or Type Name, Notary Public, State of Wisconsin)

(Date Commission Expires)

Notary Seal

IMPORTANT: A certified copy of Power of Attorney of the signatory agent must be attached to the bid bond.

CERTIFICATE OF ANNUAL BID BOND

DT1305 8/2003

Wisconsin Department of Transportation

Time Period Valid (From/To)	
Name of Surety	
Name of Contractor	
Certificate Holder	Wisconsin Department of Transportation

This is to certify that an annual bid bond issued by the above-named Surety is currently on file with the Wisconsin Department of Transportation.

This certificate is issued as a matter of information and conveys no rights upon the certificate holder and does not amend, extend or alter the coverage of the annual bid bond.

Cancellation: Should the above policy be cancelled before the expiration date, the issuing surety will give thirty (30) days written notice to the certificate holder indicated above.

(Signature of Authorized Contractor Representative)

(Date)

March 2010

LIST OF SUBCONTRACTORS

Section 66.0901(7), Wisconsin Statutes, provides that as a part of the proposal, the bidder also shall submit a list of the subcontractors the bidder proposes to contract with and the class of work to be performed by each. In order to qualify for inclusion in the bidder's list a subcontractor shall first submit a bid in writing, to the general contractor at least 48 hours prior to the time of the bid closing. The list may not be added to or altered without the written consent of the municipality. A proposal of a bidder is not invalid if any subcontractor and the class of work to be performed by the subcontractor has been omitted from a proposal; the omission shall be considered inadvertent or the bidder will perform the work personally.

No subcontract, whether listed herein or later proposed, may be entered into without the written consent of the Engineer as provided in Subsection 108.1 of the Standard Specifications.

[illegible]

DECEMBER 2000

**CERTIFICATION REGARDING DEBARMENT, SUSPENSION, AND OTHER
RESPONSIBILITY MATTERS - PRIMARY COVERED TRANSACTIONS**

Instructions for Certification

1. By signing and submitting this proposal, the prospective contractor is providing the certification set out below.
2. The inability of a person to provide the certification required below will not necessarily result in denial of participation in this covered transaction. The prospective contractor shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective contractor to furnish a certification or an explanation shall disqualify such person from participation in this transaction.
3. The certification in this clause is a material representation of fact upon which reliance was placed when the department determined to enter into this transaction. If it is later determined that the contractor knowingly rendered an erroneous certification in addition to other remedies available to the Federal Government the department may terminate this transaction for cause or default.
4. The prospective contractor shall provide immediate written notice to the department to whom this proposal is submitted if at any time the prospective contractor learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.
5. The terms "covered transaction," "debarred," "suspended," "ineligible," "lower tier covered transaction," "participant," "person," "primary covered transaction," "principal," "proposal," and "voluntarily excluded," as used in this clause, have the meanings set out in the Definitions and Coverage sections of the rules implementing Executive Order 12549. You may contact the department to which this proposal is being submitted for assistance in obtaining a copy of those regulations.
6. The prospective contractor agrees by submitting this proposal that, should this contract be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department entering into this transaction.
7. The prospective contractor further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," which is included as an addendum to PR-1273 - "Required Contract Provisions Federal Aid Construction Contracts," without

modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions.

8. The contractor may rely upon a certification of a prospective subcontractor/materials supplier that it is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A contractor may decide the method and frequency by which it determines the eligibility of its principals. Each contractor may, but is not required to, check the Disapproval List (telephone # 608/266/1631).
9. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of a contractor is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.
10. Except for transactions authorized under paragraph 6 of these instructions, if a contractor in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department may terminate this transaction for cause or default.

Certification Regarding Debarment, Suspension, and Other Responsibility Matters - Primary Covered Transactions

- (1) The prospective contractor certifies to the best of its knowledge and belief, that it and its principals:
 - (a) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency;
 - (b) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements or receiving stolen property;
 - (c) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offense enumerated in paragraph (1)(b) of this certification; and
 - (d) Have not within a three-year period preceding this proposal had one or more public transactions (Federal, State or local) terminated for cause or default.
- (2) Where the prospective contractor is unable to certify to any of the statements in this certification, such prospective contractor shall attach an explanation to this proposal.

Special Provisions

Table of Contents

Article	Description	Page #
1.	General.....	3
2.	Scope of Work.	3
3.	Prosecution and Progress.	3
4.	Lane Rental Fee Assessment.	6
5.	Traffic.	7
6.	Holiday Work Restrictions.	12
7.	Utilities.....	12
8.	Other Contracts.	18
9.	Information to Bidders, U.S. Army Corps of Engineers Section 404 Permit.	18
10.	Notice to Contractor, Notification of Demolition and/or Renovation No Asbestos Found.	19
11.	Erosion Control.	19
12.	Coordination with Businesses and Residents.	20
13.	Select Borrow.....	20
14.	QMP Base Aggregate.	20
15.	QMP HMA Pavement Nuclear Density.....	28
16.	Ice Hot Weather Concreting, Item 501.1000.S.....	35
17.	Concrete Barrier Temporary Precast.	36
18.	Cover Plates Temporary, Item 611.8120.S.....	36
19.	Crash Cushions Temporary.....	37
20.	Salvaged Rail.	37
21.	Removing Signs Type II, Item 638.2602.....	38
22.	Nighttime Work Lighting-Stationary.....	38
23.	Pavement Marking Grooved Wet Reflective Epoxy 4-Inch, Item 646.2304.S; 8-Inch, Item 646.2308.S.....	40
24.	General Requirements for Electrical Work.	43
25.	Electrical Work By Others.	43
26.	Lighting Control Cabinet 120/240 30-Inch, Item 659.2130.	43
27.	Ramp Closure Gates Hardwired 26-FT, Item 662.1026.S; Ramp Closure Gates Hardwired 37-FT, Item 662.1037.S; Ramp Closure Gates Hardwired 40-FT, Item 662.1040.S; Ramp Closure Gate Arms Stockpile 26-FT, Item 662.3026.S; Ramp Closure Gate Arms Stockpile 37-FT, Item 662.3037.S; Ramp Closure Gate Arms Stockpile 40-FT, Item 662.3040.S; Ramp Closure Gate Flashers Stockpile, Item 662.4000.S.	44
28.	Portable Changeable Message Sign (PCMS) Cellular Communications, SPV.0045.01.	49
29.	Concrete Curb and Gutter Cure and Seal Treatment, Item SPV.0090.01.....	50
30.	Fence Chain Link Polymer-Coated 6-Ft., Item SPV.0090.02.	51
31.	Concrete Sidewalk Cure and Seal Treatment, Item SPV.0165.01.....	54
32.	Concrete Median Sloped Nose Cure and Seal Treatment, Item SPV.0165.02.	55

33.	HMA Pavement 3 MT 58-28 S 3.0% Va Regression Special, Item SPV.0195.01 and HMA Pavement 4 MT 58-34 H 3.0% Va Regression Special, Item SPV.0195.02.	55
-----	---	----

SPECIAL PROVISIONS

1. General.

Perform the work under this construction contract for Project 1021-01-70, Baldwin – Menomonie, STH 128 Bridge B-55-0266, IH 94, St. Croix County, Wisconsin as the plans show and execute the work as specified in the State of Wisconsin, Department of Transportation, Standard Specifications for Highway and Structure Construction, 2016 Edition, as published by the department, and these special provisions.

If all or a portion of the plans and special provisions are developed in the SI metric system and the schedule of prices is developed in the US standard measure system, the department will pay for the work as bid in the US standard system.

100-005 (20151210)

2. Scope of Work.

The work under this contract shall consist of removals, removing B-55-0021, grading, concrete pavement, HMA pavement, base aggregate dense, steel plate beam guard, concrete curb and gutter, storm sewer, B-55-0266, pavement marking, signing, finishing, and all incidental items necessary to complete the work as shown on the plans and included in the proposal and contract.

104-005 (200090901)

3. Prosecution and Progress.

Begin work within ten calendar days after the engineer issues a written notice to do so.

Provide the time frame for construction of the project within the 2017 construction season to the engineer in writing within a month after executing the contract but at least 14 calendar days before the preconstruction conference. Assure that the time frame is consistent with the contract completion time. Upon approval, the engineer will issue the notice to proceed within ten calendar days before the beginning of the approved time frame.

It is anticipated that the notice to proceed will be issued no later than 6:00 AM April 1, 2017.

Northern Long-eared Bat (*Myotis septentrionalis*)

Northern Long-eared Bats (NLEB) have the potential to inhabit the project limits because they roost in trees. Roosts may not have been observed on this project, but conditions to support the species exist. The species and all active roosts are protected by the Federal Endangered Species Act. If an individual bat or active roost is encountered during construction operations, stop work and notify the engineer and the WisDOT Regional Environmental Coordinator (REC).

In accordance to the final 4(d) rule issued for the NLEB, the department has determined that the proposed activity may affect, but will not result in prohibited take of the NLEB. The activity involves tree removal, but will not occur within 0.25 miles of a known hibernacula, nor will the activity remove a known maternity roost tree or any other tree within 150 feet of a known maternity roost tree.

If additional trees need to be removed, no Clearing shall occur without prior approval from the engineer, following coordination with the WisDOT REC. Additional tree removal beyond the area originally specified will require consultation with the United States Fish and Wildlife Service (USFWS) and may require a bat presence/absence survey. Notify the engineer if additional Clearing cannot be avoided to begin coordination with the WisDOT REC. The WisDOT REC will initiate consultation with the USFWS and determine if a survey is necessary.

Submit a schedule and description of Clearing operations with the ECIP 14 days prior to any Clearing operations. The department will determine, based on schedule and scope of work, what additional erosion control measures shall be implemented prior to the start of Clearing operations, and list those additional measures in the ECIP.

Protection of Bridge Pier Columns

Bridge pier columns are to remain protected at all times throughout construction. Removal of existing guardrail shall be done concurrently with the placement of the temporary concrete barrier so that the bridge pier columns remain protected at all times. Placement of new beam guard shall be completed to a point to provide protection for the pier columns before the temporary concrete barrier is removed. Remaining beam guard shall be placed within 24 hours of the temporary concrete barrier being removed.

Girder Placement and Removal

The contractor will be allowed to close two lanes in a single direction for a maximum of four nights to facilitate bridge girder removal (B-55-21) and girder delivery and placement for Structure B-55-0266. The allowance includes two nights for existing deck and girder removal and two nights for girder placement. The closures must take place on a day that has allowable single lane closure hours and according to the Allowable IH 94 Full Roadway Closure Hours table in the Lane Rental Fee Assessment article.

Law enforcement shall be used to direct traffic using the alternate route as shown in the plans. Penalties for not opening IH 94 on time in the closure direction will be subject to penalties laid out in section A.1 of the Lane Rental Fee Assessment. Contact the Wisconsin State Patrol at (715) 236-2242 a minimum of two weeks prior to each full closure to coordinate staffing and implementation of the detour route. Cost for Wisconsin State Patrol services associated with the IH 94 roadway closures will be the responsibility of the department. Cost for any additional Wisconsin State Patrol services that are requested by the contractor will be the contractor's responsibility.

Temporary Single-Lane Closures

Project staging requires roadside work zone, construction vehicle and/or traffic control device encroachments within 6-foot horizontal and/or vertical, from the edge of the shoulder side of a lane. These encroachments require a temporary single-lane closure of the IH 94 lane closest to construction. Lane closures are required when work operations overhead are generating debris. Immediately remove all debris or spillage falling on live lanes or shoulders. Refer to the article Lane Rental Fee Assessments for information regarding when lane closures are allowed without incurring lane rental fees.

Shoulder Closures

The contractor will be allowed to perform work on items that are located beyond 6-foot horizontal and/or vertical, from the edge of an open lane of traffic, utilizing a shoulder closure with the approval of the engineer. Construction vehicles and equipment shall be located outside of the 6 foot encroachment area. Shoulder closures shall only occur on one shoulder at a time. The existing roadway shall be open to two lanes of traffic in each direction. The lane closure restrictions outlined in the article for Lane Rental Fee Assessment will not apply to work that can be completed with an approved shoulder closure. All shoulder closures shall be removed during applicable Holiday Work Restrictions unless provided for in shielding a hazard.

Single lane closures that extend into peak hours, as defined below, are subject to a Lane Rental Fee Assessment.

Peak Hours defined as shown in the following tables:

Freeway Peak Hours		
Pre-Memorial Day		
	Eastbound	Westbound
Sunday	11:00 AM – 6:00 PM	12:00 PM – 8:00 PM
Monday	-	-
Tuesday	-	-
Wednesday	-	-
Thursday	2:00 PM – 6:00 PM	3:00 PM – 6:00 PM
Friday	9:00 AM – 7:00 PM	12:00 PM – 7:00 PM
Saturday	9:00 AM – 1:00 PM	1:00 PM – 5:00 PM

Freeway Peak Hours		
Memorial Day to Labor Day		
	Eastbound	Westbound
Sunday	9:00 AM – 6:00 PM	11:00 AM – 9:00 PM
Monday	9:00 AM – 6:00 PM	1:00 PM – 6:00 PM
Tuesday	2:00 PM – 5:00 PM	3:00 PM – 6:00 PM
Wednesday	2:00 PM – 5:00 PM	3:00 PM – 6:00 PM
Thursday	10:00 AM – 7:00 PM	1:00 PM – 6:00 PM
Friday	9:00 AM – 8:00 PM	11:00 AM – 7:00 PM
Saturday	9:00 AM – 3:00 PM	10:00 AM – 5:00 PM

Freeway Peak Hours		
Post Labor Day		
	Eastbound	Westbound
Sunday	10:00 AM – 5:00 PM	11:00 AM – 8:00 PM
Monday	-	-
Tuesday	-	-
Wednesday	-	-
Thursday	2:00 PM – 5:00 PM	-
Friday	10:00 AM – 7:00 PM	11:00 AM – 7:00 PM
Saturday	-	-

Nighttime hours for full closure are defined as follows:

For the entire contract:

- IH 94 Eastbound nighttime hours are on Monday, Tuesday, Wednesday and Thursday, from 11:00 PM to 5:00 AM.
- IH 94 Westbound nighttime hours are on Monday, Tuesday, Wednesday and Thursday, from 11:00 PM to 5:00 AM.

4. Lane Rental Fee Assessment.

A General

The contract designates some lane closures to perform the work. No Lane Rental Fee Assessments will be charged for closing lanes during the off-peak hours. If a lane is closed during peak hours, the contractor will be subject to Lane Rental Fee Assessments. If a lane is obstructed at any time due to contractor operations, it is considered a closure. The purpose of lane rental is to enforce compliance of lane restrictions and discourage unnecessary closures.

The peak hours when lane closures are not allowed are stated in the Prosecution and Progress Article.

Submit the dates of the proposed lane, ramp, and roadway restrictions to the engineer as part of the progress schedule. Coordinate lane, ramp, and roadway closures with any concurrent operations on adjacent roadways within 3 miles of the project.

If other projects are in the vicinity of this project, coordinate lane closures to run concurrent with lane closures on adjacent projects when possible. When lane closures on adjacent projects extend into the limits of this project, Lane Rental Fee Assessments will only occur if the closure facilitates work under this contract.

A.1 Lane Rental Fee Assessment

The Lane Rental Fee Assessment incurred for each lane closure, each ramp closure, and each full closure of a roadway, per direction of travel, is as follows:

\$1,000 per lane per 15 minutes

The Lane Rental Fee Assessment represents the average cost of the interference and inconvenience to the road users for each closure. The Lane Rental Fee Assessment will be measured in 15-minute increments. All lane, roadway, or ramp closure event increments less than 15 minutes will be assessed as a 15-minute increment.

Lane Rental Fee Assessments will be made based on the applicable rate for any and all closures whether work is being performed or not. The engineer, or designated representative, will be the sole authority in determining time period length for the Lane Rental Fee Assessment.

Lane Rental Fee Assessments will not be assessed for closures due to crashes, accidents or emergencies not initiated by the contractor.

B (Vacant)

C (Vacant)

D Measurement

The department will assess Lane Rental Fee Assessment by the dollar under the administrative item Failing to Open Road to Traffic. The total dollar amount of Lane Rental Fee Assessment will be computed by multiplying the Lane Rental Assessment Rate by the number of 15-minute increments of each lane closure event as described above.

Lane Rental Fee Assessment will be in effect from the time of the Notice to Proceed until the department issues final acceptance.

5. Traffic.

Provide the engineer with a schedule of lane closures for the following week by noon on Thursday of the previous week. In addition, provide the following minimum advance notification to the engineer for incorporation into the Wisconsin Lane Closure System:

Wisconsin Lane Closure System Advance Notification

Provide the following advance notification to the engineer for incorporation into the Wisconsin Lane Closure System (LCS).

TABLE 108-1 CLOSURE TYPE AND REQUIRED MINIMUM ADVANCE NOTIFICATION

Closure type with height, weight, or width restrictions (available width, all lanes in one direction $\leq 16'$)	MINIMUM NOTIFICATION
Lane and shoulder closures	14 calendar days
Full roadway closures	14 calendar days
System and service ramp closures	14 calendar days
Full system and service ramp closures	14 calendar days
Detours	14 calendar days
Closure type without height, weight, or width restrictions (available width, all lanes in one direction $> 16'$)	MINIMUM NOTIFICATION
Lane and shoulder closures	3 business days
System and service ramp closures	3 business days
Modifying all closure types	3 business days

Discuss LCS completion dates and provide changes in the schedule to the engineer at weekly project meetings in order to manage closures nearing their completion date.

108-057 (20150630)

All lane and shoulder closures and duration are subject to the approval of the engineer based on operational needs and safety. Notify the engineer if there are any changes in the schedule, early completions, or cancellations of scheduled work.

Establish a statutory 55 mph speed limit zone for Interstate 94 only when a lane is closed to traffic. Coordinate these statutory 55 MPH speed limit zones with the Department of Transportation, NW Region Traffic Section. Reestablish a 70 mph speed limit zone when all lanes are open.

Contact the State Patrol two weeks prior to the first lane closure. For incident management and coordinating portable changeable message sign communications system testing, contact Northwest Region State Highway Patrol, Sgt. Mike Melgaard, at (715)236-2242, or PCS Denice Staff, at (715) 839-3800, Ext. 109.

Portable changeable message signs provided under this contract will be used for incident management and are to be operated by the Wisconsin State Patrol. Place the required portable changeable message signs at the specified locations in the plan at least one week prior to construction.

Lane closure is required when work operations are within 6-feet of the traffic lane. Lane closure is required when work operations overhead are generating debris.

Conduct work operations in a manner that causes the least disruption to traffic movements on IH 94 and interchange ramps. Do not directly cross, unload materials from, stop in or otherwise interfere with traffic in any lane or ramp that is open to traffic with construction equipment or vehicles. All access to Interstate 94 by construction equipment will be at existing interchange locations.

Do not perform work in the median concurrently with work in the outside lane or outside shoulder with IH 94 traffic running between work areas.

Provide the engineer with a hauling plan prior to the preconstruction conference. Include the proposed locations of points of entry and traffic control to be used. Obtain approval from the engineer for all arrangements for handling traffic during construction operations.

Flagging operations will not be permitted on Interstate 94.

Do not use maintenance crossings connecting eastbound and westbound roadways of Interstate 94 during construction operations unless the median lanes are closed to traffic. The contractor is responsible for maintaining and restoring all maintenance crossings to their original condition upon completion of this contract.

Construction traffic cannot travel counter-directional adjacent to IH 94 through traffic except for removal of traffic control devices for lane opening operations.

Equip all construction vehicles and equipment entering or leaving live traffic lanes with a hazard identification beam (flashing yellow signal). The beam shall be activated when merging into or exiting a live traffic lane.

All interchange ramps shall remain open to traffic at all times. For ramp resurfacing work, stage and keep ramps open to traffic. Coordinate ramp resurfacing with the mainline Interstate 94 work to eliminate any uneven surface joints prior to opening travel lanes.

During lane closures, lane shifts are permitted with a minimum 700-foot shifting taper.

Have available at all times experienced personnel to promptly install, remove, and reinstall the required traffic control devices to route traffic in order to perform the necessary construction operations.

Prior to opening lane closures to traffic, place temporary or permanent pavement marking, including all lane lines and edge lines removed or covered by milling and paving operations.

Do not park or store any equipment, vehicles, or construction materials within 30 feet of the edge of traffic lane carrying Interstate 94 traffic or within the median during non-working hours. In the event of an emergency, protect any equipment, vehicles, or construction

materials which remain within 30 feet of the edge of a traffic lane during non-working hours with temporary roadside barrier according to the standard specifications and meeting the requirements of the AASHTO Roadside Design Guide.

Stage 1 Traffic Control

Construct new Structure B-55-0266, ramp 'A', ramp 'AB', ramp 'B', ramp 'BB', Service Road, West Drive, East Drive and Park and Ride. Widen STH 128 northbound subgrade at south end of project and temporary widening at north end of project.

IH 94:

Temporary single-lane closures may be used as provided within the Lane Rental Fee Assessment article for bridge pier and median construction. Access the median work zone only from a closed lane.

Placement of girders over eastbound and westbound IH 94 will be permitted during full roadway closure as defined in the Lane Rental Fee Assessment article. Use the "ramp-off/ramp-on" method for detouring IH 94 traffic.

STH 128 / Ramps:

Keep STH 128 open to through traffic. Shoulder closures will be required on STH 128 northbound and southbound to construct ramps and temporary widening. Place temporary concrete barriers or drums along shoulders adjacent to construction activities.

Close NW and SW ramp shoulders for construction of ramps 'A' and 'B.' Place temporary concrete barriers along shoulders adjacent to construction activities.

The use of flaggers is allowed while these areas are constructed.

Stage 1A Traffic Control

Remove existing NW and SW ramp and grade and shaping area to proposed slopes. Construct STH 128 northbound and southbound between the ramps and new bridge structure. Construct STH 128 southbound temporary widening, ramp 'CB', ramp 'C' outside shoulder or slopes and ramp 'D' outside shoulder or slopes. Complete construction of bridge B-55-0266, Service Road, West Drive, East Drive, and Park and Ride.

IH 94:

Temporary single-lane closures may be used as provided within the Lane Rental Fee Assessment article for bridge superstructure construction and form removals or finishing. Access the median work zone only from a closed lane.

STH 128 / Ramps:

Keep STH 128 open to through traffic. Shoulder closures will be required on STH 128 northbound and southbound to construct portions of STH 128, ramps and temporary widening. Place temporary concrete barriers or drums along shoulders adjacent to construction activities.

Close ramps 'A' and 'B' inside shoulders for removal of existing NW and SW ramps. Close existing NE and SE ramp outside shoulders for construction of ramp 'CB' and 'D.' Place temporary concrete barriers or drums along shoulders adjacent to construction activities.

The use of flaggers is allowed while these areas are constructed.

Stage 2 Traffic Control

Switch STH 128 traffic to new STH 128 lanes and bridge B-55-0266. Remove existing roadway STH 128 and existing structure B-55-0021. Remove STH 128 northbound temporary widening and south driveway entrance to Kwik Trip. Construct STH 128 turn lanes at Kwik Trip and Service Road. Construct ramp 'C', ramp 'C' deceleration lane, and ramp 'D'

IH 94:

Temporary single-lane closures may be used as provided within the Lane Rental Fee Assessment article for bridge removal and construction of ramp 'C' deceleration lane. Access the median work zone only from a closed lane.

Removal of girders over eastbound and westbound IH 94 will be permitted during full roadway closure as defined in the Lane Rental Fee Assessment article. Use the "ramp-off/ramp-on" method for detouring IH 94 traffic.

STH 128 / Ramps:

Keep STH 128 open to through traffic. Shoulder closures will be required on STH 128 northbound to remove existing STH 128 and temporary widening and to restore and grade area to proposed slopes. Place temporary concrete barriers or drums along shoulders adjacent to construction activities.

Close inside shoulders of ramp 'CB' and ramp 'D' for removal of existing NE and SE ramps and construction of ramp 'C' and ramp 'D.'

Stage 3 Traffic Control

Remove STH 128 southbound temporary widening and restore to proposed grades or slopes. Construct median island and roundabout center island on STH 128 and remaining portions of median island and curb and gutter on ramp 'A', 'B' and 'C.'

IH 94:

Temporary single-lane closures may be used as provided within the Lane Rental Fee Assessment article for restoration or finishing work. Access the median work zone only from a closed lane.

STH 128 / Ramps:

Keep STH 128 open to through traffic. Close STH 128 southbound shoulder for removal of temporary widening. Median closures will be required on STH 128 northbound and southbound to construct median sidewalk and curb and gutter. Place drums along shoulders adjacent to construction activities.

Close inside median of ramp 'A', 'B' and 'C' for median sidewalk and curb and gutter construction.

6. Holiday Work Restrictions.

Do not perform work on, nor haul materials of any kind along or across any portion of the highway carrying IH 94 or STH 128 traffic, and entirely clear the traveled way and shoulders of such portions of the highway of equipment, barricades, signs, lights, and any other material that might impede the free flow of traffic during the following holiday periods:

- From noon Friday, April 14, 2017 to 6:00 AM Tuesday, April 18, 2017 for Easter;
- From noon Friday, May 26, 2017 to 6:00 AM Tuesday, May 30, 2017 for Memorial Day;
- From noon Friday, June 30, 2017 to 6:00 AM Wednesday, July 5, 2017 for Independence Day;
- From noon Friday, September 1, 2017 to 6:00 AM Tuesday, September 5, 2017 for Labor Day.

107-005 (20050502)

7. Utilities.

This contract comes under the provision of Administrative Rule Trans 220.

107-065 (20080501)

Additional detailed information regarding the location of discontinued, relocated, and/or removed utility facilities is available in the work plan provided by each utility company or on the permits issued to them. View these documents at the region WisDOT office during normal business hours.

Some of the utility work described below is dependent on prior work being performed by the contractor at a specific site. In such situations, provide the engineer and the affected utility a good faith notice of when the utility is to start work at the site. Provide this notice 14 to 16 calendar days in advance of when the prior work will be completed and the site will be available to the utility. Follow-up with a confirmation notice to the engineer and the utility not less than 3 working days before the site will be ready for the utility to begin its work.

AT&T Legacy AT&T Legacy (COMLN) has underground fiber optic within the project limits along the southern right-of-way of IH 94 (approximately 10 feet inside the old right-of-way line), crossing under STH 128 at approximately STA 244+24'NB'. The conduit bundle has multiple vaults approximately at Station 252+18'B', 58 feet RT and 244+37'SB', 18 feet RT.

The AT&T Legacy fiber optic is in a conduit bundle that is shared by AT&T Legacy and Level 3 Communications. In addition, WisDOT has an interest in one of the fiber optic conduit in the bundle; however all coordination for the WisDOT fiber optic in the conduit bundle is handled through AT&T Legacy. The WisDOT owned ITS equipment (such as cameras) and their connections outside the main conduit bundle are coordinated as roadway items with WisDOT under the bid items in the contract and are not considered to be utilities under Trans 220.

The listed relocations will take place prior to construction to eliminate conflicts with culvert pipe crossings along ramp B and ditch excavation. The work will take approximately 10 working days, anticipated completion September 2016.

- Station 253+00'B' to Station 262+00'B' the existing conduit bundle will be relocated prior to construction from approximately 10 feet inside the old right-of-way line to 5 feet inside the new right-of-way line.
- Station 261+50'BB' the relocated conduit bundle will be at a depth to provide clearance for the proposed ditch cut.
- The AT&T Legacy vault at approximately Station 244+37'SB', 18 feet RT will be removed prior to construction.
- The WisDOT vault at approximately Station 244+37'SB', 18 feet RT will be removed prior to construction.

Prior to excavating within 10 feet of the conduit bundle, contact Brad Kempf at (715) 254-5238 a minimum of three working days prior to the excavation to arrange for a fiber watch. See Level 3 Communications section for additional fiber watch requirements.

Level 3 Communications (COMLN) has underground fiber optic within the project limits along the southern right-of-way of IH 94 (approximately 10 feet inside the old right-of-way line), crossing under STH 128 at approximately STA 244+24'NB'. The conduit bundle has multiple vaults approximately at Station 252+18'B', 58 feet RT and 244+37'SB', 18 feet RT.

The Level 3 fiber optic is in a conduit bundle that is shared by AT&T Legacy and Level 3 Communications. In addition, WisDOT has an interest in some of the fiber optic in the bundle; however all coordination for the WisDOT fiber optic in the conduit bundle is handled through AT&T Legacy.

The listed relocations will take place prior to construction to eliminate conflicts with culvert pipe crossings along ramp B and ditch excavation. The work will take approximately 10 working days, anticipated completion September 2016.

- Station 253+00'B' to Station 262+00'B' the existing conduit bundle will be relocated prior to construction from approximately 10 feet inside the old right-of-way line to 5 feet inside the new right-of-way line.
- Station 261+50'BB' the relocated conduit bundle will be at a depth to provide clearance for the proposed ditch cut.
- The Level 3 vault at approximately Station 244+37'SB', 18 feet RT will be removed prior to construction.

Prior to excavating within 10 feet of the conduit bundle, contact Brad Morseth at (612) 805-9479 a minimum of three working days prior to the excavation to arrange for a fiber watch. See AT&T Legacy section for additional fiber watch requirements.

Century Link Communications f/k/a Qwest (COMLN) has underground fiber optic within the project limits along the southern right-of-way of IH 94 (approximately 5 feet inside the existing right-of-way), crossing under STH 128 at approximately Station 244+20'NB'.

The listed relocations will take place prior to construction to eliminate conflicts with culvert pipe crossings along ramp B, ditch excavation and fence posts. The work will take approximately 10 working days, anticipated completion July 2016.

- Station 252+50'B' to Station 257+00'B' the existing fiber optic will be relocated to the south, to within approximately 4 feet of the new right-of-way line and out of conflict.
- Station 260+50'B' to Station 263+00'B' the existing fiber optic will be lowered from the existing depth of approximately 4 feet to a proposed depth of approximately 7 feet under the existing ground.

Prior to excavating within 10 feet of the fiber optic, contact Bob Sampson at (636) 887-5367 a minimum of three working days prior to the excavation to arrange for a fiber watch.

St. Croix Electric Cooperative (ELCTY) has overhead electric distribution lines located along the north side of 50th Avenue, crossing STH 128 at Station 237+45'NB' and crossing 50th Avenue to the south from the pole located at Station 237+45'NB' RT.

- The pole at Station 237+40'NB', 100 feet LT is within the grading limits and will remain in place during construction.
- The pole at Station 237+48'NB', 56 feet RT and associated guy lines and anchors are within the grading limits and will remain in place during construction. There is a small amount of fill to be placed around this pole.

Care must be taken when blending slopes into the existing ground near these facilities.

We Energies (GS/PTR) has an underground 3-inch high pressure natural gas line within the project limits along the east side of STH 128 from beginning of project limits to Station 257+55'NB' then crossing STH 128 to the west side and runs north to the end of project limits. There is an additional service crossing at Station 254+27'NB' and a line that runs east at Station 237+44'NB'.

- From Station 238+00'NB' to Station 241+00'NB' the 3-inch high pressure underground gas line is within the limits of the EBS of the existing ditch. The existing cover of the gas line is generally 24-36-inches in this area. The line will remain in place during construction. Care must be taken when performing the EBS work near this facility. We Energies requires a representative to be onsite during this construction.
- From existing ramp terminal to existing ramp terminal, Station 244+00'NB' to Station 253+00'NB' the existing cover of the 3-inch high pressure gas line is approximately 10 feet or greater, therefore no conflict is anticipated with: the construction of ramp D; the culvert under ramp D; the grading for the bullnose terminal in the IH 94 median; and the construction of ramp C.
- The service crossing at Station 254+27'NB' has been previously discontinued.
- The service crossing at Station 257+52'NB' has been previously discontinued.
- From Station 255+90'NB' to Station 257+30'NB' RT the existing 3-inch high pressure gas line will remain in place under the proposed driveway culvert pipe. Care must be taken when working near this facility. We Energies requires a representative to be onsite during this construction.
- At Station 257+50'NB', 50 feet RT on the existing 3-inch high pressure gas line, a new segment of 4-inch high pressure natural gas main will be installed to the north, with a new crossing of STH 128 at approximately Station 257+60'NB' and reconnecting to the existing 4-inch gas line at approximately Station 261+10, 28 feet LT.
- The existing 4-inch high pressure gas main crossing at Station 257+55'NB' and the 4-inch line that continues north from the crossing on the west side of STH 128 to Station 261+10'NB' will be discontinued once the new segment of high pressure gas line is in service.

Contact We Energies Gas Dispatch at (800) 261-5325 a minimum of three working days prior to impacting any gas main or gas service that is believed to be discontinued for verification and for potholing the facilities that will remain in service in the EBS and culvert pipe installation locations.

In addition, contact We Energies Gas Dispatch at (800) 261-5325 a minimum of one working day when excavating within 5 feet of the high pressure gas line at all other locations.

The relocations are anticipated to take 15 working days to complete, anticipated completion October 2016.

West Wisconsin Telcom Cooperative (COMLN) has underground fiber optic and copper telecom lines and services within the project limits.

Along the western existing right-of-way of STH 128 there is a copper cable beginning at a pedestal at Station 255+80'NB', 65 feet LT and continuing north to a pedestal at Station 266+15'NB', 35 feet LT and continuing north outside the project limits.

In addition, from the copper cable pedestal at Station 255+80'NB' LT, an underground copper cable crosses STH 128 at Station 256+10'NB' and continues to the east right-of-way line of STH 128 to a pedestal at Station 256+20'NB'. The copper cable then continues north to a pedestal at Station 257+30'NB' RT and then continues north while transitioning from being approximately 55 feet RT to being 30 feet RT. This copper cable continues north outside the project limits.

- The existing copper cables will be discontinued in place and the associated pedestal at Station 255+80'NB' will be removed prior to construction.

The fiber optic line begins at a pedestal at Station 255+80'NB', 65 feet LT, with a fiber optic line north to Station 257+40'NB' where it crosses STH 128 to a pedestal at Station 257+30'NB', 55 feet RT. The fiber optic line continues north while transitioning from being approximately 50 feet RT to being 22 feet RT. This fiber optic line continues north outside the project limits.

- The existing fiber optic pedestal at Station 255+80'NB', 65 feet LT will be relocated to the western right-of-way of STH 128 prior to construction.
- The existing fiber optic from the relocated pedestal at Station 255+80'NB' that crosses STH 128 to a fiber optic pedestal at Station 257+30'NB', 5 feet RT will remain in place during construction. Care must be taken when performing the EBS work near this facility.

- From the fiber optic pedestal at Station 257+30'NB', 55 feet RT a new fiber optic line will be installed to Station 267+00'NB', approximately 60 feet RT to replace the existing fiber optic line at 22 feet RT. This new fiber optic line will continue north along the right-of-way outside the project limits, approximately 900 feet to an existing pedestal. The new fiber optic line will be installed 18-inches below the plan EBS elevation when it crosses the Service Road entrance. Care must be taken when performing the EBS work near this facility. The new fiber line will be installed prior to construction and the old fiber line will be abandoned in-place.

Contact Brad Schmidtkecht at (715) 308-1914 a minimum of three working days prior to excavation for potholing the facilities that will remain in service in the EBS locations.

The relocations are planned to begin in late October 2016 and anticipated to take 10 working days to complete.

Xcel Energy (ELCTY) has overhead electric distribution lines within the project limits along the west side of existing STH 128 from beginning of project limits to end of project limits, with an overhead crossing of STH 128 at Station 239+08'NB' and Station 257+73'NB'.

The following locations for poles; associated guy lines and anchors; and connected electric lines are in conflict with the project and will be relocated prior to construction:

- Station 239+20'SB', 80 feet LT
- Station 241+80'SB', 35 feet LT
- Station 247+40'SB', 20 feet LT
- Station 250+40'SB', 10 feet LT
- Station 253+40'SB', 45 feet LT
- Station 256+00'SB', 50 feet LT
- Station 258+40'SB', 35 feet LT
- Station 261+10'SB', 30 feet LT
- Station 263+80'SB', 30 feet LT

The following facilities are in conflict with the project and will be removed during construction:

- The pole at Station 244+10'NB' feeds the WisDOT camera in the interchange. The pole and a new temporary electric line crossing STH 128 at Station 243+75'SB' will remain in place in service until construction begins. The removal of the pole and service line is anticipated to take 2 working days. Contact Xcel Energy a minimum of 10 working days prior to when the pole and service must be removed.

The new electric distribution poles (some with associated guy lines and anchors) are planned to be located as follows:

- Station 239+20'SB', 90 feet LT
- Station 241+25'SB', 60 feet LT (with guy line and anchor)
- Station 243+00'SB', 80 feet LT
- Station 244+60'SB', 100 feet LT (with guy lines and anchors)
- Station 246+20'SB', 110 feet LT
- Station 251+15'SB', 160 feet LT
- Station 252+40'SB', 140 feet LT (with guy lines and anchors)
- Station 254+40'SB', 100 feet LT (with guy lines and anchors)
- Station 256+60'SB', 80 feet LT
- Station 258+65'SB', 60 feet LT (with guy line, anchor and a service crossing STH 128 at Station 258+25'SB')
- Station 260+80'SB', 45 feet LT
- Station 263+10'SB', 50 feet LT
- Station 265+30'SB', 50 feet LT (with guy line and anchor)
- Station 265+55'SB', 30 feet LT (with guy line and anchor)

- The new electric distribution lines will remain energized throughout construction with no outages granted. Care must be taken when blending slopes near these facilities. The relocations are planned to begin in December 2016 and will take approximately 15 working days to complete.

8. Other Contracts.

Other projects may be under construction concurrently with the work under this contract. Projects may include department or other local projects. Coordinate trucking activities, detours, work zone traffic control, roadway and lane closures, and other work items as required with other projects.

Project 1020-01-77 located in towns of Kinnickinnic and Pleasant Valley, St. Croix County is proposed for construction in 2017 under a department contract. Work under this contract may occur during this project. Lane closures on IH 94 are planned.

9. Information to Bidders, U.S. Army Corps of Engineers Section 404 Permit.

The department has obtained a U.S. Army Corps of Engineers Section 404 permit. Comply with the requirements of the permit in addition to requirements of the special provisions. A copy of the permit is available from the regional office by contacting Nick Schaff at (715) 836-2068.

107-054 (20080901)

10. Notice to Contractor, Notification of Demolition and/or Renovation No Asbestos Found.

John Roelke, License Number AII-119523, inspected Structure B-55-0021 for asbestos on December 18, 2012. No regulated Asbestos Containing Material (RACM) was found on this structure. A copy of the inspection report is available from: Stacie Lambele, (715) 833-5569.

According to NR447 and DHS159, ensure that DNR or DHS receives a completed Notification of Demolition and/or Renovation (DNR Form 4500-113 (R 4/11), or subsequent revision) via U.S. mail, hand-delivery, or using the online notification system at least 10 working days prior to beginning any construction or demolition. Pay all associated fees. Provide a copy of the completed 4500-113 form to Stacie Lambele, WisDOT Northwest Region, 718 West Clairemont Avenue, Eau Claire, WI 54701, (715) 833-5569 and DOT BTS-ESS attn: Hazardous Materials Specialist PO Box 7965, Madison, WI, 53707-7965. In addition, comply with all local or municipal asbestos requirements.

Use the following information to complete WisDNR form 4500-113 :

- Site Name: Structure B-55-0021, STH 128 over IH 94
- Site Address: 1.4 M N JCT CTH N
- Ownership Information: WisDOT Transportation Northwest Region, 718 West Clairemont Avenue, Eau Claire, WI 54701
- Contact: Stacie Lambele
- Phone: (715) 833-5569
- Age: 58 years old. This structure was constructed in 1958.
- Area: 7333 SF of deck

Insert the following paragraph in Section 6.g.:

- If asbestos not previously identified is found or previously non-friable asbestos becomes crumbled, pulverized, or reduced to a powder, stop work immediately, notify the engineer, and the engineer will notify the department's Bureau of Technical Services at (608) 266-1476 for an emergency response according to standard spec 107.24. Keep material wet until it is abated or until it is determined to be non-asbestos containing material.

107-125 (20120615)

11. Erosion Control.

Add the following to standard spec 107.20:

Perform construction operations in a timely and diligent manner, continuing all construction operations methodically from the initial topsoil stripping operation through the subsequent grading and finishing to minimize the period of exposure to erosion.

Immediately re-topsoil graded areas, as designated by the engineer, after grading is completed within those areas. Seed, fertilize, and mulch or erosion mat all topsoiled areas within five working days after placement of topsoil.

12. Coordination with Businesses and Residents.

The contractor shall arrange and conduct a meeting between the contractor, the department, affected residents, local officials and business people to discuss the project schedule of operations including vehicular and pedestrian access during construction operations. Hold the first meeting at least one week prior to the start of work under this contract and hold a meeting one week prior to each traffic staging change. The contractor shall arrange for a suitable location for the meeting(s) that provides reasonable accommodation for public involvement. The contractor shall schedule the meeting(s) with at least two weeks' prior notice to the engineer to allow for these notifications.

108-060 (20141107)

13. Select Borrow.

Conform to the requirements of standard spec 208 and as hereinafter provided.

Material

Furnish and use material that consists of granular material meeting the following requirements: granular backfill, grade 2 in accordance to standard spec 209.2.

208-005 (20031103)

14. QMP Base Aggregate.

A Description

A.1 General

- (1) This special provision describes contractor quality control (QC) sampling and testing for base aggregates, documenting those test results, and documenting related production and placement process changes. This special provision also describes department quality verification (QV), independent assurance (IA), and dispute resolution.
- (2) Conform to standard spec 301, standard spec 305, and standard spec 310 as modified here in this special provision. Apply this special provision to material placed under all of the Base Aggregate Dense and Base Aggregate Open Graded bid items, except do not apply this special provision to material classified as reclaimed asphaltic pavement placed under the Base Aggregate Dense bid items.
- (3) Do not apply this special provision to material placed under the Aggregate Detours, Salvaged Asphaltic Pavement Base, Breaker Run, Select Crushed, Pit Run, Subbase, or Riprap bid items.
- (4) Provide and maintain a quality control program, defined as all activities related to and documentation of the following:
 1. Production and placement control and inspection.
 2. Material sampling and testing.

- (5) Chapter 8 of the department's construction and materials manual (CMM) provides additional detailed guidance for QMP work and describes required sampling and testing procedures. The contractor may obtain the CMM from the department's web site at: <http://wisconsindot.gov/Pages/doing-bus/eng-consultants/cnslt-rsrces/rdwy/default.aspx>

A.2 Contractor Testing for Small Quantities

- (1) The department defines a small quantity, for each individual Base Aggregate bid item, as a plan quantity of 9000 tons or less of material as shown in the schedule of items under that bid item.
- (2) The requirements under this special provision apply equally to a small quantity for an individual bid item except as follows:
1. The contractor need not submit a full quality control plan but shall provide an organizational chart to the engineer including names, telephone numbers, and current certifications of all persons involved in the quality control program for material under affected bid items.
 2. Divide the aggregate into uniformly sized sublots for testing as follows:

Plan Quantity	Minimum Required Testing
≤ 1500 tons	One test from production, load-out, or placement at the contractor's option ^[1]
> 1500 tons and ≤ 6000 tons	Two tests of the same type, either from production, load-out, or placement at the contractor's option ^[1]
> 6000 tons and ≤ 9000 tons	Three placement tests ^{[2] [3]}

- ^[1] If using production tests for acceptance, submit test results to the engineer for review prior to incorporating the material into the work. Production test results are valid for a period of 3 years.
- ^[2] For 3-inch material, obtain samples at load-out.
- ^[3] If the actual quantity overruns 9000 tons, create overrun sublots to test at a rate of one additional placement test for each 3000 tons, or fraction of 3000 tons, of overrun.
3. No control charts are required. Submit aggregate load-out and placement test results to the engineer within one business day of obtaining the sample. Assure that all properties are within the limits specified for each test.
 4. Department verification testing is optional for quantities of 6000 tons or less.
- (3) Material represented by a subplot with any property outside the specification limits is nonconforming. The department may reject material or otherwise determine the final disposition of nonconforming material as specified in standard spec 106.5.

B Materials

B.1 Quality Control Plan

- (1) Submit a comprehensive written quality control plan to the engineer at or before the pre-construction meeting. Do not place base before the engineer reviews and comments on the plan. Construct the project as that plan provides.

- (2) Do not change the quality control plan without the engineer's review. Update the plan with changes as they become effective. Provide a current copy of the plan to the engineer and post in each of the contractor's laboratories as changes are adopted. Ensure that the plan provides the following elements:
 1. An organizational chart with names, telephone numbers, current certifications and/or titles, and roles and responsibilities of QC personnel.
 2. The process used to disseminate QC information and corrective action efforts to the appropriate persons. Include a list of recipients, the communication means that will be used, and action time frames.
 3. A list of source and processing locations, section and quarter descriptions, for all aggregate materials requiring QC testing.
 4. Test results for wear, sodium sulfate soundness, freeze/thaw soundness, and plasticity index of all aggregates requiring QC testing. Obtain this information from the region materials unit or from the engineer.
 5. Descriptions of stockpiling and hauling methods.
 6. Locations of the QC laboratory, retained sample storage, and where control charts and other documentation is posted.
 7. An outline for resolving a process control problem. Include responsible personnel, required documentation, and appropriate communication steps.

B.2 Personnel

- (1) Have personnel certified under the department's highway technician certification program (HTCP) perform sampling, testing, and documentation as follows:

Required Certification Level:	Sampling or Testing Roles:
Aggregate Technician IPP Aggregate Sampling Technician Aggregate Assistant Certified Technician (ACT-AGG)	Aggregate Sampling ^[1]
Aggregate Technician IPP Aggregate Assistant Certified Technician (ACT-AGG)	Aggregate Gradation Testing, Aggregate Fractured Particle Testing, Aggregate Liquid Limit and Plasticity Index Testing

^[1] Plant personnel under the direct observation of an aggregate technician certified at level one or higher may operate equipment to obtain samples.

- (2) A certified technician must coordinate and take responsibility for the work an ACT performs. Have a certified technician ensure that all sampling and testing is performed correctly, analyze test results, and post resulting data. No more than one ACT can work under a single certified technician.

B.3 Laboratory

- (1) Perform QC testing at a department-qualified laboratory. Obtain information on the Wisconsin laboratory qualification program from:

Materials Management Section

3502 Kinsman Blvd.

Madison, WI 53704

Telephone: (608) 246-5388

<http://wisconsindot.gov/Pages/doing-bus/eng-consultants/cnslt-rsrcs/tools/appr-prod/qual-labs.aspx>

B.4 Quality Control Documentation

B.4.1 General

- (1) Submit base aggregate placement documentation to the engineer within 10 business days after completing base placement. Ensure that the submittal is complete, neatly organized, and includes applicable project records and control charts.

B.4.2 Records

- (1) Document all placement observations, inspection records, and control adjustments daily in a permanent field record. Also include all test results in the project records. Provide test results to the engineer within 6 hours after obtaining a sample. For 3-inch base, extend this 6-hour limit to 24 hours. Post or distribute tabulated results using a method mutually agreeable to the engineer and contractor.

B.4.3 Control Charts

- (1) Plot gradation and fracture on the appropriate control chart as soon as test results are available. Format control charts according to CMM 8.30. Include the project number on base placement control charts. Maintain separate control charts for each base aggregate size, source or classification, and type.
- (2) Provide control charts to the engineer within 6 hours after obtaining a sample. For 3-inch base, extend this 6-hour limit to 24 hours. Post or distribute charts using a method mutually agreeable to the engineer and contractor. Update control charts daily to include the following:
 1. Contractor individual QC tests.
 2. Department QV tests.
 3. Department IA tests.
 4. Four-point running average of the QC tests.
- (3) Except as specified under B.8.2.1 for nonconforming QV tests, include only QC tests in the running average. The contractor may plot process control or informational tests on control charts, but do not include these tests, conforming QV tests, or IA tests in the running average.

B.5 Contractor Testing

- (1) Test gradation, fracture, liquid limit and plasticity index during placement for each base aggregate size, source or classification, and type.

- (2) Test gradation once per 3000 tons of material placed. Determine random sample locations and provide those sample locations to the engineer. Obtain samples after the material has been bladed, mixed, and shaped but before compacting; except collect 3-inch samples from the stockpile at load-out. Do not sample from material used to maintain local traffic or from areas of temporary base that will not have an overlying pavement. On days when placing only material used to maintain local traffic or only temporary base that will not have an overlying pavement, no placement testing is required.
- (3) Split each contractor QC sample and identify it according to CMM 8.30. Retain the split for 7 calendar days in a dry, protected location. If requested for department comparison testing, deliver the split to the engineer within one business day.
- (4) The engineer may require additional sampling and testing to evaluate suspect material or the technician's sampling and testing procedures.
- (5) Test fracture for each gradation test until the fracture running average is above the lower warning limit. Subsequently, the contractor may reduce the frequency to one test per 10 gradation tests if the fracture running average remains above the warning limit.
- (6) Test the liquid limit and plasticity index for the first gradation test. Subsequently, test the liquid limit and plasticity index a minimum of once per 10 gradation tests.

B.6 Test Methods

B.6.1 Gradation

- (1) Test gradation using a washed analysis conforming to the following as modified in CMM 8.60:
 Gradation..... AASHTO T 27
 Material finer than the No. 200 sieve..... AASHTO T 11
- (2) For 3-inch base, if 3 consecutive running average points for the percent passing the No. 200 sieve are 8.5 percent or less, the contractor may use an unwashed analysis. Wash at least one sample out of 10. If a single running average for the percent passing the No. 200 sieve exceeds 8.5 percent, resume washed analyses until 3 consecutive running average points are again 8.5 percent passing or less.
- (3) Maintain a separate control chart for each sieve size specified in standard spec 305 or standard spec 310 for each base aggregate size, source or classification, and type. Set control and warning limits based on the standard specification gradation limits as follows:

1. Control limits are at the upper and lower specification limits.
2. There are no upper warning limits for sieves allowing 100 percent passing and no lower control limits for sieves allowing 0 percent passing.
3. Dense graded warning limits, except for the No. 200 sieve, are 2 percent within the upper and lower control limits. Warning limits for the No. 200 sieve are set 0.5 percent within the upper and lower control limits.
4. Open graded warning limits for the 1-inch, 3/8-inch, and No. 4 sieves are 2 percent within the upper and lower control limits. Upper warning limits for the No. 10, No. 40, and No. 200 sieves are 1 percent inside the upper control limit.

B.6.2 Fracture

- (1) Test fracture conforming to CMM 8.60. The engineer will waive fractured particle testing on quarried stone.
- (2) Maintain a separate fracture control chart for each base aggregate size, source or classification, and type. Set the lower control limit at the contract specification limit, either specified in another special provision or in table 301-2 of standard spec 301.2.4.5. Set the lower warning limit 2 percent above the lower control limit. There are no upper limits.

B.6.3 Liquid Limit and Plasticity

- (1) Test the liquid limit and plasticity according to AASHTO T 89 and T 90.
- (2) Ensure the material conforms to the limits specified in standard spec table 301-2.

B.7 Corrective Action

B.7.1 General

- (1) Consider corrective action when the running average trends toward a warning limit. Take corrective action if an individual test exceeds the contract specification limit. Document all corrective actions both in the project records and on the appropriate control chart.

B.7.2 Placement Corrective Action

- (1) Do not blend additional material on the roadbed to correct gradation problems.
- (2) Notify the engineer whenever the running average exceeds a warning limit. When two consecutive running averages exceed a warning limit, the engineer and contractor will discuss appropriate corrective action. Perform the engineer's recommended corrective action and increase the testing frequency as follows:
 1. For gradation, increase the QC testing frequency to at least one randomly sampled test per 1000 tons placed.
 2. For fracture, increase the QC testing frequency to at least one test per gradation test.
- (3) If corrective action improves the property in question such that the running average after 4 additional tests is within the warning limits, the contractor may return to the testing frequency specified in B.5.3. If corrective action does not improve the property in

question such that the running average after 4 additional individual tests is still in the warning band, repeat the steps outlined above starting with engineer notification.

- (4) If the running average exceeds a control limit, material starting from the first running average exceeding the control limit and ending at the first subsequent running average inside the control limit is nonconforming and subject to pay reduction.
- (5) For individual test results significantly outside the control limits, notify the engineer, stop placing base, and suspend other activities that may affect the area in question. The engineer and contractor will jointly review data, data reduction, and data analysis; evaluate sampling and testing procedures; and perform additional testing as required to determine the extent of potentially unacceptable material. The engineer may direct the contractor to remove and replace that material. Individual test results are significantly outside the control limits if meeting one or more of the following criteria:
 1. A gradation control limit for the No. 200 sieve is exceeded by more than 3.0 percent.
 2. A gradation control limit for any sieve, except the No. 200, is exceeded by more than 5.0 percent.
 3. The fracture control limit is exceeded by more than 10.0 percent.

B.8 Department Testing

B.8.1 General

- (1) The department will conduct verification testing to validate the quality of the product and independent assurance testing to evaluate the sampling and testing. The department will provide the contractor with a listing of names and telephone numbers of all QV and IA personnel for the project, and provide test results to the contractor within two business days after the department obtains the sample.

B.8.2 Verification Testing

B.8.2.1 General

- (1) The department will have an HTCP technician, or ACT working under a certified technician, perform QV sampling and testing. Department verification testing personnel must meet the same certification level requirements specified in B.2 for contractor testing personnel for each test result being verified. The department will notify the contractor before sampling so the contractor can observe QV sampling.
- (2) The department will conduct QV tests of each base aggregate size, source or classification, and type during placement conforming to the following:
 1. One non-random test on the first day of placement.
 2. At least one random test per 30,000 tons, or fraction of 30,000 tons, placed.
- (3) The department will sample randomly, at locations independent of the contractor's QC work, collecting one sample at each QV location. The department will collect QV samples after the material has been bladed, mixed, and shaped but before compacting; except, for 3-inch aggregates, the department will collect samples from the stockpile at load-out. The department will split each sample, test half for QV, and retain half.

- (4) The department will conduct QV tests in a separate laboratory and with separate equipment from the contractor's QC tests. The department will use the same methods specified for QC testing.
- (5) The department will assess QV results by comparing to the appropriate specification limits. If QV test results conform to the specification, the department will take no further action. If QV test results are nonconforming, add the QV to the QC test results as if it were an additional QC test.

B.8.3 Independent Assurance

- (1) Independence assurance is unbiased testing the department performs to evaluate the department's QV and the contractor's QC sampling and testing including personnel qualifications, procedures, and equipment. The department will perform an IA review according to the department's independent assurance program. That review may include one or more of the following:
 1. Split sample testing.
 2. Proficiency sample testing.
 3. Witnessing sampling and testing.
 4. Test equipment calibration checks.
 5. Reviewing required worksheets and control charts.
 6. Requesting that testing personnel perform additional sampling and testing.
- (2) If the department identifies a deficiency, and after further investigation confirms it, correct that deficiency. If the contractor does not correct or fails to cooperate in resolving identified deficiencies, the engineer may suspend placement until action is taken. Resolve disputes as specified in B.9.

B.9 Dispute Resolution

- (1) The engineer and contractor should make every effort to avoid conflict. If a dispute between some aspect of the contractor's and the engineer's testing program does occur, seek a solution mutually agreeable to the project personnel. The department and contractor may review the data, examine data reduction and analysis methods, evaluate sampling and testing procedures, and perform additional testing. Use ASTM E 178 to evaluate potential statistically outlying data.
- (2) Production test results, and results from other process control testing, may be considered when resolving a dispute.
- (3) If the project personnel cannot resolve a dispute, and the dispute affects payment or could result in incorporating non-conforming product, the department will use third party testing to resolve the dispute. The department's central office laboratory, or a mutually agreed on independent testing laboratory, will provide this testing. The engineer and contractor will abide by the results of the third party tests. The party in error will pay service charges incurred for testing by an independent laboratory. The department may use third party test results to evaluate the quality of questionable materials and determine the appropriate payment. The department may reject material

or otherwise determine the final disposition of nonconforming material as specified in standard spec 106.5.

C (Vacant)

D (Vacant)

E Payment

- (1) Costs for all sampling, testing, and documentation required under this special provision are incidental to this work. If the contractor fails to perform the work required under this special provision, the department may reduce the contractor's pay. The department will administer pay reduction under the non-performance of QMP administrative item.
- (2) For material represented by a running average exceeding a control limit, the department will reduce pay by 10 percent of the contract price for the affected Base Aggregate bid items listed in subsection A. The department will administer pay reduction under the Nonconforming QMP Base Aggregate Gradation or Nonconforming QMP Base Aggregate Fracture Administrative items. The department will determine the quantity of nonconforming material as specified in B.7.2.

301-010 (20151210)

15. QMP HMA Pavement Nuclear Density.

A Description

Replace standard spec 460.3.3.2 (1) and standard spec 460.3.3.2 (4) with the following:

- (1) This special provision describes density testing of in-place HMA pavement with the use of nuclear density gauges. Conform to standard spec 460 as modified in this special provision.
- (2) Provide and maintain a quality control program defined as all activities and documentation of the following:
 1. Selection of test sites.
 2. Testing.
 3. Necessary adjustments in the process.
 4. Process control inspection.
- (3) Chapter 8 of the department's construction and materials manual (CMM) provides additional detailed guidance for QMP work and describes required procedures. Obtain the CMM from the department's web site at:
<http://roadwaystandards.dot.wi.gov/standards/cmm/index.htm>
- (4) The department's Materials Reporting System (MRS) software allows contractors to submit data to the department electronically, estimate pay adjustments, and print selected reports. Qualified personnel may obtain MRS software from the department's web site at:

<http://www.atwoodsystems.com/mrs>

B Materials

B.1 Personnel

- (1) Perform HMA pavement density (QC, QV) testing using a HTCP certified nuclear technician I, or a nuclear assistant certified technician (ACT-NUC) working under a certified technician.
- (2) If an ACT is performing sampling or testing, a certified technician must coordinate and take responsibility for the work an ACT performs. Have a certified technician ensure that all sampling and testing is performed correctly, analyze test results, and post resulting data. No more than one ACT can work under a single certified technician.

B.2 Testing

- (1) Conform to ASTM D2950 and CMM 8.15 for density testing and gauge monitoring methods. Perform nuclear gauge measurements using gamma radiation in the backscatter position. Perform each test for 4 minutes of nuclear gauge count time.

B.3 Equipment

B.3.1 General

- (1) Furnish nuclear gauges from the department's approved product list at <http://www.dot.wisconsin.gov/business/engrserv/approvedprod.htm>.
- (2) Have the gauge calibrated by the manufacturer or an approved calibration service within 12 months of its use on the project. Retain a copy of the manufacturer's calibration certificate with the gauge.
- (3) Prior to each construction season, and following any calibration of the gauge, the contractor must perform calibration verification for each gauge using the reference blocks located in the department's central office materials laboratory. To obtain information or schedule a time to perform calibration verification, contact the department's Radiation Safety Officer at:
Materials Management Section
3502 Kinsman Blvd.
Madison, Wisconsin 53704
Telephone: (608) 243-5998

B.3.2 Correlation of Nuclear Gauges

B.3.2.1 Correlation of QC and QV Nuclear Gauges

- (1) Select a representative section of the compacted pavement prior to or on the first day of paving for the correlation process. The section does not have to be the same mix design.
- (2) Correlate the 2 or more gauges used for density measurement (QC, QV). The QC and QV gauge operators will perform the correlation on 5 test sites jointly located. Record each density measurement of each test site for the QC, QV and back up gauges.

- (3) Calculate the average of the difference in density of the 5 test sites between the QC and QV gauges. Locate an additional 5 test sites if the average difference exceeds 1.0 lb/ft³. Measure and record the density on the 5 additional test sites for each gauge.
- (4) Calculate the average of the difference in density of the 10 test sites between the QC and QV gauges. Replace one or both gauges if the average difference of the 10 tests exceeds 1.0 lb/ft³ and repeat correlation process from B.3.2.1 (2).
- (5) Furnish one of the QC gauges passing the allowable correlation tolerances to perform density testing on the project.

B.3.2.2 Correlation Monitoring

- (1) After performing the gauge correlation specified in B.3.2.1, establish a project reference site approved by the department. Clearly mark a flat surface of concrete or asphalt or other material that will not be disturbed during the duration of the project. Perform correlation monitoring of the QC, QV, and all back-up gauges at the project reference site.
- (2) Conduct an initial 10 density tests with each gauge on the project reference site and calculate the average value for each gauge to establish the gauge's reference value. Use the gauge's reference value as a control to monitor the calibration of the gauge for the duration of the project.
- (3) Check each gauge on the project reference site a minimum of one test per day if paving on the project. Calculate the difference between the gauge's daily test result and its reference value. Investigate if a daily test result is not within 1.5 lb/ft³ of its reference value. Conduct 5 additional tests at the reference site once the cause of deviation is corrected. Calculate and record the average of the 5 additional tests. Remove the gauge from the project if the 5-test average is not within 1.5 lb/ft³ of its reference value established in B.3.2.2(2).
- (4) Maintain the reference site test data for each gauge at an agreed location.

B.4 Quality Control Testing and Documentation

B.4.1 Lot and Sublot Requirements

B.4.1.1 Mainline Traffic Lanes, Shoulders, and Appurtenances

- (1) A lot consists of the tonnage placed each day for each layer and target density specified in standard spec 460.3.3.1. A lot may include partial sublots.
- (2) Divide the roadway into sublots. A sublot is 1500 lane feet for each layer and target density.
- (3) A sublot may include HMA placed on more than one day of paving. Test sublots at the pre-determined random locations regardless of when the HMA is placed. No additional testing is required for partial sublots at the beginning or end of a day's paving.

- (4) If a resulting partial quantity at the end of the project is less than 750 lane feet, include that partial quantity with the last full subplot of the lane. If a resulting partial quantity at the end of the project is 750 lane feet or more, create a separate subplot for that partial quantity.
- (5) Randomly select test locations for each subplot as specified in CMM 8.15 prior to paving and provide a copy to the engineer. Locate and mark QC density test sites when performing the tests. Perform density tests prior to opening the roadway to traffic.
- (6) Use Table 1 to determine the number of tests required at each station, depending on the width of the lane being tested. When more than one test is required at a station, offset the tests 10 feet longitudinally from one another to form a diagonal testing row across the lane.

Lane Width	No. of Tests	Transverse Location
5 ft or less	1	Random
Greater than 5 ft to 9 ft	2	Random within 2 equal widths
Greater than 9 ft	3	Random within 3 equal widths

Table 1

B.4.1.2 Side Roads, Crossovers, Turn Lanes, Ramps, and Roundabouts

- (1) A lot represents a combination of the total daily tonnage for each layer and target density.
- (2) Each side road, crossover, turn lane, ramp, and roundabout must contain at least one subplot for each layer.
- (3) If a side road, crossover, turn lane, or ramp is 1500 feet or longer, determine sublots and random test locations as specified in B.4.1.1.
- (4) If a side road, crossover, turn lane, or ramp is less than 1500 feet long, determine sublots using a maximum of 750 tons per subplot and perform the number of random tests as specified in Table 2.

Side Roads, Turn Lanes, Crossovers, Ramps, Roundabouts: Sublot/Layer tonnage	Minimum Number of Tests Required
25 to 100 tons	1
101 to 250 tons	3
251 to 500 tons	5
501 to 750 tons	7

Table 2

B.4.2 Pavement Density Determination

B.4.2.1 Mainline Traffic Lanes and Appurtenances

- (1) Calculate the average subplot densities using the individual test results in each subplot.
- (2) If all subplot averages are no more than one percent below the target density, calculate the daily lot density by averaging the results of each random QC test taken on that day's material.

- (3) If any subplot average is more than one percent below the target density, do not include the individual test results from that subplot when computing the lot average density and remove that subplot's tonnage from the daily quantity for incentive. The tonnage from any such subplot is subject to disincentive pay according to standard spec 460.5.2.2.

B.4.2.2 Mainline Shoulders

B.4.2.2.1 Width Greater Than 5 Feet

- (1) Determine the pavement density as specified in B.4.2.1.

B.4.2.2.2 Width of 5 Feet or Less

- (1) If all subplot test results are no more than 3.0 percent below the minimum target density, calculate the daily lot density by averaging all individual test results for the day.
- (2) If a subplot test result is more than 3.0 percent below the target density, the engineer may require the unacceptable material to be removed and replaced with acceptable material or allow the nonconforming material to remain in place with a 50 percent pay reduction. Determine the limits of the unacceptable material according to B.4.3.

B.4.2.3 Side Roads, Crossovers, Turn Lanes, Ramps, and Roundabouts

- (1) Determine the pavement density as specified in B.4.2.1.

B.4.2.4 Documentation

- (1) Document QC density test data as specified in CMM 8.15. Provide the engineer with the data for each lot within 24 hours of completing the QC testing for the lot.

B.4.3 Corrective Action

- (1) Notify the engineer immediately when an individual test is more than 3.0 percent below the specified minimum in standard spec 460.3.3.1. Investigate and determine the cause of the unacceptable test result.
- (2) The engineer may require unacceptable material specified in B.4.3(1) to be removed and replaced with acceptable material or allow the nonconforming material to remain in place with a 50 percent pay reduction. Determine limits of the unacceptable area by measuring density of the layer at 50-foot increments both ahead and behind the point of unacceptable density and at the same offset as the original test site. Continue testing at 50-foot increments until a point of acceptable density is found as specified in standard spec 460.5.2.2(1). Removal and replacement of material may be required if extended testing is in a previously accepted subplot. Testing in a previously accepted subplot will not be used to recalculate a new lot density.
- (3) Compute unacceptable pavement area using the product of the longitudinal limits of the unacceptable density and the full subplot width within the traffic lanes or shoulders.
- (4) Retesting and acceptance of replaced pavement will be according to standard spec 105.3.

- (5) Tests indicating density more than 3.0 percent below the specified minimum, and further tests taken to determine the limits of unacceptable area, are excluded from the computations of the subplot and lot densities.
- (6) If 2 consecutive subplot averages within the same paving pass and same target density are more than one percent below the specified target density, notify the engineer and take necessary corrective action. Document the locations of such sublots and the corrective action that was taken.

B.5 Department Testing

B.5.1 Verification Testing

- (1) The department will have a HTCP certified technician, or ACT working under a certified technician, perform verification testing. The department will test randomly at locations independent of the contractor's QC work. The department will perform verification testing at a minimum frequency of 10 percent of the sublots and a minimum of one subplot per mix design. The sublots selected will be within the active work zone. The contractor will supply the necessary traffic control for the department's testing activities.
- (2) The QV tester will test each selected subplot using the same testing requirements and frequencies as the QC tester.
- (3) If the verification subplot average is not more than one percent below the specified minimum target density, use the QC tests for acceptance.
- (4) If the verification subplot average is more than one percent below the specified target density, compare the QC and QV subplot averages. If the QV subplot average is within 1.0 lb/ft³ of the QC subplot average, use the QC tests for acceptance.
- (5) If the first QV/QC subplot average comparison shows a difference of more than 1.0 lb/ft³ each tester will perform an additional set of tests within that subplot. Combine the additional tests with the original set of tests to compute a new subplot average for each tester. If the new QV and QC subplot averages compare to within 1.0 lb/ft³, use the original QC tests for acceptance.
- (6) If the QV and QC subplot averages differ by more than 1.0 lb/ft³ after a second set of tests, resolve the difference with dispute resolution specified in B.6. The engineer will notify the contractor immediately when density deficiencies or testing precision exceeding the allowable differences are observed.

B.5.2 Independent Assurance Testing

- (1) Independent assurance is unbiased testing the department performs to evaluate the department's verification and the contractor's QC sampling and testing including personnel qualifications, procedures, and equipment. The department will perform the independent assurance review according to the department's independent assurance program.

B.6 Dispute Resolution

- (1) The testers may perform investigation in the work zone by analyzing the testing, calculation, and documentation procedures. The testers may perform gauge correlation according to B.3.2.1.
- (2) The testers may use correlation monitoring according to B.3.2.2 to determine if one of the gauges is out of tolerance. If a gauge is found to be out of tolerance with its reference value, remove the gauge from the project and use the other gauge's test results for acceptance.
- (3) If the testing discrepancy cannot be identified, the contractor may elect to accept the QV subplot density test results or retesting of the subplot in dispute within 48 hours of paving. Traffic control costs will be split between the department and the contractor.
- (4) If investigation finds that both gauges are in error, the contractor and engineer will reach a decision on resolution through mutual agreement.

B.7 Acceptance

- (1) The department will not accept QMP HMA Pavement Nuclear Density if a non-correlated gauge is used for contractor QC tests.

C (Vacant)

D (Vacant)

E Payment

E.1 QMP Testing

- (1) Costs for all sampling, testing, and documentation required under this special provision are incidental to the work. If the contractor fails to perform the work required under this special provision, the department may reduce the contractor's pay. The department will administer pay reduction under the Non-performance of QMP administrative item.

E.2 Disincentive for HMA Pavement Density

- (1) The department will administer density disincentives according to standard spec 460.5.2.2.

E.3 Incentive for HMA Pavement Density

- (1) Delete standard spec 460.5.2.3.
- (2) If the lot density is greater than the minimum specified in standard spec table 460-3 and all individual air voids test results for that mixture are within +1.0 percent or -0.5 percent of the design target in standard spec table 460-2, the department will adjust pay for that lot as follows:

Percent Lot Density Above Minimum	Pay Adjustment Per Ton
From -0.4 to 1.0 inclusive	\$0
From 1.1 to 1.8 inclusive	\$0.40
More than 1.8	\$0.80

- (3) The department will adjust pay under the Incentive Density HMA Pavement bid item. Adjustment under this item is not limited, either up or down, to the bid amount shown on the schedule of items.
 - (4) If a traffic lane meets the requirements for disincentive, the department will not pay incentive on the integrally paved shoulder.
 - (5) Submit density results to the department electronically using the MRS software. The department will validate all contractor data before determining pay adjustments.
- 460-020 (20100709)

16. Ice Hot Weather Concreting, Item 501.1000.S.

Conform to standard spec 501.3.8.2 except the department will pay for ice at the contract unit price under the Ice Hot Weather Concreting bid item. This special provision only applies to work done under the following contract bid items:

Concrete Masonry Bridges	Concrete Masonry Retaining Walls
Concrete Masonry Bridges HES	Concrete Masonry Retaining Walls HES
Concrete Masonry Culverts	Concrete Masonry Endwalls
Concrete Masonry Culverts HES	Concrete Masonry Overlay Decks
High Performance Concrete (HPC) Masonry Structures	

Replace standard spec 501.4 and 501.5 with the following:

501.4 Measurement

- (1) The department will measure Ice Hot Weather Concreting by the pound, acceptably completed, measured only if the conditions prescribed in standard spec 501.3.8.2 are met.

501.5 Payment

- (1) The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
501.1000.S	Ice Hot Weather Concreting	LB

- (2) Payment for Ice Hot Weather Concreting is full compensation for ice used to cool concrete placed in hot weather as specified in standard spec 501.3.8.2.
- (3) The department will not pay directly for the concrete specified under this section. Concrete is incidental to the various bid items using it. Payment under those bid items includes providing all materials, including aggregates and associated aggregate source

testing, cement, fly ash, slag, and admixtures; for preparing, transporting, storing, protecting and curing concrete; and for contractor requirements related to testing specified in standard spec 501.3.10.

- (4) If required to remove and replace any concrete damaged by lack of proper protection. Perform this work at no expense to the department.
501-010 (20151210)

17. Concrete Barrier Temporary Precast.

Perform this work according to standard spec 603 and as hereinafter provided.

If the contractor chooses to store materials, equipment, or other items that are a hazard within 4-feet of the construction zone side (deflection zone) of the barrier, the barrier shall be anchored. The barrier must also be anchored when used on the edge of bridge decks or locations where the drop-off exceeds 2-feet, is steeper than 3H:1V and is less than 4-feet from the side of the barrier closest to the drop off. The system must be anchored as shown in the standard detail drawing.

Where temporary barrier abuts permanent barrier or parapet walls, anchor completely the first two sections of temporary barrier adjacent to the permanent barrier. Anchor the third section of temporary barrier away from the permanent barrier on either end of the temporary barrier. Anchor the fourth section of temporary barrier away from the permanent barrier at the end closest to the permanent barrier. Anchoring of the barrier wall shall be complete prior to installation of the steel rail connection.

In select areas of embankment construction, the concrete barrier shall be wrapped with silt fence fabric to aid in the retention of soil. Fabric is required on the concrete barrier from Station 22+00 C to Station 25+50 C. The fabric shall be paid under the applicable silt fence bid items.

18. Cover Plates Temporary, Item 611.8120.S.

A Description

This special provision describes furnishing, installing and removing a steel plate to cover and support asphaltic pavement and traffic loading at manholes, inlets and similar structures during milling and paving operations.

B Materials

Provide a 0.25-inch minimum thickness steel plate that extends to the outside edge of the existing masonry.

C (Vacant)

D Measurement

The department will measure Cover Plates Temporary as each individual unit, acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
611.8120.S	Cover Plates Temporary	Each

Payment is full compensation for furnishing, installing, and removing the cover plates.

The steel plates shall become the property of the contractor when no longer needed in the contract work.

611-006 (20151210)

19. Crash Cushions Temporary.

Complete work according to standard spec 614 and as hereinafter provided.

Supplement standard spec 614.3.3 with the following:

Locate the manufacturer's foundation pad adjacent to the existing paved shoulder. Provide a transition foundation pad section using a 15:1 taper rate after the required manufacturer's crash cushion foundation pad. The transition foundation pad shall be the same width as the manufacturer's crash cushion foundation pad where they meet and transition to match the edge of pavement/shoulder. Construct this transition piece using identical materials and depths used for the crash cushion pad. Place aggregate base course behind the transition pad section to blend to existing slopes. The transition foundation pad shall be incidental to item Crash Cushions Temporary.

20. Salvaged Rail.

Perform this work according to the pertinent requirements of standard spec 204 and standard spec 614 and as hereinafter provided.

Completely disassemble the existing beam guard and carefully remove all salvageable posts, blocks, guardrail and hardware (brackets, reflectors, nuts, washers, bolts and other appurtenances) in a manner that will preclude any damage (cutting or destructive measures are not allowed). Store the salvaged materials on the right-of-way, outside the limits of construction at a location approved by the engineer. Store salvaged materials as follows:

- Posts – Banded and neatly stacked on pallets.
- Blocks - Banded and neatly stacked on pallets.
- Beams - Banded and neatly stacked on pallets.
- Hardware – In 5-gallon pails or burlap sacks.

Upon completion of the removal and storage of salvageable materials, contact Randy Gunderson, St. Croix County Patrol Superintendent at (715) 796-2339. St. Croix County will inspect the materials and will have the right to reject any damaged or otherwise unacceptable materials.

Remove all other materials from the right-of-way and properly dispose of them, including items rejected by St. Croix County.

This work also includes entirely removing the posts and backfilling their hole as necessary.

21. Removing Signs Type II, Item 638.2602.

This work shall be according to the pertinent requirements of standard spec 638 and as provided here.

Type II signs are the department's property. All department signs removed, and not identified for reuse, shall be separated, plywood from aluminum signs, and the aluminum signs shall be palletized for shipment and handling with a forklift. Contact DTSD Sign Shop Coordinator Steve Allard at (715) 855-7671 at least three business days prior to delivery to coordinate shipment to be delivered to the DTSD Sign Shop Distribution Center at one of the following locations:

Dunn County Highway Shop, 3303 USH 12 East, Menomonie, WI 54751

LaCrosse County Highway Shop, 301 Carlson Rd, West Salem, WI 54669

Price County Highway Shop, 704 N. Lake Ave, Phillips, WI 54555

Washburn County Highway Shop, 1600 CTH H, Spooner, WI 54801

Wood County Highway Shop, 555 17th Ave North, Wisconsin Rapids, WI 54495

22. Nighttime Work Lighting-Stationary.

A Description

Provide portable lighting as necessary to complete nighttime work. Nighttime operations consist of work specifically scheduled to occur after sunset and before sunrise.

B (Vacant)

C Construction

C.1 General

This provision shall apply when providing, maintaining, moving, and removing portable light towers and equipment-mounted lighting fixtures for nighttime stationary work operations, for the duration of nighttime work on the contract.

At least 14 days prior to the nighttime work, furnish a lighting plan to the engineer for review and acceptance. Address the following in the plan:

1. Layout, including location of portable lighting – lateral placement, height, and spacing. Clearly show on the layout the location of all lights necessary for every aspect of work to be done at night.
2. Specifications, brochures, and technical data of all lighting equipment to be used.
3. The details on how the luminaires will be attached.
4. Electrical power source information.
5. Details on the louvers, shields, or methods to be employed to reduce glare.
6. Lighting calculations. Provide illumination with average to minimum uniformity ratio of 5:1 or less throughout the work area.
7. Detail information on any other auxiliary equipment.

C.2 Portable Lighting

Provide portable lighting that is sturdy and free standing and does not require any guy wires, braces, or any other attachments. Furnish portable lighting capable of being moved as necessary to keep up with the construction project. Position the portable lighting and trailers to minimize the risk of being impacted by traffic on the roadway or by construction traffic or equipment. Provide lightning protection for the portable lighting. Portable lighting shall withstand up to 60 mph wind velocity.

If portable generators are used as a power source, furnish adequate power to operate all required lighting equipment without any interruption during the nighttime work. Provide wiring that is weatherproof and installed according to local, state, federal (NECA and OSHA) requirements. Equip all power sources with a ground-fault circuit interrupter to prevent electrical shock.

C.3 Light Level and Uniformity

Position (spacing and mounting height) the luminaires to provide illumination with an average to minimum uniformity ratio of 5:1 or less throughout the work area.

Illuminate the area as necessary to incorporate construction vehicles, equipment, and personnel activities.

C.4 Glare Control

Design, install, and operate all lighting supplied under these specifications to minimize or avoid glare that interferes with all traffic on the roadway or that causes annoyance or discomfort for properties adjoining the roadway. Locate, aim, and adjust the luminaires to provide the adequate level of illumination and the specified uniformity in the work area without the creation of objectionable glare.

Provide louvers, shields, or visors, as needed, to reduce any objectionable levels of glare. As a minimum, ensure the following requirements are met to avoid objectionable glare on the roadways open to traffic in either direction or for adjoining properties:

1. Aim tower-mounted luminaires, either parallel or perpendicular to the roadway, so as to minimize light aimed toward approaching traffic.
2. Aim all luminaires such that the center of beam axis is no greater than 60 degrees above vertical (straight down).

If lighting does not meet above-mentioned criteria, adjust the lighting within 24 hours.

C.5 Continuous Operation

Provide and have available sufficient fuel, spare lamps, generators, and qualified personnel to ensure that the lights will operate continuously during nighttime operation. In the event of any failure of the lighting system, discontinue the operation until the adequate level of illumination is restored. Move and remove lighting as necessary.

D (Vacant)

E Payment

Costs for furnishing a lighting plan, and for providing, maintaining, moving, and removing portable lighting, tower mounted lighting, and equipment-mounted lighting required under this special provision are incidental to the contract.
643-010 (20100709)

23. Pavement Marking Grooved Wet Reflective Epoxy 4-Inch, Item 646.2304.S; 8-Inch, Item 646.2308.S.

A Description

This special provision describes furnishing, grooving, and installing wet reflective epoxy pavement marking as shown on the plans, according to standard spec 646, and as hereinafter provided.

B Materials

Furnish a 20 mils application of modified epoxy binder pavement marking, Epoplex LS65, Ennis-Flint HPS-4 or Dow Poly-Carb Mark 55.4, or approved equal, in a grooved slot. Provide a double drop system of 5.3 pounds per gallon of 3M elements Series 70E wet reflective beads for white marking and 71E for yellow markings and Utah Performance beads mixture at a drop rate of 12-22 pounds per gallon.

Replace standard spec 646.2.3 (1) with the following:

Furnish Utah Performance beads with the following gradation:

Utah Bead Gradation

US Mesh	Percent Passing (ASTM D1214)
18	65-80
20	
25	
30	30-50
40	
50	0-5

Beads shall achieve a minimum of 250 mcd, initial, and 80 mcd, for white after one year from placement, per ASTM E 2177, 45 seconds after the pavement marking is wetted.

C Construction

C.1 General

For quality assurance, provide the engineer and the region's Marking Section evidence of manufacturer training in the proper placement and installation of the wet reflective epoxy/bead marking.

Plane the grooved lines according to details in the plan. Use grooving equipment with a free-floating, independent cutting or grinding head. Plane a minimum number of passes to create a smooth groove. Remove lane line and center line pavement markings during the grooving process.

C.2 Groove Depth for Asphalt

Cut the groove to a depth of 80 mils $\pm$ 10 mils from the pavement surface. Measure depth using a straightedge placed perpendicular to the groove. The department may periodically check groove depths.

C.3 Groove Depth for Concrete

Cut the groove to a depth of 60 mils $\pm$ 10 mils from the pavement surface or, if tined from the high point of the tined surface. Measure depth using a straightedge placed perpendicular to the groove. The department may periodically check groove depths.

C.4 Groove Width – Longitudinal Markings

Cut the groove 1 inch wider than the width of the pavement marking.

C.5 Groove Position

Position the groove edge according to Standard Detail Drawing Pavement Marking (Mainline). If necessary, groove a minimum of 4 inches, but not greater than, 12 inches from both ends of the pavement marking segment. Achieve straight alignment with the grooving equipment.

C.6 Groove Cleaning

C.6.1 Concrete

Cooling the cutting head with water may be necessary for some applications and equipment. If cooling water is necessary, flush the groove immediately with high-pressure water after cutting to remove any build-up of cement dust and water slurry. If this is not done, the slurry may harden in the groove.

If water is used in the grooving process, allow the groove to dry a minimum of 24 hours after groove cleaning, and prior to pavement marking application. The groove surface shall be clean and dry before applying the marking. Use a high-pressure air blower with at least 185 ft³/min air flow and 120 psi air pressure to clean the groove; use of the air blower does not decrease the amount of time required for the groove to dry.

C. 6.2 New Asphalt

Groove pavement five or more days after paving.

If opening to traffic an asphalt lane that is not grooved, place temporary pavement marking. For asphalt lanes not open to traffic, temporary pavement marking is not required.

Use a high-pressure air blower with at least 185 ft³/min air flow and 90 psi air pressure to clean the groove.

C. 6.3 Existing Asphalt

Check for structural integrity in supporting grooving operations. If the structural integrity of the asphalt pavement is inadequate to support grooving operations, immediately notify the engineer.

Use a high-pressure air blower with at least 185 ft³/min air flow and 90 psi air pressure to clean the groove.

D Measurement

The department will measure Pavement Marking Grooved Wet Reflective Epoxy (Width) by the linear foot of line, acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid items:

ITEM NUMBER	DESCRIPTION	UNIT
646.2304.S	Pavement Marking Grooved Wet Reflective Epoxy 4-Inch	LF
646.2308.S	Pavement Marking Grooved Wet Reflective Epoxy 8-Inch	LF

Payment is full compensation for cleaning and preparing the pavement surface; furnishing and installing the epoxy, 3M elements and beads; and for removing existing or temporary marking, if necessary.

646-024 (20141107)

24. General Requirements for Electrical Work.

Amend standard spec 651.2, Materials, by adding the following paragraphs:

- (7) The approved products list is located at:
<http://www.dot.wisconsin.gov/business/engrserv/docs/ap0/electrical.pdf>

25. Electrical Work By Others.

Under Project 1021-01-70, the Wisconsin Department of Transportation Northwest Region Electrical Unit will perform the following work for all temporary and permanent street lighting systems:

Inspect staking of conduit, pull boxes, temporary wood poles and concrete bases prior to construction or installation. Staking must be approved by WisDOT before starting work.

Inspection of the conduit system prior to installing lighting wire. Inspection of wiring terminations prior to energizing the system.

Contact WisDOT Northwest Region Electrical Unit at (715) 839-3787 at least two weeks in advance of starting work to arrange for inspection of the staking and performing wire installations and terminations.

26. Lighting Control Cabinet 120/240 30-Inch, Item 659.2130.

This article describes modifications to chapter 659.

Replace standard spec 659.2, Materials, to read as follows:

- (1) Furnish lighting components from the department's approved products list.
- (2) Furnish a 120/240 volt - single phase Lighting Control Cabinet from the WisDOT qualified electrical products list. Add the following components, per the control cabinet schematic in the plans, to the lighting control cabinet:
 - 4 – 15 Amp single pole circuit breakers
- (3) Furnish necessary wiring, miscellaneous accessories, and hardware as required for a complete and fully operational unit.

Replace standard spec 659.3.5, Lighting Control Cabinet, to read as follows:

- (1) Provide lighting and ramp gate control cabinet together with the circuit wiring connections, hardware and fittings the plans show.

- 27. Ramp Closure Gates Hardwired 26-FT, Item 662.1026.S; Ramp Closure Gates Hardwired 37-FT, Item 662.1037.S; Ramp Closure Gates Hardwired 40-FT, Item 662.1040.S; Ramp Closure Gate Arms Stockpile 26-FT, Item 662.3026.S; Ramp Closure Gate Arms Stockpile 37-FT, Item 662.3037.S; Ramp Closure Gate Arms Stockpile 40-FT, Item 662.3040.S; Ramp Closure Gate Flashers Stockpile, Item 662.4000.S.**

A Description

This special provision describes providing hardwired freeway on-ramp closure gates on type 5 steel luminaire poles. This special provision also describes furnishing and delivering spare gate arms and flashers.

B Materials

B.1 General

Provide five user manuals and a listing of vendors and contact information for each manufactured component including flasher electrical components.

The engineer may allow alternates equal to specified manufactured components. The engineer may require plan detail modifications to accommodate alternates. The engineer may accept alternate arms or mounting adaptors only if the contractor can demonstrate that the department can easily remove and replace the arms.

B.2 Components

Furnish type 5 steel poles designed to carry twin 15-foot luminaire arms and conforming to standard spec 657 and with dimensions for acceptable installation of the ramp gate hardware as shown on the detail. Ensure a contiguous pole by eliminating the hand hole near base of pole, thus allowing uninhibited mounting of the gate pivot assembly.

Furnish galvanized steel nuts and bolts conforming to ASTM A307 except where designated as high strength (HS), conform to ASTM A325. For the ramp closure gate locking mechanism, furnish a handle nut to fit on a 3/4-inch.

Furnish grade A36 steel for the gate supports, gate pivot assembly, and associated hardware galvanized after fabrication by either a mechanical or hot-dip process. Grind welded connections, rough edges, and burrs smooth before galvanizing to ensure a finished appearance. Ensure that the galvanized coating conforms to ASTM A 153.

Provide aluminum/fiberglass gate arms of the nominal length the bid item indicates and conforming to plan dimensions. Cover gate arms on two sides with alternating red and white shop-applied type H reflective from the department's approved products list. Also provide a shear pin base that is the manufacturer's "permanent pivot" style. Obtain components from:

B&B Roadway
15191 Hwy 243
Russellville, AL 35654
Tel: (888) 560-2060

Gate arm: model MU605

Furnish a worm gear winch with a single line vertical lift capacity of 2000 lbs. Ensure that the winch has hardened steel gears, a handgrip, permanently lubricated bearings, a reinforced arc-welded reel assembly, and mounting plate. Ensure that the winch can be mounted to the winch mount plate shown on the construction details and the handgrip can be operated without conflict with the pole or ramp gate assembly. Furnish a 2-inch outdoor rated, rot resistant polyester strap for the connection between the worm gear winch and the gate arm pivot assembly.

Furnish hardwire power system and connections conforming to the following:

1. Cabinet

Furnish cabinet assemblies, power wire terminal strips, and power supplies for the on-ramp closure gate systems.

The cabinet shall be the following dimensions: 9-inches wide, 15-inches high, and 5-inches deep.

Minimum wall thickness of the aluminum castings shall be 3/16-inch.

Cabinet body shall have a cast rain hood over the top of the door opening.

Hinges shall consist of 3/6-inch diameter pins in cast hinge bosses that allow door to swing no less than 180° when open.

Cabinet shall be capable of being field prepared for top, bottom, or rear mounting and wire entrance holes.

Set screws shall be stainless steel.

Assembly shall be water resistant by the door flange in full contact with and compressing a neoprene gasket held by an adhesive to a groove cast into the cabinet body.

The cabinets shall consist of a cabinet body, door, and latch cast from aluminum alloy 319 or approved equivalent. The door lock shall be a standard police lock reinforced with a steel plate which is keyed the same as the standard traffic control cabinets. The cast shall be free of voids, pits, dents, molding sand, and excessive foundry grinding marks. All radii shall be smooth and intact. Exterior and interior

surfaces shall be smooth and cosmetically acceptable, free of molding fins, cracks, and other blemishes.

The aluminum shall meet the following minimum requirements:

- Yield Strength – 18 ksi
- Tensile Strength – 27 ksi
- Brinell Hardness – 70
- Elongation (% in 2 inches) – 2

The assembly shall have an alodine conversion coating to provide corrosion resistance and a proper base for paint adhesion.

Furnish a stainless steel or anodized steel mounting adapter plate to mount the cabinet to a pole with stainless steel banding straps.

2. Power Converter

Furnish the cabinet with a 120 VAC to 12 VDC power converter.

Furnish the cabinet with a 10 position terminal block for the 12 VDC power distribution. Power wire terminal strips 10 position feed-through terminal blocks UL recognized for No. 22 AWG wire through No. 16 AWG wire and UL rated for 15 amps. The terminals shall be tin-plated brass with brass clips and clamps.

Furnish gate flasher assemblies conforming to the following:

1. A 2-conductor connector, rated 12 volts at 5 amps minimum.
2. A 2-amp weather resistant in-line fuse and fuse holder.
3. Wiring harness made from 6-conductor 14 AWG stranded insulated control cable.
4. A 12 V flasher controller, capable of providing LED flashers with 5% to 100% duty cycle at a one-second pulse repetition rate.
5. A 4-conductor male/female electrical connector pair, 10 amp capacity for each connection, weather resistant, and mounted to allow rapid gate arm replacement.
6. A 5-amp mercury switch with less than 3 ohms “on” resistance and a 20 to 30 degree activation angle. Mount the switch on the gate arm to activate the flashers when the gate arm is lowered more than 45 degrees from vertical.

7. Furnish red LED flashers meeting the requirements of the MUTCD and/or AREMA standards for hue and brightness.

Power consumption	0.45 amp @ 10.5 V
Life expectancy	100,000 hrs
Directionality	0-degree cone orthogonal to face of flasher
Compliance temperature	-40° C to +70° C

Furnish electrical wires with jackets conforming to the following color scheme throughout the ramp closure gate system:

- Hot = Black or Red
- Neutral = White
- Ground = Green

Furnish a weatherproof hardened steel padlock with a minimum 2 1/4-inch shackle height and user programmable 4-digit combination.

C Construction

C.1 Ramp Closure Gates

Under the Ramp Closure Gates bid items, provide ramp closure gate at the locations the plans show. Apply marine grade anti seize compound compound to all bolt threads and to the interface between the aluminum base and steel pole. The engineer may direct adjustment of the gate arm assembly to ensure the correct vertical and angular orientation of the completed closure gate.

Install cabinet with power supply, flasher controller, and other components. Connect the 120 VAC to 12 VDC power supply to the circuit breaker in the breaker disconnect box. Connect the 120 VAC to 12 VDC power supply to the 10-position terminal block and connect the 12 VDC components to the terminal block.

Connect the 12 VDC terminal strip to the wiring harness through the female side of a 2-terminal polarized electrical connector. Connect male side of this connector to the flasher controller and the female side of a weatherproof polarized 4-conductor electrical connector.

Attach the male side of the 4 conductor electrical connector, mercury switch, wiring harness, and the three LED flasher units to the portion of the flasher assembly mounted on the breakaway portion of the gate arm. Adjust mercury switch so that as the gate arm is lowered to a maximum of 45 degrees from the vertical, the gate flasher assembly is energized, and the LEDs begin to flash. Ensure that when the gate arm is raised to a minimum of 15 degrees from vertical, the mercury switches the gate flasher assembly off.

Install structure identification plaques in the location the plan details show.

Eau Claire Sign Shop
WisDOT NW Region
5009 US 53 South
Eau Claire, WI 54701
(715) 839-3787

C.2 Furnishing Gate Arms

Under the Ramp Closure Gate Arms Stockpile bid items, furnish and deliver spare arms of the nominal length the bid item indicates conforming to B.2. Deliver spare gate arms to an address provided by:

Eau Claire Sign Shop
WisDOT NW Region
5009 US 53 South
Eau Claire, WI 54701
(715) 839-3787

C.3 Furnishing Flashers

Under the Ramp Closure Gate Flasher Stockpile bid item, furnish and deliver spare gate flasher assemblies conforming to B.2. Deliver spare gate arms to an address provided by:

Eau Claire Sign Shop
WisDOT NW Region
5009 US 53 South
Eau Claire, WI 54701
(715) 839-3787

D Measurement

The department will measure the Ramp Closure Gates Hardwired bid items as each individual installation, acceptably completed.

The department will measure the Ramp Closure Gate Arms Stockpile bid items and Ramp Closure Gate Flashers Stockpile as each individual unit, acceptably furnished and delivered.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
662.1026.S	Ramp Closure Gates Hardwired 26-FT	Each
662.1037.S	Ramp Closure Gates Hardwired 37-FT	Each
662.1040.S	Ramp Closure Gates Hardwired 40-FT	Each
662.3026.S	Ramp Closure Gate Arms Stockpile 26-FT	Each
662.3037.S	Ramp Closure Gate Arms Stockpile 37-FT	Each
662.3040.S	Ramp Closure Gate Arms Stockpile 40-FT	Each
662.4000.S	Ramp Closure Gate Flashers Stockpile	Each

Payment for the Ramp Closure Gate Hardwired bid items is full compensation for providing ramp closure gates including support poles; for gate arm assemblies including guides, collars, and gate arms; for cabinets, wiring, and power converters; for structure identification plaques; for gate flashers; and for padlock.

Payment for the Ramp Closure Gate Arms Stockpile is full compensation for furnishing and delivering spare ramp closure gate arms.

Payment for the Ramp Closure Gate Flashers Stockpile is full compensation for furnishing and delivering ramp spare closure gate flasher assemblies.
662-005 (2014630)

28. Portable Changeable Message Sign (PCMS) Cellular Communications, SPV.0045.01.

A Description

This special provision describes cellular communications requirements for use with PCMS. Cellular communication allows the department to control PCMS during incidents or other emergencies through Trans Suite software. The department will notify contractor of message changes.

B Materials

Provide a cellular modem and antenna that enables the department to communicate and control PCMS conforming to standard spec 643.2.7.

B.1 Cellular Modem and Antenna

Furnish an EV-DO Cellular modem registered to a 3G or 4G Cellular carrier. The cellular modem must include 1 or more external antennas, 1 or more 10/100 Ethernet ports, and 1 or more db9 Serial RS-232 interfaces. The device must be able to handle -30° C to +75° C and powered by a 12VDC power supply. The cellular modem must have a built-in secure router with NAT, port forwarding and IP pass-through capabilities.

Provide management IP and passwords for the cellular modem to the department.

Access includes IP address, serial port setting, and password(s). Antenna cable shall be continuous without splices. Mount the antenna at the highest practical location on the PCMS.

C Construction

Conform to standard spec 643.3.7. Install cellular modem in a lockable, weatherproof compartment in the PCMS trailer.

A minimum of 14 days prior to deployment, demonstrate to the department that the cellular modem is capable of communications with Trans Suite software.

If remote communications are interrupted or temporarily unavailable, contractor will be notified by the department to change the message.

D Measurement

The department will measure Portable Changeable Message Sign (PCMS) Cellular Communications by the day, acceptably completed, measured as the number of calendar days each cellular modem for PCMS is available for exclusive use under the contract. The department will deduct one day for each calendar day the sign communications are required but out of service for more than 2 hours.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0045.01	Portable Changeable Message Sign (PCMS) Cellular Communications	DAY

Payment is full compensation for providing, operating and maintaining a cellular modem and antenna, and for making message changes if cellular communications are interrupted or temporarily unavailable.

29. Concrete Curb and Gutter Cure and Seal Treatment, Item SPV.0090.01.**A Description**

This work includes treating all newly constructed concrete curb and gutter with a surface cure and seal treatment as shown on plans, and as hereinafter provided.

B Materials

Materials shall conform to a clear treating material listed on the current approved WISDOT product list for "Cure and Seal Compounds for Non-Trafficked Surfaces on Structural Masonry".

C Construction

Application rates for the treating material shall be according to the manufacturer's specifications.

D Measurement

The department will measure the Concrete Curb and Gutter Cure and Seal Treatment by the linear foot, acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0090.01	Concrete Curb and Gutter Cure and Seal Treatment	LF

Payment is full compensation for providing Concrete Curb and Gutter Cure and Seal Treatment.

30. Fence Chain Link Polymer-Coated 6-Ft., Item SPV.0090.02.

A Description

This special provision describes furnishing and installing a new polymer-coated fence system on structures according to the pertinent plan details, as directed by the engineer and as hereinafter provided. The color of all components in this fence system shall be the same and shall be as specified on the plans.

B Materials

All materials for this fence system shall be new stock, free from defects impairing strength, durability, and appearance. Fabric shall be produced by methods recognized as good commercial practice. Wire used in the manufacture of the fabric shall be capable of being woven into fabric without the polymer-coating cracking or peeling. Pipes used in framework shall be straight, true to section and free of defects. All burrs at the ends of pipes shall be removed before galvanizing. The polymer-coating shall be a dense impervious covering, applied without voids, tears or cuts that reveal the substrate. Excessive roughness, bubbles, blisters and flaking in the polymer-coating will be a basis for rejection.

B.1 Fabric

Provide steel chain link fence fabric that conforms to the requirements of ASTM F668, Class 2b, a polymer-coating fused and adhered to wire that is zinc-coated. Provide fabric woven from 9-gage wire using plan specified mesh size, diamond pattern, with both the top and bottom selvages knuckled. The minimum breaking strength of the wire shall be 1290 lbs. The color of polymer-coating shall conform to the requirements of ASTM F934.

B.2 Framework

Provide steel rails, posts and post sleeves conforming to the requirements of ASTM F1083, Standard Weight Pipe (Schedule 40) of the size (O.D.) and weight as shown on the plans. The minimum yield strength shall be 30,000 psi and the minimum tensile strength shall be 48,000 psi. These components shall be zinc-coated inside and outside by the hot-dip process as stated in ASTM F1083. Provide polymer-coating over zinc-coating that conforms to ASTM F1043. The color of polymer-coating shall conform to the requirements of ASTM F934, and match the color of the other fence components. Weld base plate to posts or post sleeves and complete any additional welding of components before galvanizing.

B.3 Fittings

Provide end post caps, line post caps, top rail sleeves, rail ends, line rail clamps, brace bands, tension bands, tension bars, and tie wires that are steel and conform to the requirements of ASTM F626. Tie wires shall be round and 9-gage wire. These components (excluding tie wires) shall be zinc-coated by the hot-dip process as stated in ASTM F626. Provide polymer-coating over zinc-coating on components (excluding tie wires) that conforms to the requirements of ASTM F626. For tie wires, provide polymer-coating on wire that is zinc-coated using the same procedure as used for the wires in the fence fabric. End post caps and line post caps shall fit tightly over posts to prevent moisture intrusion. Supply dome style caps for end posts and loop type caps for line posts. The color of polymer-coating shall

conform to the requirements of ASTM F934, and match the color of the other fence components.

B.4 Bolts

All bolts are to be supplied with lock washers and nuts. Use galvanized steel bolts, nuts and washers per plan details.

B.5 Tests

B.5.1 Fabric and Tie Wire

Breaking Strength: ASTM A370

Zinc-Coating Requirements

Weight of Zinc-Coating: ASTM A90

Polymer-Coating Requirements

Thickness of Polymer-Coating: ASTM F668

Adhesion: ASTM F668

Accelerated Aging Test: ASTM F668, D1499

Mandrel Bend Test: ASTM F668

B.5.2 Framework

Tensile and Yield Strength: ASTM E8

Zinc-Coating Requirements

Weight of Zinc-Coating: ASTM A90

Polymer-Coating Requirements

Thickness of Polymer-Coating: ASTM E376

Adhesion: ASTM F1043

Accelerated Aging Test: ASTM F1043, D1499

B.5.3 Fittings

Zinc-Coating Requirements

Weight of Zinc-Coating: ASTM A90

Polymer-Coating Requirements

Thickness of Polymer-Coating: ASTM F626

Adhesion: ASTM F1043 (same test as for framework)

Accelerated Aging Test: ASTM F1043, D1499 (same test as for framework)

B.6 Submittals

In addition to the engineer, send submittals listed in this section to the name below for informational purposes:

David Nelson
WisDOT (Bureau of Structures)
4802 Sheboygan Ave. (Room 601)
PO Box 7916
Madison, WI 53707

B.6.1 Shop Drawings

Submit shop drawings showing the details of fence construction. Show the fence height, post spacing, rail location, and all dimensions necessary for the construction of the chain link fence. Label the end posts, line posts, rails, post sleeves, top rail sleeves, bolts and fittings. State the polymer-coating type used on the fabric, framework and fittings and the Class of coating used on the fabric. State the color of polymer-coating to be used on the fence components. For the fabric, state the wire gage, mesh size, and type of selvages used. For the framework, state the size (O.D.) and unit weight for the posts and rails. For the fittings, state the size for top rail sleeves, brace bands, tension bands, tension bars, line rail clamps, size and type of bolts, and the tie wire gage. State the material type used for fabric, framework, and fittings. Also give the breaking strength for the fabric wire and the tensile and yield strength properties for the framework.

B.6.2 Specification Compliance

Submit certification of compliance with material specifications. Provide material certification and test documentation for fabric, framework, fittings and hardware that shows that all materials meet or exceed the specifications of this contract and the tests in B5. This document shall provide the name, address and phone number of the manufacturer, and the name of a contact person.

C Construction

C.1 Delivery, Storage and Handling

Deliver material to the site in an undamaged condition. Upon receipt at the job site, all materials shall be thoroughly inspected to ensure that no damage occurred during shipping or handling and condition of materials is in conformance with these specifications. If polymer-coating is damaged, contractor shall repair or replace components as necessary to the approval of the engineer at no additional cost to the Owner. Carefully store material off the ground to ensure proper ventilation and drainage and to provide protection against damage caused by ground moisture. Handle all polymer-coated material with care.

C.2 Touch-up and Repair

For minor damage caused by shipping, handling or installation to polymer-coated surfaces, touch-up the finish in conformance with the manufacturer's recommendations. Provide touch-up coating such that repairs are not visible from a distance of 6-feet. If damage is beyond repair, the fencing component shall be replaced at no additional cost to the Owner. The contractor shall provide the engineer with a copy of the manufacturer's recommended repair procedure and materials before repairing damaged coatings.

C.3 General

Install the chain link fence according to ASTM F567 and the manufacturer's instructions. The contractor shall provide staff that is thoroughly familiar with the type of construction involved and materials and techniques specified. Chain link fabric shall be installed on the side of the posts indicated on the plans. Fabric shall be attached to the end posts with tension bars and tension bands. It shall be attached to rails, and posts without tension bands, with tie wires. The fabric shall be installed and pulled taut to provide a smooth and uniform appearance free from sag, without permanently distorting the fabric diamond or reducing

the fabric height. Install top rail to pass through line post caps and form a continuous brace between end posts. Minimum length of top rail between splices shall be 20-feet. Splice top rail at joints with sleeves for a rigid connection. Locate splices near ¼ point of post spacing. Heads of bolts shall be on the side of the fence adjacent to pedestrian traffic.

D Measurement

The department will measure Fence Chain Link Polymer-Coated 6-Ft. by the linear foot, satisfactorily furnished and installed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0090.02	Fence Chain Link Polymer-Coated 6-Ft.	LF

Payment is full compensation for fabricating, galvanizing and polymer-coating all fence components, and transporting to jobsite; for erecting components to create a polymer-coated fence system, including any touch-up and repairs.

31. Concrete Sidewalk Cure and Seal Treatment, Item SPV.0165.01.

A Description

This work includes treating all newly constructed concrete sidewalk with a surface cure and seal treatment as shown on plans, and as hereinafter provided.

B Materials

Materials shall conform to a clear treating material listed on the current approved WISDOT product list for “Cure and Seal Compounds for Non-Trafficked Surfaces on Structural Masonry”.

C Construction

Application rates for the treating material shall be according to the manufacturer’s specifications.

D Measurement

The department will measure the Concrete Sidewalk Cure and Seal Treatment by the square foot, acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0165.01	Concrete Sidewalk Cure and Seal Treatment	SF

Payment is full compensation for providing Concrete Sidewalk Cure and Seal Treatment.

32. Concrete Median Sloped Nose Cure and Seal Treatment, Item SPV.0165.02.

A Description

This work includes treating all newly constructed Concrete Median Sloped Nose with a surface cure and seal treatment as shown on plans, and as hereinafter provided.

B Materials

Materials shall conform to a clear treating material listed on the current approved WISDOT product list for “Cure and Seal Compounds for Non-Trafficked Surfaces on Structural Masonry”.

C Construction

Application rates for the treating material shall be according to the manufacturer’s specifications.

D Measurement

The department will measure the Concrete Median Sloped Nose Cure and Seal Treatment by the square foot, acceptably completed.

E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0165.02	Concrete Median Sloped Nose Cure and Seal Treatment	SF

Payment is full compensation for providing Concrete Median Sloped Nose Cure and Seal Treatment.

33. HMA Pavement 3 MT 58-28 S 3.0% Va Regression Special, Item SPV.0195.01 and HMA Pavement 4 MT 58-34 H 3.0% Va Regression Special, Item SPV.0195.02.

A Description

This special provision describes providing HMA pavement including the binder under a combined bid item along with air void regression as described here within.

Define gradations, traffic levels, and asphaltic binder designation levels as follows:

<u>GRADATIONS (NMAS)</u>	<u>TRAFFIC VOLUME</u>	<u>DESIGNATION LEVEL</u>
1 37.5 mm	LT Low	S Standard
2 25.0 mm	MT Medium	H Heavy
3 19.0 mm	HT High	V Very Heavy
4 12.5 mm		E Extremely Heavy
5 9.5 mm		
6 4.75 mm		

Construct HMA pavement of the type the bid item indicates encoded as follows:



Conform to standard spec 460 as modified in this special provision.

B Materials

Add the following to standard spec 460.2:

Design mixtures conforming to tables 460-1 and 460-2 to 4.0% air voids to establish the aggregate structure.

Determine the target JMF Asphalt Binder content for production from the mix design data corresponding to 3.0% air voids (97% Gmm) target at Ndes. The air voids at the design number of gyrations, (Ndes) shall be achieved by the addition of liquid asphalt meeting the contract specifications.

Production shall conform to VMA and Dust to Binder Ratio requirements of table 460-1 and 460-2.

Replace standard spec table 460-1 with the following to change the footnotes to refer to LT and MT mixes instead of E-0.3 and E-3 mixes:

TABLE 460-1 AGGREGATE GRADATION MASTER RANGE AND VMA REQUIREMENTS

SIEVE	PERCENTS PASSING DESIGNATED SIEVES						
	NOMINAL SIZE						
	37.5 mm (#1)	25.0 mm (#2)	19.0 mm (#3)	12.5 mm (#4)	9.5 mm (#5)	SMA 12.5 mm (#4)	SMA 9.5 mm (#5)
50.0-mm	100						
37.5-mm	90 – 100	100					
25.0-mm	90 max	90 - 100	100				
19.0-mm	_____	90 max	90 - 100	100		100	
12.5-mm	_____	_____	90 max	90 - 100	100	90 - 97	100
9.5-mm	_____	_____	_____	90 max	90 - 100	58 - 72	90 - 100
4.75-mm	_____	_____	_____	_____	90 max	25 - 35	35 - 45
2.36-mm	15 – 41	19 - 45	23 - 49	28 - 58	20 - 65	15 - 25	18 - 28
75-µm	0 – 6.0	1.0 - 7.0	2.0 - 8.0	2.0 - 10.0	2.0 - 10.0	8.0 - 12.0	10.0 - 14.0
% MINIMUM VMA	11.0	12.0	13.0	14.0 ^[1]	15.0 ^[2]	16.0	17.0

^[1] 14.5 for LT and MT mixes

^[2] 15.5 for LT and MT mixes

Replace standard spec table 460-2 with the following to switch from E mixes to LT, MT, and HT mixes; and change the tensile strength ratio requirements to 0.75 without antistripping additive and 0.80 with antistripping additive:

TABLE 460-2 MIXTURE REQUIREMENTS

Mixture type	LT	MT	HT	SMA
ESALs x 106 (20 yr design life)	<2.0	2 - <8	>8	> 5 mil
LA Wear (AASHTO T96)				
100 revolutions(max % loss)	13	13	13	13
500 revolutions(max % loss)	50	45	45	40
Soundness (AASHTO T104) (sodium sulfate, max % loss)	12	12	12	12
Freeze/Thaw (AASHTO T103) (specified counties, max % loss)	18	18	18	18
Fractured Faces (ASTM 5821) (one face/2 face, % by count)	65/ —	75 / 60	98 / 90	100/90
Flat & Elongated (ASTM D4791) (max %, by weight)	5 (5:1 ratio)	5 (5:1 ratio)	5 (5:1 ratio)	20 (3:1 ratio)
Fine Aggregate Angularity (AASHTO T304, method A, min)	40	43	45	45
Sand Equivalency (AASHTO T176, min)	40	40	45	50
Gyratory Compaction				
Gyrations for Nini	6	7	8	8
Gyrations for Ndes	40	75	100	65
Gyrations for Nmax	60	115	160	160
Air Voids, %Va (%Gmm Ndes)	4.0 (96.0)	4.0 (96.0)	4.0 (96.0)	4.0 (96.0)
% Gmm Nini	<= 91.5 ^[1]	<= 89.0 ^[1]	<= 89.0	—
% Gmm Nmax	<= 98.0	<= 98.0	<= 98.0	—
Dust to Binder Ratio ^[2] (% passing 0.075/Pbe)	0.6 - 1.2	0.6 - 1.2	0.6 - 1.2	1.2 - 2.0
Voids filled with Binder (VFB or VFA, %)	68 - 80 ^[4] [5]	65 – 75 ^[3] [4]	65 - 75 ^[3] [4]	70 - 80
Tensile Strength Ratio (TSR) (ASTM 4867)				
no antistripping additive	0.75	0.75	0.75	0.75
with antistripping additive	0.80	0.80	0.80	0.80
Draindown at Production Temperature (%)	—	—	—	0.30

- [1] The percent maximum density at initial compaction is only a guideline.
- [2] For a gradation that passes below the boundaries of the caution zone (ref. AASHTO MP3), the dust to binder ratio limits are 0.6 - 1.6.
- [3] For #5 (9.5mm) and #4 (12.5 mm) nominal maximum size mixtures, the specified VFB range is 70 - 76%.
- [4] For #2 (25.0mm) nominal maximum size mixes, the specified VFB lower limit is 67%.
- [5] For #1 (37.5mm) nominal maximum size mixes, the specified VFB lower limit is 67%.

Replace standard spec 460.2.8.2.1.7 paragraph six with the following to base payment adjustment on the combined bid item unit price:

- (6) The department will reduce payment for nonconforming QMP HMA mixtures, starting from the stop point to the point when the running average is back inside the warning limits, as follows:

PAYMENT FOR MIXTURE^[1] ^[2]		
	PRODUCED WITHIN WARNING BANDS	PRODUCED OUTSIDE JMF LIMITS
ITEM		
Gradation	90%	75%
Asphalt Content	85%	75%
Air Voids	70%	50%
VMA	90%	75%

^[1] For projects or plants where the total production of each mixture design requires less than 4 tests refer to CMM 8-36.

^[2] Payment is in percent of the contract unit price for the HMA Pavement bid item. The department will reduce pay based on the nonconforming property with lowest percent pay. The department will administer pay reduction under the Nonconforming QMP HMA Mixture administrative item.

Replace standard spec 465.2 with the following:

(1) Under the Asphaltic Surface, Asphaltic Surface Detours, and Asphaltic Surface Patching bid items; submit a mix design. Furnish asphaltic mixture meeting the requirements specified for either type LT or MT mix under standard spec 460.2; except the engineer will not require the contractor to conform to the quality management program specified under standard spec 460.2.8.

(2) Under the other 465 bid items, the contractor need not submit a mix design. Furnish aggregates mixed with a type AC asphaltic material. Use coarse and fine mineral aggregates uniformly coated and mixed with the asphaltic material in an engineer-approved mixing plant. The contractor may include reclaimed asphaltic pavement materials in the mixture.

C Construction

Replace standard spec table 460-3 with the following to switch from E mixes to LT, MT, and HT mixes and to increase field density requirements by 1.5% when operating under this HMA Pavement 3.0% Va Regression SPV:

TABLE 460-3 MINIMUM REQUIRED DENSITY^[1]

LOCATION	LAYER	PERCENT OF TARGET MAXIMUM DENSITY		
		MIXTURE TYPE		
		LT AND MT	HT	SMA ^[5]
TRAFFIC LANES ^[2]	LOWER	93.0 ^[3]	93.5 ^[4]	_____
	UPPER	93.0	93.5	_____
SIDE ROADS, CROSSOVERS, TURN LANES, & RAMPS	LOWER	93.0 ^[3]	93.5 ^[4]	_____
	UPPER	93.0	93.5	_____
SHOULDERS & APPURTENANCES	LOWER	91.0	91.0	_____
	UPPER	92.0	92.0	_____

^[1] The table values are for average lot density. If any individual density test result falls more than 3.0 percent below the minimum required target maximum density, the engineer may investigate the acceptability of that material.

^[2] Includes parking lanes as determined by the engineer.

^[3] Minimum reduced by 2.0 percent for a lower layer constructed directly on crushed aggregate or recycled base courses.

^[4] Minimum reduced by 1.0 percent for a lower layer constructed directly on crushed aggregate or recycled base courses.

^[5] The minimum required densities for SMA mixtures are determined according to CMM 8-15.

Delete standard spec 460.2.8.2.1.5(1) and replace with the following:

(1) Conform to the following control limits for the JMF and warning limits based on a running average of the last 4 data points:

ITEM	JMF LIMITS	WARNING LIMITS
Percent passing given sieve:		
37.5-mm	+/- 6.0	+/- 4.5
25.0-mm	+/- 6.0	+/- 4.5
19.0-mm	+/- 5.5	+/- 4.0
12.5-mm	+/- 5.5	+/- 4.0
9.5-mm	+/- 5.5	+/- 4.0
2.36-mm	+/- 5.0	+/- 4.0
75-µm	+/- 2.0	+/- 1.5
Asphaltic content in percent	- 0.3	- 0.2
Air voids in percent	+ 1.3/-1.0	+ 1.0/-0.7
VMA in percent ^[1]	- 0.5	- 0.2

^[1] VMA limits based on minimum requirement for mix design nominal maximum aggregate size in [table 460-1](#).

Delete standard spec 460.2.8.3.1.6(1) and replace with the following:

(1) The engineer will provide test results to the contractor within 2 mixture-production days after obtaining the sample. The quality of the product is acceptably verified if it meets the following limits:

- Va is within a range of 2.0 to 4.3 percent.

- VMA is within minus 0.5 of the minimum requirement for the mix design nominal maximum aggregate size.

D Measurement

The department will measure HMA Pavement 3 MT 58-28 S 3.0% Va Regression Special and HMA Pavement 4 MT 58-34 H 3.0% Va Regression Special conforming to standard spec 460.4.

E Payment

Add the following to standard spec 460.5 to switch from E mixes to LT, MT, and HT mixes; to combine the pavement and binder bid items; and to specify a pay reduction for pavement placed with nonconforming binder:

The department will pay for measured quantities at the contract unit price under the following bid items:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0195.01	HMA Pavement 3 MT 58-28 S 3.0% Va Regression Special	TON
SPV.0195.02	HMA Pavement 4 MT 58-34 H 3.0% Va Regression Special	TON

Payment is full compensation for providing HMA Pavement including asphaltic binder.

In addition to any pay adjustment under standard spec 460.2.8.2.1.7(6), the department will adjust pay for nonconforming binder under the Nonconforming QMP Asphaltic Material administrative item. The department will deduct 25 percent of the contract unit price of the HMA Pavement bid item per ton of pavement placed with nonconforming PG binder the engineer allows to remain in place.

APPENDIX A

Test Procedures for HMA Pavement 3% Va Regression SPV

Delete CMM 8-15.10.1 Target maximum Density and replace with the following:

For pavement density determination, the target value in lb/ft³ (PCF) is established using the mixture maximum specific gravity (G_{mm}). For the first day of a paving mixture design, the target maximum density will be the G_{mm} value corresponding to 3.0% air voids on the mix design multiplied by 62.24 lb/ft³ (PCF). The target maximum density for all other days will be the four G_{mm} test running average value from the end of the previous days' production multiplied by 62.24 lb/ft³ (PCF). If four tests have not been completed by the end of the first day, the average of the completed G_{mm} test values multiplied by 62.24 lb/ft³ (PCF) will be used until a running average of 4 is established.

The following data must be recorded for each test on the worksheet for MRS entry

- Density standard and moisture standard
- Density count, moisture counts or contact and air gap counts
- Total wet density or bulk density
- % Compaction
- Manufacturer name and serial number
- Operator's name
- Mix design number (WisDOT 250 ID) and daily Target max density target number ($G_{mm} \times 62.24 \text{ lb/ft}^3$)

Delete CMM 8-15.15.2.1 Examples of Computing Incentive/Disincentive for Density and replace with the following:

Example 1 (nominal tonnage lots):

HMA Pavement, Type 4 HT 58-34 S Lot 2R

Total HMA Tonnage for Project: 20,000 Tons

% Density of Target Maximum (G_{mm}) = 90.9%

Required % Density of the G_{mm} = 93.5%

Lot Tonnage = 750

Contract Price per Ton = \$26.50

From Table 460-3 of this SPV.0195 and 460.5.2.2:

- Amount below Specified Minimum (Table 460-3 of this SPV) = $93.5 - 90.9 = 2.6$
- Payment Factor (SS 460.5.2.2) = 70% (30% Credit to the Department)
- Credit to the Department (HMA Mix) = $30\% \times \$26.50/\text{Ton} \times 750 \text{ Tons} = \$5,962.50$

If this were the only failing lot on the project, the final quantities on the estimate would be as shown in Table 3.

Example 2 (nominal tonnage lots):

HMA Pavement, Type 4 HT 58-34 S Lot 3R

% Density of Target Maximum (G_{mm}) = 95.1%

Required % Density of the G_{mm} = 93.5%

Lot Tonnage = 750

Air Voids for day = 2.9-3.2%

Payment Factor = $95.1 - 93.5$ (Table 460-3) = 1.6

Adjusted Unit Price = $\$0.40/\text{Ton} \times 750 \text{ Tons}$ (SS 460.5.2.3(1) of this SPV) = \$300

If this is the only lot with a higher density than required on the project, the final quantities on the estimate would be as shown in Table 3 below:

Table 3 Estimate for Pay Adjustment for Incentive/Disincentive Density

Bid Item	Description	Unit	Cost/Unit	Total Quantity	Total
460.7244	HMA Type 4 HT 58-34 S	TON	\$26.50	20,000	\$530,000.00
460.2000	Incentive Density HMA Pavement	DOL	\$1.00	300.00	\$300.00
804.2005	Disincentive Density HMA Pavement	DOL	\$1.00	-(5,962.5)	-(5,962.50)

Project Information for Examples 3 and 4 (daily tonnage lots & linear sublots):

A project begins at station 56+78 and ends at station 234+25. It is a 2-lane roadway with a shoulder on each side. The traffic lanes are 12 feet wide and the shoulders are 3 feet wide. Shown in the figure below is the eastbound traffic lane and shoulder for the length of the project. The contractor will be paving the shoulder integrally with the traffic lane. The pavement is a 2-inch overlay and the same HMA mix type is used on the entire project. The HMA mixture includes 5.5% asphaltic material. The bid price for the HMA pavement item is \$41.75 per ton. The specified target density for the traffic lane is 93.5%. The target density for the shoulder is 92.0%.

Day 1:

The contractor begins paving at station 56+78 and ends the day at station 102+97, a total length of 4,619 feet. A quantity of 677 tons was placed on the eastbound traffic lane, and 169 tons was placed on the integral shoulder.


Day 2:

The contractor begins paving at station 102+97. Due to traffic staging requirements, the contractor stops paving at station 159+93, 5,696 feet, and begins paving again at station 202+36. They end the day at the end of the project, station 234+25, 3,189 additional feet. A quantity of 1303 tons was paved on the eastbound traffic lane, and 326 tons was placed on the integral shoulder.

Day 3:

The contractor begins paving at station 159+93 and ends the day at station 202+36, 4,243 feet. A total of 622 tons was placed on the eastbound traffic lane, and 156 tons was placed on the integral shoulder.

Figure 6 Linear Sublot Example Project

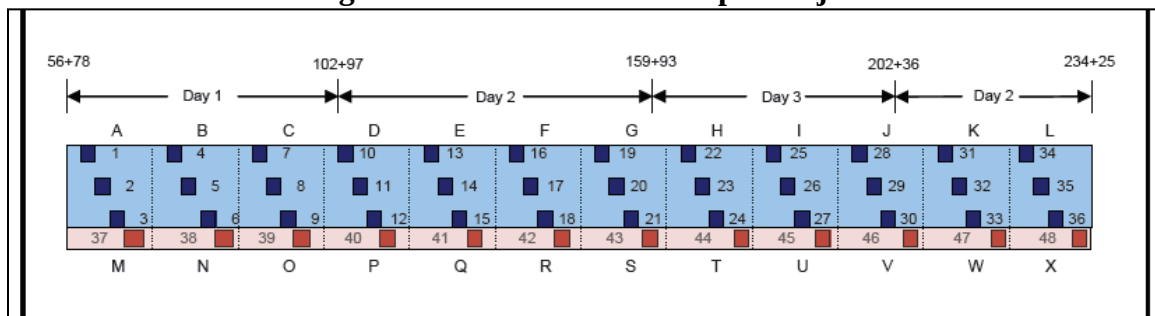

Example 3 (daily tonnage lot & linear sublots):

Use the example project information and the following test results from day 1. All of the day's air voids tests were acceptable. (Density Calculated off the PCF value, subplot is the average of the density %)

Sublot ID	Test ID	% Density	Sublot Avg % Density
A 56+78 to 71+78	1	94.3	94.6
	2	94.7	
	3	94.9	
B 71+78 to 86+78	4	94.6	95.0
	5	95.2	
	6	95.1	
C 86+78 to 101+78	7	94.1	94.6
	8	95.0	
	9	94.8	
M	37	93.2	93.2
N	38	94.2	94.2
O	39	93.0	93.0

1. Compute the average density for each traffic lane sublot and each shoulder sublot.

SOLUTION: See the results in the table above.

2. Compute the density incentive or disincentive for the day's paving.

SOLUTION:

- Traffic Lane:

The specified target density for the traffic lane is 93.5%. All of the sublot averages were no more than one percent below the target density, so all of the day's traffic lane test results are used to compute the daily lot density and the lot incentive pay.

- Lot density = $(94.3 + 94.7 + 94.9 + 94.6 + 95.2 + 95.1 + 94.1 + 95.0 + 94.8) / 9$ tests = 94.7%

According to 460.5.2.3(1) of this SPV, this lot density is eligible for incentive pay of \$0.40 per ton. 677 tons of HMA was placed on the traffic lane on day 1, therefore the contractor receives \$270.80 density incentive for the day 1 traffic lane lot. This is for all of sublot A, B & C and the 119' in sublot D that did not reach the random number.

- Shoulder:

The minimum required density is 92.0%. All of the subplot averages were acceptable, so all of the day's shoulder tests are used to compute the shoulder lot density. The average of all the shoulder tests is 93.5%. According to the specification, this lot density is eligible for incentive pay of \$0.40 per ton. 169 tons of HMA was placed on the shoulder on day 1, therefore the contractor receives \$67.60 density incentive for the day 1 shoulder lot.

Example 4 (daily tonnage lot & linear sublots):

Use the example project information and the following test results from day 3. All of the day's air voids tests were acceptable.

Sublot ID	Test ID	% Density	Sublot Avg % Density
H 161+78 to 176+78	22	92.3	92.3
	23	92.4	
	24	92.2	
I 176+78 to 191+78	25	95.6	95.4
	26	95.3	
	27	95.4	
J 191+78 to 202+36	28	92.5	92.4
	29	92.3	
	30	92.4	
T	44	91.9	91.9
U	45	94.4	94.4
V	46	92.1	92.1

Compute the density incentive or disincentive for the day's paving.

SOLUTION:

1. Traffic Lane:

According to the specification, a minimum density of 93.5% is required for the traffic lane. When verifying whether or not the subplot densities meet the requirements, it is found that subplot H and subplot J have average densities that are more than one percent below the required minimum. According to the specification, the quantity of HMA pavement placed this day in each of these sublots is subject to disincentive, and the day's test results within these sublots are not included when computing the incentive for the remainder of the lot.

2. Sublot H:

Day 3 began inside the limits of subplot G, at station 159+93, but beyond its random test location. The tests for subplot G represent material placed on day 2. The tests in subplot H represent the day 3 material from station 159+93 to 176+78, a total length of 1685 feet long (185' from subplot G, paved on day 3, and 1500' in subplot H) by 12 feet wide.

Quantity represented by tests in subplot H =

$$\frac{(1685' \times 12')}{(9 \text{ sf/sy})} \times \frac{(2 \text{ in.} \times 110 \text{ lb/sy/in})}{(2000 \text{ lb/ton})} = 247 \text{ tons}$$

According to the disincentive pay table in the specification, the quantities are subject to a pay factor equal to 95 percent of the contract price. This is equivalent to a 5 percent pay reduction.

$$\text{Disincentive Density HMA Pavement} = 247 \text{ tons} \times (\$41.75/\text{ton} \times 0.05) = -\$515.61$$

3. Sublot I:

Quantity represented by tests in subplot I =

$$\frac{(1500' \times 12')}{(9 \text{ sf/sy})} \times \frac{(2 \text{ in.} \times 110 \text{ lb/sy/in})}{(2000 \text{ lb/ton})} = 220 \text{ tons}$$

According to the incentive pay table, 220 tons of the HMA pavement item are eligible for an incentive of \$0.80 per ton, or a total of \$176.00.

4. Sublot J:

Day 3 ended within the limits of subplot J, beyond its random test location. The day 3 quantity placed within subplot J, from station 191+78 to 202+36, at length of 1,058 feet, is represented by its tests. The day 2 quantity placed toward the end of subplot J is represented by the tests taken on day 2 within subplot K.

Quantity represented by tests in subplot J=

$$\frac{(1058' \times 12')}{(9 \text{ sf/sy})} \times \frac{(2 \text{ in.} \times 110 \text{ lb/sy/in})}{(2000 \text{ lb/ton})} = 155 \text{ tons}$$

According to the disincentive pay table in the specification, the quantities are subject to a pay factor equal to 95 percent of the contract price. This is equivalent to a 5 percent pay reduction.

$$\text{Disincentive Density HMA Pavement} = 155 \text{ tons} \times (\$41.75/\text{ton} \times 0.05) = -\$323.56$$

5. Shoulder:

All of the day 3 shoulder sublots have acceptable density values, so we use all of the results to compute the day's shoulder lot density.

Day 3 shoulder lot density = $(91.9 + 94.4 + 92.1) / 3 \text{ tests} = 92.8\%$

The lot density of 92.8% is not more than 1.0% above the required minimum of 92.0%, therefore the day 3 shoulder pavement does not receive any density incentive.

Day 3 Incentive/Disincentive Summary:

Incentive Density HMA Pavement (Lot I) = \$176.00

Disincentive Density HMA Pavement (Lot H) = -\$515.61

Disincentive Density HMA Pavement (Lot J) = -\$323.56

Delete CMM 8-36.6.1 QC Tests and replace with the following:

QC testing must be completed, and data posted, on the day the sample was taken or as approved by the engineer.


For administration of projects requiring only one, two, or three single tests per mix design, apply the following tolerances table for mixture evaluation:

- $V_a = 2.0 - 5.0\%$
- $VMA = - 1.3$ from required minimums for Table 460-1 as revised in STSP 460-025
- $AC = \text{within } -0.1 \text{ of JMF Pb after regression}$

Delete CMM 8-36 Figure 8 HMA Verification Dispute Resolution Scenarios and replace with the following:

HMA Verification Dispute Resolution Scenario Examples


NOTE: The following diagrams (A-H) represent standard scenarios. Specific project detail and troubleshooting activities may present cause for adjustment to this guidance




Test Values	Tolerance between QC & QC-ret	Category
Gmm	0.00-0.015	=WBL
Gmm	0.016-0.020	=JMFL
Gmm	> 0.020	> JMFL
Gmb	0.00-0.020	=WBL
Gmb	0.021-0.025	=JMFL
Gmb	> 0.025	> JMFL

Example A

A1 QV (3-2+)




A2 QV (3-2+)



END RESULT

A No Adjustment (NA) QMP Controls
 *The Referee third party (BTS) test results determine the Pass/Fail status of the QV sample once it has gone into Dispute Resolution


Example B



END RESULT

B Isolated Area: Localized Problem
 Backward and forward comparison results meet WBL tolerances
 Standard Tons
 (50 ton @ 50% pay)


Example C

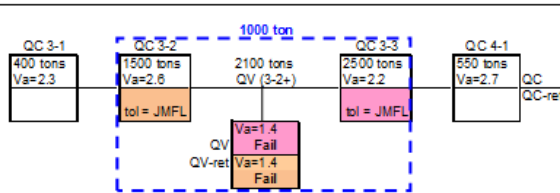

END RESULT


C Full QV Window
 Backward and forward comparison results exceed WBL tol but are within JMFL tol
 Tonnes each side of QV point are affected between Forward and Backward QC-ret points
 (ex: 2500-1500 = 1000 ton @ 50% pay)

Example D

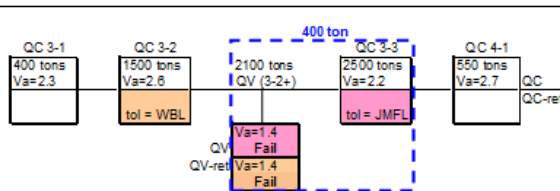

END RESULT

D Forward QV GAP
 Backward comparison results meet WBL tol
 Forward comparison results exceed WBL tol but meet JMFL tol
 Tons from QV point to Forward QC-ret point
 (ex 2500-2100 = 400 @ 50% Pay)

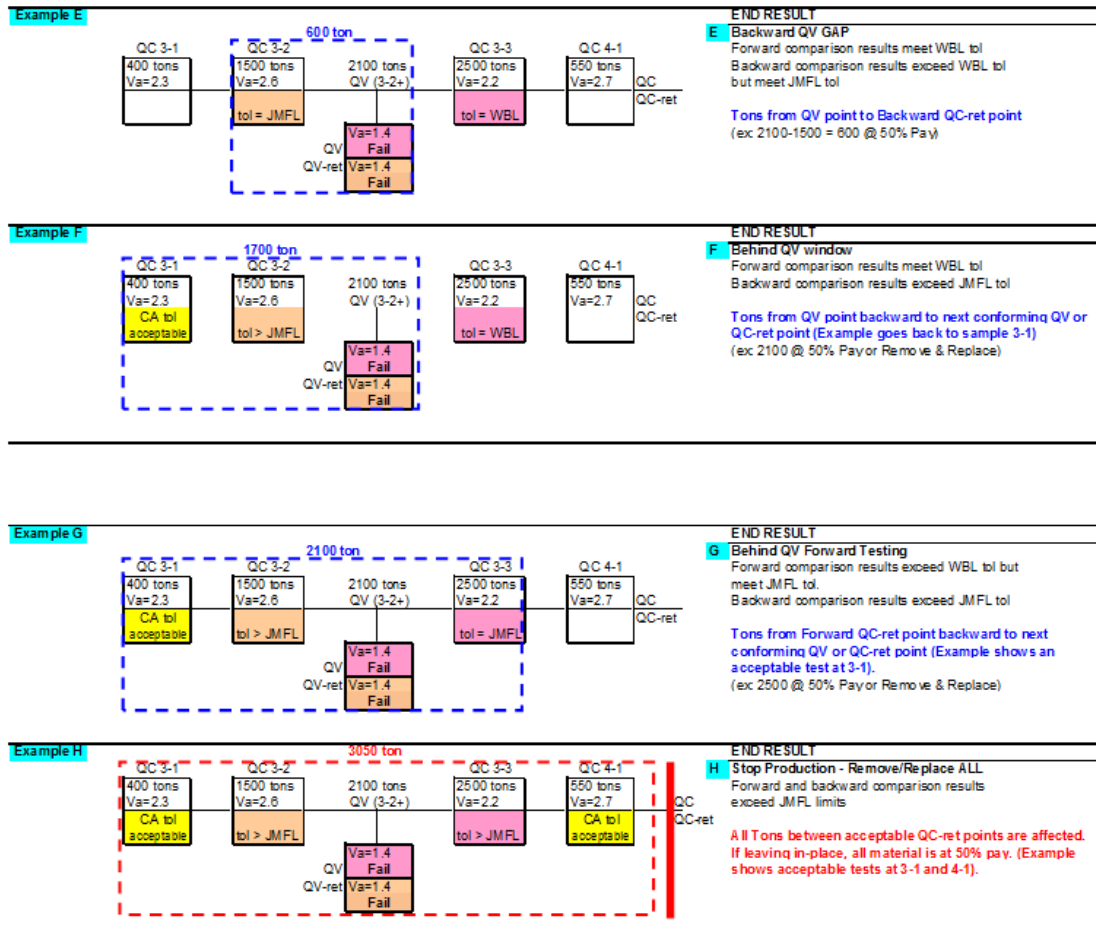

Delete CMM 8-66.2.2(3) and replace with the following:

3. Determine trial asphalt binder contents (estimated by experience or by calculation based on aggregate properties of trial blends).
 - Compact gyratory specimens using a minimum of 3 asphalt binder contents (0.5% increments) and covering a range to include the estimated optimum design binder content as well as 3.0% air voids. Use N_{des} for compaction effort.
 - Compare trial binder content results. The design binder content (by either graphing or interpolating the trial data results) is determined as that meeting requirements stated in standard spec 460. The department will determine the optimum binder content corresponding to 3.0% air voids by linear regression of the trial gyratory specimens.

**ADDITIONAL SPECIAL PROVISION 1 (ASP 1)
FOR TRANSPORTATION ALLIANCE FOR NEW SOLUTIONS (TrANS)
PROGRAM EMPLOYMENT PLACEMENTS AND APPRENTICESHIPS**

The Safe, Accountable, Flexible, Efficient Transportation Equity Act: A Legacy for Users (SAFETEA-LU), Section 5204(e) – Surface Transportation Workforce Development Training and Education, provides for 100 percent Federal funding if the core program funds are used for training, education, or workforce development purposes, including “pipeline” activities. The core programs includes: Congestion Mitigation and Air Quality Improvement (CMAQ) Program, Highway Bridge Program (HBP), Interstate Maintenance (IM), National Highway System (NHS), and Surface Transportation Program (STP). These workforce development activities cover surface transportation workers, including OJT/SS programs for women and minorities as authorized in 23 U.S.C. §140(b).

TrANS is an employment program originally established in 1995 in Southeastern Wisconsin. Currently TrANS has expanded to include TrANS program locations to serve contractors in Southeast (Milwaukee and surrounding counties), Southcentral (Dane County and surrounding counties including Rock County), and most Northeastern Wisconsin counties from locations in Keshena, Rhinelander and surrounding far Northern areas. TrANS attempts to meet contractor’s needs in other geographic locations as possible. It is an industry driven plan of services to address the outreach, preparation, placement and retention of women, minorities and non-minorities as laborers and apprentices in the highway skilled trades. These candidate preparation and contractor coordination services are provided by community based organizations. For a list of the TrANS Coordinators contact the Disadvantaged Business Enterprise Office at (414) 438-4583 in Milwaukee or (608) 266-6961 in Madison. These services are provided to you at no cost.

I. BASIC CONCEPTS

Training reimbursements to employing contractors for new placements, rehires or promotions to apprentice of TrANS Program graduates will be made as follows:

- 1) **On-the-Job Training, Item ASP.1T0G, ASP 1 Graduate.** At the rate of \$5.00 per hour on federal aid projects when TrANS graduates are initially hired, or seasonally rehired, as unskilled laborers or the equivalent.

Eligibility and Duration: To the employing contractor, for up to 2000 hours from the point of initial hire as a TrANS program placement.

Contract Goal: To maintain the intent of the Equal Employment Opportunity program, it is a goal that 4 (number) TrANS Graduate(s) be utilized on this contract.

- 2) **On-the-Job Training, Item ASP.1T0A, ASP 1 Apprentice.** At the rate of \$5.00 per hour on federal aid projects at the point when an employee who came out of the TrANS Program is subsequently entered into an apprenticeship contract in an underutilized skilled trade (this will include the Skilled Laborer Apprenticeship when that standard is implemented).

Eligibility and Duration: To the employing contractor, for the length of time the TrANS graduate is in apprentice status.

Contract Goal: To maintain the intent of the Equal Employment Opportunity program, it is a goal that 5 (number) TrANS Apprentice(s) be utilized on this contract.

- 3) The maximum duration of reimbursement is two years as a TrANS graduate plus time in apprentice status.
- 4) If a TrANS program is not available in the contractor's area and another training program is utilized, payment of On-the-Job Training hours may be approved by the Wisconsin Department of Transportation (WisDOT) if the training program meets the established acceptance criteria. Only On-the-Job Training Hours accumulated after WisDOT approval will be reimbursed as specified under Items ASP.1T0G and ASP.1T0A. For more information, contact the Disadvantaged Business Enterprise Office at the phone numbers listed above.
- 5) WisDOT reserves the right to deny payments under items ASP.1T0G and ASP.1T0A if the contractor either fails to provide training or there is evidence of a lack of good faith in meeting the requirements of this training special provision.

I. RATIONALE AND SPECIAL NOTE

The \$5.00 per hour now being paid for TrANS placements is intended to cover the duration of two years to allow for reaching entry-level laborer status. An additional incentive, the \$5.00 rate, would promote movement into the underutilized skilled trades' apprenticeships and applies until the individual completes their apprenticeship. These incentives benefit TrANS candidates by giving them a better opportunity to enter a skilled trade; benefits contractors who will be assisted in meeting their EEO profiles and goals; and benefits the public who will see the program reinforce larger public-private employment reform in Wisconsin. The pool of TrANS graduates was created for the purpose of addressing underutilization in the skilled trades, an objective that is further reinforced by a parallel retention pilot program, known as the Companywide Reporting. *Whether or not reimbursement is involved, the WisDOT reassures contractors who are in the Companywide Program that TrANS placements still contribute toward fulfilling the new hire goal of 50% women and minorities.* Based on data administered by United States Department of Labor (US DOL), the highway skilled trades remain underutilized for women statewide (less than 6.9%); and for minorities in all counties (% varies by county).

NOTE: *Unless using other advancement strategies, contractors are encouraged to use some or all of this monetary incentive to offset the cut in hourly wages an individual may incur when entering an apprenticeship if the full general laborer hourly rate has been previously paid. No special accounting measures are required.*

II. IMPLEMENTATION

The implementation of ASP 1 is intended to cover only the amount of time it takes for underutilization to be resolved across the trades. This will be measured annually at the county and/or state levels using data administered by WisDWD in relation to goals set by the USDOL-

OFCCP. With appropriate state and federal approvals, we may also do some measurement at the company level.

It is the contractor's responsibility to note on their Certified Payrolls if their employee is a TrANS graduate or a TrANS apprentice. The District EEO Coordinators utilize the information on the Certified Payrolls to track the hours accumulated by TrANS Graduates and TrANS apprentices on WisDOT contracts. Payment under this ASP 1 is made based on the hours recorded off of the Certified Payrolls. Tracking may eventually include improved linkages with the WisDWD apprentice database, information from company and committee level sources.

TrANS is nondiscriminatory by regulation, and is a tool for optional use by contractors to address the underutilization of women and minorities as laborers and apprentices in our industry's skilled trades.

IV. TRANS TRAINING

As part of the contractor's equal employment opportunity affirmative action program, training shall be provided to employees enrolled in apprenticeship and on-the-job training programs as follows:

The contractor shall provide on-the-job training aimed at developing full journey workers in the type of trade or job classifications involved. In the event the contractor subcontracts a portion of the contract work, the contractor shall determine how many, if any, of the trainees are to be trained by the subcontractor provided, however, that the contractor shall retain the primary responsibility for meeting the training requirements imposed by this special provision. The contractor shall also insure that this training special provision is made applicable to such subcontract.

Training and upgrading of minorities and women toward journey workers status is a primary objective of this training special provision. Accordingly, the contractor shall make every effort to enroll minority trainees and women (e.g., by conducting systematic and direct recruitment through public and private sources likely to yield minority trainees and women trainees); to the extent such persons are available within a reasonable area of recruitment. The contractor will be given an opportunity and will be responsible for demonstrating the steps that they have taken in pursuance thereof, prior to determination as to whether the contractor is in compliance with this training special provision. This training commitment is not intended, and shall not be used, to discriminate against any applicant for training, whether a member of a minority group or not.

No employee shall be employed as a trainee in any classification in which they have successfully completed a training course leading to journey workers status or in which they have been employed as a journey worker. The contractor should satisfy this requirement by including appropriate questions in the employee application or by other suitable means. Regardless of the method used, the contractor's records should document the findings in each case.

V. APPRENTICESHIP TRAINING

The Federal Highway Administration's (FHWA) policy is to require full use of all available training and skill improvement opportunities to assure increased participation of minority groups, disadvantaged persons and women in all phases of the highway construction industry. The FHWA On-the-Job Training (OJT) Program requires the State transportation agencies (STAs) to establish apprenticeships and training programs targeted to move women, minorities, and disadvantaged individuals into journey-level positions to ensure that a competent workforce is available to meet highway construction hiring needs, and to address the historical underrepresentation of members of these groups in highway construction skilled crafts.

The OJT Supportive Services (OJT/SS) Program was established in Title 23 Code of Federal Regulations (CFR), Part 230) to supplement the OJT program and support STA training programs by providing services to highway construction contractors and assistance to highway construction apprentices and trainees. The primary objectives of OJT/SS are:

- (1) To increase the overall effectiveness of the State highway agencies' approved training programs.
- (2) To seek other ways to increase the training opportunities for women, minorities, and disadvantaged individuals.

The STAs are responsible for establishing procedures, subject to the availability of Surface Transportation and Bridge Funds under 23 U.S.C. §140(b) (Nondiscrimination), for the provision of supportive services with respect to training programs approved under 23 CFR, Part 230(a) (Equal Employment Opportunity on Federal and Federal-aid Construction Contracts – including Supportive Services).

The contractor and subcontractor shall maintain records to demonstrate compliance with these apprenticeship requirements. Reasonable exemptions and modifications to and from any or all of these requirements will be determined by the Wisconsin Department of Transportation-Civil Rights Office. A request for an exemption or modification, with justification, shall be made in writing, addressed to WisDOT Civil Rights Office, 4802 Sheboygan Avenue, P.O. Box 7965, Rm. 451, Madison, WI 53707.

ADDITIONAL SPECIAL PROVISION 3 DISADVANTAGED BUSINESS ENTERPRISE PROGRAM

1. Description

General

- a. The disadvantaged business enterprise (DBE) requirements of 49 CFR Part 26 apply to this contract. The department's DBE goal is shown on the cover of the bidding proposal. The contractor can meet the specified contract DBE goal by procuring services or materials from a DBE or by subcontracting work to a DBE. The department calculates the DBE participation as the dollar value of DBE participation included in the bid expressed as a percentage of the total contract bid amount.
- b. Under the contract, the contractor agrees to provide the assistance to participating DBE's in the following areas:
 - i. Produce accurate and complete quotes.
 - ii. Understand highway plans applicable to their work.
 - iii. Understand specifications and contract requirements applicable to their work.
 - iv. Understand contracting reporting requirements.
- c. The department encourages the contractor to assist and develop DBE firms to become fully knowledgeable contractors to successfully perform on its contracts.
- d. For information on the disadvantaged business program, visit the department's Civil Rights and Compliance Section website at:

<http://wisconsindot.gov/Pages/doing-bus/civil-rights/dbe/default.aspx>

2. Definitions

- a. Interpret these terms, used throughout this additional special provision, as follows:
 - i. **Bid Percentage:** The DBE percentage indicated in the bidding proposal at the time of bid.
 - ii. **DBE:** A disadvantaged business enterprise (DBE) certified as a DBE by the department and included on the department's list of certified DBE's who are determined to be ready, willing and able.
 - iii. **DBE goal:** The amount of DBE participation expected in the contract as shown on the cover of the Highway Work Proposal.
 - iv. **Discretionary Goal:** A contractor assigned DBE goal, typically abbreviated as "Disc" on the cover of the Highway Work Proposal, which is enforced as committed.
 - v. **Manufacturer:** A firm that operates or maintains a factory or establishment that produces, on the premises, the materials, supplies, articles, or equipment required under the contract.
 - vi. **Supplier:** A firm that owns, operates, or maintains a store, warehouse, or other establishment in which the materials, supplies, articles or equipment required under the contract are bought, kept in stock, and regularly sold or leased to the public.
 - vii. **Voluntary Achievement:** The amount of DBE participation achieved and reported in the contract in excess of the assigned goal.

3. DBE Percentage Required at Bid Submission

Indicate the bid percentage (i.e. 0% through 100%) of DBE participation on the completed bidding proposal, including projects with discretionary goals. For electronic submittals, show the percentage in the miscellaneous data folder, Item 3, DBE Percent. For paper submittals, show the percentage on the sheet included after the schedule of items. By submission of the bid, the bidder contractually

commits to DBE participation at or above the bid percentage, or certifies that they have utilized comprehensive good faith efforts to solicit and utilize DBE firms to meet the DBE participation requirements of this contract proposal, and that the bid percentage is reflective of these good faith efforts. If the bidder does not indicate the bid percentage of DBE participation on the completed bidding proposal, the department will consider the bid irregular and may reject the bid.

4. Department's DBE Evaluation Process

a. Documentation Submittal

Within 10 business days after the notification of contract award, the contractor is to identify, by name, the DBE firms whose utilization is intended to satisfy this provision, the items of work of the DBE subcontract or supply agreement and the dollar value of those items of work by completing the Commitment to Subcontract to DBE Form [DT1506] and all necessary attachment A forms, as well as, Good Faith Waiver Form [DT1202] and supporting documentation as necessary. If the contractor fails to furnish the required forms within the specified time, the department may cancel the award. Delay in fulfilling this requirement is not a cause for extension of the contract time and shall not be used as a tool to delay execution.

i. Bidder Meets DBE Goal

If the bidder indicates that the contract DBE goal is met, after award and before execution, the department will evaluate the Commitment to Subcontract to DBE Form DT1506 and attachment A(s) to verify the actual DBE percentage achieved. If the DBE commitment is verified, the contract is eligible for execution with respect to the DBE commitment.

ii. Bidder Does Not Meet DBE Goal

- (1) If the bidder indicates a bid percentage on the Commitment to Subcontract to DBE Form [DT1506] that does not meet the contract DBE goal, the bidder must submit a Good Faith Waiver Form [DT1202] and supporting documentation. After award and before execution, the department will evaluate the bidder's DBE commitment and consider the bidder's good faith waiver request.
- (2) The department will review the bidder's good faith waiver request and notify the bidder of one of the following:
 - a. If the department grants a good faith waiver, the bid is eligible for contract execution with respect to DBE commitment.
 - b. If the department rejects the good faith waiver request, the department may declare the bid ineligible for execution. The department will provide a written explanation of why the good faith waiver request was rejected. The bidder may appeal the department's rejection as allowed under 7 a. & b.

5. Department's Criteria for Good Faith Effort

The Code of Federal Regulations {CFR}, 49 CFR Part 26-Appendix A, is the guiding regulation concerning good faith efforts. However, the federal regulations do not define "good faith" but states that bidder must actively and aggressively attempt to meet the goal. The federal regulations are general and do not include every factor or effort that can be considered. As a result, each state must establish its own processes and consider the factors established in its own process when making a determination of good faith.

- a. The department will only grant a good faith waiver if the bidder has made the effort, given the relevant circumstances under the contract that a bidder actively and aggressively seeking to meet the goal would make. The department will evaluate the bidder's good faith effort to determine whether a good faith waiver will be granted. The bidder must demonstrate, on the DT1202 that they

have aggressively solicited DBE participation in an attempt to meet the contract DBE goal and attaining the stated DBE goal is not feasible.

- b. The department, in conjunction with industry stakeholders, has developed the following guidance for contractor good faith effort. The guidance and the attached appendices provide a framework for the actions required by all parties in the processing and evaluation of bidder's total efforts to achieve the project specific DBE goal prior to the bid letting date.
- c. Prime Contractors should:
 - i. Document all efforts and decisions made toward achieving the DBE goal on the contract. The bidder should use the Civil Rights & Compliance System [CRCS] and related WisDOT-approved DBE outreach tools, including the Bid Express Small Business Network, to foster DBE participation on all applicable contracts.
 - ii. Request quotes by identifying potential items to subcontract and solicit. Prime contractors are strongly encouraged to include in their initial contacts a single page including a detailed list of items for which they are accepting quotes, by project, within a letting. See *attached sample entitled "Sample Contractor Solicitation Letter" in Appendix A*. Prime contractors should also indicate a willingness to accept quotes in areas they are planning to perform themselves, **as required by federal rules**. In some cases, it might be appropriate to use DBE's to do work in a prime contractor's area of specialization.
 - (1) Solicit quotes through all reasonable and available means from certified DBE firms who match 'possible items to subcontract' and send copies to DBESS office, highlighting areas in which you are seeking quotes. Email is acceptable.
 - (2) SBN is the preferred outreach tool. <https://www.bidx.com/wi/main> Other acceptable means include postal mail, email, fax, phone call.
 - a. Primes must ask DBE firms for a response in their solicitations. See *Sample Contractors Solicitation Letter* in Appendix. This letter can be included as an attachment to the SBN sub-quote request.
 - b. Solicit quotes at least 10 calendar days prior to the letting date {ideally two Fridays before the letting} to allow DBE firms sufficient time to respond. Prime contractors should contact DBE firms early, asking them if they need help in putting together a quote, or helping to arrange for equipment needs, or solve other problems.
 - (3) Second solicitation should take place within 5 days
 - a. An email solicitation is highly recommended for this second solicitation
 - (4) Upon request, provide interested DBE firms with adequate information about plans, specifications and the requirements of the contract by letter, information session, email, phone call and/or referral.
 - (5) When potential exists, advise interested DBE firms on how to obtain bonding, line of credit or insurance as may be requested.
 - (6) Document DBE firm's interest in quoting by taking appropriate steps to follow up initial solicitation with:
 - a. Email to all prospective DBE firms in relevant work areas
 - b. Phone call log to DBE firms who express interest via written response or call.
 - c. Fax/letter confirmation
 - d. Copy of the DBE quotes
 - e. Signed copy of Bid Express SBN Record of Subcontractor Outreach Effort.

- d. Evaluate DBE quotes as documentation is critical if the prime does not utilize the DBE firm's quote for any reason.
- i. Evaluate DBE firm's capability to perform 'possible items to subcontract' using legitimate reasons, including but not limited to, **a discussion with the DBE firm** regarding its capabilities prior to the bid letting. If lack of capacity is your reason for not utilizing the DBE quote, you are required to contact the DBE directly regarding their ability to perform the work indicated in the UCP directory as their work area [NAICS code]; only the work area and/or NAICS code listed in the UCP directory will be counted for DBE credit. Documentation of the conversation is required.
 - ii. In striving to meet a DBE conscious contract goal, prime contractors are expected to use DBE quotes that are responsive and reasonable. This includes DBE quotes that are not the low quote.
 - iii. **Special Circumstance:** Evaluation of DBE quotes with tied bid items. "Tied quotes are the condition in which a subcontractor submits quotes including multiple areas of expertise across multiple work areas noting that the items and price are tied. Typically this type of quoting represents a cost saving to the prime but is not clearly stated as a discount; tied quotes are usually presented as 'all or none' quote to the prime." When non-DBE subcontractors submit tied bid items in their quotes to the prime, the DBE firms' quote may seem not competitive. In such a case, the following steps are taken in comparing the relevant quotes. These are qualitative examples.
 - (1) Compare bid items common to both quotes, noting the reasonableness in the price comparison.
 - (2) Review quotes from other firms for the bid items not quoted by the DBE firm to see if combining both can provide the same competitive advantage that the tied bid items offered.
- e. After notification of contract award, submit '**Commitment to Subcontract**' form within the time period specified in the contract.
- i. Provide the following information along with department form DT1202:
 - (1) The names, addresses, e-mail addresses, telephone numbers of DBE's contacted. The dates of both initial and follow-up contact. A printed copy of SBN solicitation is acceptable.
 - (2) A description of information provided to the DBE's regarding the plans, specifications, and estimated quantities for portions of the work to be performed by that DBE.
 - (3) Photocopies or electronic copies of all written solicitations to DBE's.
 - (4) Documentation of each quote received from a DBE and, if rejected, the reason for that rejection.
 - (5) Bidder attendance at any pre-solicitation or pre-bid meetings the department held to inform DBE's of participation opportunities available on the project.
- f. The department's DBE Support Services Office is available by phone, email or in writing to request assistance in meeting the DBE goal:

DBE Support Services Office
6150 Fond du Lac Ave.
Milwaukee, WI 53218
Phone: 414-438-4583 / 608-266-6961
Fax: 414-438-5392
E-mail: DOTDBESupportServices@dot.wi.gov

6. Bidder's Appeal Process

- a. A bidder can appeal the department's decision to deny the bidder's good faith waiver request. The bidder must provide written documentation refuting the specific reasons for rejection as stated in the department's rejection notice. The bidder may meet in person with the department if so requested. Failure to appeal within 7 calendar days after receiving the department's written notice of rejection of a good faith waiver request under constitutes a forfeiture of the bidder's right of appeal. If the bidder does not appeal, the department may declare the bid ineligible for execution.
- b. The department will appoint a representative, who did not participate in the original determination, to assess the bidder's appeal. The department will issue a written decision within 7 calendar days after the bidder presents all written and oral testimony. In that written decision, the department will explain the basis for finding that the bidder did or did not meet the contract DBE goal or make an adequate good faith effort to meet the contract DBE goal. The department's decision is final. If the department finds that the bidder did not meet the contract DBE goal or did not make adequate efforts to meet the DBE goal, the department may declare the bid ineligible for execution.

7. Department's Criteria for DBE Participation**Department's DBE List**

- a. The department maintains a DBE list on the department's website
<http://wisconsindot.gov/Documents/doing-bus/civil-rights/dbe/ucp-directory.xlsx>
- b. The DBE office is also available to assist at 414-438-4583 or 608-266-6961.

8. Counting DBE Participation**Assessing DBE Work**

- a. The department will only count the DBE usage towards the contract DBE goal if the DBE firm is certified as a DBE by one of the unified certification program agencies. If a firm becomes DBE certified before entering into a subcontract, the department may consider that DBE usage towards the contract goal. The department only counts the value of the work a DBE actually performs towards the DBE goal. The department assesses the DBE work as follows:
- b. The department counts work performed by the DBE's own resources. The department includes the cost of materials and supplies the DBE obtains for the work. The department also includes the cost of equipment the DBE leases for the work. The department will not include the cost of materials, supplies, or equipment the DBE purchases or leases from the prime contractor or its affiliate, except the department will count non-project specific leases the DBE has in place before the work is advertised.
- c. The department counts fees and commissions the DBE charges for providing a bona fide professional, technical, consultant, or managerial services. The department also counts fees and commissions the DBE charges for providing bonds or insurance. The department will only count costs the engineer deems reasonable based on experience or prevailing market rates.
- d. If a DBE subcontracts work, the department counts the value of the subcontracted work only if the DBE's subcontractor is also a DBE.
- e. The contractor shall maintain records and may be required to furnish periodic reports documenting its performance under this item.
- f. It is the prime contractor's responsibility to determine the DBE's ability to perform the work with the use of the UCP directory.

9. Commercially Useful Function

- a. The department counts expenditures of a DBE toward the DBE goal only if the DBE is performing a commercially useful function on that contract.
- b. A DBE is performing a commercially useful function if the following conditions are met:
- c. For contract work, the DBE is responsible for executing a distinct portion of the contract work and it is carrying out its responsibilities by actually performing, managing, and supervising that work.
- d. For materials and supplies, the DBE is responsible for negotiating price, determining quality and quantity, ordering, and paying for those materials and supplies.

10. Trucking

All bidders are expected to adhere to the department's current trucking policy posted on the HCCI website

<http://wisconsindot.gov/Documents/doing-bus/civil-rights/dbe/trucking-utilization-policy.pdf>

11. Manufacturers and Suppliers

The department counts material and supplies a DBE provides under the contract. The department will give full credit toward the DBE goal if the DBE is a manufacturer of those materials or supplies. The department will give 60 percent credit toward the DBE goal if the DBE is merely a supplier of those materials or supplies. It is the bidder's responsibility to find out if the DBE is considered a supplier or a manufacturer before listing them on Commitment to Subcontract to DBE form DT1506.

12. DBE Prime

If the prime contractor is a DBE, the department will only count the work the contractor performs with its own forces, the work DBE subcontractors perform, and the work DBE suppliers or manufacturers perform.

13. Joint Venture

If a DBE performs as a participant in a joint venture, the department will only count that portion of the total dollar value of the contract equal to that portion of the work that the DBE performs with its own forces.

14. Mentor Protégé

- a. If a DBE performs as a participant in a mentor protégé agreement, the department will credit the portion of the work performed by the DBE protégé firm
- b. On every other project that the mentor protégé team identifies itself on.
- c. For no more than one half of the total contracted DBE goal on any WisDOT project.

15. DBE Replacement

In the event a Prime Contractor needs to replace a DBE firm originally listed on the approved DBE Commitment Form DT1506, the Prime Contractor must comply with the department's DBE Replacement Policy located on the DBE page on the following web site:

<http://wisconsindot.gov/Documents/doing-bus/civil-rights/dbe/policy-statement.pdf>

16. Changes to the approved DBE Commitment Form DT1506

If there are any changes to the approved Commitment to Subcontract to DBE Form DT1506, the prime contractor must submit a revised DBE Commitment Form DT1506 and relevant attachment A(s) to the DBE Programs Office within 5 business days.

17. Contract Modifications

When additional opportunity is available by contract modifications, the Prime Contractor shall utilize DBE Subcontractors that were committed to equal work items, in the original contract.

18. Payment

Costs for conforming to this Additional Special Provision (ASP) and any associated DBE requirements are incidental to the contract.

APPENDIX A
Sample Contractor Solicitation Letter Page 1
This sample is provided as a guide not a requirement

GFW SAMPLE MEMORANDUM

TO: DBE FIRMS
FROM: POTENTIAL PRIME CONTRACTOR OR MAJOR SUBCONTRACTOR
SUBJECT: REQUEST FOR DBE QUOTES
LET DATE & TIME
DATE: MONTH DAY YEAR
CC: DBE OFFICE ENGINEER

Our company is considering bidding on the projects indicated on the next page, as a prime and/or a subcontractor for the Wisconsin Department of Transportation Month- date -year Letting. Page 2 lists the projects and work items that we may subcontract for this letting. We are interested in obtaining subcontractor quotes for these projects and work categories. Also note that we are willing to accept quotes in areas we may be planning to perform ourselves as required by federal rules.

Please review page 2, respond whether you plan to quote, highlight the projects and work items you are interested in performing and return it via fax or email within 3 days. Plans, specifications and addenda are available through WisDOT at the DBE Support Services office or at the Highway Construction Contract Information (HCCI) site at <http://roadwaystandards.dot.wi.gov/hcci/>

Your quote should include all of the costs required to complete the items you propose to perform including labor, equipment, material, and related bonding or insurance. The quote should note items that you are DBE certified to perform, tied items, and any special terms. Page 2, with the indicated projects and items you plan to quote, should be used as a cover sheet for your quote.

Please make every effort to have your quotes into our office by time deadline the prior to the letting date. **Make sure the correct letting date, project ID and proposal number, unit price and extension are included in your quote.** We prefer quotes be sent via SBN but prime's alternative's are acceptable. Our office hours are include hours and days. Please call our office as soon as possible prior to the letting if you need information/clarification to prepare your quote at contact number.

If you wish to discuss or evaluate your quote in more detail, contact us after the contract is awarded. Status of the contract can be checked at WisDOT's HCCI site at <http://roadwaystandards.dot.wi.gov/hcci/>

All questions should be directed to:

Project Manager, John Doe,
Phone: (000) 123-4567
Email: Joe@joetheplumber.com
Fax: (000) 123- 4657

Sample Contractor Solicitation Letter Page 2

This sample is provided as a guide not a requirement

REQUEST FOR QUOTATION

Prime's Name: _____

Letting Date: _____

Project ID: _____

Please check all that apply

- ☐ Yes, we will be quoting on the projects and items listed below
- ☐ No, we are not interested in quoting on the letting or its items referenced below
- ☐ Please take our name off your monthly DBE contact list
- ☐ We have questions about quoting this letting. Please have some one contact me at this number

Prime Contractor 's Contact Person

Phone: _____
Fax: _____
Email: _____

DBE Contractor Contact Person

Phone _____
Fax _____
Email _____

Please circle the jobs and items you will be quoting below

Proposal No.	1	2	3	4	5	6	7
County							

WORK DESCRIPTION:

Clear and Grub	X		X	X		X	X
Dump Truck Hauling	X		X	X		X	X
Curb & Gutter/Sidewalk, Etc.	X		X	X		X	X
Erosion Control Items	X		X	X		X	X
Signs and Posts/Markers	X		X	X		X	X
Traffic Control		X	X	X		X	X
Electrical Work/Traffic Signals		X	X	X		X	
Pavement Marking		X	X	X	X	X	X
Sawing Pavement		X	X	X	X	X	X
QMP, Base	X	X		X	X	X	X
Pipe Underdrain	X			X			
Beam Guard				X	X	X	X
Concrete Staining							X
Trees/Shrubs	X						X

Again please make every effort to have your quotes into our office by time deadline prior to the letting date.

We prefer quotes be sent via SBN but prime's preferred alternative's are acceptable.

If there are further questions please direct them to the prime contractor's contact person at phone number.

APPENDIX B BEST PRACTICES FOR PRIME CONTRACTOR & DBE SUBCONTRACTOR GOOD FAITH EFFORT

This list is not a set of requirements; it is a list of potential strategies

Primes

- Prime contractor open houses inviting DBE firms to see the bid “war room” or providing technical assistance
- Participate in speed networking and mosaic exercises as arranged by DBE office
- Host information sessions not directly associated with a bid letting;
- Participate in a formal mentor protégé or joint venture with a DBE firm
- Participate in WisDOT advisory committees i.e. TRANSAC, or Mega Project committee meetings
- Facilitate a small group DBE ‘training session’ Clarifying how your firm prepares for bid letting, evaluates subcontractors, preferred qualifications and communication methods
- Encourage subcontractors to solicit and highlight DBE participation in their quotes to you
- Quality of communication, not quantity creates the best results. Contractors should do as thorough a job as possible in communicating with DBE firms before the bid and provide any assistance requested to assure best possible bid.

DBE

- DBE firms should contact primes as soon as possible with questions regarding their quotes or bid; seven days prior is optimal.
- Continually check for contract addendums on the HCCI website through the Thursday prior to letting to stay abreast of changes.
- Review the status of contracts on the HCCI website reviewing the ‘apparent low bidder’ list, and bid tabs at a minimum.
- Prepare a portfolio or list of related projects and prime and supplier references; be sure to note transportation-related projects of similar size and scope, firm expertise and staffing.
- Participate in DBE office assessment programs
- Participate on advisory and mega-project committees
- Sign up to receive the DBE Contracting Update
- Consider membership in relevant industry or contractor organizations
- Active participation is a must. Quote as many projects as you can reasonably work on; quoting the primes and bidding as a prime with the department are the only ways to get work.

APPENDIX C

Types of Efforts considered in determining GFE

This list represents concepts being assessed; analysis requires additional steps

1. Whether the contractor attended any pre-solicitation or pre-bid meetings that were scheduled by WisDOT to inform DBEs of contracting and subcontracting opportunities;
2. Whether the contractor provided written notice to a reasonable number of specific DBEs that their interest in the contract was being solicited, in sufficient time to allow the DBEs to participate effectively;
3. Whether the contractor followed up initial solicitations of interest by contacting DBEs to determine if the DBEs were interested; returned the phone calls of interested DBE firms.
4. Whether the contractor selected portions of the work to be performed by DBEs in order to increase the likelihood of meeting the DBE goal;
5. Whether the contractor provided interested DBEs with adequate information about the plans, specifications and requirements of the contract;
6. Whether the contractor negotiated in good faith with interested DBEs, not rejected DBEs as unqualified without sound reasons based on a thorough investigation of their capabilities;
7. Whether the contractor made efforts to assist interested DBEs in being more competitive.
8. Whether the contractor effectively used the services of available minority community organizations: minority contractors groups, local, state, and Federal minority business assistance offices, and other organizations that provide assistance to small businesses and DBE firms.
9. Whether Prime used CRCS to identify DBE who specialize in relevant work areas.
10. Whether the contractor used available resources including contacting the DBE office, using WisDOT's website
11. Whether the contractor returned calls of firms expressing interest in a timely manner.

APPENDIX D
Good Faith Effort Evaluation Guidance
Excerpt from Appendix A of 49 CFR Part 26

APPENDIX A TO PART 26 -- GUIDANCE CONCERNING GOOD FAITH EFFORTS

- I. When, as a recipient, you establish a contract goal on a DOT assisted contract, a bidder must, in order to be responsible and/or responsive, make good faith efforts to meet the goal. The bidder can meet this requirement in either of two ways. First, the bidder can meet the goal, documenting commitments for participation by DBE firms sufficient for this purpose. Second, even if it doesn't meet the goal, the bidder can document adequate good faith efforts. This means that the bidder must show that it took all necessary and reasonable steps to achieve a DBE goal or other requirement of this part which, by their scope, intensity, and appropriateness to the objective, could reasonably be expected to obtain sufficient DBE participation, even if they were not fully successful.
- II. In any situation in which you have established a contract goal, part 26 requires you to use the good faith efforts mechanism of this part. As a recipient, it is up to you to make a fair and reasonable judgment whether a bidder that did not meet the goal made adequate good faith efforts. It is important for you to consider the quality, quantity, and intensity of the different kinds of efforts that the bidder has made. The efforts employed by the bidder should be those that one could reasonably expect a bidder to take if the bidder were actively and aggressively trying to obtain DBE participation sufficient to meet the DBE contract goal. Mere pro forma efforts are not good faith efforts to meet the DBE contract requirements. We emphasize, however, that your determination concerning the sufficiency of the firm's good faith efforts is a judgment call: meeting quantitative formulas is not required.
- III. The Department also strongly cautions you against requiring that a bidder meet a contract goal (i.e., obtain a specified amount of DBE participation) in order to be awarded a contract, even though the bidder makes an adequate good faith efforts showing. This rule specifically prohibits you from ignoring bona fide good faith efforts.
- IV. The following is a list of types of actions which you should consider as part of the bidder's good faith efforts to obtain DBE participation. It is not intended to be a mandatory checklist, nor is it intended to be exclusive or exhaustive. Other factors or types of efforts may be relevant in appropriate cases.
 - A. Soliciting through all reasonable and available means (e.g. attendance at pre-bid meetings, advertising and/or written notices) the interest of all certified DBEs who have the capability to perform the work of the contract. The bidder must solicit this interest within sufficient time to allow the DBEs to respond to the solicitation. The bidder must determine with certainty if the DBEs are interested by taking appropriate steps to follow up initial solicitations.
 - B. Selecting portions of the work to be performed by DBEs in order to increase the likelihood that the DBE goals will be achieved. This includes, where appropriate, breaking out contract work items into economically feasible units to facilitate DBE participation, even when the prime contractor might otherwise prefer to perform these work items with its own forces.
 - C. Providing interested DBEs with adequate information about the plans, specifications, and requirements of the contract in a timely manner to assist them in responding to a solicitation.

- D.
 - (1) Negotiating in good faith with interested DBEs. It is the bidder's responsibility to make a portion of the work available to DBE subcontractors and suppliers and to select those portions of the work or material needs consistent with the available DBE subcontractors and suppliers, so as to facilitate DBE participation. Evidence of such negotiation includes the names, addresses, and telephone numbers of DBEs that were considered; a description of the information provided regarding the plans and specifications for the work selected for subcontracting; and evidence as to why additional agreements could not be reached for DBEs to perform the work.
 - (2) A bidder using good business judgment would consider a number of factors in negotiating with subcontractors, including DBE subcontractors, and would take a firm's price and capabilities as well as contract goals into consideration. However, the fact that there may be some additional costs involved in finding and using DBEs is not in itself sufficient reason for a bidder's failure to meet the contract DBE goal, as long as such costs are reasonable. Also, the ability or desire of a prime contractor to perform the work of a contract with its own organization does not relieve the bidder of the responsibility to make good faith efforts. Prime contractors are not, however, required to accept higher quotes from DBEs if the price difference is excessive or unreasonable.
 - E. Not rejecting DBEs as being unqualified without sound reasons based on a thorough investigation of their capabilities. The contractor's standing within its industry, membership in specific groups, organizations, or associations and political or social affiliations (for example union vs. non-union employee status) are not legitimate causes for the rejection or non solicitation of bids in the contractor's efforts to meet the project goal.
 - F. Making efforts to assist interested DBEs in obtaining bonding, lines of credit, or insurance as required by the recipient or contractor.
 - G. Making efforts to assist interested DBEs in obtaining necessary equipment, supplies, materials, or related assistance or services.
 - H. Effectively using the services of available minority/women community organizations; minority/women contractors' groups; local, state, and Federal minority/women business assistance offices; and other organizations as allowed on a case-by-case basis to provide assistance in the recruitment and placement of DBEs.
- V. In determining whether a bidder has made good faith efforts, you may take into account the performance of other bidders in meeting the contract. For example, when the apparent successful bidder fails to meet the contract goal, but others meet it, you may reasonably raise the question of whether, with additional reasonable efforts, the apparent successful bidder could have met the goal. If the apparent successful bidder fails to meet the goal, but meets or exceeds the average DBE participation obtained by other bidders, you may view this, in conjunction with other factors, as evidence of the apparent successful bidder having made good faith efforts.

Appendix E

Small Business Network [SBN] Overview

The Small Business Network is a part of the Bid Express® service that was created to ensure that prime bidders have a centralized online location to find subs - including small and disadvantaged business enterprises (DBEs). It is available for prime bidders to use as part of their Basic Service subscription. Within the Small Business Network, **Prime Contractors** can:

1. Easily select proposals, work types and items:
 - a. After adding applicable work types, select items that you wish to quote. Enter the sub-quote quantities and add comments, if desired. Adding or removing items and work types can be done quickly. If needed, you can save the sub-quote for completion at a later time.
2. Create sub-quotes for the subcontracting community:
 - a. Create sub-quotes with ease using the intuitive sub-quote creator. In seven short steps, you can rapidly create a custom sub-quote directed to all subcontractors that bid on the applicable work types. Steps include: provide contact information and sub-quote expiration date, select letting and proposal, add work types and items, specify terms and conditions, upload attachments, and select vendors.
 - b. Create a sub-quote to send to subcontractors or suppliers that lists the items in a proposal that you want quoted
 - c. Create an unlimited number of sub-quotes for items you want quoted, and optionally mark them as a DBE-preferred request
 - d. Add attachments to sub-quotes
3. View sub-quote requests & responses:
 - a. After logging into the Bid Express service, you can quickly review all of your sub-quote requests and all unsolicited sub-quote requests from subcontractors. To simplify the Small Business Network home screen, sub-quote requests can be hidden with one click if they are not applicable.
 - b. View or receive unsolicited sub-quotes that subcontractors have posted, complete with terms, conditions and pricing
4. View Record of Subcontractor Outreach Effort:
 - a. For each sub-quote produced, a *Record of Subcontractor Outreach Effort* is generated that shows the response statistics for a particular sub-quote. If accepted by the letting agency, this report may serve as proof of a “Good Faith” effort in reaching out to the DBE community.
 - b. Easily locate pre-qualified and certified small and disadvantaged businesses
 - c. Advertise to small and disadvantaged businesses more efficiently and cost effectively
 - d. Document your interactions with subs/DBEs by producing an Outreach Report (may be accepted as proof of DBE outreach at the discretion of each agency)

The Small Business Network is a part of the Bid Express® service that was created to ensure that small businesses have a centralized area to access information about upcoming projects. It can help small businesses learn more about opportunities, compete more effectively, network with other contractors and subcontractors, and win more jobs.

1. View and reply to sub-quote requests from primes:
 - a. After logging into the Bid Express service, you can quickly review all incoming sub-quote requests and all unsolicited sub-quotes created by your company. Receive notifications by selected work type. To simplify on the Small Business Network home screen, sub-quote requests can be filtered by work types relevant to your interests, or hidden with one click if they are not applicable.
2. Select items when responding to sub-quote requests from primes:
 - a. You have the freedom to choose and price any number of items when responding to a sub-quote request. Quantities can be modified, and per-item comments are also available.
 - b. View requests for sub-quotes for work that primes have posted for projects they are bidding, add your pricing, terms, and conditions, and submit completed sub-quotes to the requesting primes
 - c. Add attachments to a sub-quote
3. Create and send unsolicited sub-quotes to specific contractors:
 - a. Create unsolicited sub-quotes with ease using the intuitive sub-quote creator. In eight short steps, you can rapidly create a custom sub-quote directed at any number of specific vendors of your choosing. Steps include: provide contact information and sub-quote expiration date, select letting and proposal, add work types and items, specify terms and conditions, upload attachments, and select vendors.
4. Easily select and price items for unsolicited sub-quotes:
 - a. After adding applicable work types, select items that you wish to quote. The extended price calculates automatically, cutting out costly calculation errors. Comments can be provided on an per-item basis as well.
 - b. Create an unsolicited sub-quote that lists the items from a proposal that you want to quote, include pricing, terms and conditions, and send it to selected prime/plan holder
 - c. Add attachments to a sub-quote
 - d. Add unsolicited work items to sub-quotes that you are responding to
5. Easy Access to Valuable Information
 - a. Receive a confirmation that your sub-quote was opened by a prime
 - b. View Bid Tab Analysis data from past bids, including the high, average and low prices of items.
 - c. View important notices and publications from DOT targeted to small and disadvantaged businesses
6. Accessing Small Business Network for WisDOT contracting opportunities
 - a. If you are a contractor not yet subscribing to the Bid Express service, go to **www.bidx.com** and select “Order Bid Express.” The Small Business Network is a part of the Bid Express Basic Service.
 - b. DBE firms can request a Bid Express Small Business Network Account at no cost by calling 414-438-4588

ADDITIONAL SPECIAL PROVISION 4

Payment to First-Tier Subcontractors

Within 10 calendar days of receiving a progress payment for work completed by a subcontractor, pay the subcontractor for that work. The prime contractor may withhold payment to a subcontractor if, within 10 calendar days of receipt of that progress payment, the prime contractor provides written notification to the subcontractor and the department documenting "just cause" for withholding payment.

The prime contractor may also withhold routine retainage from payments due subcontractors.

Payment to Lower-Tier Subcontractors

Ensure that subcontracting agreements at all tiers provide prompt payment rights to lower-tier subcontractors that parallel those granted first-tier subcontractors in this provision.

Release of Routine Retainage

After granting substantial completion the department may reduce the routine retainage withheld from the prime contractor to 75 percent of the original total amount retained.

When the Department sends the semi-final estimate the department may reduce the routine retainage withheld from the prime contractor to 10 percent of the original total amount retained.

Within 30 calendar days of receiving the semi-final estimate from the department, submit written certification that subcontractors at all tiers are paid in full for acceptably completed work and that no routine retainage is being withheld. The department will pay the prime contractor in full and reduce the routine retainage withheld from the prime contractor to zero when the department approves the final estimate.

This special provision does not limit the right of the department, prime contractor, or subcontractors at any tier to withhold payment for work not acceptably completed or work subject to an unresolved contract dispute.

ADDITIONAL SPECIAL PROVISIONS 5**Fuel Cost Adjustment****A Description**

Fuel Cost Adjustments will be applied to partial and final payments for work items categorized in Section B as a payment to the contractor or a credit to the department. ASP-5 shall not apply to any force account work.

B Categories of Work Items

The following items and Fuel Usage Factors shall be used to determine Fuel Cost Adjustments:

(1) Earthwork.		Unit	Gal. Fuel Per Unit
205.0100	Excavation Common	CY	0.23
205.0200	Excavation Rock	CY	0.39
205.0400	Excavation Marsh	CY	0.29
208.0100	Borrow	CY	0.23
208.1100	Select Borrow	CY	0.23
209.0100	Backfill Granular	CY	0.23
350.0102	Subbase	CY	0.28
350.0104	Subbase	Ton	0.14
350.0115	Subbase 6-Inch	SY	0.05
350.0120	Subbase 7-Inch	SY	0.05
350.0125	Subbase 8-Inch	SY	0.06
350.0130	Subbase 9-Inch	SY	0.07
350.0135	Subbase 10-Inch	SY	0.08
350.0140	Subbase 11-Inch	SY	0.09
350.0145	Subbase 12-Inch	SY	0.09

C Fuel Index

A Current Fuel Index (CFI) in dollars per gallon will be established by the Department of Transportation for each month. The CFI will be the price of No. 2 fuel oil, as reported in U.S. Oil Week, using the first issue dated that month. The CFI will be the average of prices quoted for Green Bay, Madison, Milwaukee and Minneapolis.

The base Fuel Index (BFI) for this contract is \$1.50 per gallon.

D Computing the Fuel Cost Adjustment

The engineer will compute the ratio CFI/BFI each month. If the ratio falls between 0.85 and 1.15, inclusive, no fuel adjustment will be made for that month. If the ratio is less than 0.85 a credit to the department will be computed. If the ratio is greater than 1.15 additional payment to the contractor will be computed. Credit or additional payment will be computed as follows:

- (1) The engineer will estimate the quantity of work done in that month under each of the contract items categorized in Section B.
- (2) The engineer will compute the gallons of fuel used in that month for each of the contract items categorized in Section B by applying the unit fuel usage factors shown in Section B.
- (3) The engineer will summarize the total gallons (Q) of fuel used in that month for the items categorized in Section B.
- (4) The engineer will determine the Fuel Cost Adjustment credit or payment from the following formula:

$$FA = \left(\frac{CFI}{BFI} - 1 \right) \times Q \times BFI$$

(plus is payment to contractor; minus is credit to the department)

Where	FA	=	Fuel Cost Adjustment (plus or minus)
	CFI	=	Current Fuel Index
	BFI	=	Base Fuel Index
	Q	=	Monthly total gallons of fuel

E Payment

A Fuel Cost Adjustment credit to the department will be deducted as a dollar amount each month from any sums due to the contractor. A Fuel Cost Adjustment payment to the contractor will be made as a dollar amount each month.

Upon completion of the work under the contract, any difference between the estimated quantities and the final quantities will be determined. An average CFI, calculated by averaging the CFI for all months that fuel cost adjustment was applied, will be applied to the quantity differences. The average CFI shall be applied in accordance with the procedure set forth in Section D.

ADDITIONAL SPECIAL PROVISION 6**ASP 6 - Modifications to the standard specifications**

Make the following revisions to the standard specifications:

440.3.5.2 Corrective Actions for Localized Roughness

Replace paragraph two with the following effective with the September 2016 letting:

- (2) The engineer will not direct corrective action or assess a pay reduction for an area of localized roughness without physically riding that work. The engineer will not direct corrective action on bridges without authorization from the department's bureau of structures.
-

450.3.2.1 General

Replace the entire text with the following effective with the June 2016 letting:

450.3.2.1.1 Preparation and Paving Operations

- (1) Do not place asphaltic mixture when the air temperature approximately 3 feet above grade, in shade, and away from artificial heat sources is less than 36 F for upper layers or 32 F for lower layers unless the engineer allows in writing. The contractor should place HMA pavement for projects in the northern asphalt zone between May 1 and October 15 inclusive and for projects in the southern asphalt zone between April 15 and November 1 inclusive. CMM 4-53 figure 2 defines asphalt zones. Notify the engineer at least one business day before paving.
- (2) Unless the contract specifies otherwise, conform to the following:
 - Keep the road open to all traffic during construction.
 - Prepare the existing foundation for treatment as specified in 211.
 - Incorporate loose roadbed aggregate as a part of preparing the foundation, in shoulder construction, or dispose of as the engineer approves.
- (3) Place asphaltic mixture only on a prepared, firm, and compacted base, foundation layer, or existing pavement substantially surface-dry and free of loose and foreign material. Do not place over frozen subgrade or base, or where the roadbed is unstable.

450.3.2.1.2 Cold Weather Paving**450.3.2.1.2.1 General**

- (1) Conform to these cold weather paving provisions for work performed under the following:
 - The 460 HMA Pavement bid items.
 - The 465 Asphaltic Surface bid items.
 - Special provisions that require placing mixture conforming to the contract requirements under 460 for HMA pavement or under 465 for asphaltic surface.

450.3.2.1.2.2 Cold Weather Paving Plan

- (1) Submit a written cold weather paving plan to the engineer at the preconstruction meeting. In that plan outline material, operational, and equipment changes for paving when the air temperature approximately 3 feet above grade, in shade, and away from artificial heat sources is less than 40 F. Include the following:
 - Use a department-accepted HMA mix design that incorporates a warm mix additive from the department's approved products list. Do not use a foaming process that introduces water into the mix.
 - Identify the warm mix additive and dosage rate.
 - Identify modifications to the compaction process and when to use them.
- (2) Engineer written acceptance is required for the cold weather paving plan. Engineer acceptance of the plan does not relieve the contractor of responsibility for the quality of HMA pavement placed in cold weather except as specified in 450.5.2(3).

450.3.2.1.2.3 Cold Weather Paving Operations

- (1) Do not place asphaltic mixture when the air temperature approximately 3 feet above grade, in shade, and away from artificial heat sources is less than 40 F unless a valid engineer-accepted cold weather paving plan is in effect.

- (2) If the national weather service forecast for the construction area predicts ambient air temperature less than 40 F at the projected time of paving within the next 24 hours, confirm or submit revisions to the cold weather paving plan for engineer validation. Update the plan as required to accommodate the conditions anticipated for the next day's operations. Upon validation of the plan, the engineer will allow paving for the next day. Once in effect, pave conforming to the engineer-accepted cold weather paving plan for the balance of that work day or shift regardless of the temperature at the time of paving.

450.4 Measurement

Add the following as paragraph three effective with the June 2016 letting:

- (3) The department will measure HMA Cold Weather Paving by the ton of HMA mixture placed conforming to an engineer-accepted cold weather paving plan.

450.5 Payment

Replace the entire text with the following effective with the June 2016 letting:

450.5.1 General

- (1) All costs of furnishing, maintaining, and operating the truck scale or other weighing equipment and furnishing the weigh tickets are incidental to the contract.
- (2) Nonconforming material allowed to remain in place is subject to price adjustment under 105.3.2.
- (3) Full-depth sawing to remove integrally placed safety edge where not required is incidental to the contract.
- (4) The contractor is responsible for the quality of HMA placed in cold weather.

450.5.2 Cold Weather Paving

- (1) The department will pay for measured quantities at the contract unit price under the following bid items:

<u>ITEM NUMBER</u>	<u>DESCRIPTION</u>	<u>UNIT</u>
450.4000	HMA Cold Weather Paving	TON

- (2) Payment for HMA Cold Weather Paving is full compensation for additional materials and equipment specified for cold weather paving under 450.3.2.1.2 including costs for preparing, administering, and following the contractor's cold weather paving plan. The department will not pay for HMA Cold Weather Paving for HMA placed as follows:
- If the lot density is less than the minimum specified in table 460-3 for mixture placed under 460.
 - On days when the department is assessing liquidated damages.
- (3) If because of an excusable compensable delay under 108.10.3, the engineer directs the contractor to pave when the temperature is less than 36 F for the upper layer or less than 32 F for lower layers, the department:
- Will relieve the contractor of responsibility for damage and defects the engineer attributes to cold weather paving.
 - Will not assess disincentives for density or ride.
- (4) If HMA pavement is placed under 450.3.2.1.2 and the HMA Cold Weather Paving bid item is not in the contract, the department will pay for the additional costs specified in 450.5.2(2) as extra work. The department will pay separately for providing HMA pavement and HMA surface under 460.5, 465.5, and the contract special provisions.

460.3.4 Cold Weather Paving

Delete the entire subsection effective with the June 2016 letting:

460.5.1 General

Replace the entire text with the following effective with the June 2016 letting:

- (1) The department will pay for measured quantities at the contract unit price under the following bid items:

<u>ITEM NUMBER</u>	<u>DESCRIPTION</u>	<u>UNIT</u>
--------------------	--------------------	-------------

460.5000 - 5999	HMA Pavement (gradation) LT (binder)(designation)	TON
460.6000 - 6999	HMA Pavement (gradation) MT (binder)(designation)	TON
460.7000 - 7999	HMA Pavement (gradation) HT (binder)(designation)	TON
460.8000 - 8999	HMA Pavement (gradation) SMA (binder)(designation)	TON
460.2000	Incentive Density HMA Pavement	DOL

460.5.2.2 Disincentive for HMA Pavement Density

Replace paragraph two with the following effective with the June 2016 letting:

- (2) The department will not assess density disincentives for pavement placed in cold weather because of a department-caused delay as specified in 450.5.2(3).

460.5.2.4 Cold Weather Paving

Delete the entire subsection effective with the June 2016 letting:

501.2.6 Fly Ash

Replace paragraph four with the following effective with the July 2016 letting:

- (4) Use only one source of fly ash for a bid item of work under the contract, unless the engineer directs or allows otherwise in writing.

502.3.7.8 Floors

Replace paragraph sixteen with the following effective with the September 2016 letting:

- (16) The finished bridge floor shall conform to the surface test specified in 415.3.10. The engineer will not direct corrective grinding without authorization from the department's bureau of structures.

550.5.2 Piling

Add the following as paragraph three effective with the December 2015 letting:

- (3) The department will not entertain a change order request for a differing site condition under 104.2.2.2 or for a quantity change under 104.2.2.4.3 for the Piling bid items. Instead the department will adjust pay under the Piling Quantity Variation administrative item if the total driven length of each size is less than 85 percent of, or more than 115 percent of the contract quantity as follows:

Percent of Contract Length Driven	Pay Adjustment
< 85	(85% contract length - driven length) x 20% unit price
> 115	(driven length - 115% contract length) x 5% unit price

643.2.1 General

Replace paragraph two with the following effective with the December 2015 letting:

- (2) Use reflective sheeting from the department's approved products list on barricades, drums, and flexible tubular marker posts.

715.3.1.2.1 General

Replace paragraph one with the following effective with the July 2016 letting:

- (1) Designate the location and size of all lots before placing concrete. Ensure that no lot contains concrete of more than one mix design or placement method defined within 715.3.1.2 as follows:

Mix design change A modification to the mix requiring the engineer's approval under 710.4(5).

For paving mixes, a source change under item 1 of 710.4(5) for fly ash of the same class that does not require a modification under items 2 through 4 of 710.4(5) does not constitute a mix design change.

Placement method Either slip-formed, not slip-formed, or placed under water.

Errata

Make the following corrections to the standard specifications:

460.2.7 HMA Mixture Design - TABLE 460-2 MIXTURE REQUIREMENTS

Correct errata in the Fractured Faces row of table 460-2 to reference ASTM D5821.

Fractured Faces (ASTM D5821) (one face/2 face, % by count)	60 / __	65 / __	75 / 60	85 / 80	98 / 90	100/100	100/90
---	---------	---------	---------	---------	---------	---------	--------

Correct errata in footnote two of table 460-2 to reference AASHTO M323.

^[2] For a gradation that passes below the boundaries of the caution zone (ref. AASHTO M323), the dust to binder ratio limits are 0.6 - 1.6.

641.2.9 Overhead Sign Supports

Correct errata adding back accidentally deleted paragraphs one through three.

- (1) Provide commercially fabricated overhead sign supports conforming to AASHTO design and fabrication standards for structural supports for highway signs, luminaires, and traffic signals. Use a design life of 50 years with a wind importance factor of 1.00. Design to withstand a 3 second gust wind speed of 90 mph. Do not use the methods of appendix C of those AASHTO standards.
- (2) Design structures, listed as applicable structure types in the AASHTO standards, to the fatigue category criteria as follows:
 1. Structures carrying variable message signs:
 - Category I criteria for structures over all roadway types.
 2. Structures carrying type II or III signs:
 - Category I criteria for structures used over highways and free flow ramps.
 - Category II criteria for structures with arms greater than 30 feet used over local roads and city streets.
 - Category III criteria for structures with arms 30 feet or less used over local roads and city streets.
- (3) Use the posted speed limit of the roadway beneath the structure for truck-induced gusts.
- (4) Submit shop drawings identified by structure number, design computations, and material specifications, to the engineer before erecting sign supports. Provide tightening procedures for mast arm or luminaire arm to pole shaft connections on the shop drawings. Have a professional engineer registered in the state of Wisconsin sign, seal, and date the shop drawings and certify that the design conforms to AASHTO standards and the contract.
- (5) Provide steel pole shafts and mast arms zinc coated according to ASTM A123. Provide tapered pole and arm shafts with a minimum taper of 0.14 inch per foot for single-member vertical and single-member horizontal structure components. Provide bolts and other hardware conforming to 641.2.2.

ADDITIONAL SPECIAL PROVISION 7

- A. Reporting 1st Tier and DBE Payments During Construction
1. Comply with reporting requirements specified in the department's Civil Rights Compliance, Contractor's User Manual, Sublets and Payments.
 2. Report payments to all DBE firms within 10 calendar days of receipt of a progress payment by the department or a contractor for work performed, materials furnished, or materials stockpiled by a DBE firm. Report the payment as specified in A(1) for all work satisfactorily performed and for all materials furnished or stockpiled.
 3. Report payments to all first tier subcontractor relationships within 10 calendar days of receipt of a progress payment by the department for work performed. Report the payment as specified in A(1) for all work satisfactorily performed.
 4. All tiers shall report payments as necessary to comply with the DBE payment requirement as specified in A(2).
 5. Require all first tier relationships, DBE firms and all other tier relationships necessary to comply with the DBE payment requirement in receipt of a progress payment by contractor to acknowledge receipt of payment as specified in A(1), (2), (3) and (4).
 6. All agreements made by a contractor shall include the provisions in A(1), (2), (3), (4) and (5), and shall be binding on all first tier subcontractor relationships and all contractors and subcontractors utilizing DBE firms on the project.
- B. Costs for conforming to this special provision are incidental to the contract.

ADDITIONAL SPECIAL PROVISION 9

Electronic Certified Payroll Submittal

(1) Use the department's Civil Rights Compliance System (CRCS) to submit certified payrolls electronically. Details are available online through the department's highway construction contractor information (HCCI) site on the Labor, Wages, and EEO Information page at:

<http://wisconsindot.gov/Pages/doing-bus/civil-rights/labornwage/default.aspx>

(2) Ensure that all tiers of subcontractors, as well as all trucking firms, submit their weekly certified payrolls electronically through CRCS. These payrolls are due within seven calendar days following the close of the payroll period. Every firm providing physical labor towards completing the project is a subcontractor under this special provision.

(3) Upon receipt of contract execution, promptly make all affected firms aware of the requirements under this special provision and arrange for them to receive CRCS training as they are about to begin payrolls. The department will provide training either in a classroom setting at one of our regional offices or by telephone. Contact Tess Mulrooney at 608-267-4489 to schedule the training.

(4) The department will reject all paper submittals of forms DT-1816 and DT-1929 for information required under this special provision. All costs for conforming to this special provision are incidental to the contract.

(5) Firms wishing to export payroll data from their computer system into CRCS should have their payroll coordinator send several sample electronic files to Tess two months before a payroll needs to be submitted. Not every contractor's payroll system is capable of producing export files. For details, see pages 17-22 of the CRCS System Background Information manual available online on the Labor, Wages, and EEO Information page at:

<http://wisconsindot.gov/Documents/doing-bus/civil-rights/labornwage/crcs-payroll-manual.pdf>

REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS

- I. General
- II. Nondiscrimination
- III. Nonsegregated Facilities
- IV. Davis-Bacon and Related Act Provisions
- V. Contract Work Hours and Safety Standards Act Provisions
- VI. Subletting or Assigning the Contract
- VII. Safety: Accident Prevention
- VIII. False Statements Concerning Highway Projects
- IX. Implementation of Clean Air Act and Federal Water Pollution Control Act
- X. Compliance with Governmentwide Suspension and Debarment Requirements
- XI. Certification Regarding Use of Contract Funds for Lobbying

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under Title 23 (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services).

The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Form FHWA-1273 must be included in all Federal-aid design-build contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services). The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in bid proposal or request for proposal documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract).

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors.

II. NONDISCRIMINATION

The provisions of this section related to 23 CFR Part 230 are applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR 60, 29 CFR 1625-1627, Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding \$10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR 60, and 29 CFR 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), and Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The following provision is adopted from 23 CFR 230, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

1. Equal Employment Opportunity: Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630, 29 CFR 1625-1627, 41 CFR 60 and 49 CFR 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under

this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract.

b. The contractor will accept as its operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."

2. EEO Officer: The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so.

3. Dissemination of Policy: All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.

b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.

c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.

d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.

e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. Recruitment: When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.

a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.

b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.

c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.

5. Personnel Actions: Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:

a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.

b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.

c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.

6. Training and Promotion:

a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are

applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.

7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women. Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:

a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.

b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.

c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide sufficient referrals (even though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.

8. Reasonable Accommodation for Applicants / Employees with Disabilities: The contractor must be familiar

with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established there under. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.

9. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.

a. The contractor shall notify all potential subcontractors and suppliers and lessors of their EEO obligations under this contract.

b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.

10. Assurance Required by 49 CFR 26.13(b):

a. The requirements of 49 CFR Part 26 and the State DOT's U.S. DOT-approved DBE program are incorporated by reference.

b. The contractor or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the contracting agency deems appropriate.

11. Records and Reports: The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.

a. The records kept by the contractor shall document the following:

(1) The number and work hours of minority and non-minority group members and women employed in each work classification on the project;

(2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and

(3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women;

b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on [Form FHWA-1391](#). The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-the-job training is being required by special provision, the contractor

will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

III. NONSEGREGATED FACILITIES

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more.

The contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location, under the contractor's control, where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

IV. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding \$2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size). The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. Contracting agencies may elect to apply these requirements to other projects.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 "Contract provisions and related matters" with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. Minimum wages

a. All laborers and mechanics employed or working upon the site of the work, will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions

of paragraph 1.d. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in 29 CFR 5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under paragraph 1.b. of this section) and the Davis-Bacon poster (WH-1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b.(1) The contracting officer shall require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The contracting officer shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:

(i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and

(ii) The classification is utilized in the area by the construction industry; and

(iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(3) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. The Wage and Hour Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or

will notify the contracting officer within the 30-day period that additional time is necessary.

(4) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraphs 1.b.(2) or 1.b.(3) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

c. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.

d. If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program. Provided, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

2. Withholding

The contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor under this contract, or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the contracting agency may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

3. Payrolls and basic records

a. Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work and preserved for a period of three years thereafter for all laborers and mechanics working at the site of the work. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-

Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.

b. (1) The contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the contracting agency. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee (e.g., the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired. Optional Form WH-347 is available for this purpose from the Wage and Hour Division Web site at <http://www.dol.gov/esa/whd/forms/wh347instr.htm> or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors. Contractors and subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the contracting agency for transmission to the State DOT, the FHWA or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. It is not a violation of this section for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the contracting agency..

(2) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(i) That the payroll for the payroll period contains the information required to be provided under §5.5 (a)(3)(ii) of Regulations, 29 CFR part 5, the appropriate information is being maintained under §5.5 (a)(3)(i) of Regulations, 29 CFR part 5, and that such information is correct and complete;

(ii) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

(3) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(2) of this section.

(4) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.

c. The contractor or subcontractor shall make the records required under paragraph 3.a. of this section available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the FHWA may, after written notice to the contractor, the contracting agency or the State DOT, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

4. Apprentices and trainees

a. Apprentices (programs of the USDOL).

Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice.

The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly

rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

b. Trainees (programs of the USDOL).

Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration.

The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration.

Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Equal employment opportunity. The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

d. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

5. Compliance with Copeland Act requirements. The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract.

6. Subcontracts. The contractor or subcontractor shall insert Form FHWA-1273 in any subcontracts and also require the subcontractors to include Form FHWA-1273 in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.

7. Contract termination: debarment. A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract.

9. Disputes concerning labor standards. Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of eligibility.

a. By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

c. The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

The following clauses apply to any Federal-aid construction contract in an amount in excess of \$100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchmen and guards.

1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.

2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph (1.) of this section, the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (1.) of this section, in the sum of \$10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (1.) of this section.

3. Withholding for unpaid wages and liquidated damages. The FHWA or the contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (2.) of this section.

4. Subcontracts. The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (1.) through (4.) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (1.) through (4.) of this section.

VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

a. The term "perform work with its own organization" refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions:

(1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;

(2) the prime contractor remains responsible for the quality of the work of the leased employees;

(3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and

(4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract.

2. The contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is

evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

5. The 30% self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements.

VII. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C.3704).

VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

By submission of this bid/proposal or the execution of this contract, or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any person who is or will be utilized in the performance of this contract is not prohibited from receiving an award due to a violation of Section 508 of the Clean Water Act or Section 306 of the Clean Air Act.

2. That the contractor agrees to include or cause to be included the requirements of paragraph (1) of this Section X in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements.

X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost \$25,000 or more – as defined in 2 CFR Parts 180 and 1200.

1. Instructions for Certification – First Tier Participants:

a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this

covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default.

d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.

g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (<https://www.epls.gov/>), which is compiled by the General Services Administration.

i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

* * * * *

2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency;

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

2. Instructions for Certification - Lower Tier Participants:

(Applicable to all subcontracts, purchase orders and other lower tier transactions requiring prior FHWA approval or estimated to cost \$25,000 or more - 2 CFR Parts 180 and 1200)

a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which

this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (<https://www.epls.gov/>), which is compiled by the General Services Administration.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the

department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

* * * * *

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency.

2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

* * * * *

XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed \$100,000 (49 CFR 20).

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such recipients shall certify and disclose accordingly.

**ATTACHMENT A - EMPLOYMENT AND MATERIALS
PREFERENCE FOR APPALACHIAN DEVELOPMENT
HIGHWAY SYSTEM OR APPALACHIAN LOCAL ACCESS
ROAD CONTRACTS**

This provision is applicable to all Federal-aid projects funded under the Appalachian Regional Development Act of 1965.

1. During the performance of this contract, the contractor undertaking to do work which is, or reasonably may be, done as on-site work, shall give preference to qualified persons who regularly reside in the labor area as designated by the DOL wherein the contract work is situated, or the subregion, or the Appalachian counties of the State wherein the contract work is situated, except:

a. To the extent that qualified persons regularly residing in the area are not available.

b. For the reasonable needs of the contractor to employ supervisory or specially experienced personnel necessary to assure an efficient execution of the contract work.

c. For the obligation of the contractor to offer employment to present or former employees as the result of a lawful collective bargaining contract, provided that the number of nonresident persons employed under this subparagraph (1c) shall not exceed 20 percent of the total number of employees employed by the contractor on the contract work, except as provided in subparagraph (4) below.

2. The contractor shall place a job order with the State Employment Service indicating (a) the classifications of the laborers, mechanics and other employees required to perform the contract work, (b) the number of employees required in each classification, (c) the date on which the participant estimates such employees will be required, and (d) any other pertinent information required by the State Employment Service to complete the job order form. The job order may be placed with the State Employment Service in writing or by telephone. If during the course of the contract work, the information submitted by the contractor in the original job order is substantially modified, the participant shall promptly notify the State Employment Service.

3. The contractor shall give full consideration to all qualified job applicants referred to him by the State Employment Service. The contractor is not required to grant employment to any job applicants who, in his opinion, are not qualified to perform the classification of work required.

4. If, within one week following the placing of a job order by the contractor with the State Employment Service, the State Employment Service is unable to refer any qualified job applicants to the contractor, or less than the number requested, the State Employment Service will forward a certificate to the contractor indicating the unavailability of applicants. Such certificate shall be made a part of the contractor's permanent project records. Upon receipt of this certificate, the contractor may employ persons who do not normally reside in the labor area to fill positions covered by the certificate, notwithstanding the provisions of subparagraph (1c) above.

5. The provisions of 23 CFR 633.207(e) allow the contracting agency to provide a contractual preference for the use of mineral resource materials native to the Appalachian region.

6. The contractor shall include the provisions of Sections 1 through 4 of this Attachment A in every subcontract for work which is, or reasonably may be, done as on-site work.

Non-discrimination Provisions

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the "contractor") agrees as follows:

1. Compliance with Regulations: The contractor (hereinafter includes consultants) will comply with the Acts and the Regulations relative to Non-discrimination in Federally-assisted programs of the U.S. Department of Transportation, Federal Highway Administration, as they may be amended from time to time, which are herein incorporated by reference and made a part of this contract.

2. Non-discrimination: The contractor, with regard to the work performed by it during the contract, will not discriminate on the grounds of race, color, or national origin in the selection and retention of subcontractors, including procurements of materials and leases of equipment. The contractor will not participate directly or indirectly in the discrimination prohibited by the Acts and the Regulations, including employment practices when the contract covers any activity, project, or program set forth in Appendix B of 49 CFR Part 21.

3. Solicitations for Subcontracts, Including Procurements of Materials and Equipment: In all solicitations, either by competitive bidding, or negotiation made by the contractor for work to be performed under a subcontract, including procurements of materials, or leases of equipment, each potential subcontractor or supplier will be notified by the contractor of the contractor's obligations under this contract and the Acts and the Regulations relative to Non-discrimination on the grounds of race, color, or national origin.

4. Information and Reports: The contractor will provide all information and reports required by the Acts, the Regulations, and directives issued pursuant thereto and will permit access to its books, records, accounts, other sources of information, and its facilities as may be determined by the Recipient or the Federal Highway Administration to be pertinent to ascertain compliance with such Acts, Regulations, and instructions. Where any information required of a contractor is in the exclusive possession of another who fails or refuses to furnish the information, the contractor will so certify to the Recipient or the Federal Highway Administration, as appropriate, and will set forth what efforts it has made to obtain the information.

5. Sanctions for Noncompliance: In the event of a contractor's noncompliance with the Non-discrimination provisions of this contract, the Recipient will impose such contract sanctions as it or the Federal Highway Administration may determine to be appropriate, including, but not limited to:

- a. Withholding payments to the contractor under the contract until the contractor complies; and/or
- b. Cancelling, terminating, or suspending a contract, in whole or in part.

6. Incorporation of Provisions: The contractor will include the provisions of paragraphs one through six in every subcontract, including procurements of materials and leases of equipment, unless exempt by the Acts, the Regulations and directives issued pursuant thereto. The contractor will take action with respect to any subcontract or procurement as the Recipient or the Federal Highway Administration may direct as a means of enforcing such provisions including sanctions for noncompliance. Provided, that if the contractor becomes involved in, or is threatened with litigation by a subcontractor, or supplier because of such direction, the contractor may request the Recipient to enter into any litigation to protect the interests of the Recipient. In addition, the contractor may request the United States to enter into the litigation to protect the interests of the United States.

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the "contractor") agrees to comply with the following non-discrimination statutes and authorities; including but not limited to:

Pertinent Non-Discrimination Authorities:

- Title VI of the Civil Rights Act of 1964 (42 U.S.C. § 2000d et seq., 78 stat. 252), (prohibits discrimination on the basis of race, color, national origin); and 49 CFR Part 21.
- The Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970, (42 U.S.C. § 4601), (prohibits unfair treatment of persons displaced or whose property has been acquired because of Federal or Federal-aid programs and projects);
- Federal-Aid Highway Act of 1973, (23 U.S.C. § 324 et seq.), (prohibits discrimination on the basis of sex);
- Section 504 of the Rehabilitation Act of 1973, (29 U.S.C. § 794 et seq.), as amended, (prohibits discrimination on the basis of disability); and 49 CFR Part 27;
- The Age Discrimination Act of 1975, as amended, (42 U.S.C. § 6101 et seq.), (prohibits discrimination on the basis of age);
- Airport and Airway Improvement Act of 1982, (49 USC § 471, Section 47123), as amended, (prohibits discrimination based on race, creed, color, national origin, or sex);
- The Civil Rights Restoration Act of 1987, (PL 100-209), (Broadened the scope, coverage and applicability of Title VI of the Civil Rights Act of 1964, The Age Discrimination Act of 1975 and Section 504 of the Rehabilitation Act of 1973, by expanding the definition of the terms "programs or activities" to include all of the programs or activities of the Federal-aid recipients, sub-recipients and contractors, whether such programs or activities are Federally funded or not);
- Titles II and III of the Americans with Disabilities Act, which prohibit discrimination on the basis of disability in the operation of public entities, public and private transportation systems, places of public accommodation, and certain testing entities (42 U.S.C. §§ 12131-12189) as implemented by Department of Transportation regulations at 49 C.F.R. parts 37 and 38;
- The Federal Aviation Administration's Non-discrimination statute (49 U.S.C. § 47123) (prohibits discrimination on the basis of race, color, national origin, and sex);

- Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations, which ensures Non-discrimination against minority populations by discouraging programs, policies, and activities with disproportionately high and adverse human health or environmental effects on minority and low-income populations;
- Executive Order 13166, Improving Access to Services for Persons with Limited English Proficiency, and resulting agency guidance, national origin discrimination includes discrimination because of Limited English proficiency (LEP). To ensure compliance with Title VI, you must take reasonable steps to ensure that LEP persons have meaningful access to your programs (70 Fed. Reg. at 74087 to 74100);
- Title IX of the Education Amendments of 1972, as amended, which prohibits you from discriminating because of sex in education programs or activities (20 U.S.C. 1681 et seq).

SEPTEMBER 2002

**NOTICE OF REQUIREMENT FOR AFFIRMATIVE ACTION TO ENSURE
EQUAL EMPLOYMENT OPPORTUNITY (EXECUTIVE ORDER 11246)**

1. The Offeror's or Bidder's attention is called to the "Employment Practices" and "Equal Opportunity Clause" set forth in the Required Contract Provisions, FHWA 1273.
2. The goals and timetables for minority and female participation expressed in percentage terms for the contractor's aggregate work force in each trade, on all construction work in the covered area, are as follows:

Goals for Minority Participation for Each Trade:

<u>County</u>	<u>%</u>	<u>County</u>	<u>%</u>	<u>County</u>	<u>%</u>
Adams	1.7	Iowa	1.7	Polk	2.2
Ashland	1.2	Iron	1.2	Portage	0.6
Barron	0.6	Jackson	0.6	Price	0.6
Bayfield	1.2	Jefferson	7.0	Racine	8.4
Brown	1.3	Juneau	0.6	Richland	1.7
Buffalo	0.6	Kenosha	3.0	Rock	3.1
Burnett	2.2	Kewaunee	1.0	Rusk	0.6
Calumet	0.9	La Crosse	0.9	St. Croix	2.9
Chippewa	0.5	Lafayette	0.5	Sauk	1.7
Clark	0.6	Langlade	0.6	Sawyer	0.6
Columbia	1.7	Lincoln	0.6	Shawano	1.0
Crawford	0.5	Manitowoc	1.0	Sheboygan	7.0
Dane	2.2	Marathon	0.6	Taylor	0.6
Dodge	7.0	Marinette	1.0	Trempealeau	0.6
Door	1.0	Marquette	1.7	Vernon	0.6
Douglas	1.0	Menominee	1.0	Vilas	0.6
Dunn	0.6	Milwaukee	8.0	Walworth	7.0
Eau Claire	0.5	Monroe	0.6	Washburn	0.6
Florence	1.0	Oconto	1.0	Washington	8.0
Fond du Lac	1.0	Oneida	0.6	Waukesha	8.0
Forest	1.0	Outagamie	0.9	Waupaca	1.0
Grant	0.5	Ozaukee	8.0	Waushara	1.0
Green	1.7	Pepin	0.6	Winnebago	0.9
Green Lake	1.0	Pierce	2.2	Wood	0.6

Goals for female participation for each trade: 6.9%

These goals are applicable to all the contractor's construction work, (whether or not it is federal or federally assisted), performed in the covered area. If the contractor performs construction work in the geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the contractor also is subject to the goals for both its federally involved and nonfederally involved construction.

The contractor's compliance with the Executive Order and the Regulations in 41 CFR Part 60-4 shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4.3(a), and its efforts to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade, and the contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from contractor to contractor or from project to project for the sole purpose of meeting the contractor's goals shall be a violation of the contract, the Executive Order and the Regulations in 41 CFR Part 60-4. Compliance with the goals will be measured against the total work hours performed.

3. The contractor shall provide written notification to the Director of the Office of Federal Contract Compliance Programs within ten (10) working days of award of any construction subcontract in excess of \$10,000.00 at any tier for construction work under the contract resulting from this solicitation. The notification shall list the name, address and telephone number of the subcontractor, employer identification number of the subcontractor; estimated dollar amount of the subcontract; estimated starting and completion dates of the subcontract; and the geographical area in which the subcontract is to be performed.

As referred to in this section, the Director means:

Director
Office of Federal Contract Compliance Programs
Ruess Federal Plaza
310 W. Wisconsin Ave., Suite 1115
Milwaukee, WI 53202

The "Employer Identification Number" means the Federal Social Security number used on the Employer's Quarterly Federal Tax Return, U.S. Treasury Department Form 941.

4. As used in this notice, and in the contract resulting from solicitation, the "covered area" is the county(ies) in Wisconsin to which this proposal applies.

APRIL 2013

ADDITIONAL FEDERAL-AID PROVISIONS

NOTICE TO ALL BIDDERS

To report bid rigging activities call:

1-800-424-9071

The U.S. Department of Transportation (DOT) operates the above toll-free "hotline" Monday through Friday, 8:00 a.m. to 5:00 p.m., Eastern Time. Anyone with knowledge of possible bid rigging, bidding collusion, or other fraudulent activities should use the "hotline" to report such activities.

The "hotline" is part of the DOT's continuing effort to identify and investigate highway construction contract fraud and abuse and is operated under the direction of the DOT Inspector General. All information will be treated confidentially and caller anonymity will be respected.

Effective August 2015 letting

BUY AMERICA PROVISION

All steel and iron materials permanently incorporated in this project shall be domestic products and all manufacturing and coating processes for these materials from smelting forward in the manufacturing process must have occurred within the United States. Coating includes epoxy coating, galvanizing, painting and any other coating that protects or enhances the value of a material subject to the requirements of Buy America. The exemption of this requirement is the minimal use of foreign materials if the total cost of such material permanently incorporated in the product does not exceed one-tenth of one percent (1/10 of 1%) of the total contract cost or \$2,500.00, whichever is greater. For purposes of this paragraph, the cost is that shown to be the value of the subject products as they are delivered to the project. The contractor shall take actions and provide documentation conforming to CMM 2-28.5 to ensure compliance with this "Buy America" provision.

<http://wisconsindot.gov/rdwy/cmm/cm-02-28.pdf>

Upon completion of the project certify to the engineer, in writing using department form WS4567, that all steel, iron, and coating processes for steel or iron incorporated into the contract work conform to these "Buy America" provisions. Attach a list of exemptions and their associated costs to the certification form. Department form WS4567 is available at:

<http://wisconsindot.gov/hcciDocs/contracting-info/ws4567.doc>

Cargo Preference Act Requirement

All Federal-aid projects shall comply with 46 CFR 381.7 (a) – (b) as follows:

(a) *Agreement Clauses*. “Use of United States-flag vessels:”

(1) Pursuant to Pub. L. 664 (43 U.S.C. 1241(b)) at least 50 percent of any equipment, materials or commodities procured, contracted for or otherwise obtained with funds granted, guaranteed, loaned, or advanced by the U.S. Government under this agreement, and which may be transported by ocean vessel, shall be transported on privately owned United States-flag commercial vessels, if available.

(2) Within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, ‘on-board’ commercial ocean bill-of-lading in English for each shipment of cargo described in paragraph (a)(1) of this section shall be furnished to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Division of National Cargo, Office of Market Development, Maritime Administration, Washington, DC 20590.”

(b) *Contractor and Subcontractor Clauses*. “Use of United States-flag vessels: The contractor agrees—”

(1) To utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage (computed separately for dry bulk carriers, dry cargo liners, and tankers) involved, whenever shipping any equipment, material, or commodities pursuant to this contract, to the extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels.

(2) To furnish within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, ‘on-board’ commercial ocean bill-of-lading in English for each shipment of cargo described in paragraph (b) (1) of this section to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Division of National Cargo, Office of Market Development, Maritime Administration, Washington, DC 20590.

(3) To insert the substance of the provisions of this clause in all subcontracts issued pursuant to this contract.

Effective with September 2004 Letting

**WISCONSIN DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS AND TRANSPORTATION FACILITIES**

SUPPLEMENTAL REQUIRED CONTRACT PROVISIONS

- I. Wage Rates, Hours of labor and payment of Wages
- II. Payroll Requirements
- III. Postings at the Site of the Work
- IV. Affidavits
- V. Wage Rate Redistribution
- VI. Additional Classifications

I. WAGE RATES, HOURS OF LABOR AND PAYMENT OF WAGES

The schedule of "Minimum Wage Rates" attached hereto and made a part hereof furnishes the prevailing wage rates that have been determined pursuant to Section 103.50 of the Wisconsin Statutes. These wage rates are the minimum required to be paid to the various laborers, workers, mechanics and truck drivers employed by contractors and subcontractors on the construction work embraced by the contract and subject to prevailing hours and wages under Section 103.50, Stats. If necessary to employ laborers, workers, mechanics or truck drivers whose classification is not listed on the schedule, they shall be paid at rates conformable to those listed for similar classifications. Apprentices shall be paid at rates not less than those prescribed in their state indenture contracts.

While the wage rates shown are the minimum rates required by the contract to be paid during its life, this is not a representation that labor can be obtained at these rates. It is the responsibility of bidders to inform themselves as to the local labor conditions and prospective changes or adjustments of wage rates. No increase in the contract price shall be allowed or authorized on account of the payment of wage rates in excess of those listed herein.

Pursuant to Section 103.50 of the Wisconsin Statutes, the prevailing hours of labor have been determined to be up to 10 hours per day and 40 hours per calendar week Monday through Friday. If any laborer, worker, mechanic or truck driver is permitted or required to work more than the prevailing number of hours per day or per calendar week on this contract, they shall be paid for all hours in excess of the prevailing hours at a rate of at least one and one-half (1 1/2) times their hourly rate of pay. All work on Saturday, Sunday and the following holidays is to be paid at time and a half: (1) January 1, (2) the last Monday in May, (3) July 4, (4) the first Monday in September, (5) the fourth Thursday in November, (6) December 25, (7) the day before if January 1, July 4 or December 25 falls on a Saturday and (8) the day following if January 1, July 4 or December 25 falls on a Sunday.

All laborers, workers, mechanics and truck drivers shall be paid unconditionally not less often than once a week. Persons who own and operate their own trucks must receive the prevailing truck driver rate for the applicable type of truck (i.e. 2 axle, 3 or more axle, articulated, eculid or dumptor) he or she operates, plus an agreed upon amount for the use of his or her truck. Every owner-operator MUST be paid separately for their driving and for the use of their truck.

For those projects subject to the requirements of the Davis-Bacon Act, the Secretary of Labor will also have determined "Minimum Wage Rates" for work to be performed under the contract. These rates are, for all or most of the labor, worker, mechanic or truck driver classifications, identical to those established under Section 103.50 of the Wisconsin Statutes. In the event the rates are not identical, the higher of the two rates will govern.

II. PAYROLL REQUIREMENTS

All contractors and subcontractors must submit weekly Certified Payrolls and Compliance Statement verifying that all laborers, workers, mechanics and truck drivers working on the project have been paid the prevailing wage rates for all work performed under the contract required by Section 103.50 of the Wisconsin Statutes.

III. POSTINGS AT THE SITE OF THE WORK

In addition to the required postings furnished by the Department, the contractor shall post the following in at least one conspicuous place at the site of work:

- a. "NOTICE TO EMPLOYEES," which provides information required to be posted by the provisions of Section 103.50 of the Wisconsin Statutes.
- b. A copy of the State of Wisconsin Minimum Wages Rates. (Four pages.)
- c. A copy of the contractor's Equal Employment Opportunity Policy.
- d. On any project involving federal aid, in addition to the furnished postings, the contractor shall post a copy of the "Davis-Bacon Act, Minimum Wage Rates". (Three pages.)

IV. WAGE RATE REDISTRIBUTION

The amount specified as the hourly basic rate of pay and the amount(s) specified as the fringe benefit contribution(s), for all classes of laborers, workers, mechanics or truck drivers may be redistributed, when necessary, to conform to those specified in any applicable collective bargaining agreement, provided that both parties to such agreement

request and receive the approval for any such redistribution from both the Department of Transportation and the Department of Workforce Development prior to the implementation of such redistribution.

V. ADDITIONAL CLASSIFICATIONS

Any unlisted laborer or mechanic classification that is needed to perform work on this project, and is not included within the scope of any of the classifications listed in the application prevailing wage rate determination, may be added after award only if all of the following criteria have been met:

1. The affected employer(s) must make a written request to WisDOT Central Office to utilize the unlisted classification on this project.
2. The request must indicate the scope of the work to be performed by the unlisted classification and must indicate the proposed wage/fringe benefit package that the unlisted classification is to receive.
3. The work to be performed by the unlisted classification must not be performed by a classification that is included in the applicable prevailing wage rate determination.
4. The unlisted classification must be commonly employed in the area where the project is located.
5. The proposed wage/fringe benefit package must bear a reasonable relationship to those set forth in the applicable prevailing wage rate determination.
6. The request should be made prior to the actual performance of the work by the unlisted classification.
7. DWD must approve the use of the unlisted classification and the proposed wage/fringe benefit package. USDOL also must approve the use of the unlisted classification and the proposed wage/fringe benefit package on federal aid projects.
8. WisDOT and DWD may amend the proposed wage/fringe benefit package, as deemed necessary, and may set forth specific employment ratios and scope of work requirements in the approval document.

The approved wage/fringe benefit package shall be paid to all laborers, workers, mechanics or truck drivers performing work within the scope of that performed by the unlisted classification, from the first day on which such work is performed. In the event that work is performed by the unlisted classification prior to approval, the wage/fringe benefit package to be paid for such work must be in conformance with the wage/fringe

benefit package approved for such work. Under this arrangement a retroactive adjustment in wages and/or fringe benefits may be required to be made to the affected laborers, workers, mechanics or truck drivers by the affected employer(s).

**ANNUAL PREVAILING WAGE RATE DETERMINATION
FOR ALL STATE HIGHWAY PROJECTS
ST. CROIX COUNTY**

Compiled by the State of Wisconsin - Department of Workforce Development
for the Department of Transportation
Pursuant to s. 103.50, Stats.
Issued on May 1, 2016

CLASSIFICATION: Contractors are required to call the Department of Workforce Development if there are any questions regarding the proper trade or classification to be used for any worker on a public works project.

OVERTIME: Time and one-half must be paid for all hours worked over 10 hours per day and 40 hours per calendar week and for all hours worked on Saturday, Sunday and the following six (6) holidays: January 1; the last Monday in May; July 4; the 1st Monday in September; the 4th Thursday in November; December 25; the day before if January 1, July 4 or December 25 falls on a Saturday; the day following if January 1, July 4 or December 25 falls on a Sunday.

FUTURE INCREASE: If indicated for a specific trade or occupation, the full amount of such increase MUST be added to the "TOTAL" indicated for such trade or occupation on the date(s) such increase(s) becomes effective.

PREMIUM PAY: If indicated for a specific trade or occupation, the full amount of such pay MUST be added to the "HOURLY BASIC RATE OF PAY" indicated for such trade or occupation, whenever such pay is applicable.

SUBJOURNEY: Wage rates may be available for some of the classifications indicated below. Any employer that desires to use any subjourney classification on a project MUST request the applicable wage rate from the Department of Workforce Development PRIOR to the date such classification is used on such project. Form ERD-10880 is available for this purpose and can be obtained by writing to the Department of Workforce Development, Equal Rights Division, P.O. Box 8928, Madison, WI 53708.

<u>TRADE OR OCCUPATION</u>	<u>HOURLY BASIC RATE OF PAY</u>	<u>HOURLY FRINGE BENEFITS</u>	<u>TOTAL</u>
	\$	\$	\$
Bricklayer, Blocklayer or Stonemason	31.55	18.52	50.07
Carpenter	34.79	17.30	52.09
Cement Finisher	34.16	18.90	53.06
Future Increase(s): Add \$1.75 on 6/1/16.			
Premium Pay: DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.40/hr when the Wisconsin Department of Transportation or responsible governing agency requires that work be performed at night under artificial illumination with traffic control and the work is completed after sunset and before sunrise.			
Electrician	31.21	18.96	50.17
Future Increase(s): Add \$1.15 on 6/1/16			
Premium Pay: DOT PREMIUM: Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day.			
Fence Erector	35.62	0.00	35.62
Ironworker	35.50	23.45	58.95
Premium Pay: DOT PREMIUM: Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day and Christmas Day.			
Line Constructor (Electrical)	40.81	20.67	61.48
Painter	29.87	18.79	48.66
Pavement Marking Operator	24.11	24.16	48.27
Piledriver	30.11	21.09	51.20
Roofer or Waterproofer	30.40	2.23	32.63
Teledata Technician or Installer	22.50	12.74	35.24
Tuckpointer, Caulker or Cleaner	31.12	18.69	49.81
Underwater Diver (Except on Great Lakes)	36.74	16.00	52.74
Heavy Equipment Operator - ELECTRICAL LINE CONSTRUCTION ONLY	36.73	15.92	52.65

TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY	HOURLY FRINGE BENEFITS	TOTAL
	\$	\$	\$
Light Equipment Operator -ELECTRICAL LINE CONSTRUCTION ONLY	32.65	16.12	48.77
Heavy Truck Driver - ELECTRICAL LINE CONSTRUCTION ONLY	28.57	13.71	42.28
Light Truck Driver - ELECTRICAL LINE CONSTRUCTION ONLY	26.53	13.09	39.62
Groundman - ELECTRICAL LINE CONSTRUCTION ONLY	21.75	12.97	34.72

TRUCK DRIVERS

Single Axle or Two Axle	36.72	21.15	57.87
Three or More Axle	25.78	18.96	44.74
Premium Pay: DOT PREMIUM: Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day.			
Articulated, Euclid, Dumptor, Off Road Material Hauler	30.82	21.85	52.67
Future Increase(s): Add \$1.30/hr on 6/1/2016; Add \$1.25/hr on 6/1/2017.			
Premium Pay: DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.50/hr night work premium. See DOT'S website for details about the applicability of this night work premium at: http://wisconsin.gov/Pages/doing-bus/civil-rights/labornwage/prevaling-wage-compliance.aspx .			
Pavement Marking Vehicle	23.82	17.72	41.54
Shadow or Pilot Vehicle	25.28	18.31	43.59
Truck Mechanic	25.28	18.31	43.59

LABORERS

General Laborer	30.67	15.65	46.32
Future Increase(s): Add \$1.00/hr eff. 06/01/2016; Add \$1.00/hr eff. 06/01/2017			
Premium Pay: Add \$.10/hr for topman, air tool operator, vibrator or tamper operator (mechanical hand operated), chain saw operator and demolition burning torch laborer; Add \$.15/hr for bituminous worker (raker and luteman), formsetter (curb, sidewalk and pavement) and strike off man; Add \$.20/hr for blaster and powderman; Add \$.25/hr for bottomman; Add \$.35/hr for line and grade specialist; Add \$.45/hr for pipelayer. DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.25/hr for work on projects involving temporary traffic control setup, for lane and shoulder closures, when work under artificial illumination conditions is necessary as required by the project provisions (including prep time prior to and/or cleanup after such time period).			
Asbestos Abatement Worker	24.92	15.12	40.04
Landscafer	30.67	15.65	46.32
Future Increase(s): Add \$1.00/hr eff. 06/01/2016; Add \$1.00/hr eff. 06/01/2017			
Premium Pay: DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.25/hr for work on projects involving temporary traffic control setup, for lane and shoulder closures, when work under artificial illumination conditions is necessary as required by the project provisions (including prep time prior to and/or cleanup after such time period).			
Flagperson or Traffic Control Person	27.30	15.65	42.95
Future Increase(s): Add \$1.00/hr eff. 06/01/2016; Add \$1.00/hr eff. 06/01/2017			
Premium Pay: DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.25/hr when the Wisconsin Department of Transportation or responsible governing agency requires that work be performed at night under artificial illumination with traffic control and the work is completed after sunset and before sunrise.			
Fiber Optic Laborer (Outside, Other Than Concrete Encased)	16.00	4.93	20.93

<u>TRADE OR OCCUPATION</u>	<u>HOURLY BASIC RATE OF PAY</u>	<u>HOURLY FRINGE BENEFITS</u>	<u>TOTAL</u>
	\$	\$	\$
Railroad Track Laborer	24.22	15.12	39.34

HEAVY EQUIPMENT OPERATORS

Crane, Tower Crane, Pedestal Tower or Derrick, With Boom, Leads &/or Jib Lengths Measuring 176 Ft or Over; Crane, Tower Crane, Pedestal Tower or Derrick, With or Without Attachments, With a Lifting Capacity of Over 100 Tons, Self-Erecting Tower Crane With a Lifting Capacity Of Over 4,000 Lbs., Crane With Boom Dollies; Traveling Crane (Bridge Type).

Future Increase(s): Add \$1.30/hr on 6/1/2016; Add \$1.25/hr on 6/1/2017.

Premium Pay: DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.50/hr night work premium.

See DOT'S website for details about the applicability of this night work premium at:

<http://wisconsindot.gov/Pages/doing-bus/civil-rights/labornwage/prevaling-wage-compliance.aspx>.

Backhoe (Track Type) Having a Mfr.'s Rated Capacity of 130,000 Lbs. or Over; Caisson Rig; Crane, Tower Crane, Portable Tower, Pedestal Tower or Derrick, With Boom, Leads &/or Jib Lengths Measuring 175 Ft or Under; Crane, Tower Crane, Portable Tower, Pedestal Tower or Derrick, With or Without Attachments, With a Lifting Capacity of 100 Tons or Under, Self-Erecting Tower Crane With A Lifting Capacity Of 4,000 Lbs., & Under; Dredge (NOT Performing Work on the Great Lakes); Licensed Boat Pilot (NOT Performing Work on the Great Lakes); Pile Driver.	37.77	21.85	59.62
---	-------	-------	-------

Future Increase(s): Add \$1.30/hr on 6/1/2016; Add \$1.25/hr on 6/1/2017.

Premium Pay: DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.50/hr night work premium.

See DOT'S website for details about the applicability of this night work premium at:

<http://wisconsindot.gov/Pages/doing-bus/civil-rights/labornwage/prevaling-wage-compliance.aspx>.

Air Track, Rotary or Percussion Drilling Machine &/or Hammers, Blaster; Asphalt Heater, Planer & Scarifier; Asphalt Milling Machine; Asphalt Screed; Automatic Subgrader (Concrete); Backhoe (Track Type) Having a Mfr.'s Rated Capacity of Under 130,000 Lbs., Backhoe (Mini, 15,000 Lbs. & Under); Bituminous (Asphalt) Plant & Paver, Screed; Boatmen (NOT Performing Work on the Great Lakes); Boring Machine (Directional, Horizontal or Vertical); Bridge (Bidwell) Paver; Bulldozer or Endloader; Concrete Batch Plant, Batch Hopper; Concrete Breaker (Large, Auto, Vibratory/Sonic, Manual or Remote); Concrete Bump Cutter, Grinder, Planing or Grooving Machine; Concrete Conveyor System; Concrete Laser/Screed; Concrete Paver (Slipform); Concrete Pump, Concrete Conveyor (Rotec or Bidwell Type); Concrete Slipform Placer Curb & Gutter Machine; Concrete Spreader & Distributor; Crane (Carry Deck, Mini) or Truck Mounted Hydraulic Crane (10 Tons or Under); Crane With a Lifting Capacity of 25 Tons or Under; Forestry Equipment, Timbco, Tree Shear, Tub Grinder, Processor; Gradall (Cruz-Aire Type); Grader or Motor Patrol; Grout Pump; Hydro-Blaster (10,000 PSI or Over); Loading Machine (Conveyor); Material or Stack Hoist; Mechanic or Welder; Milling Machine; Post Hole Digger or Driver; Roller (Over 5 Ton); Scraper (Self Propelled or Tractor Drawn) 5 cu yds or More Capacity; Shoulder Widener; Sideboom; Skid Rig; Stabilizing or Concrete Mixer (Self-Propelled or 14S or Over); Straddle Carrier or Travel Lift; Tractor (Scraper, Dozer, Pusher, Loader); Tractor or Truck Mounted Hydraulic Backhoe; Trencher (Wheel Type or Chain Type); Tube Finisher; Tugger (NOT Performing Work on the Great Lakes); Winches	37.27	21.85	59.12
--	-------	-------	-------

<u>TRADE OR OCCUPATION</u>	<u>HOURLY BASIC RATE OF PAY</u>	<u>HOURLY FRINGE BENEFITS</u>	<u>TOTAL</u>
	\$	\$	\$

& A- Frames.			
Future Increase(s): Add \$1.30/hr on 6/1/2016; Add \$1.25/hr on 6/1/2017.			
Premium Pay: DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.50/hr night work premium.			
See DOT'S website for details about the applicability of this night work premium at:			
http://wisconsindot.gov/Pages/doing-bus/civil-rights/labornwage/prevailing-wage-compliance.aspx .			

Belting, Burlap, Texturing Machine; Broom or Sweeper; Compactor (Self-Propelled or Tractor Mounted, Towed & Light Equipment); Concrete Finishing Machine (Road Type); Environmental Burner; Farm or Industrial Type Tractor; Fireman (Asphalt Plant, Pile Driver & Derrick NOT Performing Work on the Great Lakes); Forklift; Greaser; Hoist (Tugger, Automatic); Jeep Digger; Joint Sawyer (Multiple Blade); Launch (NOT Performing Work on the Great Lakes); Lift Slab Machine; Mechanical Float; Mulcher; Power Subgrader; Robotic Tool Carrier (With or Without Attachments); Roller (Rubber Tire, 5 Ton or Under); Self Propelled Chip Spreader; Shouldering Machine; Skid Steer Loader (With or Without Attachments); Telehandler; Tining or Curing Machine.	37.01	21.85	58.86
Future Increase(s): Add \$1.30/hr on 6/1/2016; Add \$1.25/hr on 6/1/2017.			
Premium Pay: DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.50/hr night work premium.			
See DOT'S website for details about the applicability of this night work premium at:			
http://wisconsindot.gov/Pages/doing-bus/civil-rights/labornwage/prevailing-wage-compliance.aspx .			

Air Compressor (&/or 400 CFM or Over); Air, Electric or Hydraulic Jacking System; Augers (Vertical & Horizontal); Automatic Belt Conveyor & Surge Bin; Boiler (Temporary Heat); Concrete Proportioning Plant; Crusher, Screening or Wash Plant; Generator (&/or 150 KW or Over); Heaters (Mechanical); High Pressure Utility Locating Machine (Daylighting Machine); Mudjack; Oiler; Prestress Machine; Pug Mill; Pump (3 Inch or Over) or Well Points; Rock, Stone Breaker; Screed (Milling Machine); Stump Chipper; Tank Car Heaters; Vibratory Hammer or Extractor, Power Pack.	36.72	21.85	58.57
Future Increase(s): Add \$1.30/hr on 6/1/2016; Add \$1.25/hr on 6/1/2017.			
Premium Pay: DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.50/hr night work premium.			
See DOT'S website for details about the applicability of this night work premium at:			
http://wisconsindot.gov/Pages/doing-bus/civil-rights/labornwage/prevailing-wage-compliance.aspx .			

Fiber Optic Cable Equipment.	28.50	0.36	28.86

SUPERSEDES DECISION WI20120010
U. S. DEPARTMENT OF LABOR
(DAVIS-BACON ACT, MINIMUM WAGE RATES)

STATE: Wisconsin

GENERAL DECISION NUMBER: WI160010

DESCRIPTION OF WORK: Highways and Airport Runway and Taxiway Construction

DATE: September 2, 2016

LABORERS CLASSIFICATION:	Basic Hourly Rates	Fringe Benefits
Group 1: General Laborer; Tree Trimmer; Conduit Layer; Demolition and Wrecking Laborer; Guard Rail, Fence and Bridge Builder; Landscaper, Multiplate Culvert Assembler; Stone Handler; Bituminous Worker (Shoveler, Loader, Utility Man); Batch Truck Dumper; or Cement Handler; Bituminous Worker; (Dumper, Ironer, Smoother, Tamper); Concrete Handler	\$30.67	16.55
Group 2: Air Tool Operator; Joint Sawyer and Filler (Pavement); Vibrator or Tamper Operator (Mechanical Hand Operated);	30.77	16.55
Group 3: Bituminous Worker (Raker and Luteman); Formsetter (Curb, Sidewalk, and Pavement); Strike Off man.....	30.82	16.55
Group 4: Line and Grade Specialist	31.02	16.55
Group 5: Blaster and Powderman	30.87	16.55
Group 6: Flagperson; Traffic Control	27.30	16.55

Truck Drivers:

1 & 2 Axles	26.63	19.85
Three or More Axles; Euclids, Dumptor & Articulated, Truck Mechanic.....	26.78	19.85

CLASSES OF LABORER AND MECHANICS

Bricklayer	31.36	16.51
Carpenter (W. of Hwy. 65)	33.34	16.73
Piledriverman (W. of Hwy. 65)	33.34	16.73
Carpenter (E. of Hwy. 65).....	30.48	15.80
Millwright (E. of Hwy. 65).....	32.11	15.80
Piledriverman (E. of Hwy. 65).....	30.98	15.80
Ironworker	35.50	23.45
Cement Mason/Concrete Finisher	35.07	19.75
Electrician		See Page 3
Line Construction		
Lineman	42.14	32% + 5.00
Heavy Equipment Operator	40.03	32% + 5.00
Equipment Operator	33.71	32% + 5.00
Heavy Groundman Driver	26.78	14.11
Light Groundman Driver	24.86	13.45
Groundsman	23.18	32% + 5.00
Painters.....	24.11	12.15
Well Drilling:		
Well Driller.....	16.52	3.70

Notes: Welders receive rate prescribed for craft performing operation to which welding is incidental. Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29 CFR, 5.5(a)(1)(ii)). Includes Modification #0 dated January 8, 2016; Modification #1 dated January 29, 2016; Modification #2 dated February 26, 2016; Modification #3 dated March 11, 2016; Modification #4 dated April 8, 2016; Modification #5 dated June 17, 2016; Modification #6 dated July 1, 2016; Modification #7 dated July 22, 2016; Modification #8 dated July 29, 2016; Modification #9 dated August 19, 2016; Modification #10 dated August 26, 2016; Modification #11 dated September 2, 2016.

SUPERSEDES DECISION WI20120010
U. S. DEPARTMENT OF LABOR
(DAVIS-BACON ACT, MINIMUM WAGE RATES)

STATE: Wisconsin

GENERAL DECISION NUMBER: WI160010

DESCRIPTION OF WORK: Highways and Airport Runway and Taxiway Construction

DATE: September 2, 2016

<u>POWER EQUIPMENT OPERATORS CLASSIFICATION:</u>	<u>Basic Hourly Rates</u>	<u>Fringe Benefits</u>	<u>POWER EQUIPMENT OPERATORS CLASSIFICATION: (Continued)</u>	<u>Basic Hourly Rates</u>	<u>Fringe Benefits</u>
Group 1: Cranes, tower cranes and derricks, with or without attachments, with a lifting capacity of over 100 tons or cranes, tower cranes and derricks with boom, leads and/or jib lengths measuring 176 feet or longer	\$39.27	\$21.80	(scraper, dozer, pusher, loader); scraper - rubber tired (single or twin engine); end loader hydraulic backhoe (tractor-type); trenching machine; skid rigs; tractor, side boom (heavy); drilling or boring machine (mechanical heavy); roller (over 5 tons); percussion or rotary drilling machine; air track; blaster; loading machine (conveyor); tugger; boatmen; winches and A-frames; post driver; material hoist operator.	\$38.27	\$21.80
Group 2: Cranes, tower cranes and derricks, with or without attachments, with a lifting capacity of 100 tons or less or cranes, tower cranes and derricks with boom, leads and/or jib lengths measuring 175 feet or less, and backhoes (excavators) having a manufacturer's rated capacity of 3 cu. yds. and over, caisson rigs, pile driver, dredge operator, dredge engineer.	\$38.77	\$21.80	Group 4: Greaser, roller steel (5 tons or less); roller (pneumatic tired) - self-propelled; tractor (mounted or towed compactors and light equipment); shouldering machine; self-propelled chip spreader; concrete spreader; finishing machine; mechanical float; curing machine; power subgrader; joint saw (multiple blade) belting machine; burlap machine; texturing machine; tractor, end loader (rubber tired) - light; jeep digger; fork lift; mulcher; launch operator; fireman; environmental burner.	\$38.01	\$21.80
Group 3: Mechanic or welder - heavy duty equipment, cranes with a lifting capacity of 25 tons or less, concrete breaker (manual or remote); vibrator/sonic concrete breaker; concrete laser screed; concrete slipform paver; concrete batch plant operator; concrete pavement spreader - heavy duty (rubber tired); concrete spreader and distributor, automatic subgrader (concrete); concrete grinder and planing machine; concrete slipform curb and gutter machine; slipform concrete placer; tube finisher; hydro blaster (10,000 psi and over); bridge paver; concrete conveyor system; concrete pump; stabilizing mixer (self propelled); shoulder widener; asphalt plant engineer; bituminous paver; bump cutter and grooving machine; milling machine; screed (bituminous paver); asphalt heater, planer and scarifier; backhoes (excavators) having a manufacturers rated capacity of under 3 cu. yds.; grader or motor patrol; tractor			Group 5: Air compressor; power pack; vibratory hammer and extractor; heavy equipment, leadman; tank car heaters; stump chipper; curb machine operator; concrete proportioning plants generators; mudjack operator; rock breaker; crusher or screening plant; screed (milling machine); automatic belt conveyor and surge bin; pug mill operator; oiler; pump (over 3 inches); drilling machine helper.	\$37.72	\$21.80
			Group 6: Off - road material hauler with or without ejector	\$31.82	\$21.80
			Premium Pay: EPA Level "A" protection - \$3.00 per hour EPA Level "B" protection - \$2.00 per hour EPA Level "C" protection - \$1.00 per hours		

SUPERSEDES DECISION WI20120010
U. S. DEPARTMENT OF LABOR
(DAVIS-BACON ACT, MINIMUM WAGE RATES)

STATE: Wisconsin

GENERAL DECISION NUMBER: WI160010

DESCRIPTION OF WORK: Highways and Airport Runway and Taxiway Construction

DATE: September 2, 2016

LABORERS CLASSIFICATION:		Rates	Benefits		
Electricians				Area 4 -	BROWN, DOOR, KEWAUNEE, MANITOWOC (except Schleswig), MARINETTE (Wausauke and area south thereof), OCONTO, MENOMINEE (East of a line 6 miles West of the West boundary of Oconto County), SHAWANO (except area North of Townships of Aniwa and Hutchins) COUNTIES.
Area 1		\$30.68	17.28		
Area 2:				Area 5 -	ADAMS, CLARK (Colby, Freemont, Lynn, Mayville, Sherman, Sherwood, Unity), FOREST, JUNEAU, LANGLADE, LINCOLN, MARATHON, MARINETTE (Area North of the town of Wausauke), MENOMINEE (Area West of a line 6 miles West of the West boundary of Oconto County), ONEIDA, PORTAGE, SHAWANO (Area North of the townships of Aniwa and Hutchins), VILAS AND WOOD COUNTIES
Electricians.....		32.00	19.28		
Area 3:				Area 6 -	KENOSHA COUNTY
Electrical contracts under \$130,000		28.96	18.26	Area 8 -	DODGE, (Emmet Township only), GREEN, JEFFERSON, LAFAYETTE, RACINE (Burlington township), ROCK and WALWORTH COUNTIES
Electrical contracts over \$130,000		31.16	18.34	Area 9 -	COLUMBIA, DANE, DODGE, (area west of Hwy. 26, except Chester & Emmet Townships), GREEN LAKE (except townships of Berlin, Seneca and St. Marie), IOWA, MARQUETTE (except townships of Neshkoka, Crystal Lake, Newton and Springfield), and SAUK COUNTIES
Area 4:		30.50	29.50% + 9.57	Area 10 -	CALUMET (Township of New Holstein), DODGE (East of Hwy. 26 including Chester Township), FOND DU LAC, MANITOWOC (Schleswig), and SHEBOYGAN COUNTIES
Area 5		28.96	24.85% + 9.70	Area 11 -	DOUGLAS COUNTY
Area 6		37.02	29%+9.77	Area 12 -	RACINE (except Burlington township) COUNTY
Area 8				Area 13 -	MILWAUKEE, OZAUKEE, WASHINGTON and WAUKESHA COUNTIES
Electricians.....		32.45	26.10% + 10.56	Area 14 -	Statewide.
Area 9:				Area 15 -	DODGE (East of Hwy 26 including Chester Twp, excluding Emmet Twp), FOND DU LAC (Except Waupun), MILWAUKEE, OZAUKEE, MANITOWOC (Schleswig), WASHINGTON, AND WAUKESHA COUNTIES.
Electricians.....		36.50	20.39		
Area 10		29.64	20.54		
Area 11		34.92	25.05		
Area 12		34.98	19.89		
Area 13		35.13	23.26		
Teledata System Installer					
Area 14					
Installer/Technician		24.35	13.15		
Sound & Communications					
Area 15					
Installer		16.47	14.84		
Technician.....		26.00	17.70		
Area 1 -	CALUMET (except township of New Holstein), GREEN LAKE (N. part, including Townships of Berlin, St. Marie and Seneca), MARQUETTE (N. part, including Townships of Crystal Lake, Neshkoro, Newton & Springfield), OUTAGAMIE, WAUPACA, WAUSHARA and WINNEBAGO COUNTIES.				
Area 2 -	ASHLAND, BARRON, BAYFIELD, BUFFALO, BURNETT, CHIPPEWA, CLARK (except Mayville, Colby, Unity, Sherman, Fremont, Lynn and Sherwood), CRAWFORD, DUNN, EAU CLAIRE, GRANT, IRON, JACKSON, LA CROSSE, MONROE, PEPIN, PIERCE, POLK, PRICE, RICHLAND, RUSK, ST. CROIX, SAWYER, TAYLOR, TREMPLEAU, VERNON and WASHBURN COUNTIES				
Area 3 -	FLORENCE (townships of Aurora, Commonwealth, Fern, Florence and Homestead), MARINETTE (Niagara township)				

FEBRUARY 1999

**NOTICE TO BIDDERS
WAGE RATE DECISION**

The wage rate decision of the Secretary of Labor which has been incorporated in these advertised specifications is incomplete in that the classifications may be omitted from the Secretary of Labor's decision.

Since the bidder is responsible, independently, for ascertaining area practice with respect to the necessity, or lack of necessity, for the use of these classifications in the prosecution of the work contemplated by this project, no inference may be drawn from the omission of these classifications concerning prevailing area practices relative to their use. Further, this omission will not, per se, be construed as establishing any governmental liability for increased labor cost if it is subsequently determined that such classifications are required.

There may be omissions and/or errors in the federal wage rates. The bidder is responsible for evaluating and determining the correct applicable rate. The higher of state or federal rate will apply.

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS

SECTION 0001 Contract Items

0010	201.0105 Clearing	32.000				
	STA		.		.	
0020	201.0205 Grubbing	32.000				
	STA		.		.	
0030	203.0100 Removing Small Pipe Culverts	10.000				
	EACH		.		.	
0040	203.0200 Removing Old Structure (station) 01. Sta. 248+88	LUMP	LUMP			.
0050	204.0110 Removing Asphaltic Surface	3,470.000				
	SY		.		.	
0060	204.0150 Removing Curb & Gutter	464.000				
	LF		.		.	
0070	204.0170 Removing Fence	2,960.000				
	LF		.		.	
0080	204.0180 Removing Delineators and Markers	80.000				
	EACH		.		.	
0090	204.0220 Removing Inlets	1.000				
	EACH		.		.	
0100	205.0100 Excavation Common	36,243.000				
	CY		.		.	

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0110	206.1000 Excavation for Structures Bridges (structure) 01. B-55-266	LUMP	LUMP			.
0120	208.0100 Borrow	68,648.000 CY	.		.	
0130	208.1100 Select Borrow	9,242.000 CY	.		.	
0140	209.0100 Backfill Granular	3,330.000 CY	.		.	
0150	210.0100 Backfill Structure	557.000 CY	.		.	
0160	211.0100 Prepare Foundation for Asphaltic Paving (project) 01. 1021-01-70	LUMP	LUMP			.
0170	213.0100 Finishing Roadway (project) 01. 1021-01-70	1.000 EACH	.		.	
0180	305.0110 Base Aggregate Dense 3/4-Inch	3,300.000 TON	.		.	
0190	305.0120 Base Aggregate Dense 1 1/4-Inch	36,565.000 TON	.		.	
0200	311.0115 Breaker Run	2,779.000 CY	.		.	

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0210	312.0115 Select Crushed Material	19,324.000 CY	.		.	
0220	405.0100 Coloring Concrete WisDOT Red	592.000 CY	.		.	
0230	415.1410 Concrete Pavement Approach Slab HES	128.000 SY	.		.	
0240	416.0512 Concrete Truck Apron 12-Inch	1,690.000 SY	.		.	
0250	440.4410 Incentive IRI Ride	5,180.000 DOL	1.00000		5180.00	
0260	450.4000 HMA Cold Weather Paving	18,525.000 TON	.		.	
0270	455.0605 Tack Coat	3,100.000 GAL	.		.	
0280	460.2000 Incentive Density HMA Pavement	11,860.000 DOL	1.00000		11860.00	
0290	465.0120 Asphaltic Surface Driveways and Field Entrances	28.000 TON	.		.	
0300	465.0125 Asphaltic Surface Temporary	1,590.000 TON	.		.	
0310	465.0315 Asphaltic Flumes	175.000 SY	.		.	

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0320	465.0400 Asphaltic Shoulder Rumble Strips	1,640.000 LF	.		.	
0330	501.1000 S Ice Hot Weather Concreting	6,135.000 LB	.		.	
0340	502.0100 Concrete Masonry Bridges	818.000 CY	.		.	
0350	502.3200 Protective Surface Treatment	1,498.000 SY	.		.	
0360	502.3210 Pigmented Surface Sealer	216.000 SY	.		.	
0370	503.0146 Prestressed Girder Type I 45W-Inch	2,113.000 LF	.		.	
0380	505.0100 Bar Steel Reinforcement Structures	10,240.000 LB	.		.	
0390	505.0600 Bar Steel Reinforcement HS Coated Structures	139,310.000 LB	.		.	
0400	506.2605 Bearing Pads Elastomeric Non-Laminated	36.000 EACH	.		.	
0410	506.4000 Steel Diaphragms (structure) 01. B-55-266	32.000 EACH	.		.	
0420	511.1200 Temporary Shoring (structure) 01. B-55-266	125.000 SF	.		.	

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0430	516.0500 Rubberized Membrane Waterproofing	31.000 SY	.		.	
0440	521.1012 Apron Endwalls for Culvert Pipe Steel 12-Inch	5.000 EACH	.		.	
0450	521.1024 Apron Endwalls for Culvert Pipe Steel 24-Inch	3.000 EACH	.		.	
0460	521.1030 Apron Endwalls for Culvert Pipe Steel 30-Inch	1.000 EACH	.		.	
0470	522.0112 Culvert Pipe Reinforced Concrete Class III 12-Inch	44.000 LF	.		.	
0480	522.0115 Culvert Pipe Reinforced Concrete Class III 15-Inch	120.000 LF	.		.	
0490	522.0118 Culvert Pipe Reinforced Concrete Class III 18-Inch	242.000 LF	.		.	
0500	522.0124 Culvert Pipe Reinforced Concrete Class III 24-Inch	258.000 LF	.		.	
0510	522.0130 Culvert Pipe Reinforced Concrete Class III 30-Inch	94.000 LF	.		.	
0520	522.0336 Culvert Pipe Reinforced Concrete Class IV 36-Inch	176.000 LF	.		.	
0530	522.1012 Apron Endwalls for Culvert Pipe Reinforced Concrete 12-Inch	9.000 EACH	.		.	

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0540	522.1015 Apron Endwalls for Culvert Pipe Reinforced Concrete 15-Inch	EACH 3.000	.		.	
0550	522.1018 Apron Endwalls for Culvert Pipe Reinforced Concrete 18-Inch	EACH 8.000	.		.	
0560	522.1024 Apron Endwalls for Culvert Pipe Reinforced Concrete 24-Inch	EACH 7.000	.		.	
0570	522.1030 Apron Endwalls for Culvert Pipe Reinforced Concrete 30-Inch	EACH 2.000	.		.	
0580	522.1036 Apron Endwalls for Culvert Pipe Reinforced Concrete 36-Inch	EACH 2.000	.		.	
0590	529.0124 Culvert Pipe Corrugated Steel Aluminum Coated 24-Inch	LF 96.000	.		.	
0600	529.0130 Culvert Pipe Corrugated Steel Aluminum Coated 30-Inch	LF 32.000	.		.	
0610	550.1100 Piling Steel HP 10-Inch X 42 Lb	LF 2,695.000	.		.	
0620	601.0405 Concrete Curb & Gutter 18-Inch Type A	LF 560.000	.		.	

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0630	601.0411 Concrete Curb & Gutter 30-Inch Type D	5,245.000 LF	.		.	
0640	601.0553 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type D	1,491.000 LF	.		.	
0650	601.0557 Concrete Curb & Gutter 6-Inch Sloped 36-Inch Type D	239.000 LF	.		.	
0660	601.0582 Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type T	1,095.000 LF	.		.	
0670	602.0410 Concrete Sidewalk 5-Inch	9,471.000 SF	.		.	
0680	602.0415 Concrete Sidewalk 6-Inch	36,118.000 SF	.		.	
0690	602.0515 Curb Ramp Detectable Warning Field Natural Patina	168.000 SF	.		.	
0700	603.8000 Concrete Barrier Temporary Precast Delivered	9,400.000 LF	.		.	
0710	603.8125 Concrete Barrier Temporary Precast Installed	9,400.000 LF	.		.	
0720	604.0500 Slope Paving Crushed Aggregate	538.000 SY	.		.	
0730	606.0200 Riprap Medium	127.000 CY	.		.	

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0740	608.0212 Storm Sewer Pipe Reinforced Concrete Class II 12-Inch	1,213.000 LF	.		.	
0750	608.0215 Storm Sewer Pipe Reinforced Concrete Class II 15-Inch	52.000 LF	.		.	
0760	611.0606 Inlet Covers Type B	3.000 EACH	.		.	
0770	611.0624 Inlet Covers Type H	4.000 EACH	.		.	
0780	611.0627 Inlet Covers Type HM	4.000 EACH	.		.	
0790	611.0652 Inlet Covers Type T	5.000 EACH	.		.	
0800	611.0660 Inlet Covers Type WM	17.000 EACH	.		.	
0810	611.2004 Manholes 4-FT Diameter	1.000 EACH	.		.	
0820	611.3225 Inlets 2x2.5-FT	21.000 EACH	.		.	
0830	611.3230 Inlets 2x3-FT	11.000 EACH	.		.	
0840	611.8120.S Cover Plates Temporary	20.000 EACH	.		.	

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0850	612.0212 Pipe Underdrain Unperforated 12-Inch	396.000 LF	.		.	
0860	612.0406 Pipe Underdrain Wrapped 6-Inch	847.000 LF	.		.	
0870	614.0150 Anchor Assemblies for Steel Plate Beam Guard	4.000 EACH	.		.	
0880	614.0220 Steel Thrie Beam Bullnose Terminal	2.000 EACH	.		.	
0890	614.0230 Steel Thrie Beam	250.000 LF	.		.	
0900	614.0905 Crash Cushions Temporary	21.000 EACH	.		.	
0910	614.0920 Salvaged Rail	1,990.000 LF	.		.	
0920	616.0100 Fence Woven Wire (height) 01. 4. 5-FT	2,600.000 LF	.		.	
0930	618.0100 Maintenance And Repair of Haul Roads (project) 01. 1021-01-70	1.000 EACH	.		.	
0940	619.1000 Mobilization	1.000 EACH	.		.	
0950	620.0300 Concrete Median Sloped Nose	490.000 SF	.		.	

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0960	624.0100 Water	300.000 MGAL	.		.	
0970	625.0500 Salvaged Topsoil	81,910.000 SY	.		.	
0980	627.0200 Mulching	43,625.000 SY	.		.	
0990	628.1504 Silt Fence	10,625.000 LF	.		.	
1000	628.1520 Silt Fence Maintenance	10,625.000 LF	.		.	
1010	628.1905 Mobilizations Erosion Control	6.000 EACH	.		.	
1020	628.1910 Mobilizations Emergency Erosion Control	6.000 EACH	.		.	
1030	628.2004 Erosion Mat Class I Type B	21,060.000 SY	.		.	
1040	628.2023 Erosion Mat Class II Type B	18,630.000 SY	.		.	
1050	628.6510 Soil Stabilizer Type B	2.400 ACRE	.		.	
1060	628.7005 Inlet Protection Type A	5.000 EACH	.		.	

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1070	628.7010 Inlet Protection Type B	2.000 EACH	.		.	
1080	628.7015 Inlet Protection Type C	27.000 EACH	.		.	
1090	628.7504 Temporary Ditch Checks	504.000 LF	.		.	
1100	628.7555 Culvert Pipe Checks	11.000 EACH	.		.	
1110	628.7560 Tracking Pads	5.000 EACH	.		.	
1120	629.0210 Fertilizer Type B	60.000 CWT	.		.	
1130	630.0130 Seeding Mixture No. 30	1,477.000 LB	.		.	
1140	630.0200 Seeding Temporary	3,015.000 LB	.		.	
1150	630.0300 Seeding Borrow Pit	400.000 LB	.		.	
1160	633.0100 Delineator Posts Steel	80.000 EACH	.		.	
1170	633.0500 Delineator Reflectors	92.000 EACH	.		.	

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1180	633.5200 Markers Culvert End	36.000 EACH	.		.	
1190	634.0614 Posts Wood 4x6-Inch X 14-FT	89.000 EACH	.		.	
1200	634.0616 Posts Wood 4x6-Inch X 16-FT	16.000 EACH	.		.	
1210	634.0618 Posts Wood 4x6-Inch X 18-FT	8.000 EACH	.		.	
1220	634.0816 Posts Tubular Steel 2x2-Inch X 16-FT	5.000 EACH	.		.	
1230	635.0200 Sign Supports Structural Steel HS	1,172.000 LB	.		.	
1240	636.0100 Sign Supports Concrete Masonry	1.800 CY	.		.	
1250	636.0500 Sign Supports Steel Reinforcement	100.000 LB	.		.	
1260	637.2210 Signs Type II Reflective H	803.530 SF	.		.	
1270	637.2215 Signs Type II Reflective H Folding	30.000 SF	.		.	
1280	637.2230 Signs Type II Reflective F	219.380 SF	.		.	

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1290	638.2101 Moving Signs Type I	1.000 EACH	.		.	
1300	638.2602 Removing Signs Type II	47.000 EACH	.		.	
1310	638.3000 Removing Small Sign Supports	54.000 EACH	.		.	
1320	638.3100 Removing Structural Steel Sign Supports	1.000 EACH	.		.	
1330	642.5201 Field Office Type C	1.000 EACH	.		.	
1340	643.0100 Traffic Control (project) 01. 1021-01-70	1.000 EACH	.		.	
1350	643.0300 Traffic Control Drums	36,600.000 DAY	.		.	
1360	643.0420 Traffic Control Barricades Type III	1,900.000 DAY	.		.	
1370	643.0705 Traffic Control Warning Lights Type A	2,300.000 DAY	.		.	
1380	643.0715 Traffic Control Warning Lights Type C	3,000.000 DAY	.		.	
1390	643.0800 Traffic Control Arrow Boards	520.000 DAY	.		.	

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1400	643.0900 Traffic Control Signs	10,900.000 DAY	.		.	
1410	643.0910 Traffic Control Covering Signs Type I	2.000 EACH	.		.	
1420	643.0920 Traffic Control Covering Signs Type II	4.000 EACH	.		.	
1430	643.1050 Traffic Control Signs PCMS	900.000 DAY	.		.	
1440	645.0120 Geotextile Type HR	492.000 SY	.		.	
1450	645.0140 Geotextile Type SAS	3,570.000 SY	.		.	
1460	646.0106 Pavement Marking Epoxy 4-Inch	9,858.000 LF	.		.	
1470	646.0126 Pavement Marking Epoxy 8-Inch	2,780.000 LF	.		.	
1480	646.0156 Pavement Marking Epoxy 18-Inch	170.000 LF	.		.	
1490	646.0600 Removing Pavement Markings	1,000.000 LF	.		.	
1500	646.2304.S Pavement Marking Grooved Wet Reflective Epoxy 4-Inch	13,053.000 LF	.		.	

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1510	646.2308.S Pavement Marking Grooved Wet Reflective Epoxy 8-Inch	2,077.000 LF	.		.	
1520	647.0456 Pavement Marking Curb Epoxy	40.000 LF	.		.	
1530	647.0606 Pavement Marking Island Nose Epoxy	4.000 EACH	.		.	
1540	647.0656 Pavement Marking Parking Stall Epoxy	1,534.000 LF	.		.	
1550	647.0726 Pavement Marking Diagonal Epoxy 12-Inch	450.000 LF	.		.	
1560	647.0766 Pavement Marking Crosswalk Epoxy 6-Inch	240.000 LF	.		.	
1570	649.0400 Temporary Pavement Marking Removable Tape 4-Inch	1,000.000 LF	.		.	
1580	649.0403 Temporary Pavement Marking Epoxy 4-Inch	1,000.000 LF	.		.	
1590	649.1200 Temporary Pavement Marking Stop Line Removable Tape 18-Inch	60.000 LF	.		.	
1600	650.4000 Construction Staking Storm Sewer	31.000 EACH	.		.	

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1610	650.4500 Construction Staking Subgrade	15,294.000 LF	.		.	
1620	650.5000 Construction Staking Base	15,000.000 LF	.		.	
1630	650.5500 Construction Staking Curb Gutter and Curb & Gutter	8,630.000 LF	.		.	
1640	650.6000 Construction Staking Pipe Culverts	15.000 EACH	.		.	
1650	650.6500 Construction Staking Structure Layout (structure) 01. B-55-266	LUMP	LUMP		.	
1660	650.8500 Construction Staking Electrical Installations (project) 01. 1021-01-70	LUMP	LUMP		.	
1670	650.9910 Construction Staking Supplemental Control (project) 01. 1021-01-70	LUMP	LUMP		.	
1680	650.9920 Construction Staking Slope Stakes	15,294.000 LF	.		.	
1690	652.0125 Conduit Rigid Metallic 2-Inch	88.000 LF	.		.	
1700	652.0225 Conduit Rigid Nonmetallic Schedule 40 2-Inch	5,108.000 LF	.		.	

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1710	652.0235 Conduit Rigid Nonmetallic Schedule 40 3-Inch	1,165.000 LF	.		.	
1720	653.0140 Pull Boxes Steel 24x42-Inch	25.000 EACH	.		.	
1730	653.0222 Junction Boxes 18x12x6-Inch	2.000 EACH	.		.	
1740	654.0106 Concrete Bases Type 6	29.000 EACH	.		.	
1750	654.0230 Concrete Control Cabinet Bases Type L30	2.000 EACH	.		.	
1760	655.0610 Electrical Wire Lighting 12 AWG	6,030.000 LF	.		.	
1770	655.0615 Electrical Wire Lighting 10 AWG	6,546.000 LF	.		.	
1780	655.0620 Electrical Wire Lighting 8 AWG	25,130.000 LF	.		.	
1790	656.0200 Electrical Service Meter Breaker Pedestal (location) 01. CB100 263+6'A'	LUMP	LUMP		.	
1800	656.0200 Electrical Service Meter Breaker Pedestal (location) 02. CB 200 10+47'PR'	LUMP	LUMP		.	

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1810	657.0255 Transformer Bases Breakaway 11 1/2-Inch Bolt Circle	29.000 EACH	.		.	
1820	657.0326 Poles Type 6-Steel	3.000 EACH	.		.	
1830	657.0327 Poles Type 6-Aluminum	26.000 EACH	.		.	
1840	657.0614 Luminaire Arms Single Member 4-Inch Clamp 8-FT	2.000 EACH	.		.	
1850	657.0615 Luminaire Arms Single Member 4 1/2-Inch Clamp 8-FT	33.000 EACH	.		.	
1860	659.1115 Luminaires Utility LED A	30.000 EACH	.		.	
1870	659.1120 Luminaires Utility LED B	5.000 EACH	.		.	
1880	659.2130 Lighting Control Cabinets 120/240 30-Inch	2.000 EACH	.		.	
1890	662.1026.S Ramp Closure Gates Hardwired 26-FT	1.000 EACH	.		.	
1900	662.1037.S Ramp Closure Gates Hardwired 37-FT	1.000 EACH	.		.	
1910	662.1040.S Ramp Closure Gates Hardwired 40-FT	1.000 EACH	.		.	

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
1920	662.3026.S Ramp Closure Gate Arms Stockpile 26-FT	1.000 EACH	.		.	
1930	662.3037.S Ramp Closure Gate Arms Stockpile 37-FT	1.000 EACH	.		.	
1940	662.3040.S Ramp Closure Gate Arms Stockpile 40-FT	1.000 EACH	.		.	
1950	662.4000.S Ramp Closure Gate Flashers Stockpile	3.000 EACH	.		.	
1960	690.0150 Sawing Asphalt	6,410.000 LF	.		.	
1970	715.0502 Incentive Strength Concrete Structures	4,908.000 DOL	1.000000		4908.00	
1980	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	2,500.000 HRS	5.000000		12500.00	
1990	ASP.1T0G On-the-Job Training Graduate at \$5. 00/HR	1,440.000 HRS	5.000000		7200.00	
2000	SPV.0045 Special 01. Portable Changeable Message Sign (PCMS) Cellular Communications	675.000 DAY	.		.	
2010	SPV.0090 Special 01. Concrete Curb and Gutter Cure and Seal Treatment	8,630.000 LF	.		.	

SCHEDULE OF ITEMS

REVISED:

CONTRACT:
20161108016PROJECT(S):
1021-01-70FEDERAL ID(S):
WISC 2016351

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
2020	SPV.0090 Special 02. Fence Chain Link Polymer-Coated 6-Ft	538.000 LF	.		.	
2030	SPV.0165 Special 01. Concrete Sidewalk Cure and Seal Treatment	46,925.000 SF	.		.	
2040	SPV.0165 Special 02. Concrete Median Sloped Nose Cure and Seal Treatment	490.000 SF	.		.	
2050	SPV.0195 Special 01. HMA Pavement 3-MT 58-28 S 3.0% VA Regression Special	13,045.000 TON	.		.	
2060	SPV.0195 Special 02. HMA Pavement 4-MT 58-34 H 3.0% VA Regression Special	5,480.000 TON	.		.	
	SECTION 0001 TOTAL				.	
	TOTAL BID				.	

PLEASE ATTACH SCHEDULE OF ITEMS HERE