


LAX  
PROJECT ID: 1640-03-61  
WITH:

NOVEMBER 2020

ORDER OF SHEETS

Section No.	1	Title
Section No.	2	Typical Sections and Details
Section No.	3	Estimate of Quantities
Section No.	3	Miscellaneous Quantities
Section No.	<del>4</del>	<del>Right of Way Plan</del>
Section No.	5	Plan and Profile
Section No.	6	Standard Detail Drawings
Section No.	<del>7</del>	<del>Sign Plates</del>
Section No.	<del>8</del>	<del>Structure Plans</del>
Section No.	<del>8</del>	<del>Computer Earthwork Data</del>
Section No.	9	Cross Sections

TOTAL SHEETS = 68

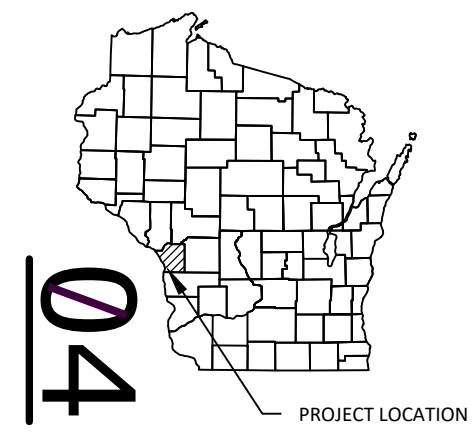

DESIGN DESIGNATION


A.A.D.T. (2023)	=	10,000
A.A.D.T. (2043)	=	10,500
D.H.V.	=	9.3%
D.D.	=	60/40
T.	=	11.1%
DESIGN SPEED	=	60 MPH
ESALS	=	1,700,000

CONVENTIONAL SYMBOLS

PLAN	PROFILE
CORPORATE LIMITS	GRADE LINE
PROPERTY LINE	ORIGINAL GROUND
LOT LINE	MARSH OR ROCK PROFILE (To be noted as such)
LIMITED HIGHWAY EASEMENT	SPECIAL DITCH
EXISTING RIGHT OF WAY	GRADE ELEVATION
PROPOSED OR NEW R/W LINE	CULVERT (Profile View)
SLOPE INTERCEPT	UTILITIES
REFERENCE LINE	ELECTRIC
EXISTING CULVERT	FIBER OPTIC
PROPOSED CULVERT (Box or Pipe)	GAS
COMBUSTIBLE FLUIDS	SANITARY SEWER
MARSH AREA	STORM SEWER
WOODED OR SHRUB AREA	TELEPHONE
	WATER
	UTILITY PEDESTAL
	POWER POLE
	TELEPHONE POLE

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION  
PLAN OF PROPOSED IMPROVEMENT  
LA CROSSE - WESTBY  
BRICKYARD LANE TO CTH M  
USH 14  
LA CROSSE COUNTY

STATE PROJECT NUMBER  
1640-03-61

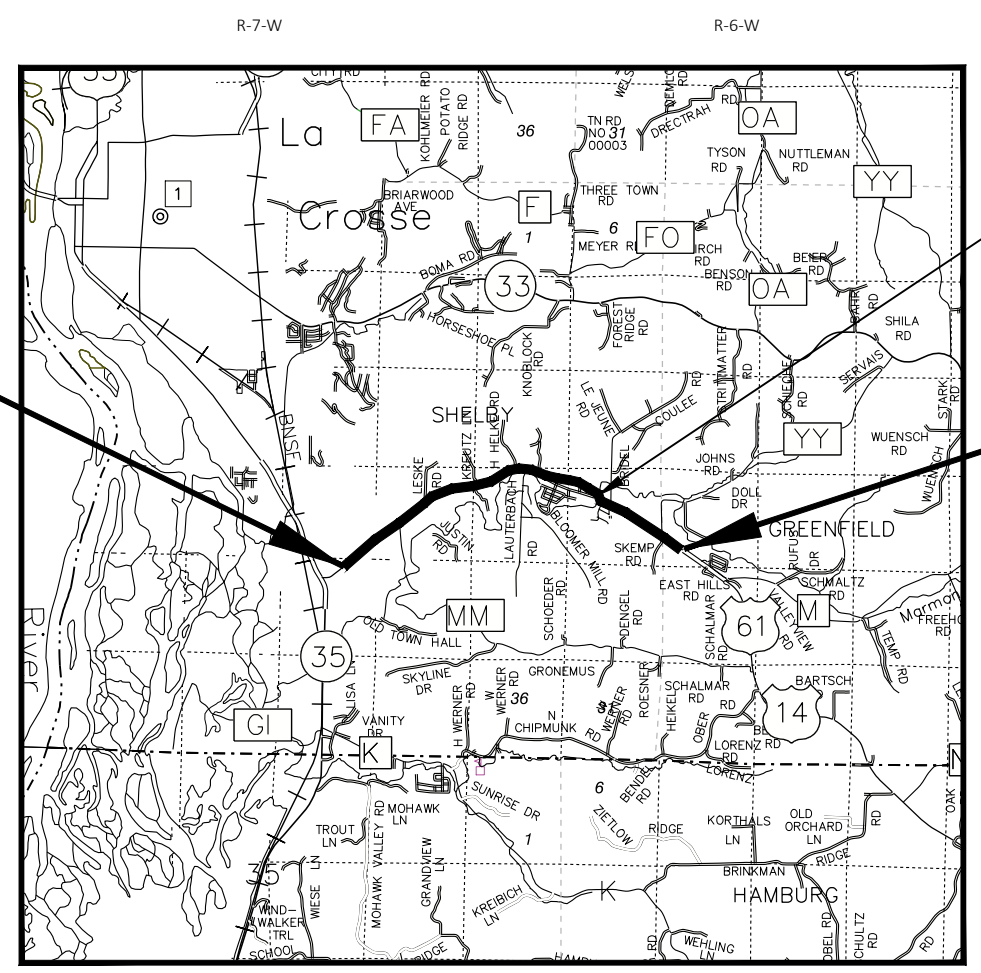

BEGIN PROJECT  
STA 165+00.00  
Y = 111,289.444  
X = 460,750.957

NET EXCEPTION TO CL LENGTH  
STRUCTURE B-32-144  
STA 310+58 - STA 312+23

END PROJECT  
STA 367+75  
Y = 111,530.169  
X = 478,419.812

LAYOUT  
SCALE 0 2 MI  
TOTAL NET LENGTH OF CENTERLINE = 3.808 MI

HORIZONTAL POSITIONS SHOWN ON THIS PLAN ARE WISCONSIN COUNTY COORDINATES, LA CROSSE COUNTY, NAD83 (2011), IN U.S. SURVEY FEET. VALUES ARE GRID COORDINATES, GRID BEARINGS, AND GRID DISTANCES. GRID DISTANCES MAY BE USED AS GROUND DISTANCES. ELEVATIONS SHOWN ON THIS PLAN ARE REFERENCED TO THE NORTH AMERICAN VERTICAL DATUM OF 1988, NAVD (2012).

STATE PROJECT	FEDERAL PROJECT	
	PROJECT	CONTRACT
1640-03-61	WISC 2020528	1

ORIGINAL PLANS PREPARED BY

7/23/20  
(Date) *Jeremy J. Tomesh*  
(Signature)

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

PREPARED BY

Surveyor	SEH
Designer	SEH
Project Manager	TIM MAEDKE
Regional Examiner	SW REGION
Regional Supervisor	REINY YAHNKE

APPROVED FOR THE DEPARTMENT

DATE: 7/28/20 *Timothy J. Maedke*

E

COUNTY: LA CROSSE

**GENERAL NOTES**

REFERENCE LINES SHOWN ON THE PLANS ARE APPROXIMATE IN RELATION TO EXISTING CENTERLINE. CONTRACTOR SHALL VERIFY THAT PLAN OFFSETS ARE ACCURATE IN RELATION TO THE EXISTING CENTERLINE.

ELEVATIONS SHOWN ON THE PLAN ARE REFERENCED TO THE APPROXIMATE USGS DATUM.

WHEN THE QUANTITY OF BASE AGGREGATE OR ASPHALTIC SURFACE IS MEASURED FOR PAYMENT BY THE TON OR CUBIC YARD, THE DEPTH OR THICKNESS OF THE LAYER SHOWN ON THE PLANS IS APPROXIMATE AND THE ACTUAL THICKNESS WILL DEPEND ON THE DISTRIBUTION OF THE MATERIAL AS DIRECTED BY THE ENGINEER.

THE LOCATION OF EXISTING AND PROPOSED UTILITY INSTALLATIONS AS SHOWN ON THE PLANS IS APPROXIMATE. THERE MAY BE OTHER UTILITY INSTALLATIONS WITHIN THE PROJECT AREA THAT ARE NOT SHOWN.

NO TREES OR SHRUBS ARE TO BE REMOVED WITHOUT THE APPROVAL OF THE ENGINEER.

THE EXACT LOCATION OF THE EROSION CONTROL DEVICES SHALL BE DETERMINED IN THE FIELD.

DISTURBED AREAS WITHIN THE RIGHT-OF-WAY, EXCEPT THE AREAS WITHIN THE FINISHED SHOULDER POINTS, ARE TO BE 4-INCH SALVAGED TOPSOILED/TOPSOILED, FERTILIZED, SEEDED AND MULCHED.

ALL PRIVATE DRIVEWAYS, FIELD ENTRANCES, AND SHALL BE RESTORED IN-KIND. LIMITS TO BE DETERMINED BY ENGINEER

WHEN PORTION OF EXISTING ASPHALTIC SURFACES ARE TO BE REMOVED TO ACCOMMODATE NEW CONSTRUCTION, THE LINE OF SUCH REMOVAL SHALL BE NEATLY DELINEATED WITH A SAW CUT JOINT THROUGH THE ASPHALTIC SURFACE SO THAT REMOVAL OF THE ASPHALT SHALL BE ACCOMPLISHED WITHOUT DAMAGE TO REMAINING PORTION, THE LOCATION OF SAW JOINT AND THE AMOUNT REMOVED AT SIDE ROADS WILL BE DETERMINED IN THE FIELD BY THE ENGINEER

BEARINGS SHOWN ON THE PLAN ARE REFERENCED TO THE EXISTING ROADWAY CENTERLINE AND ARE ASSUMED.

THE CONTRACTOR'S PAVING OPERATIONS SHALL BE CONSISTENT WITH THE PLAN TYPICAL SECTIONS AND CONSTRUCTED TO PREVENT HMA LONGITUDINAL JOINTS FROM BEING LOCATED WITHIN A DRIVING, TURNING, PASSING OR PARKING LANE.

SHOULDER TAPER LOCATIONS SHALL MATCH EXISTING.

TACK COAT CALCULATIONS ARE BASED ON THE FOLLOWING APPLICATION RATES:

- BETWEEN THE MILLED PAVEMENT AND NEW HMA PAVEMENT AT 0.07 GAL/SY
- BETWEEN THE LOWER LAYER AND UPPER LAYER OF NEW HMA PAVEMENT AT 0.05 GAL/SY

HMA PAVEMENT SHALL BE PLACED IN LIFTS AS FOLLOWS:

- 2": SINGLE LAYER (4 MT 58-28 S)
- 3.5": 1.75" LOWER LAYER (4 LT 58-28 S), 1.75" UPPER LAYER (4 MT 58-28 S)

A CONVERSION FACTOR OF 2.1 TONS/CY IS USED TO ESTIMATE QUANTITIES FOR BASE AGGREGATE DENSE 3/4-INCH.

A CONVERSION FACTOR OF 112 LBS/IN/SY IS USED TO ESTIMATE QUANTITIES FOR HMA PAVEMENT.

STANDARD ABBREVIATIONS:

ABUT	ABUTMENT	CWT	HUNDREDWEIGHT
AC	ACRE	HYD	HYDRANT
AGG	AGGREGATE	ID	INSIDE DIAMETER
AECPRC	APRON ENDWALL FOR CULVERT PIPE	INV	INVERT
	REINFORCED CONCRETE	IP	IRON PIPE OR PIN
AECPCS	APRON ENDWALL FOR CULVERT PIPE	LHF	LEFT-HAND FORWARD
	CORRUGATED STEEL	L	LENGTH OF CURVE
ASPH	ASPHALTIC	LF	LINEAR FOOT
AVG	AVERAGE	LC	LONG CHORD OF CURVE
ADT	AVERAGE DAILY TRAFFIC	LS	LUMP SUM
BF	BACK FACE	MH	MANHOLE
BM	BENCH MARK	MOR	MID POINT OF RADIUS
BR	BRIDGE	MCE	MARKERS CULVERT END
CE	COMMERCIAL ENTRANCE	NC	NORMAL CROWN
CL OR C/L OR €	CENTER LINE	NO	NUMBER
Δ	CENTRAL ANGLE OR DELTA	OBLIT	OBLITERATE
CONC	CONCRETE	PAVT	PAVEMENT
CPRC	CULVERT PIPE REINFORCED	PE	PRIVATE ENTRANCE
CONCRETE		PVRC	POINT OF VERTICAL REVERSE CURVE
CPCS	CULVERT PIPE CORRUGATED STEEL	OOR	QUARTER POINT OF RADIUS
CR	CREEK	R	RADIUS
CY	CUBIC YARD	REQ'D	REQUIRED
C & G	CURB AND GUTTER	RES	RESIDENCE OR RESIDENTIAL
D	DEGREE OF CURVE	RHF	RIGHT-HAND FORWARD
DHV	DESIGN HOUR VOLUME	R/W	RIGHT-OF-WAY
DISCH	DISCHARGE	R	RIVER
DG	DITCH GRADE	RDWY	ROADWAY
DWY	DRIVEWAY	R/L OR R	REFERENCE LINE
X	EAST GRID COORDINATE	SALV	SALVAGED
EAT	STEEL PLATE BEAM GUARD	SAN	SANITARY SEWER
	ENERGY ABSORBING TERMINAL	SF	SQUARE FEET
EOR	END POINT OF RADIUS	SY	SQUARE YARD
EL	ELEVATION	SDD	STANDARD DETAIL DRAWINGS
ENT	ENTRANCE	STA	STATION
ESALS	EQUIVALENT SINGLE AXLE LOADS	SS	STORM SEWER
EXC	EXCAVATION	SSPRC	STORM SEWER PIPE REINFORCED
EBS	EXCAVATION BELOW SUBGRADE	CONCRETE	
EXIST	EXISTING	SE	SUPERELEVATION RATE
FC	FACE OF CURB	TC	TOP OF CURB
FF	FACE TO FACE	T OR TN	TOWN
FERT	FERTILIZE	T	TRUCKS (PERCENT OF)
FE	FIELD ENTRANCE	TYP	TYPICAL
FL	FLOW LINE	VAR	VARIABLE
FO	FIBER OPTIC	VC	VERTICAL CURVE
		Y	NORTH GRID COORDINATE
		YD	YARD

UTILITY CONTACTS

CENTURYLINK - COMMUNICATION LINE  
ATTENTION : MONTY PARKER  
20 S WILSON AVE  
RICE LAKE, WI 54868  
PHONE: (715) 234-5528  
EMAIL: MONTY.PARKER@CENTURYLINK.COM

LA CROSSE WATER UTILITY - WATER  
ATTENTION: RANDY TURTENWALD  
400 LA CROSSE ST  
LA CROSSE, WI 54601  
PHONE (608)789-7505  
TURTENWALDR@CITYOFLACROSSE.ORG

CITY OF LA CROSSE - SEWER  
ATTENTION: RANDY TURTENWALD  
400 LA CROSSE ST  
LA CROSSE, WI 54601  
PHONE (608)789-7505  
EMAIL: TURTENWALDR@CITYOFLACROSSE.ORG

DAIRYLAND POWER COOPERATIVE - ELECTRICITY  
ATTENTION: ROB MALY  
3200 EAST AVE S  
P.O. BOX 817  
LA CROSSE, WI 54602-0817  
PHONE (608)788-4000  
ROB.MALY@DAIRYLANDPOWER.COM

WINDSTREAM KDL, LLC - COMMUNICATION LINE  
ATTENTION: KEVIN PARRIS  
1855 WRIGHT ST  
MADISON WI 53704  
PHONE: (608) 819-5016  
EMAIL: KEVIN.J.PARRIS@WINDSTREAM.COM

MIDWEST NATURAL GAS, INC. - GAS/PETROLEUM  
ATTENTION: RANDY RISEN  
3600 STATE HIGHWAY 157  
P.O. BOX 429  
LA CROSSE, WI 54602-0429  
PHONE (608)781-1011  
EMAIL: RANDYR@MIDWESTNATURALGAS.COM

MEDIACOM WISCONSIN LLC - COMMUNICATION LINE  
ATTENTION: CRAIG EGGERT  
207 W PEARLE ST  
P.O. BOX 226  
DECORAH, IA 52101-0226  
PHONE (563) 419-5160  
EMAIL: CEGGERT@MEDIACOMCC.COM

VERNON ELECTRIC COOPERATIVE - ELECTRICITY  
ATTENTION: CRAIG BUROS  
110 SAUGSTAD RD  
WESTBY, WI 54667-1199  
PHONE: (608) 634-3121  
EMAIL: CBUROS@VERNONELECTRIC.ORG

XCEL ENERGY - GAS/PETROLEUM  
ATTENTION: CORISSA SEELY  
1414 W HAMILTON AVE  
P.O. BOX 8  
EAU CLARE, WI 54702-0008  
PHONE: (715) 737-4097  
EMAIL: CORISSA.E.SEELY@XCELENERGY.COM



Dial 811 or (800)242-8511  
www.DiggersHotline.com

DESIGN CONTACTS

SEH  
ATTENTION : JEREMY TOMESH  
329 JAY ST SUITE 301  
LA CROSSE, WI 54601  
PHONE: (608) 498-4947  
EMAIL: JTOMESH@SEHINC.COM

WISDOT SW REGION  
ATTENTION : TIM MAEDKE  
3550 MORMON COULEE ROAD  
LA CROSSE, WI 54601  
PHONE: (608) 789-6317  
EMAIL: TIMOTHY.MAEDKE@DOT.WI.GOV

WDNR LIASON

DNR SERVICE CENTER  
ATTENTION : KAREN KALVELAGE  
3550 MORMON COULEE ROAD  
LACROSSE, WI 54601  
PHONE: (608) 785-9115  
EMAIL:KAREN.KALVALAGE@WISCONSIN.GOV

PROJECT NO: 1640-03-61

HWY: USH 14




COUNTY: LA CROSSE

GENERAL NOTES


SHEET

E

NOTES:  
HALF SECTIONS SHOWN ARE SYMMETRICAL ABOUT CENTERLINE  
SEE PLAN SHEETS FOR GUARDRAIL LOCATIONS

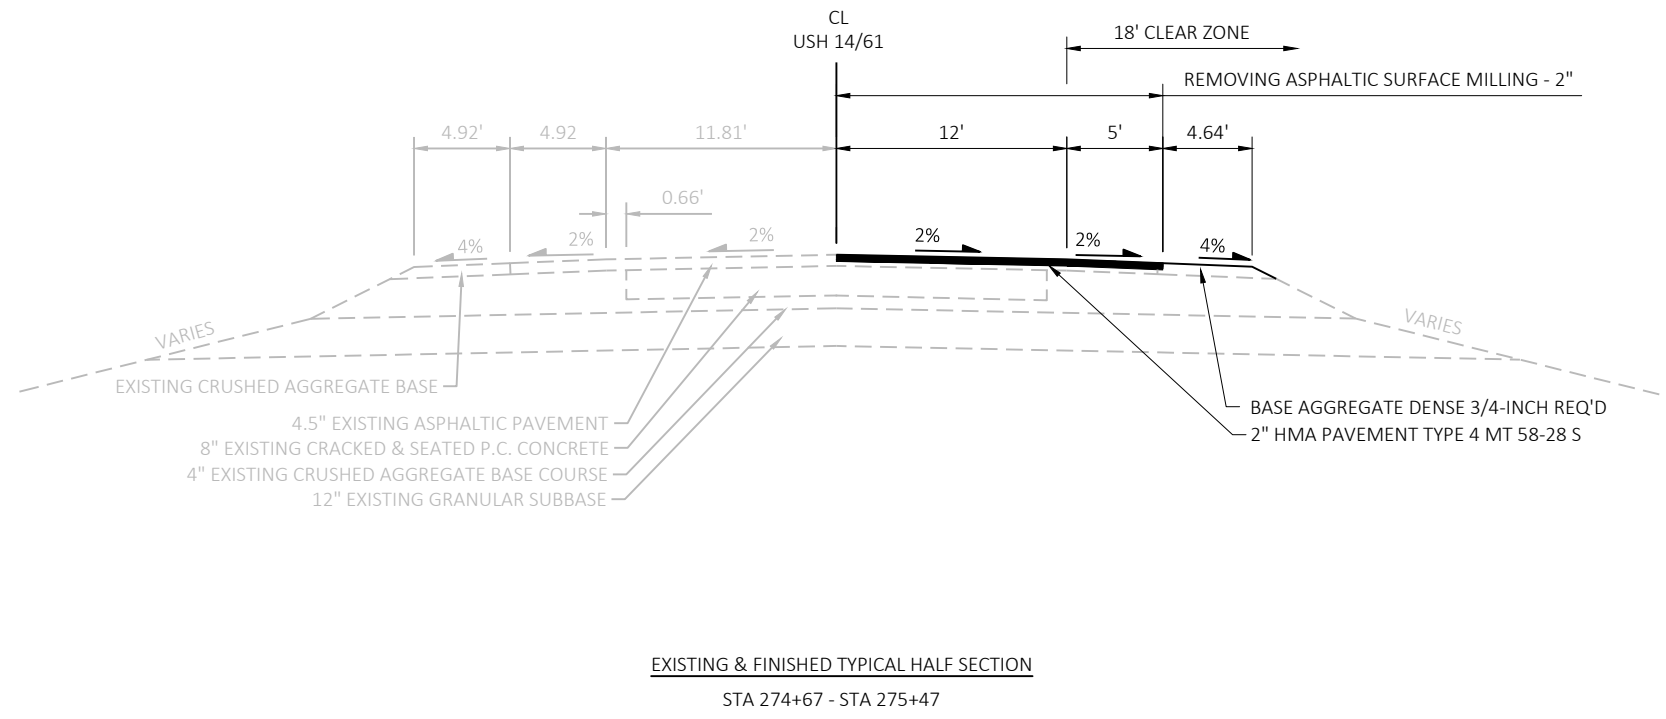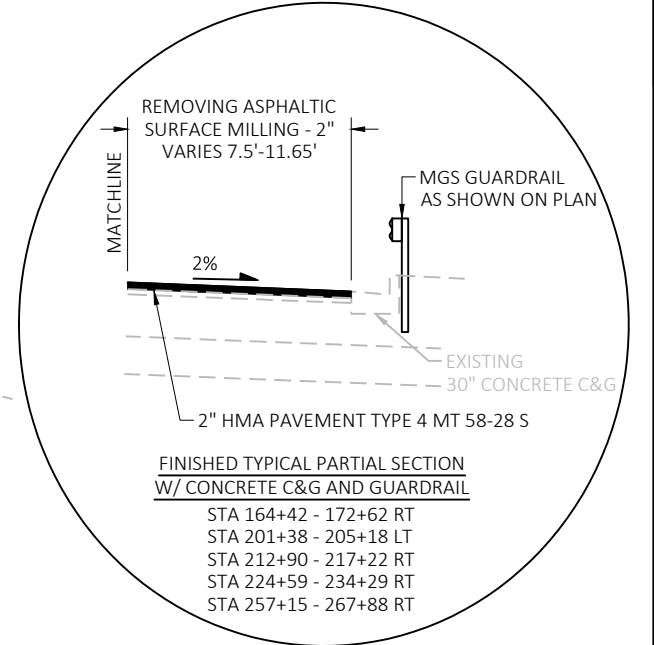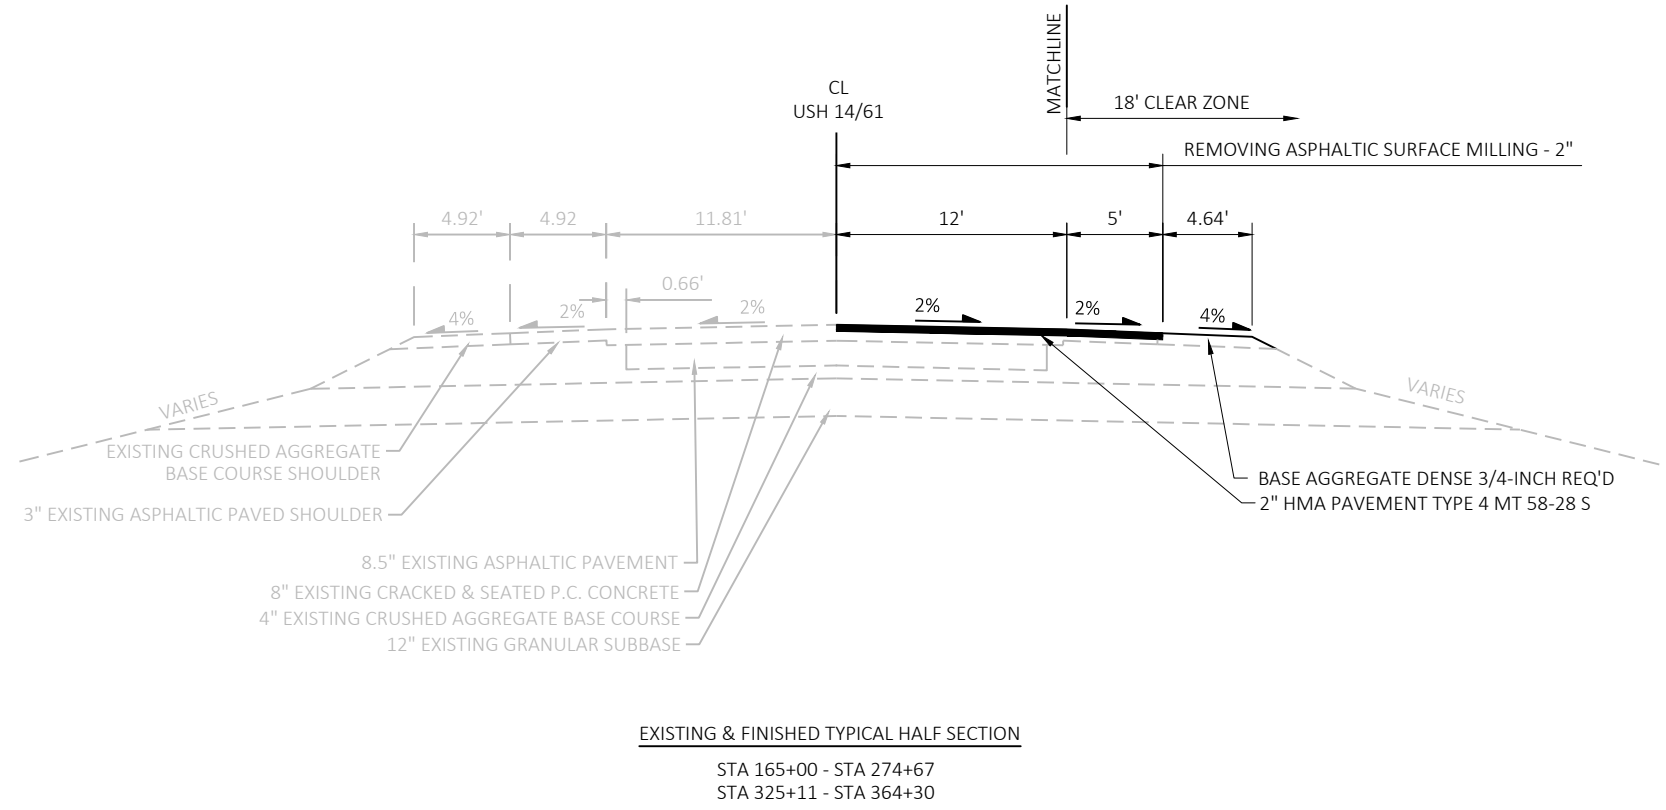


NOTES:  
 HALF SECTIONS SHOWN ARE SYMMETRICAL ABOUT CENTERLINE  
 SEE PLAN SHEETS FOR GUARDRAIL LOCATIONS  
 TAPER THE 1/2" PROFILE CHANGE FROM STA 274+97 - STA 275+47  
 AND STA 325+11 - STA 325+61

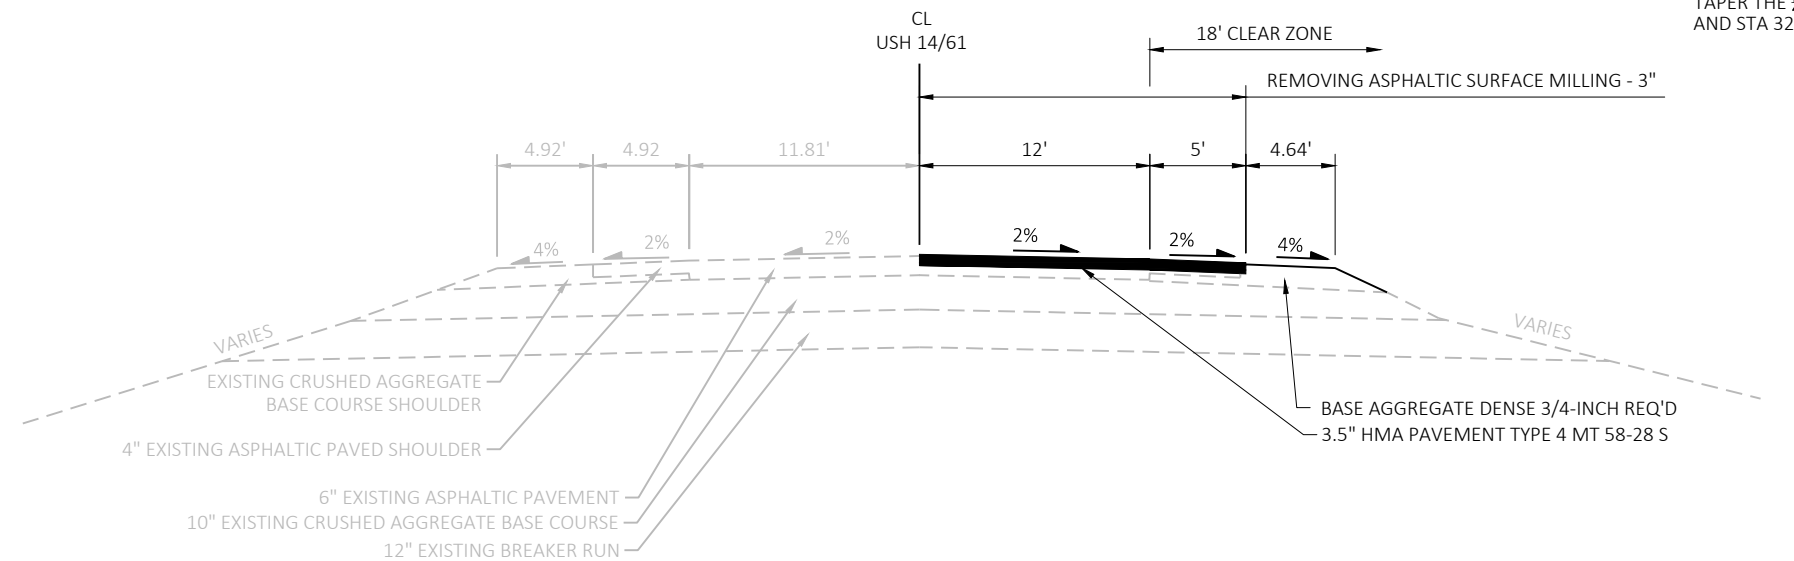


EXISTING & FINISHED TYPICAL HALF SECTION

STA 275+47 - STA 310+58  
 STA 312+23 - STA 325+11

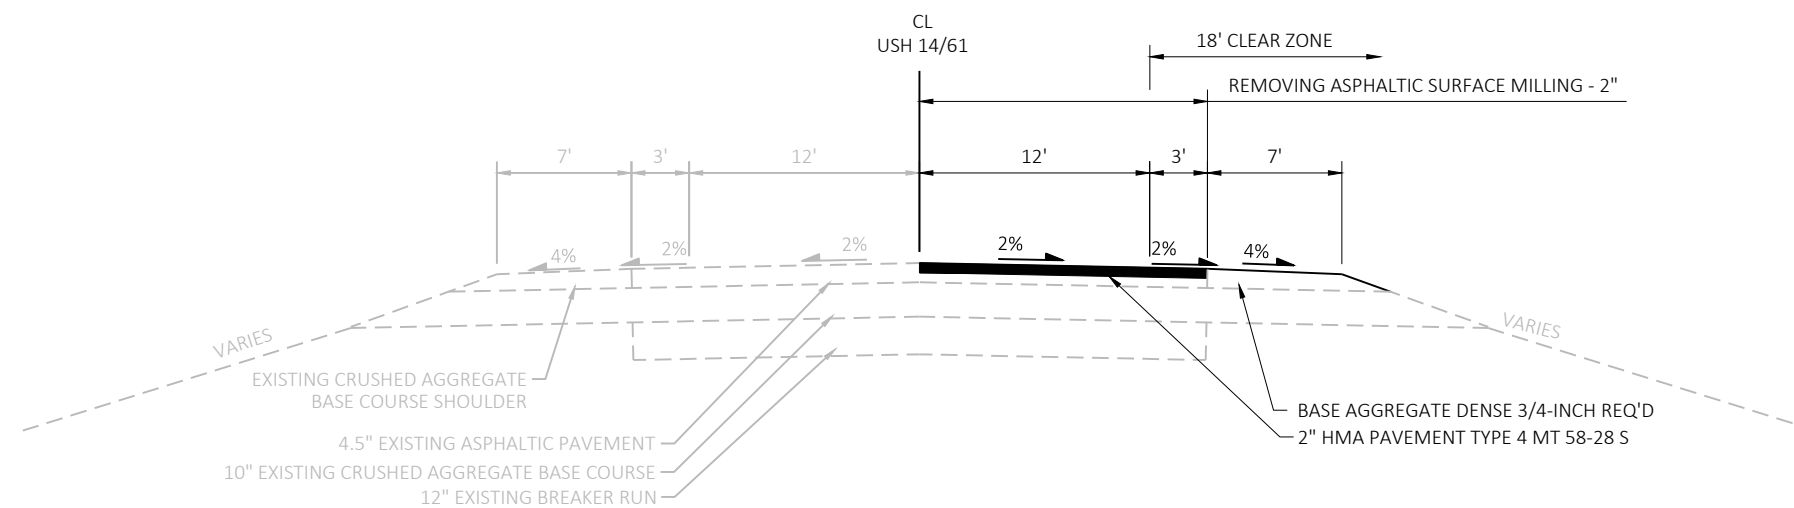

EXISTING & FINISHED TYPICAL HALF SECTION

STA 364+30 - STA 367+75

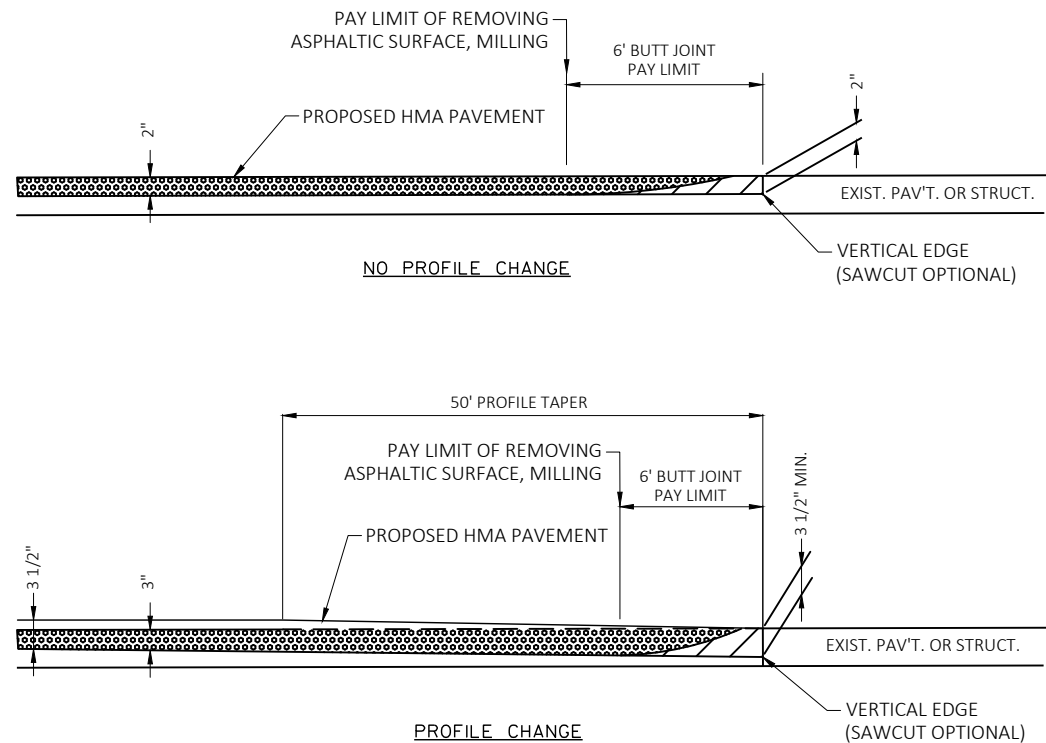


 REMOVING ASPHALTIC SURFACE, MILLING
  REMOVING ASPHALTIC SURFACE BUTT JOINT


**BUTT JOINT DETAIL FOR ASPHALTIC PAVEMENTS**

SALVAGE ALL COMPONENTS, EXCLUDING POSTS AND BLOCKOUTS, BETWEEN POST NO. 1 AND POST NO. 3 FOR REINSTALL. INSTALL IN ACCORDANCE WITH S.D.D. MIDWEST GUARDRAIL SYSTEM (MGS) ENERGY ABSORBING TERMINAL (EAT)


CONTRACTOR TO PROVIDE AND INSTALL NEW RAIL COMPONENTS BETWEEN POST NO. 9 AND POST NO. 3 AND NEW POSTS AND BLOCKOUTS FOR THE ENTIRE EAT SYSTEM IN ACCORDANCE WITH S.D.D. MIDWEST GUARDRAIL SYSTEM (MGS) ENERGY ABSORBING TERMINAL (EAT)

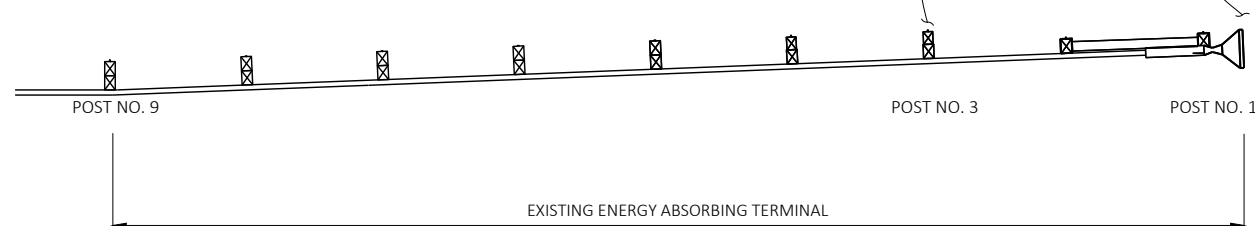


**DETAIL FOR SALVAGE AND REINSTALL GUARDRAIL ENERGY ABSORBING TERMINAL**

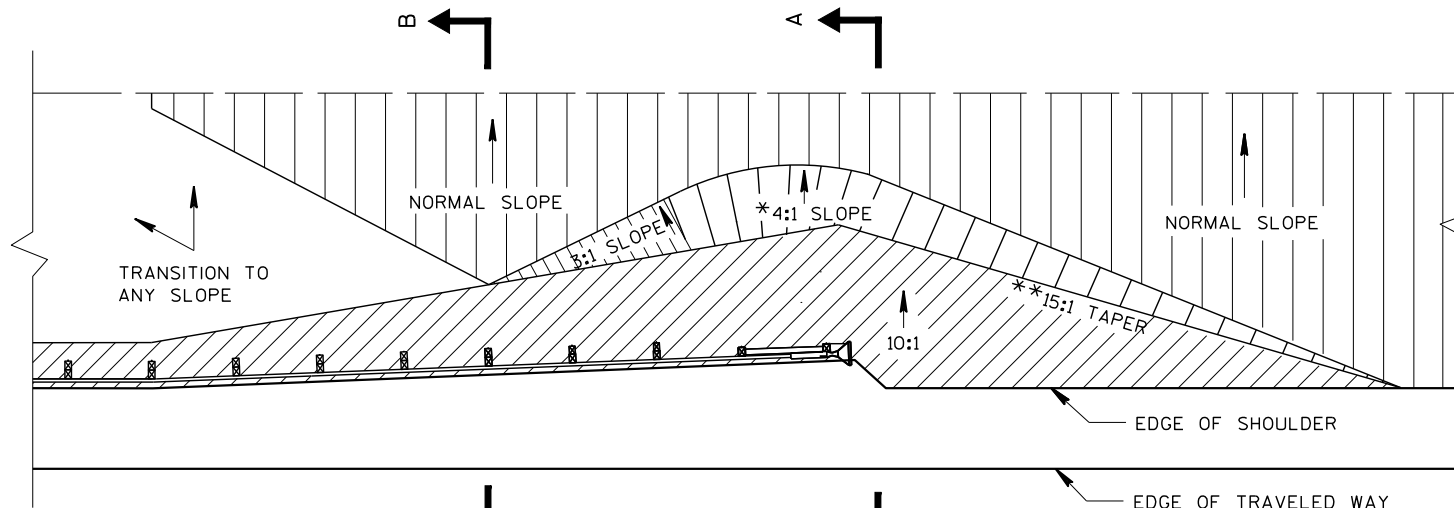

**PLAN VIEW**

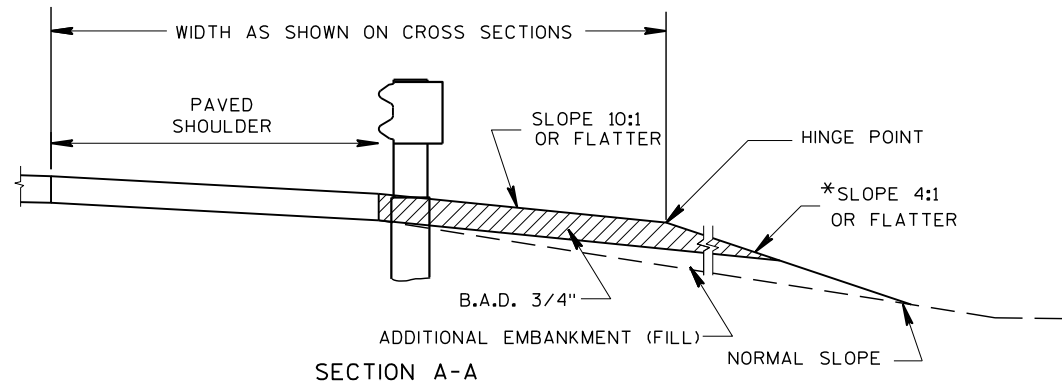



**SECTION A-A**

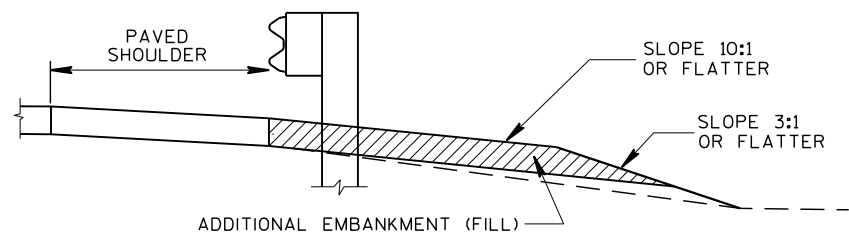

**SECTION B-B**



**FILL AREA AT BEAMGUARD**

\*4:1 TYPICAL. SEE CROSS SECTIONS FOR SLOPE AT EACH E.A.T. LOCATION.  
 \*\*TAPER MAY BE REDUCED TO 10:1 AS APPROVED BY THE ENGINEER.

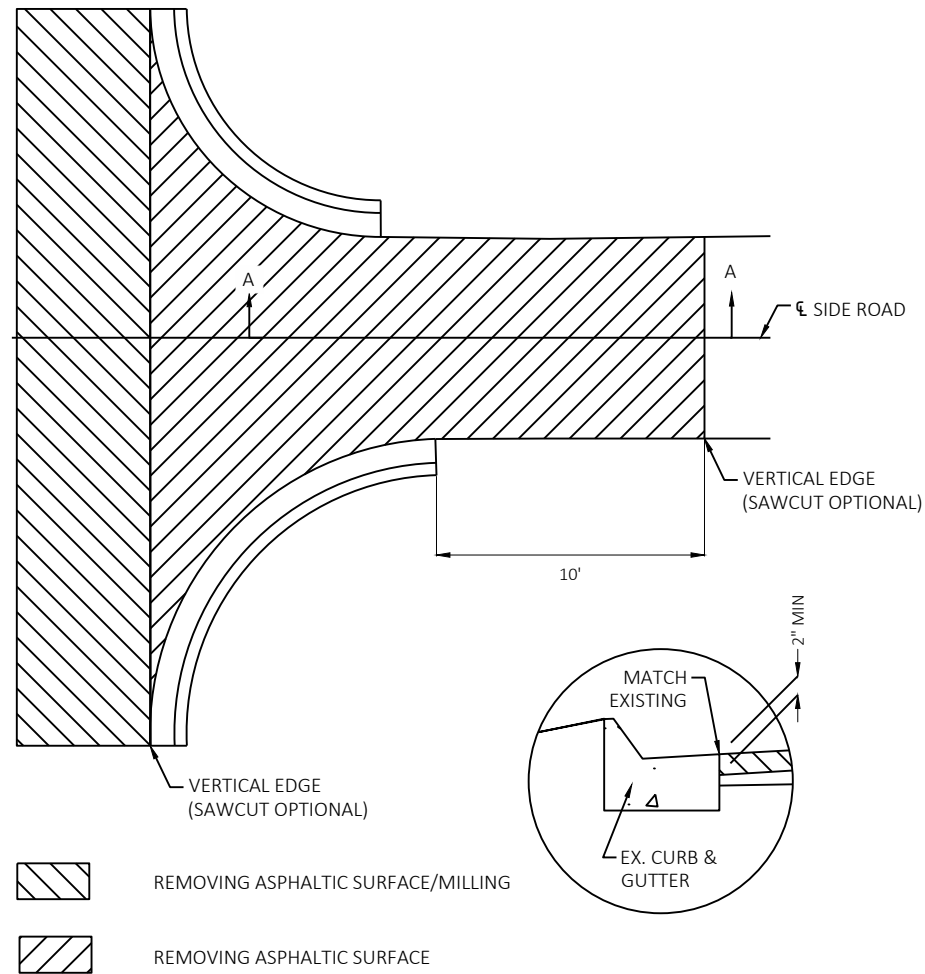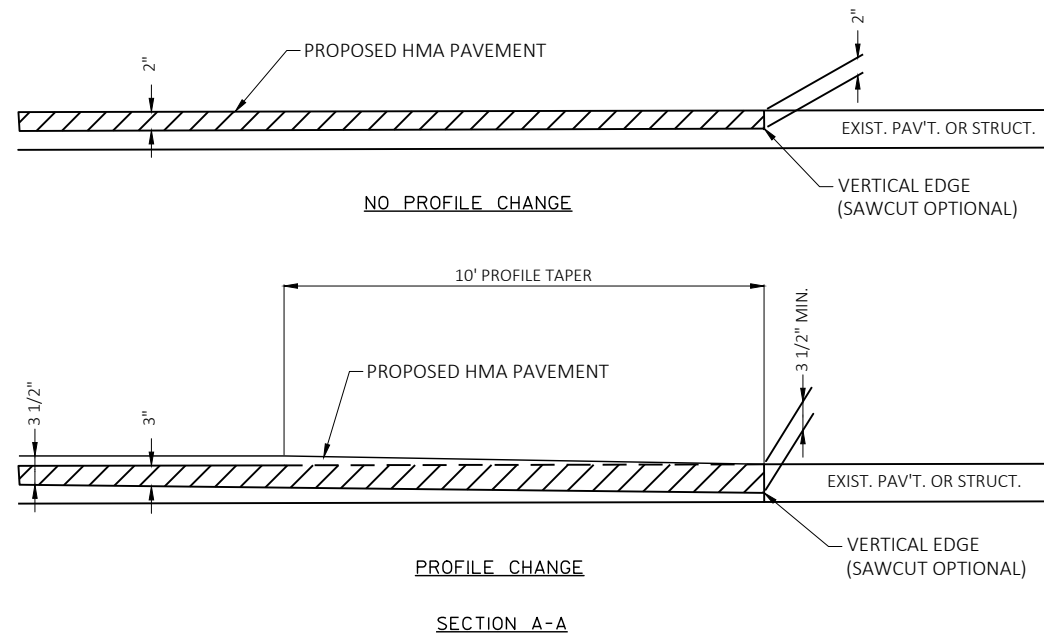


- REMOVING ASPHALTIC SURFACE/MILLING
- REMOVING ASPHALTIC SURFACE

\*LIMITS OF BASE AGGREGATE DENSE 3/4-INCH AT AGGREGATE DRIVEWAYS AND FIELD ENTRANCES

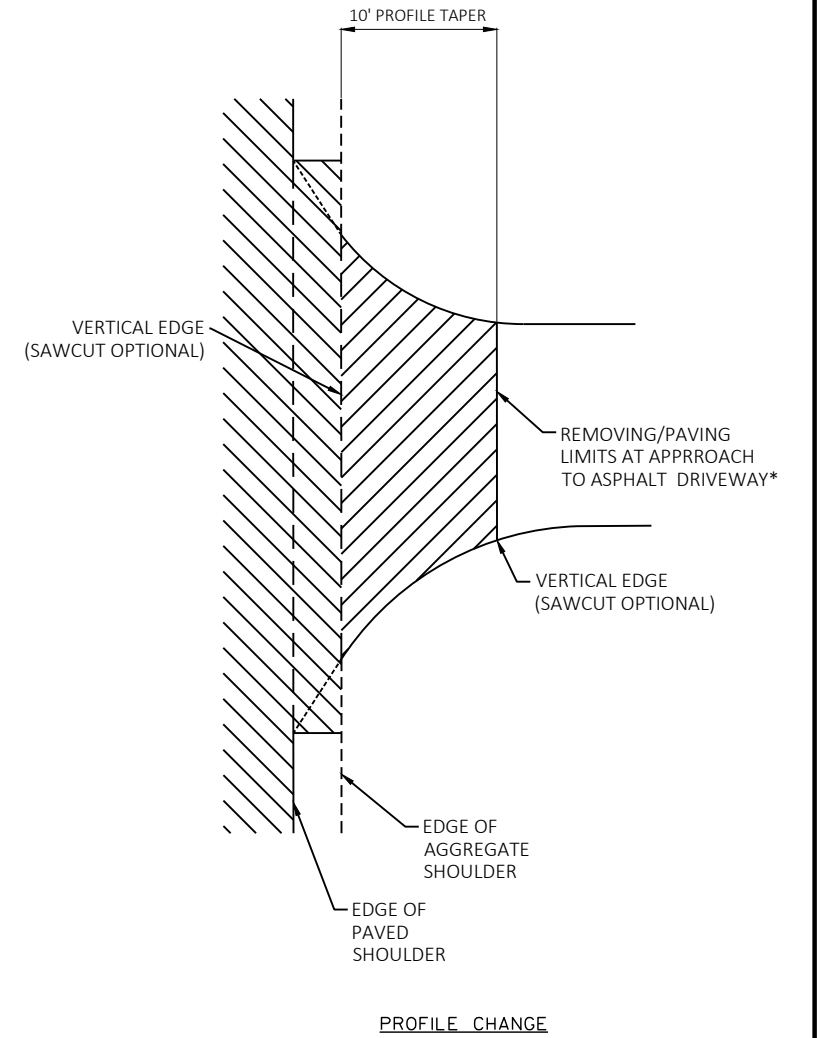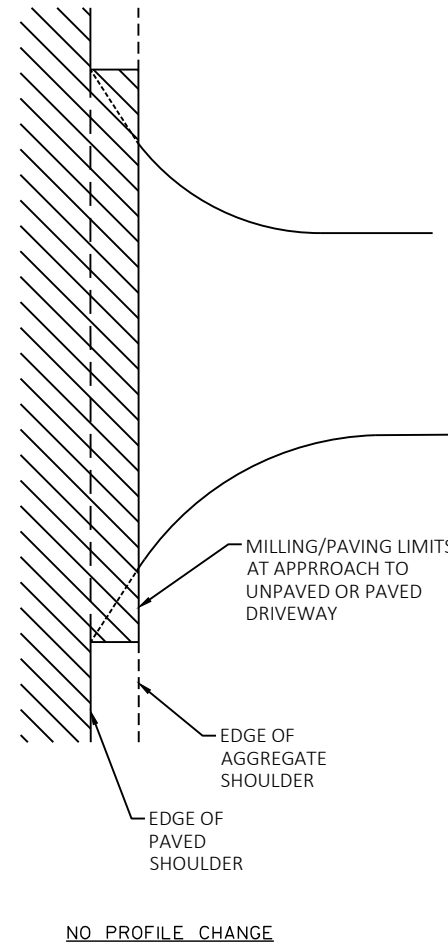


- REMOVING ASPHALTIC SURFACE/MILLING (AND HMA PAVEMENT AS SPECIFIED)
- REMOVING ASPHALTIC SURFACE (AND ASPHALTIC SURFACE DRIVEWAYS AND FIELD ENTRANCES) MATCH ADJACENT PAVEMENT THICKNESS ALONG JOINTS

PRIVATE ENTRANCE DETAIL

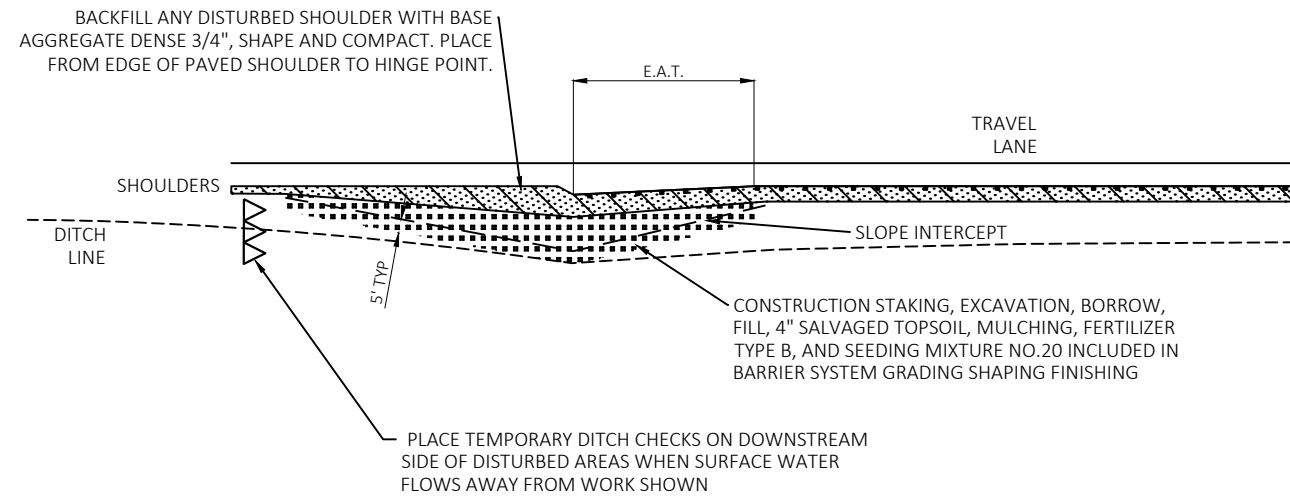


TYPICAL DETAIL FOR BARRIER SYSTEM GRADING SHAPING FINISHING

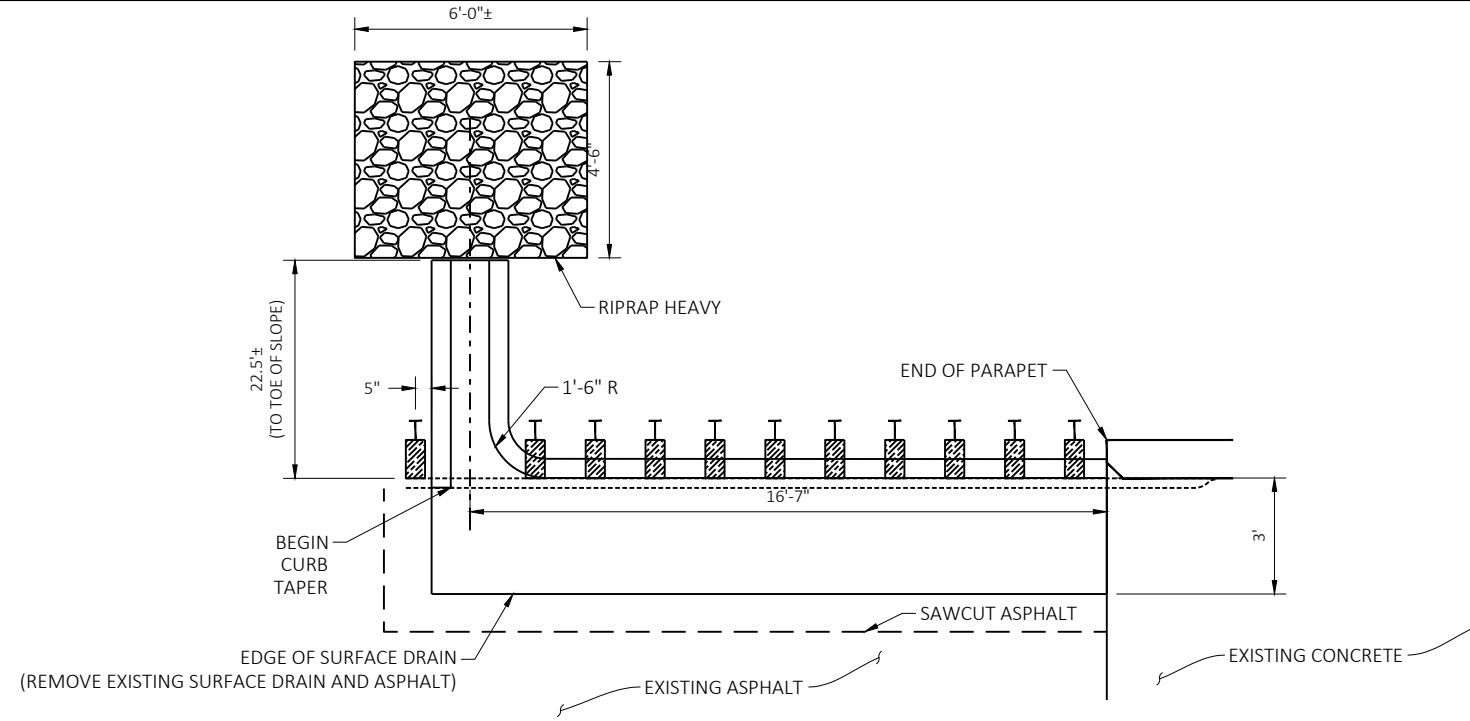


CONCRETE SURFACE DRAIN - STA 310+17 LT

SEE SDD 8D2, CONCRETE SURFACE DRAINS FLUME TYPE AT STRUCTURES FOR FURTHER DETAIL


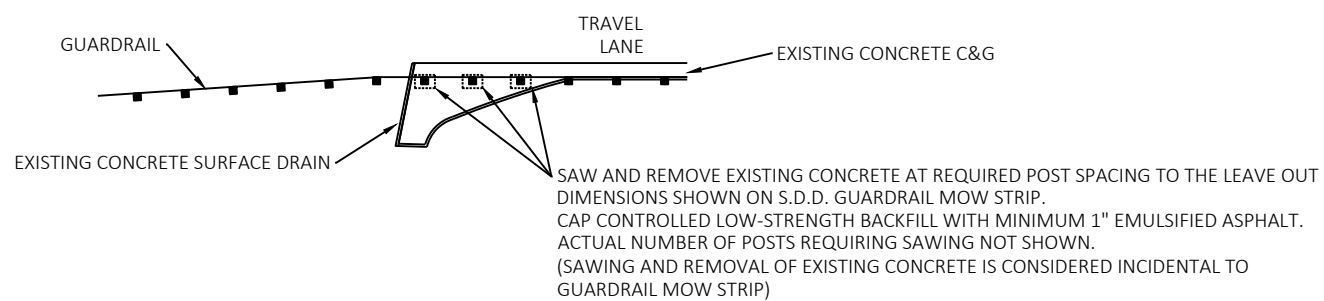


DETAIL FOR GUARDRAIL MOW STRIP

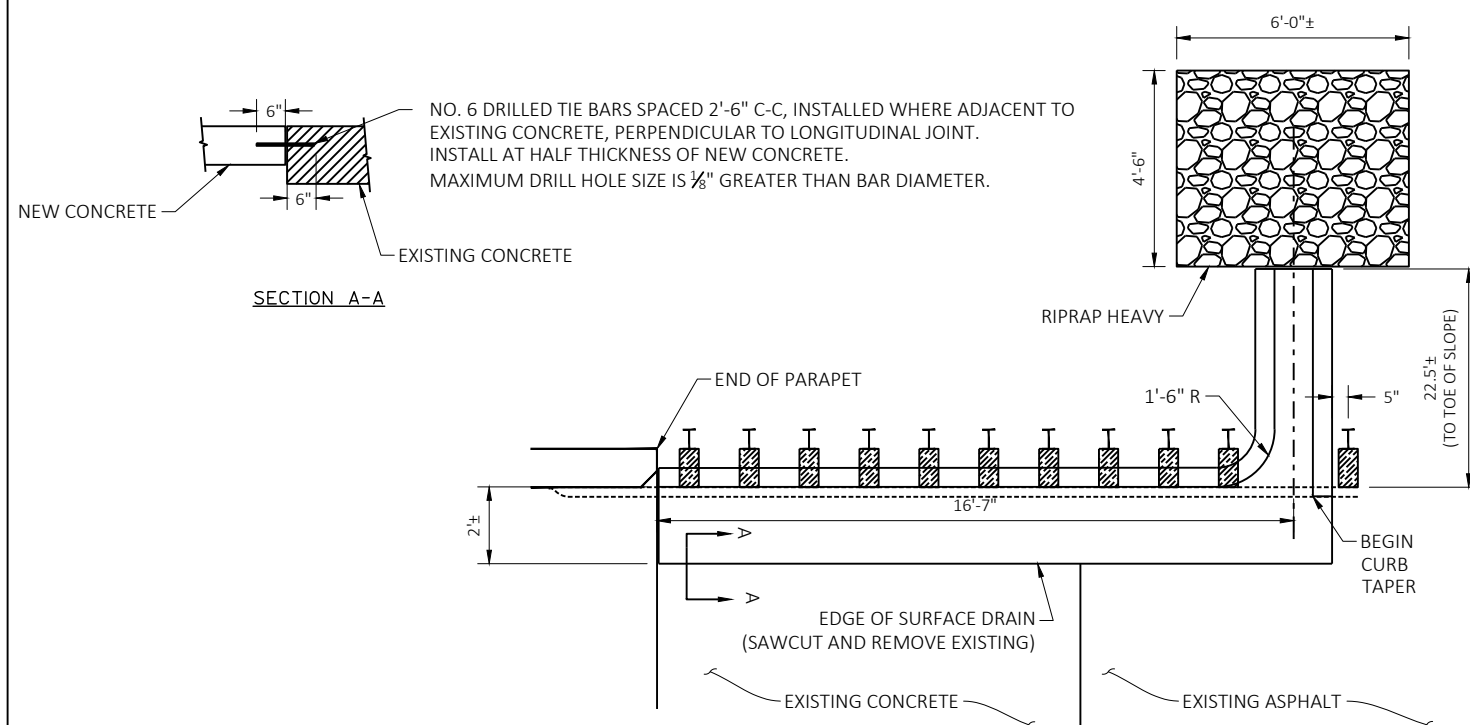

CONCRETE SURFACE DRAIN - STA 312+47 LT

SEE SDD 8D2, CONCRETE SURFACE DRAINS FLUME TYPE AT STRUCTURES FOR FURTHER DETAIL

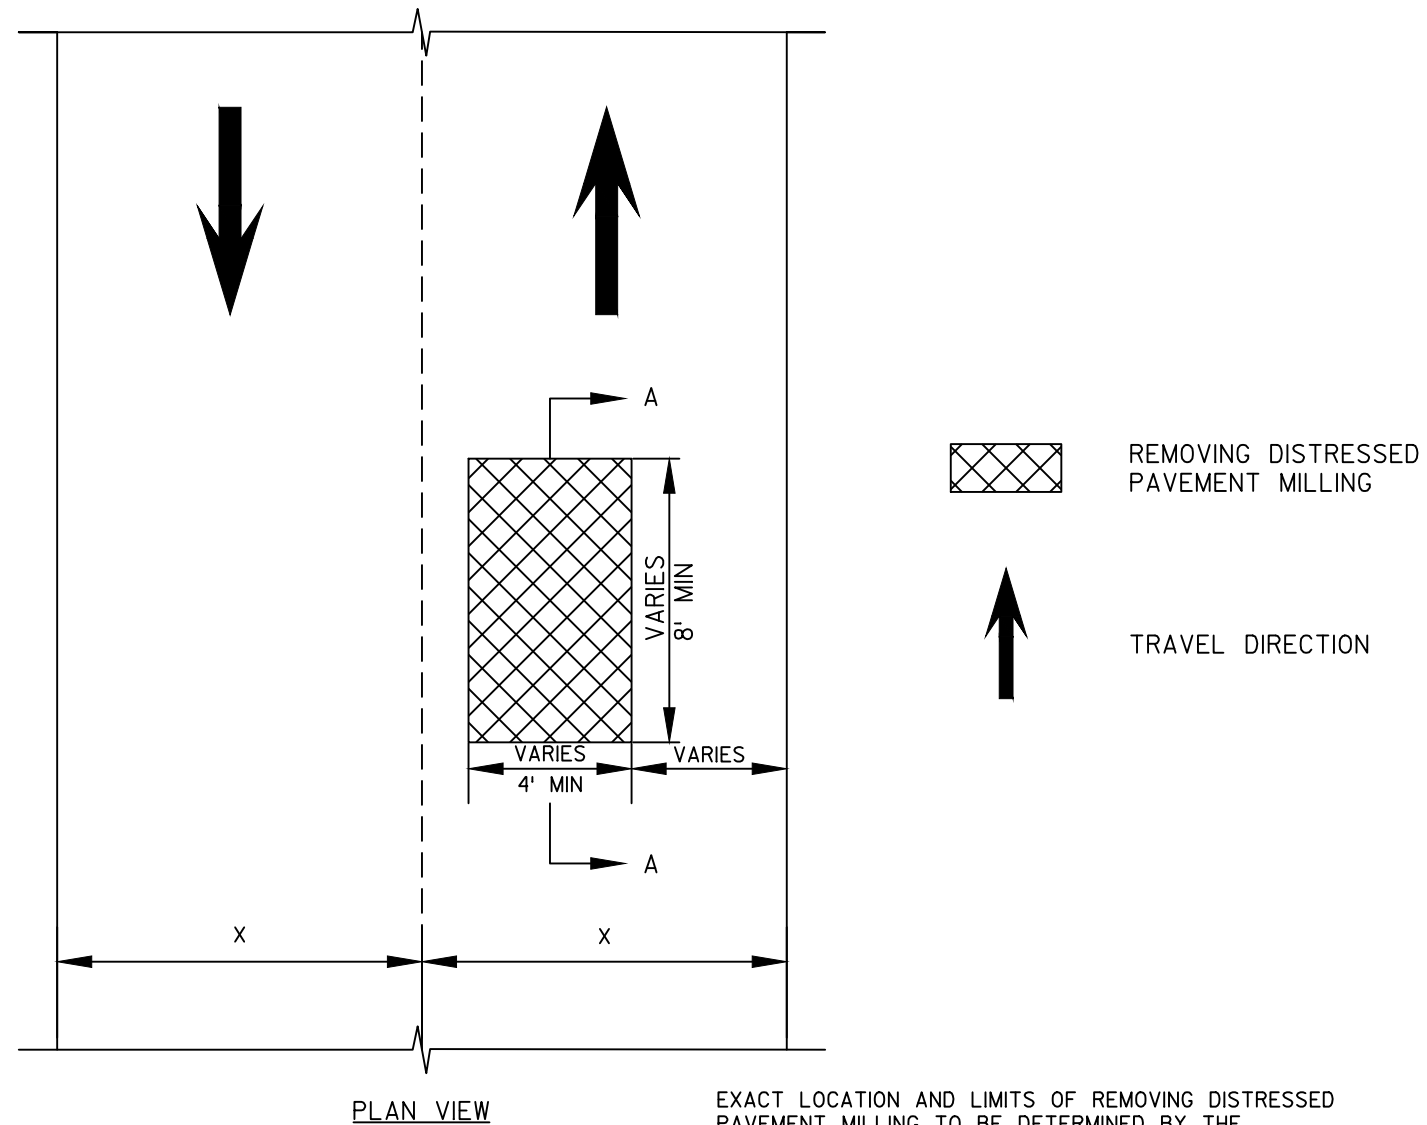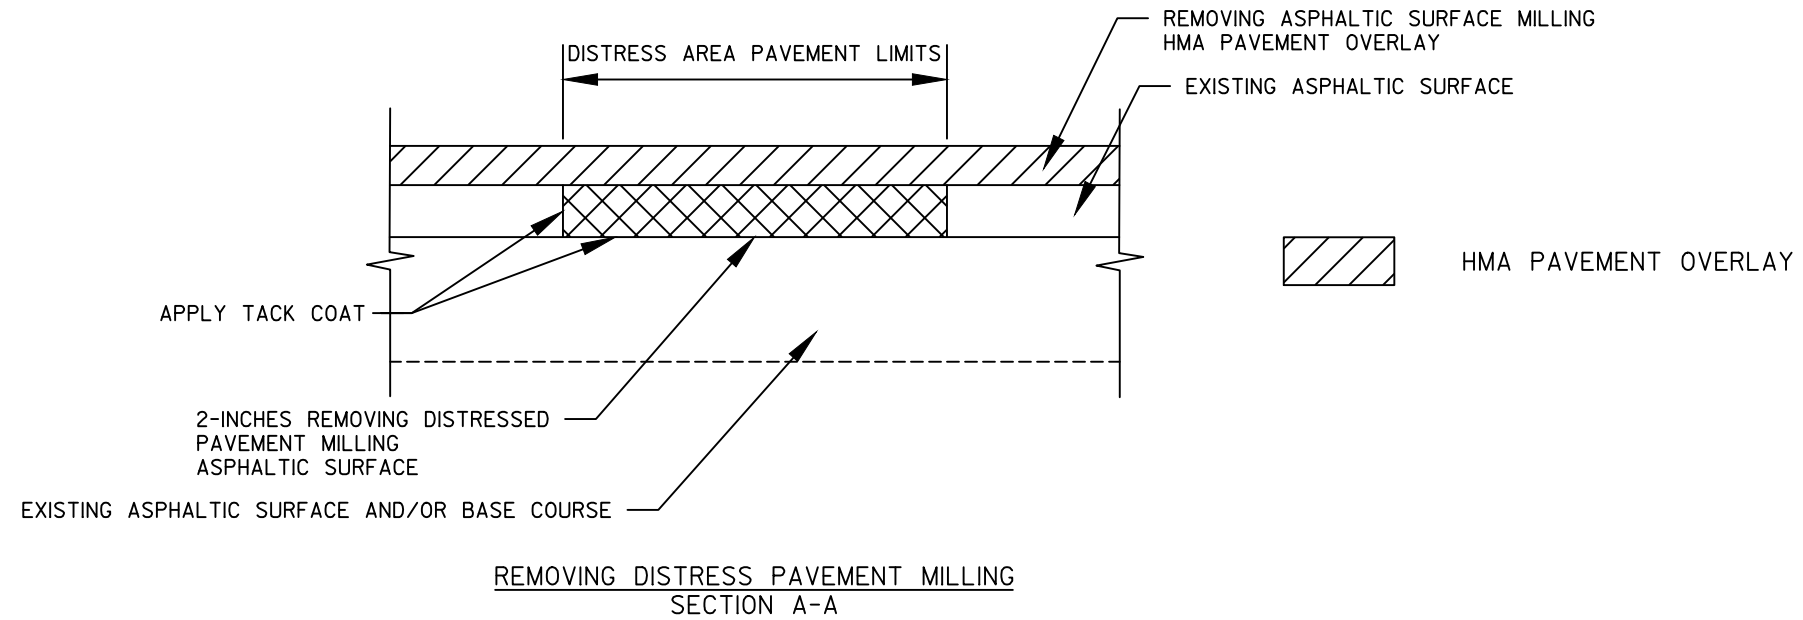

EXACT LOCATION AND LIMITS OF REMOVING DISTRESSED  
PAVEMENT MILLING TO BE DETERMINED BY THE  
ENGINEER IN THE FIELD



Location	Station	Mixture Use	Underlying Surface	Bid Items	Tons	Thickness	Mixture Acceptance	Density Acceptance
12' Driving Lane	165+00 to 275+47 325+11 to 367+75	Upper Layer	Existing Pavement	4 MT 58-28 S	<b>4573</b>	2"	Incentive Air Voids HMA Pavement 460.2010	Incentive Density PWL HMA Pavement 460.2005
12' Driving Lane	275+47 to 325+11	Upper Layer	4 MT 58-28 S	4 MT 58-28 S	<b>1254</b>	1 3/4"	Incentive Air Voids HMA Pavement 460.2010	Incentive Density HMA Pavement 460.2000
12' Driving Lane	275+47 to 325+11	Lower Layer	Existing Pavement	4 MT 58-28 S	<b>1254</b>	1 3/4"	Incentive Air Voids HMA Pavement 460.2010	Incentive Density HMA Pavement 460.2000
5' Shoulder	Varies	Upper Layer	Existing Pavement	4 MT 58-28 S	<b>1418</b>	2"	Incentive Air Voids HMA Pavement 460.2010	Acceptance testing by the department; Not eligible for incentive
5' Shoulder	275+47 to 325+11	Upper Layer	4 MT 58-28 S	4 MT 58-28 S	<b>523</b>	1 3/4"	Incentive Air Voids HMA Pavement 460.2010	Incentive Density HMA Pavement 460.2000
5' Shoulder	275+47 to 325+11	Lower Layer	Existing Pavement	4 MT 58-28 S	<b>523</b>	1 3/4"	Incentive Air Voids HMA Pavement 460.2010	Incentive Density HMA Pavement 460.2000
3' Shoulder	364+30 to 367+75	Upper Layer	Existing Pavement	4 MT 58-28 S	<b>26</b>	2"	Incentive Air Voids HMA Pavement 460.2010	Acceptance testing by the department; Not eligible for incentive
Beamguard Shoulder	Varies	Upper Layer	Existing Pavement	4 MT 58-28 S	<b>523</b>	2"	Incentive Air Voids HMA Pavement 460.2010	Acceptance testing by the department; Not eligible for incentive
Beamguard Shoulder	Varies	Upper Layer	4 MT 58-28 S	4 MT 58-28 S	<b>42</b>	1 3/4"	Incentive Air Voids HMA Pavement 460.2010	Incentive Density HMA Pavement 460.2000
Beamguard Shoulder	Varies	Lower Layer	Existing Pavement	4 MT 58-28 S	<b>42</b>	1 3/4"	Incentive Air Voids HMA Pavement 460.2010	Incentive Density HMA Pavement 460.2000
Intersections	Varies	Upper Layer	Existing Pavement	4 MT 58-28 S	<b>653</b>	2"	Incentive Air Voids HMA Pavement 460.2010	Acceptance testing by the department; Not eligible for incentive
Intersections	Varies	Upper Layer	4 MT 58-28 S	4 MT 58-28 S	<b>196</b>	1 3/4"	Incentive Air Voids HMA Pavement 460.2010	Incentive Density HMA Pavement 460.2000
Intersections	Varies	Lower Layer	Existing Pavement	4 MT 58-28 S	<b>196</b>	1 3/4"	Incentive Air Voids HMA Pavement 460.2010	Incentive Density HMA Pavement 460.2000
Acceleration & Turn Lanes	Varies	Upper Layer	Existing Pavement	4 MT 58-28 S	<b>446</b>	2"	Incentive Air Voids HMA Pavement 460.2010	Acceptance testing by the department; Not eligible for incentive
Acceleration & Turn Lanes	Varies	Upper Layer	4 MT 58-28 S	4 MT 58-28 S	<b>153</b>	1 3/4"	Incentive Air Voids HMA Pavement 460.2010	Incentive Density HMA Pavement 460.2000
Acceleration & Turn Lanes	Varies	Lower Layer	Existing Pavement	4 MT 58-28 S	<b>153</b>	1 3/4"	Incentive Air Voids HMA Pavement 460.2010	Incentive Density HMA Pavement 460.2000
Side Entrances & Driveways	Varies	Upper Layer	Existing Pavement	4 MT 58-28 S	<b>103</b>	2"	Incentive Air Voids HMA Pavement 460.2010	Acceptance testing by the department; Not eligible for incentive
Side Entrances & Driveways	Varies	Upper Layer	4 MT 58-28 S	4 MT 58-28 S	<b>29</b>	1 3/4"	Incentive Air Voids HMA Pavement 460.2010	Incentive Density HMA Pavement 460.2000
Side Entrances & Driveways	Varies	Lower Layer	Existing Pavement	4 MT 58-28 S	<b>29</b>	1 3/4"	Incentive Air Voids HMA Pavement 460.2010	Incentive Density HMA Pavement 460.2000

NOTE:  
SEE PLAN SHEETS FOR ALIGNMENT CURVE DATA.

SUPERELEVATION TRANSITION EVENT POINTS

Station	Description	Left Lane	Right Lane
195+07.21'	End Normal Crown	-2.00%	-2.00%
195+60.72'	Level Crown	-2.00%	0.00%
196+14.24'	Reverse Crown	-2.00%	2.00%
196+59.72'	Begin Full Super	-3.51%	3.51%
204+64.60'	End Full Super	-3.51%	3.51%
205+10.08'	Reverse Crown	-2.00%	2.00%
205+63.60'	Level Crown	-2.00%	0.00%
206+17.11'	Begin Normal Crown	-2.00%	-2.00%

Station	Description	Left Lane	Right Lane
273+99.28'	End Normal Crown	-2.00%	-2.00%
274+52.76'	Level Crown	-2.00%	0.00%
275+06.23'	Reverse Crown	-2.00%	2.00%
275+75.76'	Begin Full Super	-4.50%	4.50%
287+99.03'	End Full Super	-4.50%	4.50%
288+68.55'	Reverse Crown	-2.00%	2.00%
289+22.03'	Level Crown	-2.00%	0.00%
289+75.51'	Begin Normal Crown	-2.00%	-2.00%

207+04.99'	End Normal Crown	-2.00%	-2.00%
207+58.32'	Level Crown	0.00%	-2.00%
208+11.66'	Reverse Crown	2.00%	-2.00%
208+94.32'	Begin Full Super	5.10%	-5.10%
222+81.05'	End Full Super	5.10%	-5.10%
223+63.71'	Reverse Crown	2.00%	-2.00%
224+17.05'	Level Crown	0.00%	-2.00%
224+70.38'	Begin Normal Crown	-2.00%	-2.00%

291+20.49'	End Normal Crown	-2.00%	-2.00%
291+73.94'	Level Crown	0.00%	-2.00%
292+27.40'	Reverse Crown	2.00%	-2.00%
293+20.94'	Begin Full Super	5.60%	-5.60%
305+30.24'	End Full Super	5.60%	-5.60%
306+23.78'	Reverse Crown	2.00%	-2.00%
306+77.24'	Level Crown	0.00%	-2.00%
307+30.69'	Begin Normal Crown	-2.00%	-2.00%

238+15.25'	End Normal Crown	-2.00%	-2.00%
238+68.58'	Level Crown	-2.00%	0.00%
239+21.91'	Reverse Crown	-2.00%	2.00%
239+88.58'	Begin Full Super	-4.38%	4.38%
251+16.71'	End Full Super	-4.38%	4.38%
251+83.38'	Reverse Crown	-2.00%	2.00%
252+36.71'	Level Crown	-2.00%	0.00%
252+90.04'	Begin Normal Crown	-2.00%	-2.00%

308+38.92'	End Normal Crown	-2.00%	-2.00%
308+92.25'	Level Crown	-2.00%	0.00%
309+45.59'	Reverse Crown	-2.00%	2.00%
310+12.25'	Begin Full Super	-4.60%	4.60%
315+19.39'	End Full Super	-4.60%	4.60%
315+86.06'	Reverse Crown	-2.00%	2.00%
316+39.39'	Level Crown	-2.00%	0.00%
316+92.73'	Begin Normal Crown	-2.00%	-2.00%

254+68.92'	End Normal Crown	-2.00%	-2.00%
255+22.26'	Level Crown	0.00%	-2.00%
255+75.59'	Reverse Crown	2.00%	-2.00%
256+82.26'	Begin Full Super	5.96%	-5.96%
271+54.03'	End Full Super	5.96%	-5.96%
272+60.70'	Reverse Crown	2.00%	-2.00%
273+14.03'	Level Crown	0.00%	-2.00%
273+67.37'	Begin Normal Crown	-2.00%	-2.00%

318+09.30'	End Normal Crown	-2.00%	-2.00%
318+62.87'	Level Crown	0.00%	-2.00%
319+16.44'	Reverse Crown	2.00%	-2.00%
319+37.87'	Begin Full Super	2.50%	-2.50%
322+34.43'	End Full Super	2.50%	-2.50%
322+55.86'	Reverse Crown	2.00%	-2.00%
323+09.43'	Level Crown	0.00%	-2.00%
323+63.00'	Begin Normal Crown	-2.00%	-2.00%

\*SUPERELEVATION DATA IS FOR INFORMATION ONLY AND IS ASSUMED TO MATCH EXISTING CONDITIONS. PAVING OPERATIONS SHALL MATCH EXISTING PAVEMENT SLOPES AND SHALL NOT PERFORM CORRECTIONS TO MATCH TABLE.

## Estimate Of Quantities

1640-03-61

Line	Item	Item Description	Unit	Total	Qty
0002	204.0110	Removing Asphaltic Surface	SY	5,072.000	5,072.000
0004	204.0115	Removing Asphaltic Surface Butt Joints	SY	177.000	177.000
0006	204.0120	Removing Asphaltic Surface Milling	SY	87,117.000	87,117.000
0008	204.0150	Removing Curb & Gutter	LF	97.000	97.000
0010	204.0165	Removing Guardrail	LF	6,928.000	6,928.000
0012	204.0190	Removing Surface Drains	EACH	2.000	2.000
0014	211.0100	Prepare Foundation for Asphaltic Paving (project) 01. 1640-03-61	LS	1.000	1.000
0016	213.0100	Finishing Roadway (project) 01. 1640-03-61	EACH	1.000	1.000
0018	305.0110	Base Aggregate Dense 3/4-Inch	TON	2,640.000	2,640.000
0020	305.0120	Base Aggregate Dense 1 1/4-Inch	TON	60.000	60.000
0022	305.0500	Shaping Shoulders	STA	400.000	400.000
0024	416.0610	Drilled Tie Bars	EACH	7.000	7.000
0026	416.1010	Concrete Surface Drains	CY	2.600	2.600
0028	455.0605	Tack Coat	GAL	7,624.000	7,624.000
0030	460.0105.S	HMA Percent Within Limits (PWL) Test Strip Volumetrics	EACH	1.000	1.000
0032	460.0110.S	HMA Percent Within Limits (PWL) Test Strip Density	EACH	1.000	1.000
0034	460.2000	Incentive Density HMA Pavement	DOL	4,402.000	4,402.000
0036	460.2005	Incentive Density PWL HMA Pavement	DOL	4,573.000	4,573.000
0038	460.2010	Incentive Air Voids HMA Pavement	DOL	12,141.000	12,141.000
0040	460.6224	HMA Pavement 4 MT 58-28 S	TON	12,141.000	12,141.000
0042	465.0105	Asphaltic Surface	TON	112.000	112.000
0044	465.0120	Asphaltic Surface Driveways and Field Entrances	TON	32.000	32.000
0046	465.0425	Asphaltic Shoulder Rumble Strips 2-Lane Rural	LF	29,404.000	29,404.000
0048	465.0475	Asphalt Centerline Rumble Strips 2-Lane Rural	LF	14,578.000	14,578.000
0050	601.0411	Concrete Curb & Gutter 30-Inch Type D	LF	42.000	42.000
0052	601.0557	Concrete Curb & Gutter 6-Inch Sloped 36-Inch Type D	LF	55.000	55.000
0054	606.0300	Riprap Heavy	CY	5.000	5.000
0056	614.0010	Barrier System Grading Shaping Finishing	EACH	1.000	1.000
0058	614.0395	Guardrail Mow Strip Concrete	SY	12.000	12.000
0060	614.2300	MGS Guardrail 3	LF	5,237.500	5,237.500
0062	614.2330	MGS Guardrail 3 K	LF	337.500	337.500
0064	614.2500	MGS Thrie Beam Transition	LF	157.600	157.600
0066	614.2610	MGS Guardrail Terminal EAT	EACH	26.000	26.000
0068	614.2620	MGS Guardrail Terminal Type 2	EACH	3.000	3.000
0070	618.0100	Maintenance And Repair of Haul Roads (project) 01. 1640-03-61	EACH	1.000	1.000
0072	619.1000	Mobilization	EACH	1.000	1.000
0074	624.0100	Water	MGAL	40.000	40.000
0076	625.0500	Salvaged Topsoil	SY	10.000	10.000

## Estimate Of Quantities

1640-03-61

Line	Item	Item Description	Unit	Total	Qty
0078	627.0200	Mulching	SY	10.000	10.000
0080	628.1905	Mobilizations Erosion Control	EACH	1.000	1.000
0082	628.1910	Mobilizations Emergency Erosion Control	EACH	1.000	1.000
0084	628.7504	Temporary Ditch Checks	LF	15.000	15.000
0086	629.0210	Fertilizer Type B	CWT	0.100	0.100
0088	630.0120	Seeding Mixture No. 20	LB	1.000	1.000
0090	630.0500	Seed Water	MGAL	15.000	15.000
0092	642.5001	Field Office Type B	EACH	1.000	1.000
0094	643.0300	Traffic Control Drums	DAY	2,145.000	2,145.000
0096	643.0900	Traffic Control Signs	DAY	2,276.000	2,276.000
0098	643.1050	Traffic Control Signs PCMS	DAY	14.000	14.000
0100	643.5000	Traffic Control	EACH	1.000	1.000
0102	645.0120	Geotextile Type HR	SY	22.000	22.000
0104	646.1020	Marking Line Epoxy 4-Inch	LF	37,285.000	37,285.000
0106	646.1040	Marking Line Grooved Wet Ref Epoxy 4-Inch	LF	40,550.000	40,550.000
0108	646.3020	Marking Line Epoxy 8-Inch	LF	1,678.000	1,678.000
0110	646.4520	Marking Line Same Day Epoxy 4-Inch	LF	34,727.000	34,727.000
0112	646.7120	Marking Diagonal Epoxy 12-Inch	LF	55.000	55.000
0114	648.0100	Locating No-Passing Zones	MI	3.840	3.840
0116	649.0105	Temporary Marking Line Paint 4-Inch	LF	2,022.000	2,022.000
0118	650.8000	Construction Staking Resurfacing Reference	LF	18,934.000	18,934.000
0120	650.9910	Construction Staking Supplemental Control (project) 01. 1640-03-61	LS	1.000	1.000
0122	690.0150	Sawing Asphalt	LF	663.000	663.000
0124	740.0440	Incentive IRI Ride	DOL	14,344.000	14,344.000
0126	ASP.1T0A	On-the-Job Training Apprentice at \$5.00/HR	HRS	1,200.000	1,200.000
0128	ASP.1T0G	On-the-Job Training Graduate at \$5.00/HR	HRS	600.000	600.000
0130	SPV.0060	Special 01. Salvage and Reinstall Guardrail Energy Absorbing Terminal	EACH	1.000	1.000
0132	SPV.0180	Special 01. Removing Distressed Pavement Milling	SY	1,000.000	1,000.000

3

REMOVING ASPHALTIC SURFACE ITEMS

Table with columns: CATEGORY, STATION - STATION, LOCATION, 204.0110 REMOVING ASPHALTIC SURFACE (SY), 204.0120 REMOVING ASPHALTIC SURFACE MILLING (SY). Includes project totals: 5072, 87117.

REMOVING GUARDRAIL

Table with columns: CATEGORY, STATION - STATION, LOCATION, 204.0165 (LF). Includes project totals: 6928.

BASE AGGREGATE DENSE

Table with columns: CATEGORY, STATION - STATION, LOCATION, 305.0110 (TON), 305.0120 (TON), 305.0500 SHOULDERS (STA), 624.0100 WATER (MGAL). Includes project totals: 2,640, 60, 400, 40.

3

CONCRETE SURFACE DRAINS

Table with columns: CATEGORY, STATION, LOCATION, 204.0190 (EACH), 416.1010 (CY), 416.0610 (EACH), 645.0120 (SY), 606.0300 (CY). Includes project totals: 2, 2.6, 7, 22, 5.

REMOVING ASPHALTIC SURFACE BUTT JOINTS

Table with columns: CATEGORY, STATION, LOCATION, 204.0115 (SY). Includes project totals: 177.

ASPHALTIC PAVEMENT ITEMS

Table with columns: CATEGORY, STATION - STATION, LOCATION, 455.0605 LAYER THICKNESS (IN), 460.6224 TACK COAT (GAL), 465.0120 HMA PAVEMENT 4 MT 58-28 S (TON), 465.0105 ASPHALTIC SURFACE DRIVEWAYS AND FIELD ENTRANCES (TON), 465.0105 ASPHALTIC SURFACE (TON). Includes project totals: 7,624, 12,141, 32, 112.

CONCRETE CURB & GUTTER

Table with columns: CATEGORY, STATION - STATION, LOCATION, 204.0150 (LF), 601.0411 (LF), 601.0557 (LF). Includes project totals: 97, 42, 55.

PROJECT NO: 1640-03-61

HWY: USH 14

COUNTY: LA CROSSE

MISCELLANEOUS QUANTITIES

SHEET

E

**RUMBLE STRIPS**

CATEGORY	STATION - STATION	LOCATION	465.0425 ASPHALTIC SHOULDER RUMBLE STRIPS 2-LANE RURAL (LF)	465.0475 ASPHALTIC CENTERLINE RUMBLE STRIPS 2-LANE RURAL (LF)
0010	165+00 - 174+57	LT SHOULDER	957	-
	165+00 - 177+05	CENTERLINE	-	1205
	165+00 - 186+39	RT SHOULDER	2139	-
	181+05 - 188+47	CENTERLINE	-	742
	182+48 - 186+41	LT SHOULDER	393	-
	187+03 - 199+59	LT SHOULDER	1256	-
	192+37 - 200+56	RT SHOULDER	819	-
	192+47 - 203+37	CENTERLINE	-	1090
	200+19 - 207+58	LT SHOULDER	739	-
	207+19 - 210+30	RT SHOULDER	281	-
	210+72 - 211+52	LT SHOULDER	80	-
	211+07 - 235+91	CENTERLINE	-	2484
	212+28 - 235+95	RT SHOULDER	2367	-
	212+71 - 236+63	LT SHOULDER	2392	-
	239+87 - 247+90	RT SHOULDER	803	-
	240+76 - 244+25	LT SHOULDER	349	-
	241+22 - 261+00	CENTERLINE	-	1978
	244+93 - 246+60	LT SHOULDER	167	-
	247+28 - 256+00	LT SHOULDER	872	-
	248+58 - 264+55	RT SHOULDER	1597	-
	257+10 - 260+98	LT SHOULDER	388	-
	265+00 - 265+93	CENTERLINE	-	93
	268+29 - 270+38	LT SHOULDER	209	-
	270+99 - 272+70	LT SHOULDER	171	-
	270+58 - 272+70	CENTERLINE	-	213
	271+10 - 282+42	RT SHOULDER	1132	-
	276+70 - 284+93	CENTERLINE	-	822
	288+93 - 298+89	CENTERLINE	-	997
	289+30 - 296+47	RT SHOULDER	717	-
	302+65 - 310+11	RT SHOULDER	746	-
	302+89 - 310+11	CENTERLINE	-	722
	312+68 - 316+84	RT SHOULDER	416	-
	312+68 - 318+53	CENTERLINE	-	585
	322+86 - 351+04	CENTERLINE	-	2818
	322+90 - 330+79	RT SHOULDER	789	-
	331+39 - 334+20	RT SHOULDER	281	-
	334+84 - 349+42	RT SHOULDER	1458	-
	355+89 - 361+11	RT SHOULDER	522	-
	355+45 - 360+92	CENTERLINE	-	547
	361+83 - 362+33	RT SHOULDER	50	-
	362+94 - 367+75	RT SHOULDER	481	-
	278+48 - 286+59	LT SHOULDER	811	-
	287+28 - 300+48	LT SHOULDER	1320	-
	301+25 - 306+26	LT SHOULDER	501	-
	306+96 - 310+11	LT SHOULDER	315	-
	312+68 - 318+41	LT SHOULDER	573	-
	324+67 - 351+06	LT SHOULDER	2639	-
	356+34 - 360+41	LT SHOULDER	407	-
	364+91 - 367+75	CENTERLINE	-	284
	365+08 - 367+75	LT SHOULDER	267	-
<b>PROJECT TOTALS</b>			<b>29404</b>	<b>14578</b>

**FINISHING ITEMS**

CATEGORY	STATION	LOCATION	625.0500 SALVAGED TOPSOIL (SY)	627.0200 MULCHING (SY)	629.0210 FERTILIZER TYPE B (CWT)	630.0120 SEEDING NO. 20 (LB)	630.0500 SEED WATER (MGAL)
0010	312+47	LT	10	10	0.1	1	15
<b>PROJECT TOTAL</b>			<b>10</b>	<b>10</b>	<b>0.1</b>	<b>1</b>	<b>15</b>

**EROSION CONTROL MOBILIZATION**

CATEGORY	LOCATION	628.1905 MOBILIZATION EROSION CONTROL (EACH)	628.1910 EMERGENCY MOBILIZATIONS EROSION CONTROL (EACH)
0010	USH 14	1	1
<b>PROJECT TOTALS</b>		<b>1</b>	<b>1</b>

**BARRIER SYSTEM GRADING SHAPING FINISHING**

CATEGORY	STATION - STATION	LOCATION	628.7504 TEMPORARY DITCH CHECKS (LF)	*EXCAVATION COMMON (CY)	*BORROW (CY)	*SALVAGED TOPSOIL (SY)	*MULCHING (SY)	*FERTILIZER TYPE B (CWT)	*SEEDING NO. 20 (LB)	*CONSTRUCTION STAKING SLOPE STAKES (LF)	
0010	223+65 - 224+52	GUARDRAIL EAT; RT	1	15	21	3	85	85	0.1	4	87
<b>PROJECT TOTAL</b>			<b>1</b>	<b>15</b>	<b>21</b>	<b>3</b>	<b>85</b>	<b>85</b>	<b>0.1</b>	<b>4</b>	<b>87</b>

\*ITEMS AND QUANTITIES LISTED FOR BID INFORMATION ONLY

**GUARDRAIL ITEMS**

CATEGORY	STATION - STATION	LOCATION	614.2300 MGS GUARDRAIL 3 (LF)	614.2330 MGS GUARDRAIL 3 K (LF)	614.2500 MGS THRIE BEAM TRANSITION (LF)	614.2610 MGS GUARDRAIL TERMINAL EAT (EACH)	614.2620 MGS GUARDRAIL TYPE 2 (EACH)	614.0395 GUARDRAIL CONCRETE (SY)	SPV.0060.01 SALVAGE AND REINSTALL GUARDRAIL ENERGY ABSORBING TERMINAL (EACH)
0010	163+57.50 - 172+76.24	RT	812.5	-	-	2	-	-	-
	167+33.00 - 168+64.24	LT	25.0	-	-	2	-	-	-
	178+37.25 - 181+68.50	RT	225.0	-	-	2	-	-	-
	179+41.50 - 183+10.23	LT	262.5	-	-	2	-	-	-
	199+65.92 - 205+05.65	RT	487.5	-	-	1	1	-	-
	201+25.50 - 205+31.74	LT	300.0	-	-	2	-	-	-
	212+71.76 - 217+28.00	RT	350.0	-	-	2	-	-	-
	213+21.00 - 217+64.74	LT	-	337.5	-	2	-	-	-
	224+02.50 - 234+33.74	RT	925.0	-	-	2	-	12	-
	256+40.00 - 268+37.19	RT	1150.0	-	-	1	-	-	-
	261+55.54 - 262+81.80	LT	137.5	-	-	1	1	-	-
	268+67.39 - 269+60.68	RT	62.5	-	-	1	-	-	-
	308+20.48 - 310+47.97	RT	137.5	-	39.4	-	-	-	1
	308+68.80 - 310+33.79	LT	75.0	-	39.4	1	-	-	-
	312+29.91 - 314+19.90	LT	100.0	-	39.4	1	-	-	-
	312+47.31 - 313+87.30	RT	50.0	-	39.4	1	-	-	-
	354+07.62 - 355+49.61	RT	125.0	-	-	1	1	-	-
	354+66.00 - 355+84.74	LT	12.5	-	-	2	-	-	-
<b>PROJECT TOTAL</b>			<b>5237.5</b>	<b>337.5</b>	<b>157.6</b>	<b>26</b>	<b>3</b>	<b>12</b>	<b>1</b>

**MARKING LINE ITEMS**

STATION - STATION	LOCATION	646.1020 MARKING LINE EPOXY 4-INCH				646.4520 MARKING LINE SAME DAY EPOXY 4-INCH		646.1040 MARKING LINE GROOVED WET REF EPOXY 4-INCH		646.3020 MARKING LINE EPOXY 8-INCH		646.7120 MARKING DIAGONAL EPOXY 12-INCH	REMARKS
		SKIPS WHITE LF	CL LENGTH	SOLID YELLOW LF	SKIPS YELLOW LF	SOLID YELLOW LF	SKIPS YELLOW LF	SOLID WHITE LT	SOLID WHITE LF	SKIPS WHITE LF	SKIPS WHITE LF	YELLOW LF	
165+00 - 310+55	CL	15	14,555	29,110	-	29,110	-	-	-	-	-	-	
165+00 - 310+55	LT/RT	588	-	-	-	-	-	29,110	1,160	150	-	-	
310+55 - 323+75	CL	-	1,320	1,320	660	1,320	330	-	-	-	-	-	
310+55 - 323+75	LT/RT	38	-	-	-	-	-	2,640	330	38	-	-	
323+75 - 345+20	CL	1,821	2,145	-	571	-	537	-	-	-	-	-	
323+75 - 345+20	LT/RT	-	-	-	-	-	-	4,290	-	-	-	-	
345+20 - 364+00	CL	-	1,880	1,880	470	1,880	-	-	-	-	-	-	
345+20 - 364+00	LT/RT	-	-	-	-	-	-	3,760	-	-	-	-	
364+00 - 367+75	CL	-	375	750	-	750	-	-	-	-	-	-	
364+00 - 367+75	LT/RT	63	-	-	-	-	-	750	-	-	-	-	
366+12 - 367+75	MEDIAN	-	200	-	-	800	-	-	-	-	-	55	
SIDE ROADS		-	-	-	-	-	-	-	-	-	-	-	
<b>PROJECT TOTALS</b>			<b>37,285</b>			<b>34,727</b>		<b>40,550</b>	<b>1,678</b>		<b>55</b>		

**TEMPORARY MARKING ITEMS**

STATION - STATION	LOCATION	649.0105 TEMPORARY MARKING LINE PAINT 4-INCH YELLOW LF	REMARKS
165+00 - 275+47	CL	884	4' SKIPS 50' C-C
275+47 - 325+11	CL	796	4' SKIPS 50' C-C
325+11 - 367+75	CL	342	4' SKIPS 50' C-C
<b>PROJECT TOTALS</b>		<b>2022</b>	

**SAWING ASPHALT**

CATEGORY	STATION	LOCATION	690.0150 (LF)	REMARKS
0010	165+00	USH 14	37	TRANSVERSE
	234+21 - 234+64	USH 14, RT	42	LONGITUDINAL
	310+17	USH 14, LT	25	CONC. SURF DRN
	367+75	USH 14	42	TRANSVERSE
	5+72'WV'	WATERFORD VALLEY RD	46	TRANSVERSE
	8+92'MM'	CTH MM	29	TRANSVERSE
	13+85'J'	JUSTIN RD	31	TRANSVERSE
	20+86'L'	LESKE RD	23	TRANSVERSE
	25+68'C'	CONTINENTAL LN	24	TRANSVERSE
	30+68'K'	KREUTZ LN	22	TRANSVERSE
	35+74'H'	HELKE RD	22	TRANSVERSE
	39+32'BM'	BLOOMER MILL RD	29	TRANSVERSE
	45+91'RO'	RED OAK RD	24	TRANSVERSE
	49+30'P'	PARK RD	36	TRANSVERSE
	59+04'A'	AUTUMN DR	32	TRANSVERSE
	71+00'BC'	BREIDEL COULEE RD	30	TRANSVERSE
	74+17'P'	PINEVIEW DR	29	TRANSVERSE
80+22 - 80+74'YY'	CTH YY	65	CURB RETURN	
80+84'YY'	CTH YY	28	TRANSVERSE	
84+12'S'	SKEMP RD	24	TRANSVERSE	
90+59'CM'	COULEE MANOR RD	23	TRANSVERSE	
<b>PROJECT TOTALS</b>			<b>663</b>	

**TEMPORARY TRAFFIC CONTROL**

DESCRIPTION	DAYS	EACH	643.0300 TRAFFIC CONTROL DRUMS		643.0900 TRAFFIC CONTROL SIGNS		643.1050 TRAFFIC CONTROL PCMS		643.5000 TRAFFIC CONTROL EACH		REMARKS
			DAY	DAY	DAY	DAY	DAY	DAY			
ADVANCE SIGNING	7	2						14			
GUARDRAIL WORK	15	143	2145								
MILLING & PAVING OPS	25	34		850							
PAVING OPS	6	8		48							
PROJECT DURATION	53	26		1378					1		
<b>PROJECT TOTALS</b>			<b>2145</b>	<b>2276</b>	<b>14</b>	<b>1</b>					

**CONSTRUCTION STAKING**

CATEGORY	STATION - STATION	650.8000 RESURFACING REFERENCE LF
0010	STA 165+00 - 367+75	18934
<b>PROJECT TOTALS</b>		<b>18934</b>

**LOCATING NO-PASSING ZONES**

CATEGORY	LOCATION	648.0100 MI
0010	PROJECT	3.84
<b>PROJECT TOTALS</b>		<b>3.84</b>

**CONSTRUCTION STAKING**

CATEGORY	650.9910 SUPPLEMENTAL CONTROL (1640-03-61) (LS)	
0010	1	
<b>PROJECT TOTALS</b>		<b>1</b>

PROJECT NO: 1640-03-61

HWY: USH 14

COUNTY: LA CROSSE

MISCELLANEOUS QUANTITIES

SHEET

E

BOUNDARIES OF SENSITIVE AREAS ARE APPROXIMATE.

BENCHMARK DATA				
NO.	DESCRIPTION	STATION	OFFSET (FT)	ELEV. (FT)
BM # 5	BRONZE TABLET ON CONCRETE CULVERT	180+27.91	33.62 RT	714.64
BM # 7	CHISELED SQUARE ON NE END OF NW HEADWALL OF CONCRETE CULVERT	156+08.57	10.58 LT	728.95
BM # 7 NOT SHOWN ON THIS SHEET				



MGS GUARDRAIL 3 REQ'D  
 STA 167+86.12 TO 168+08.00, 22' LT  
 MGS GUARDRAIL TERMINAL EAT REQ'D  
 STA 167+33.00 TO 167+86.12, POST 1: 24' LT  
 STA 168+08.00 TO 168+64.24, POST 1: 24' LT

MGS GUARDRAIL 3 REQ'D  
 STA 164+10.62 TO STA 172+23.12, 21.5' RT  
 MGS GUARDRAIL TERMINAL EAT REQ'D  
 STA 163+57.50 TO 164+10.62, POST 1: 23.5' RT  
 STA 172+23.12 TO 172+76.24, POST 1: 23.5' RT

PI STA = 174+69.76  
 DELTA = 8°31'52"  
 D = 0°24'57"  
 T = 1027.42'  
 L = 2051.05'  
 R = 13775.00'  
 PC STA = 164+42.34  
 PT STA = 184+93.39

5

5

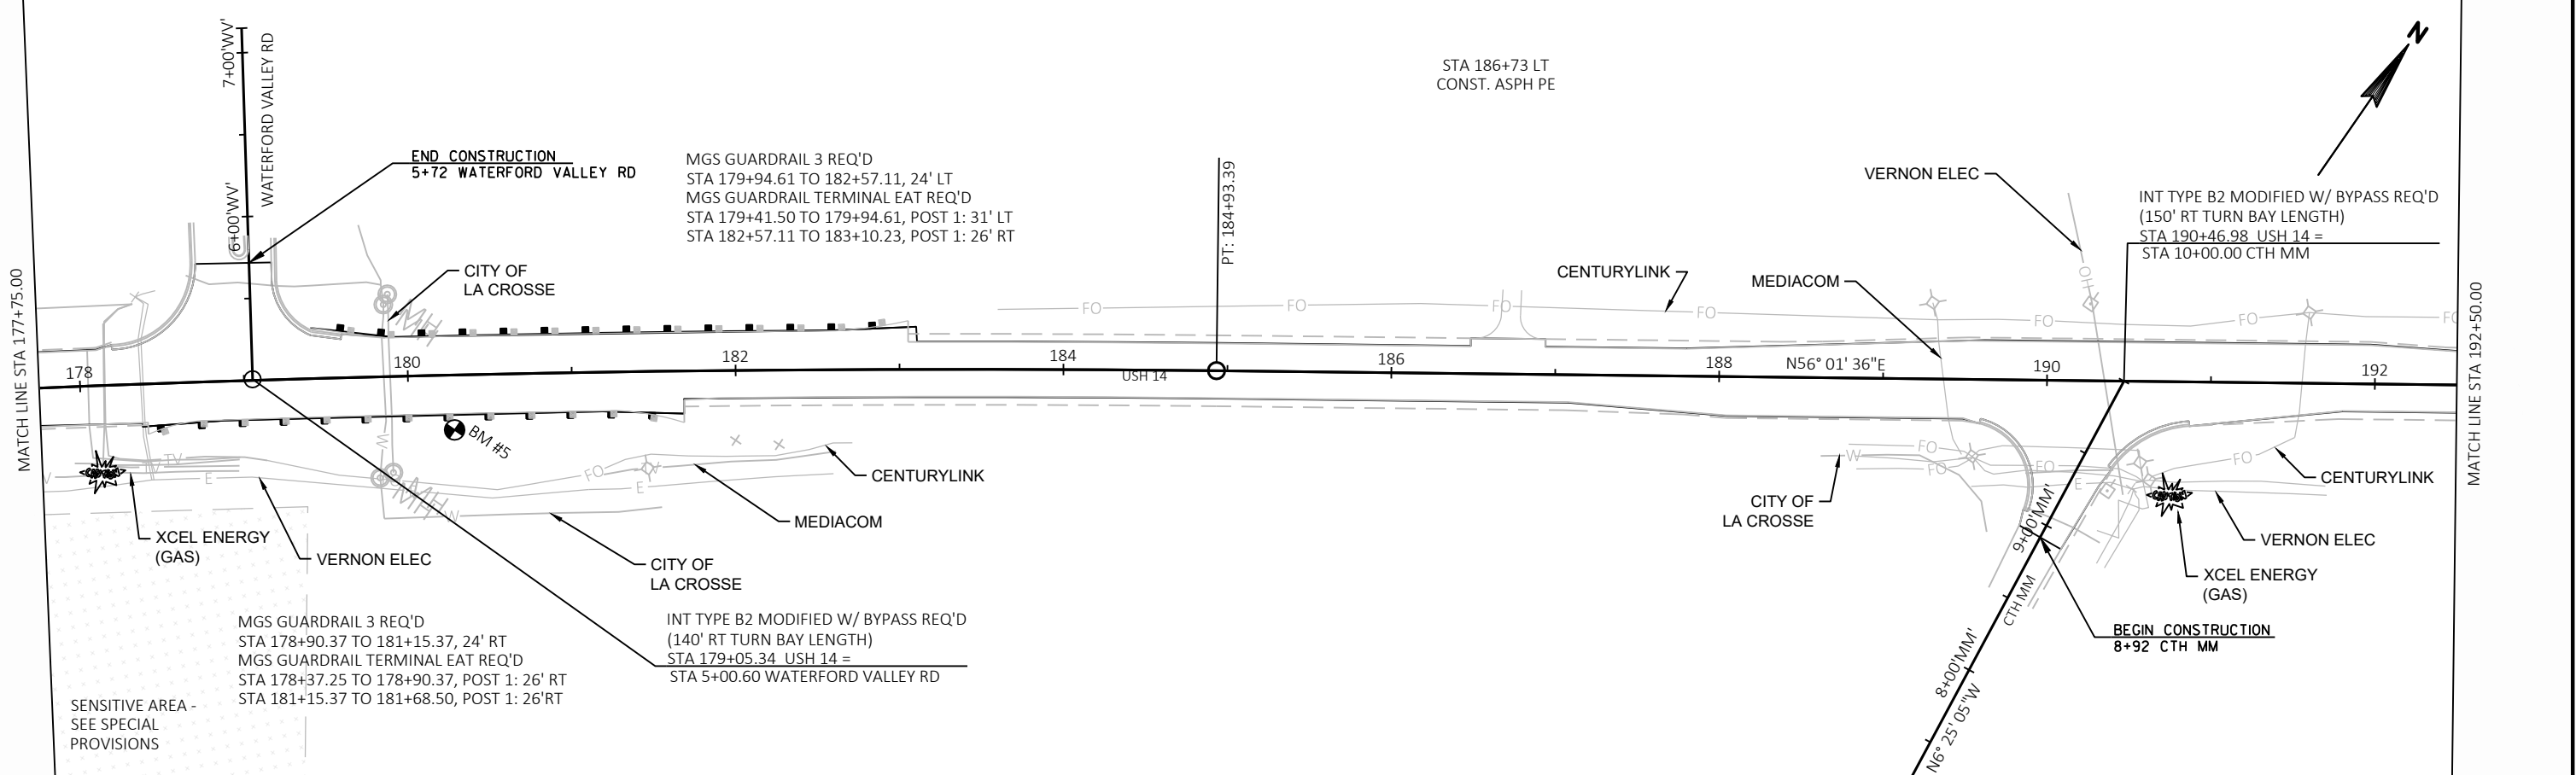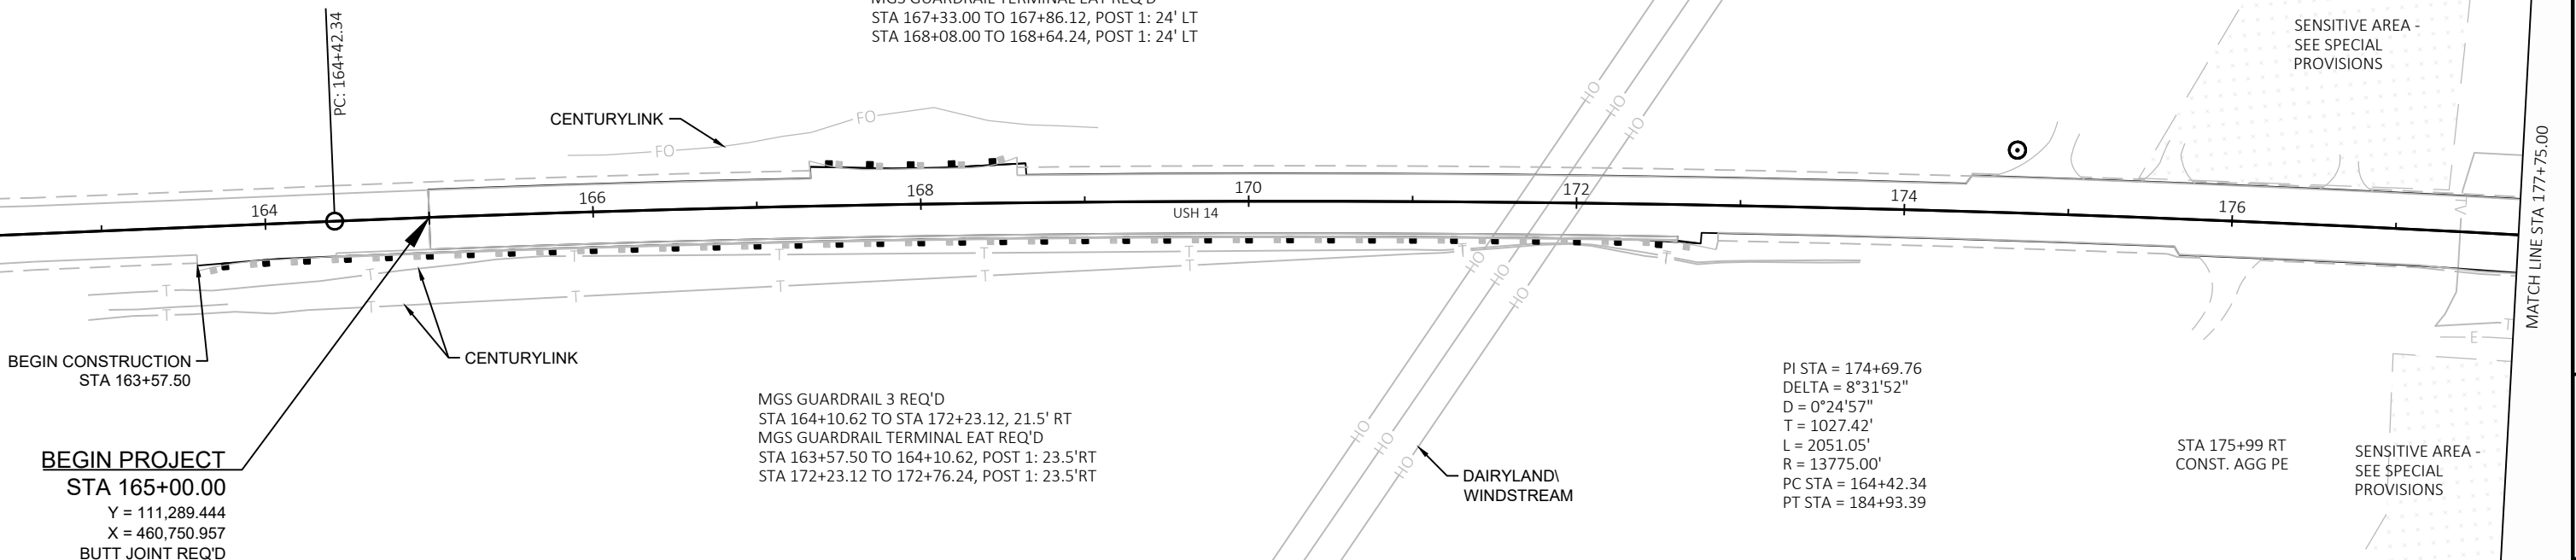

PROJECT NO: 1640-03-61      HWY: USH 14      COUNTY: LA CROSSE      PLAN SHEETS      SHEET      E




BENCHMARK DATA				
NO.	DESCRIPTION	STATION	OFFSET (FT)	ELEV. (FT)
BM # 1	BRONZE CAP IN CONCRETE	193+51.25	49.41 LT	723.65

INT TYPE B2 MODIFIED W/ BYPASS REQ'D  
(210' RT TURN BAY LENGTH)  
STA 205+37.39 USH 14 =  
STA 15+00.00 JUSTIN RD


STA 199+79 LT  
CONST. AGG PE

MGS GUARDRAIL 3 REQ'D  
STA 201+78.62 TO 204+78.62, 25.65' LT  
MGS GUARDRAIL TERMINAL EAT REQ'D  
STA 201+25.50 TO 201+78.62, POST 1: 27.65' LT  
STA 204+78.62 TO 205+31.74, POST 1: 25.65' LT

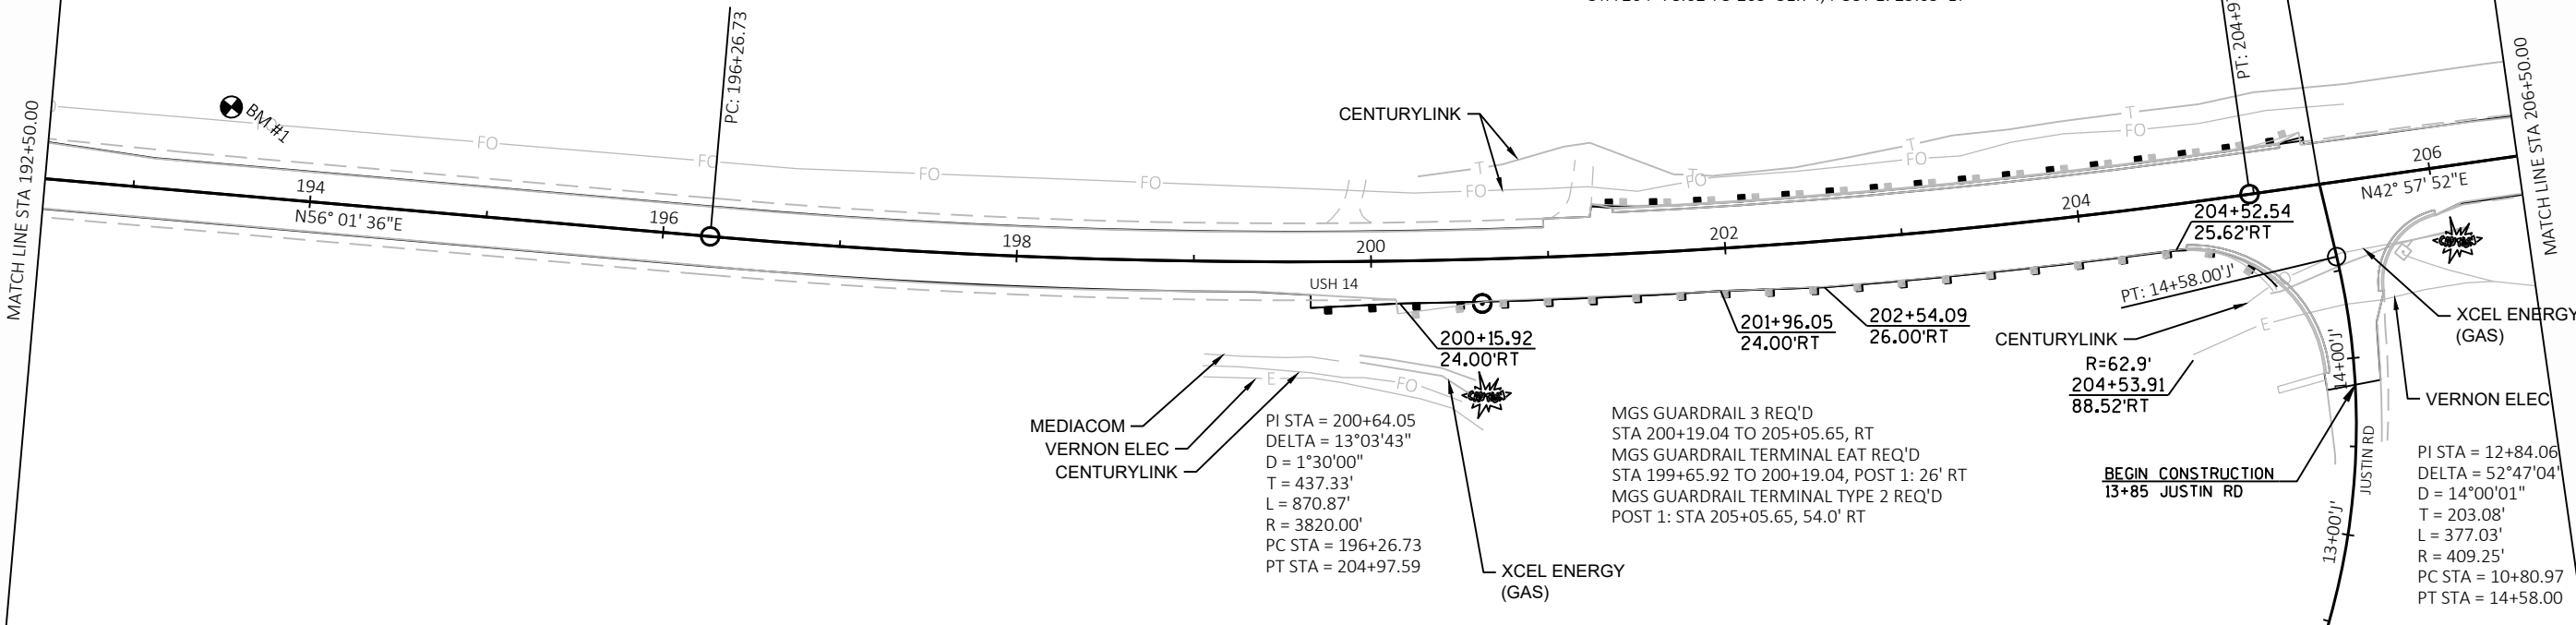


5

5

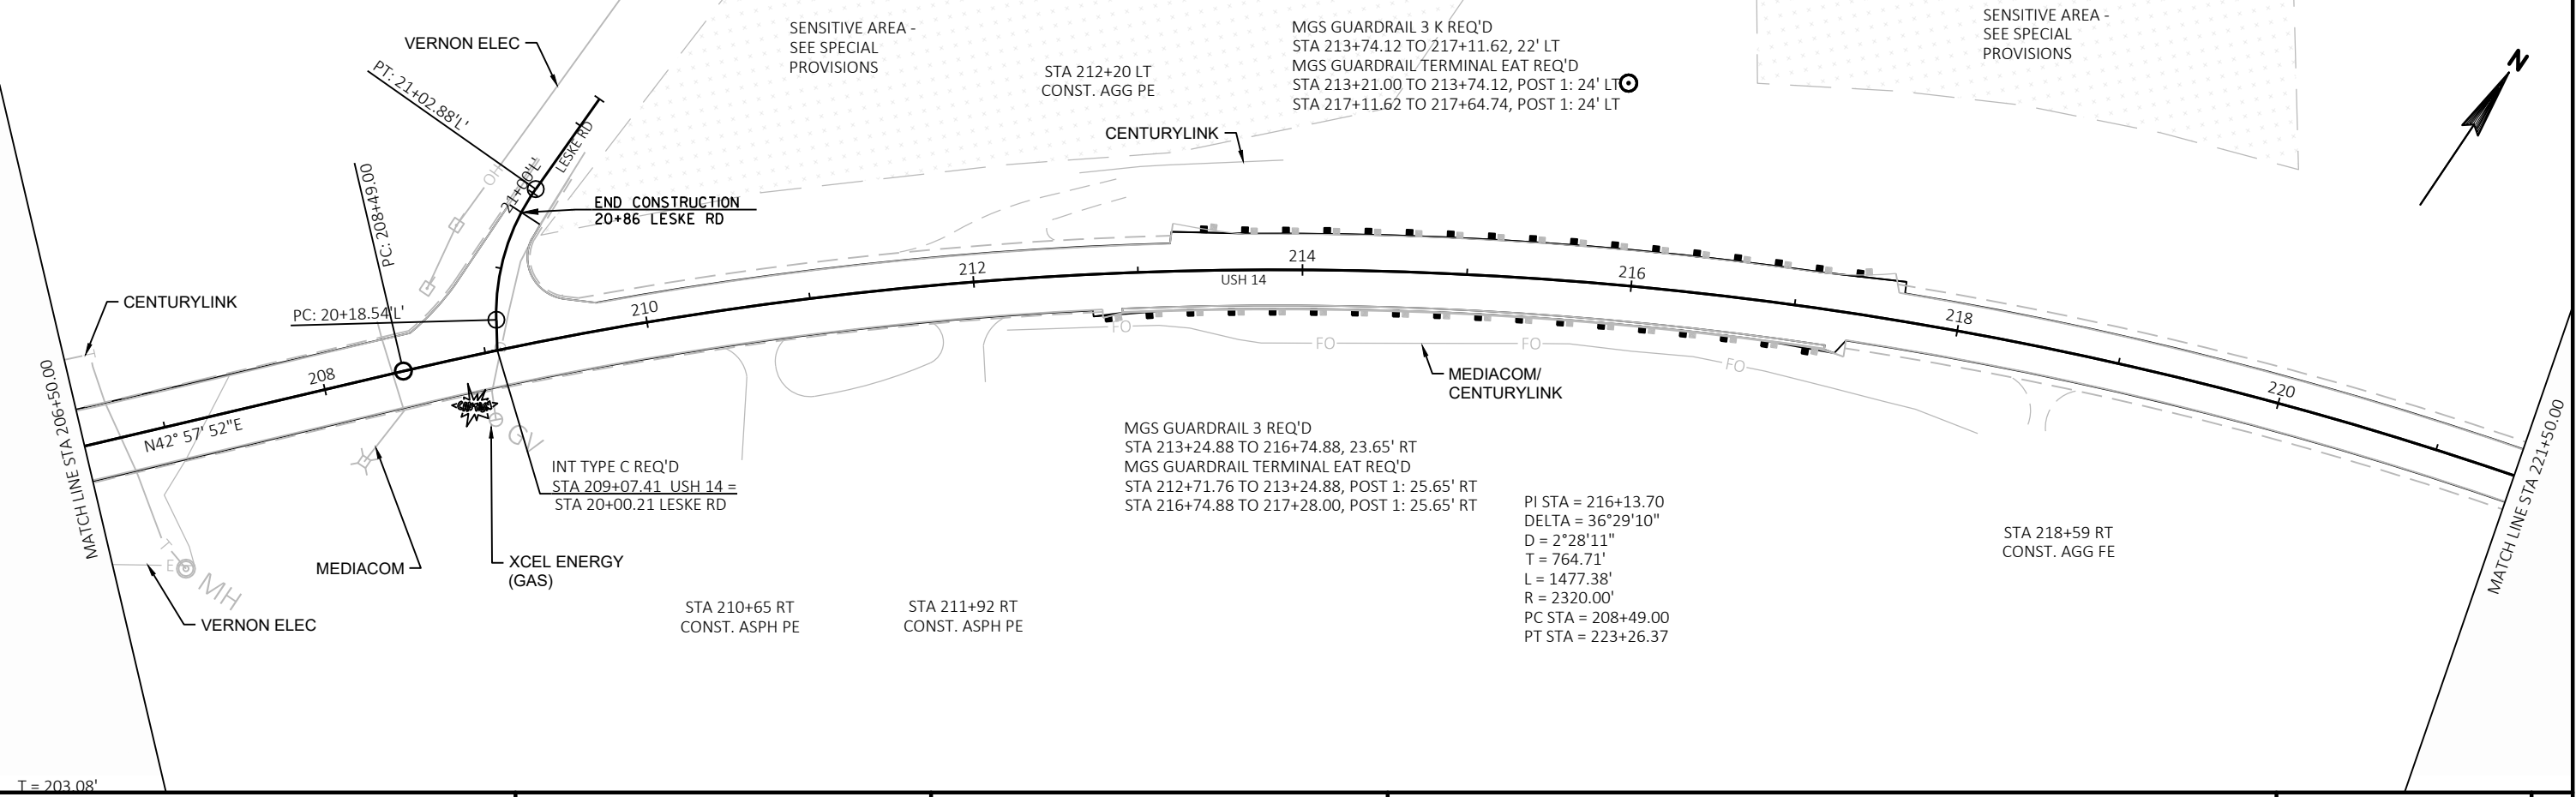


PROJECT NO: 1640-03-61      HWY: USH 14      COUNTY: LA CROSSE      PLAN SHEETS      SHEET      E

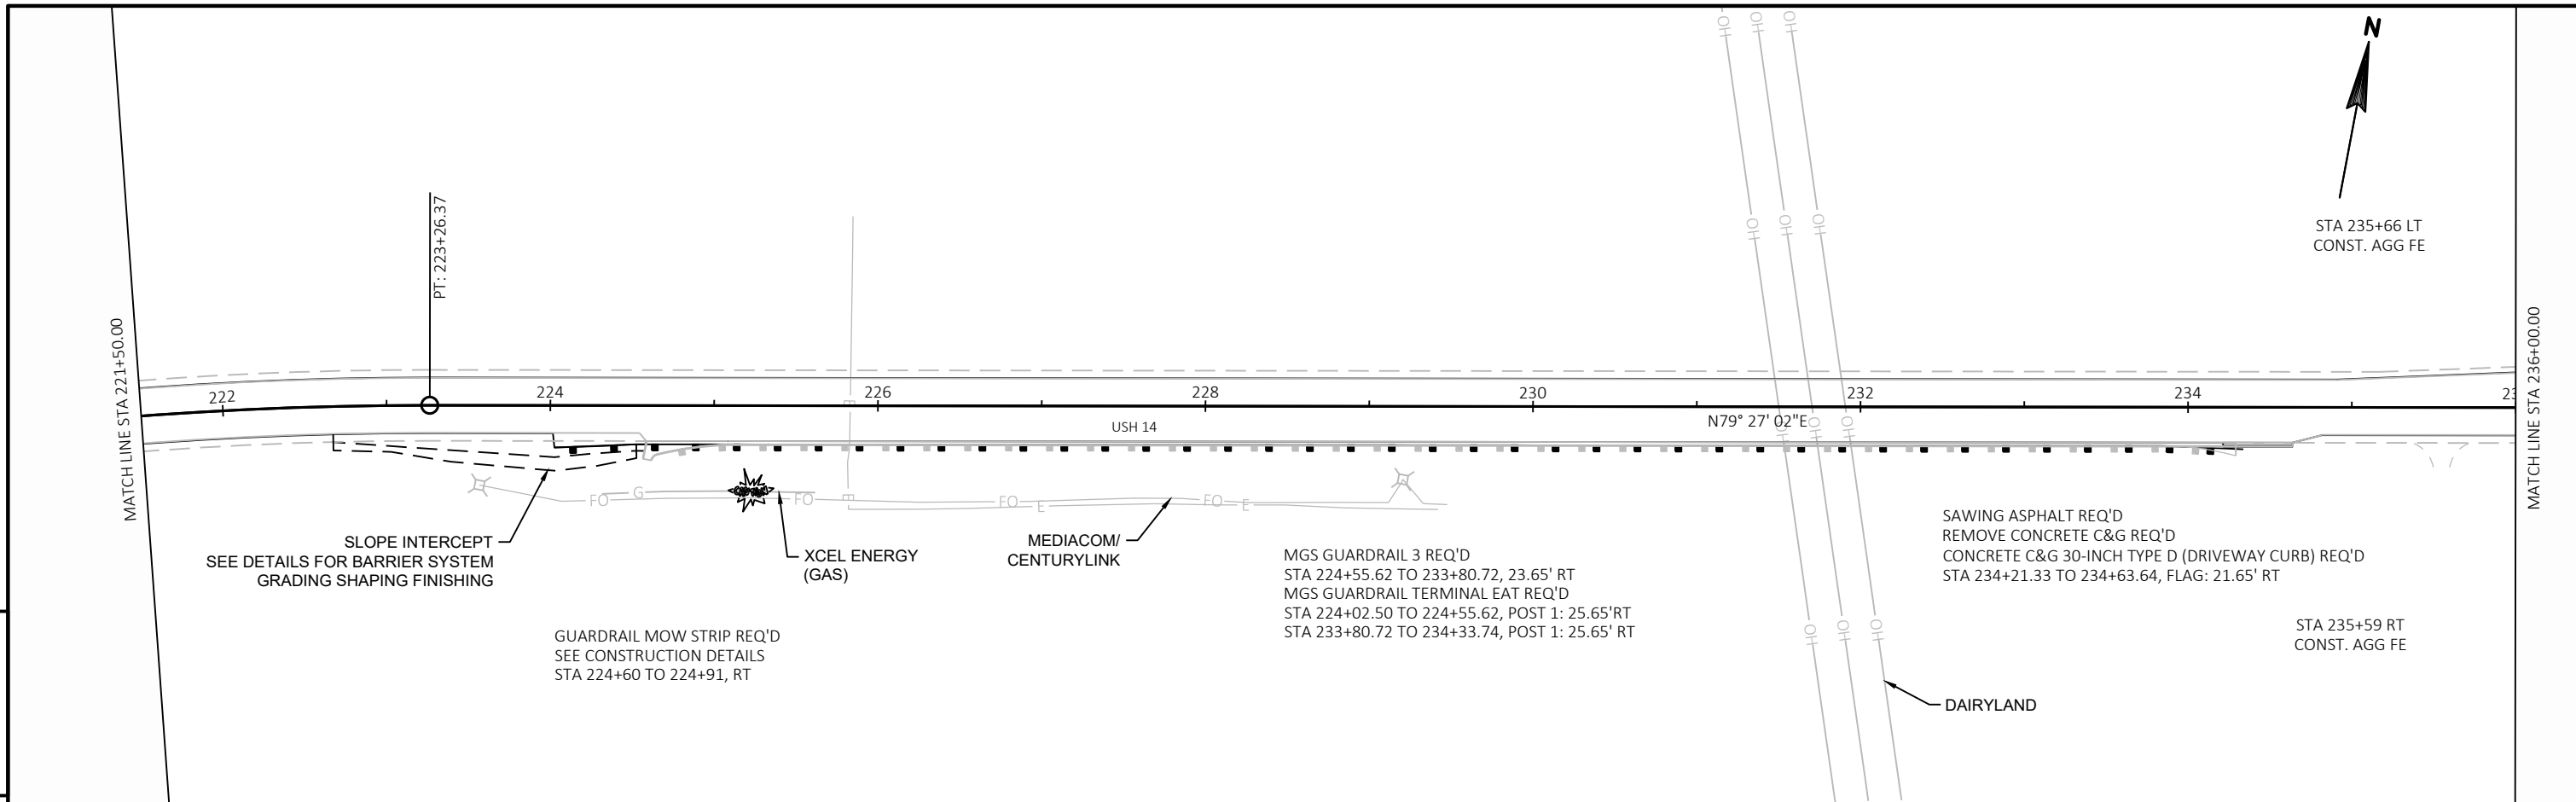



5

5


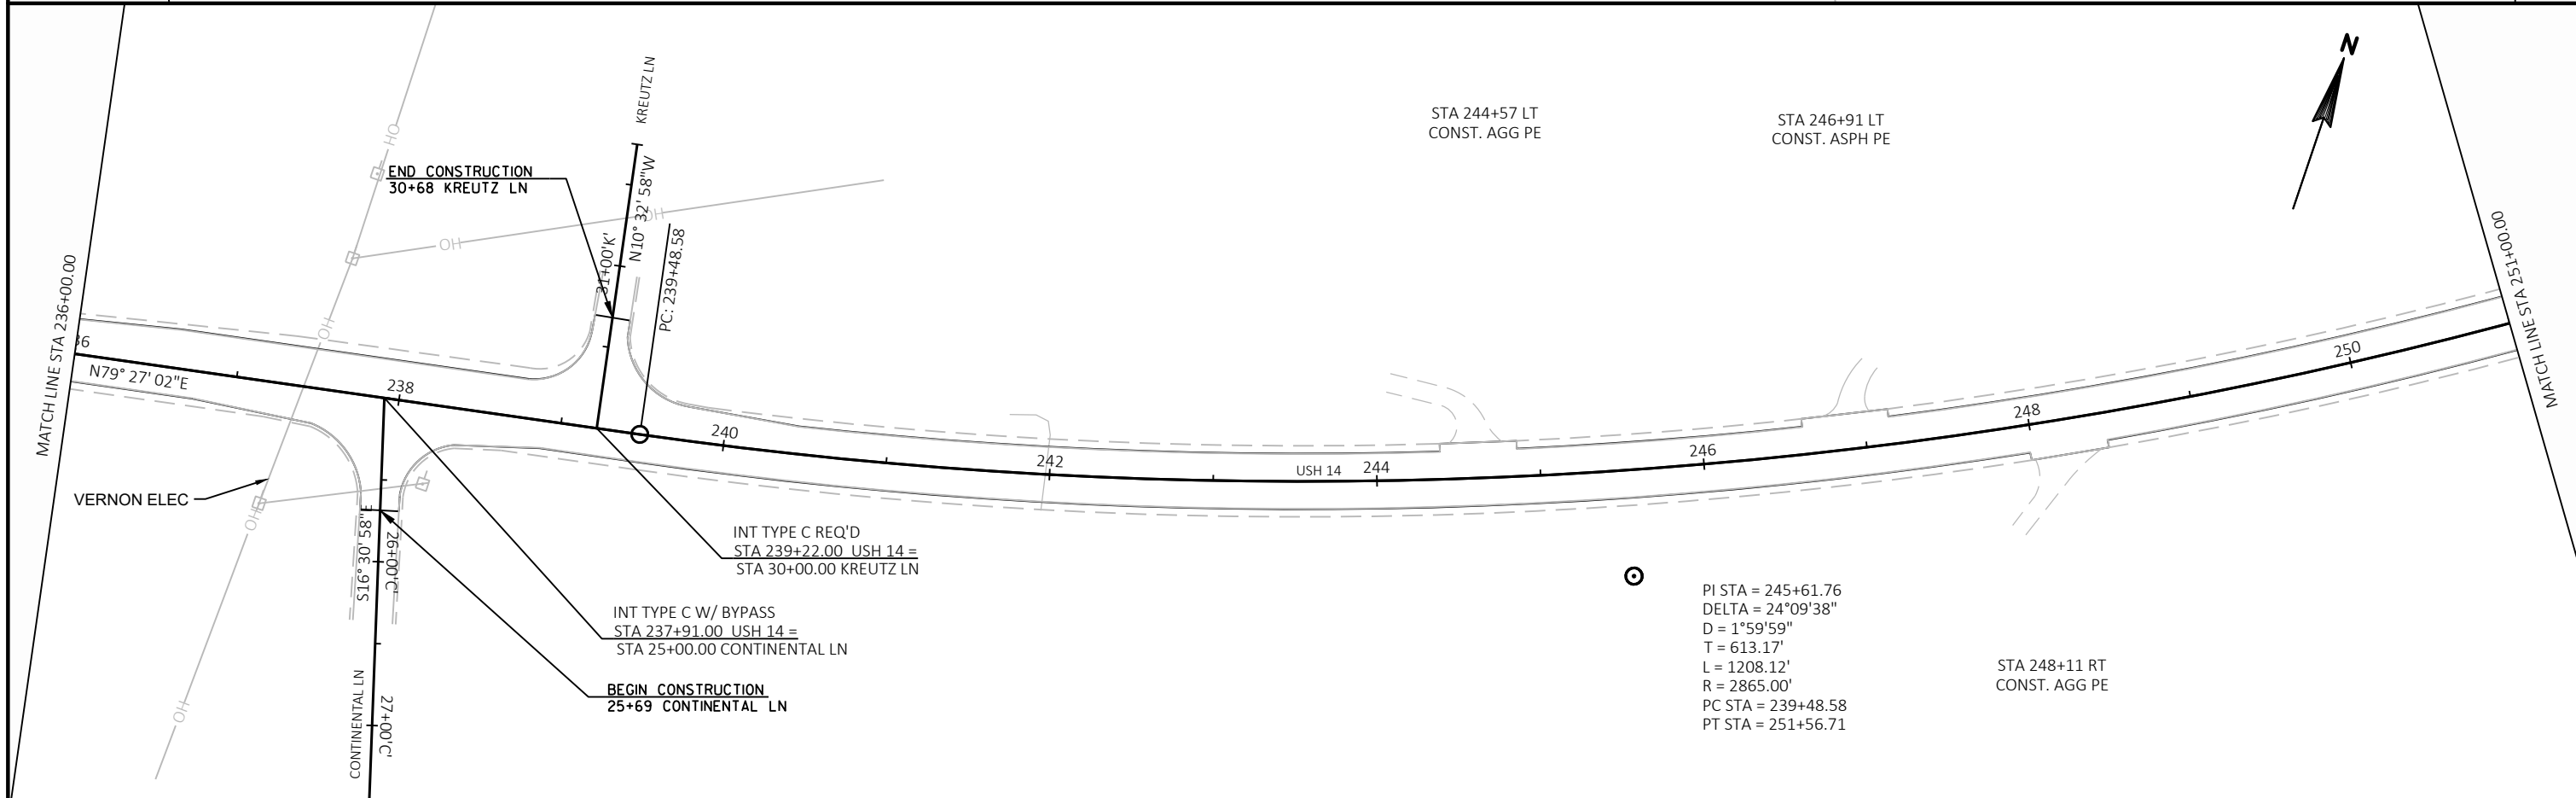


PROJECT NO: 1640-03-61	HWY: USH 14	COUNTY: LA CROSSE	PLAN SHEETS	SHEET	E
------------------------	-------------	-------------------	-------------	-------	---


BENCHMARK DATA				
NO.	DESCRIPTION	STATION	OFFSET (FT)	ELEV. (FT)
BM #3	NOT AVAILABLE	260+84.18	4.56 LT	698.11
BM #2	NOT AVAILABLE	265+35.62	42.92 RT	693.89
BM #8	NOT AVAILABLE	266+54.10	111.95 RT	-

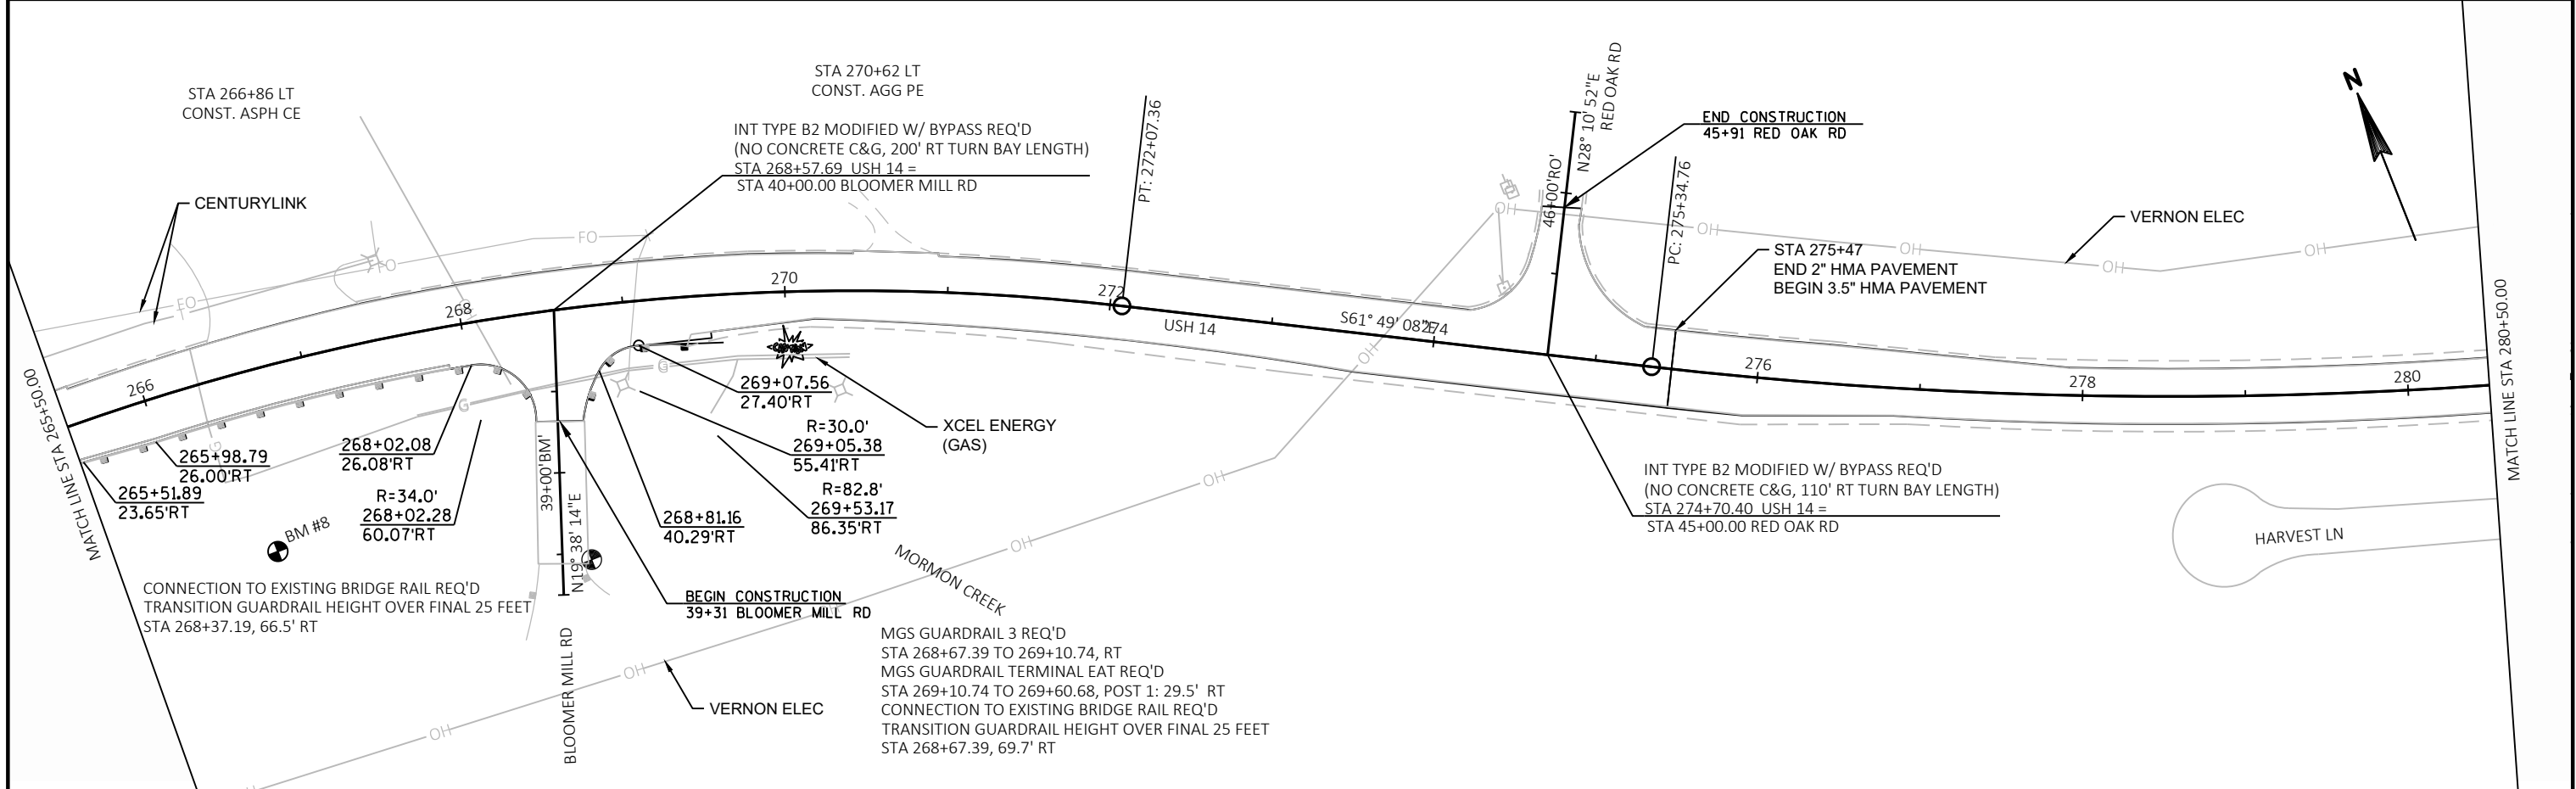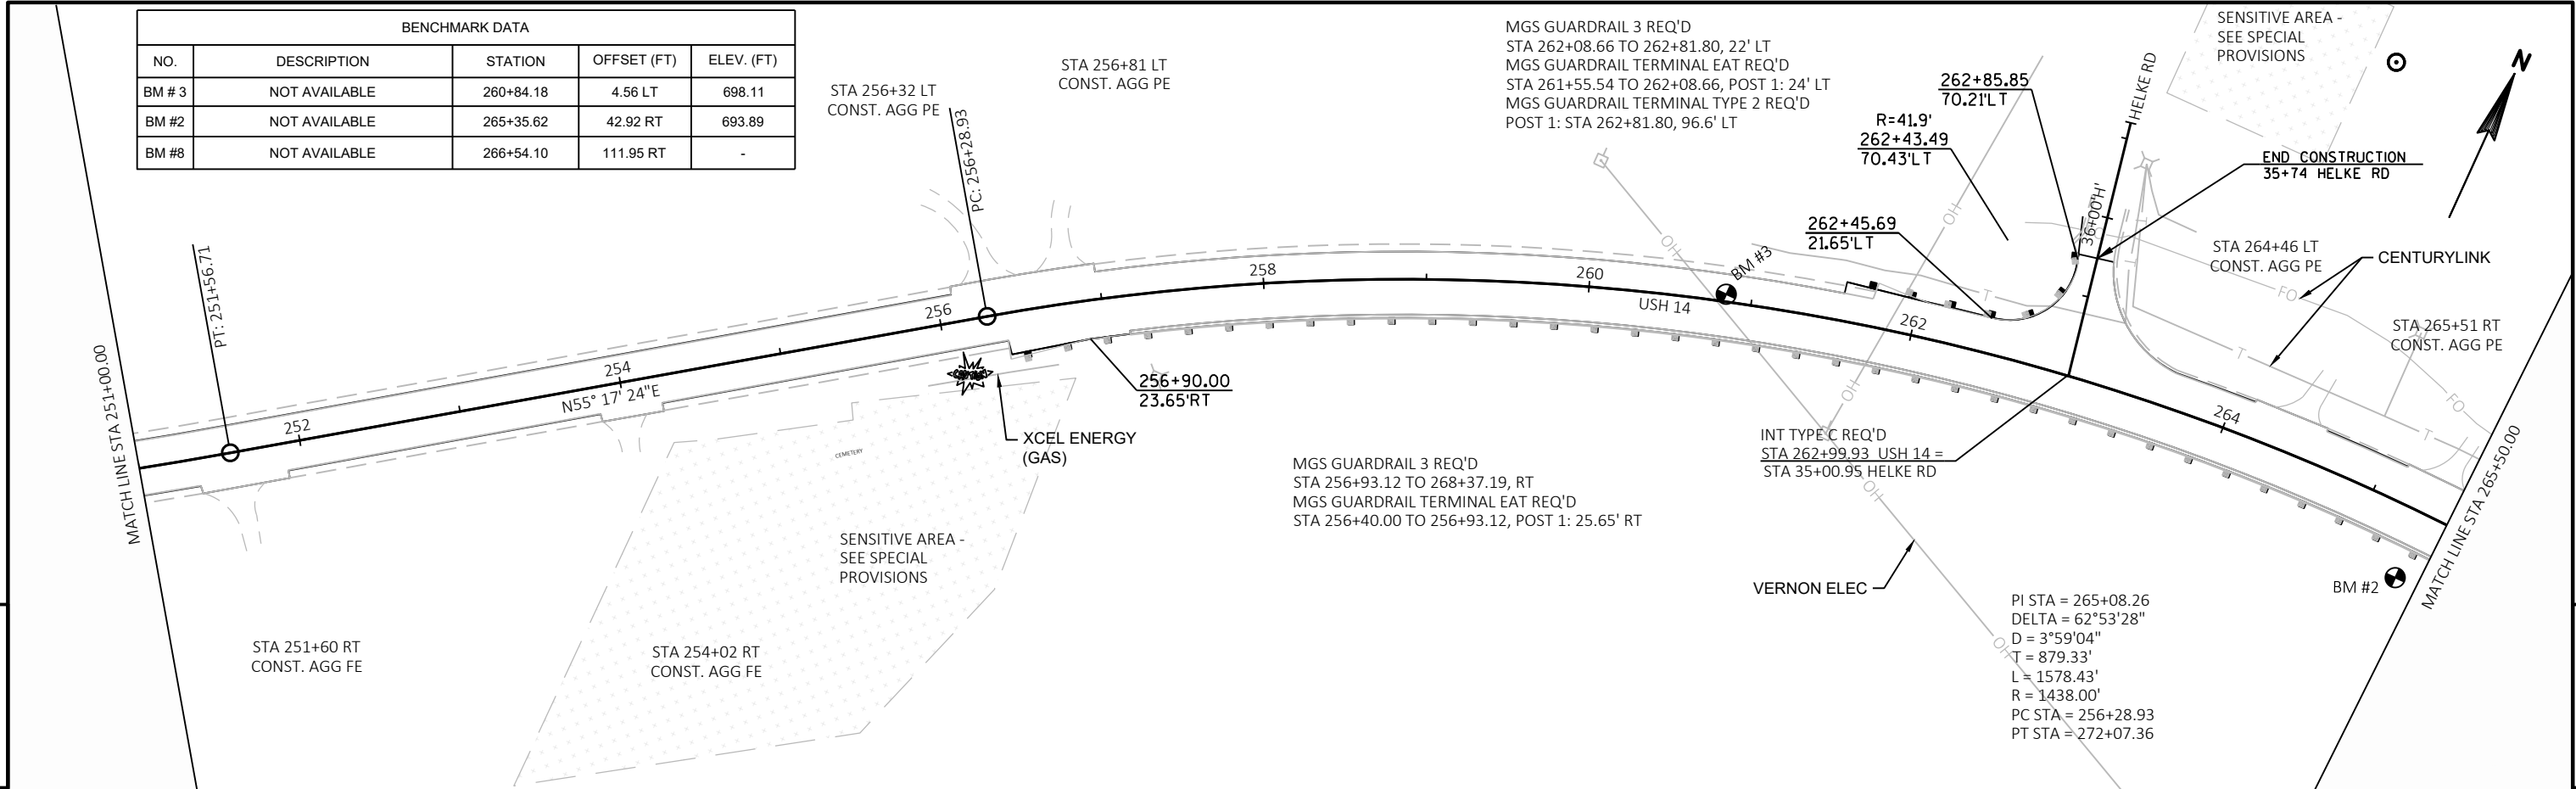

PROJECT NO: 1640-03-61      HWY: USH 14      COUNTY: LA CROSSE      PLAN SHEETS      SHEET      E

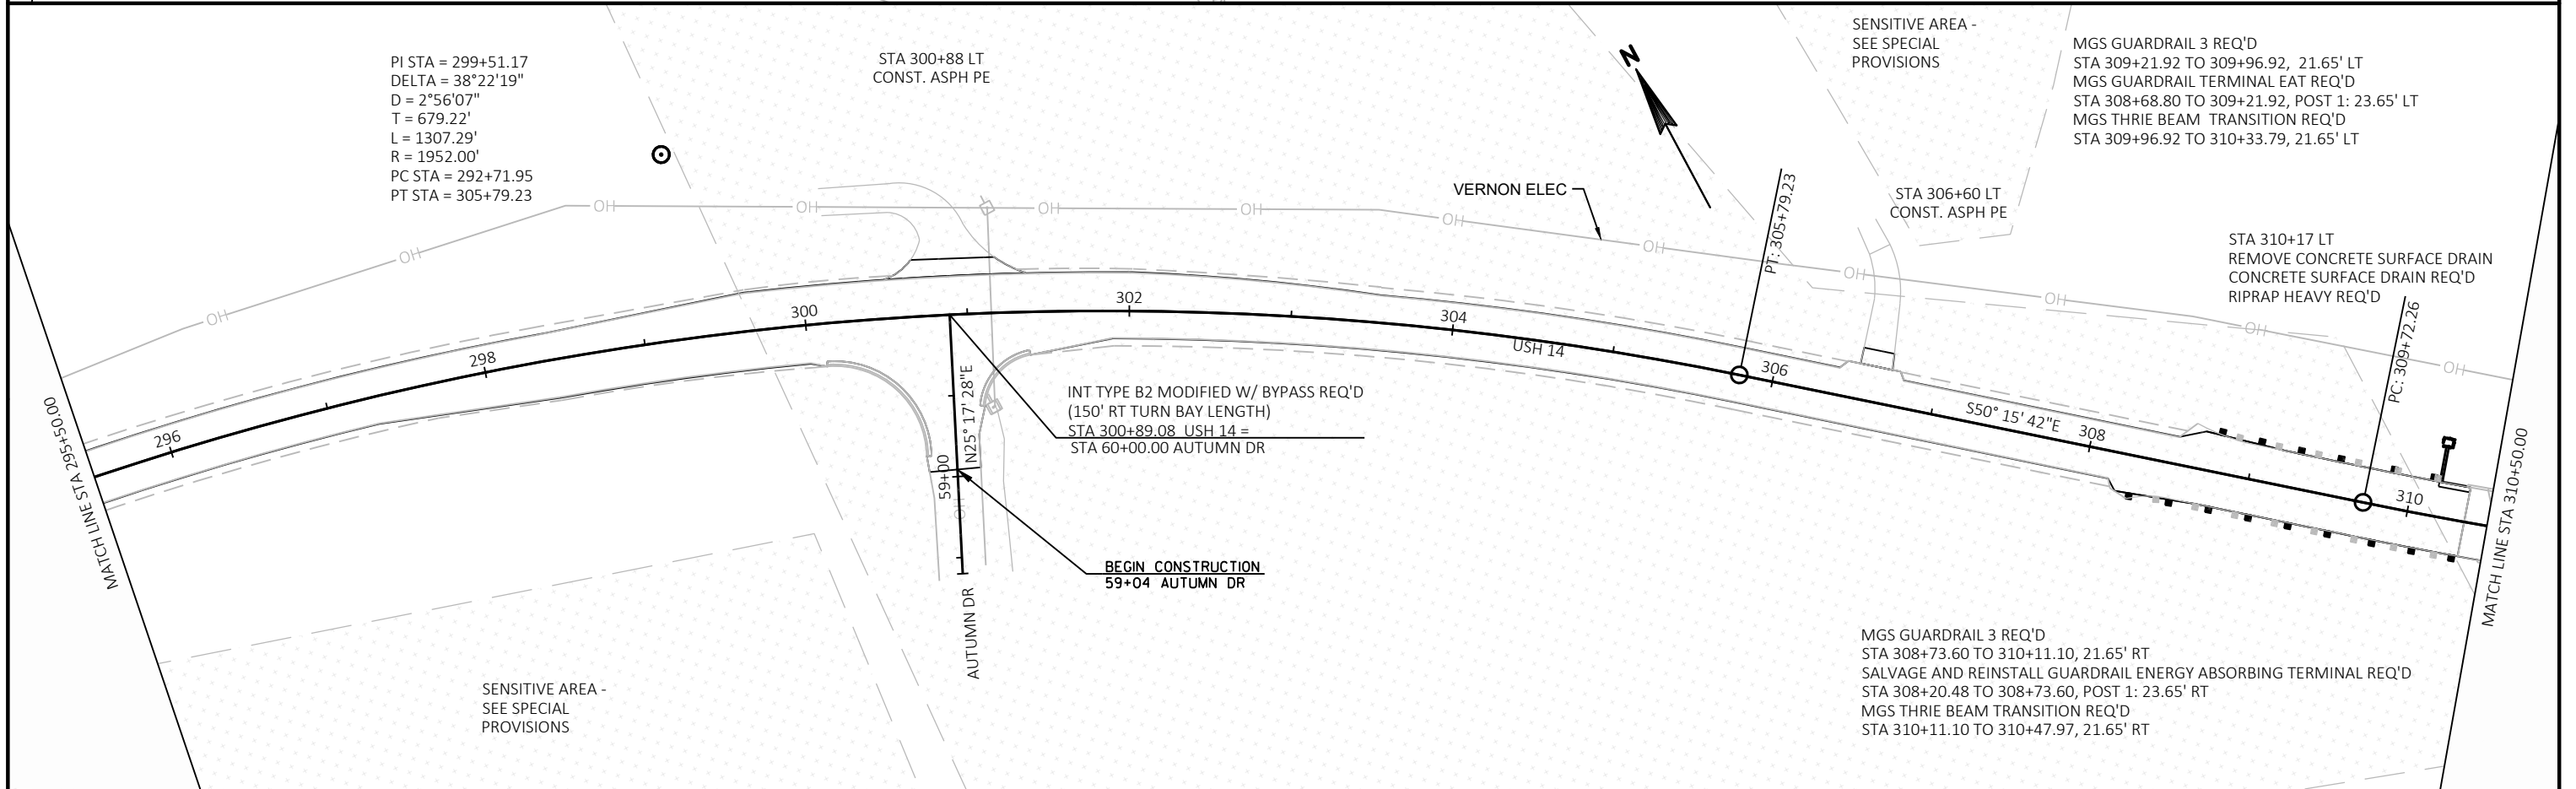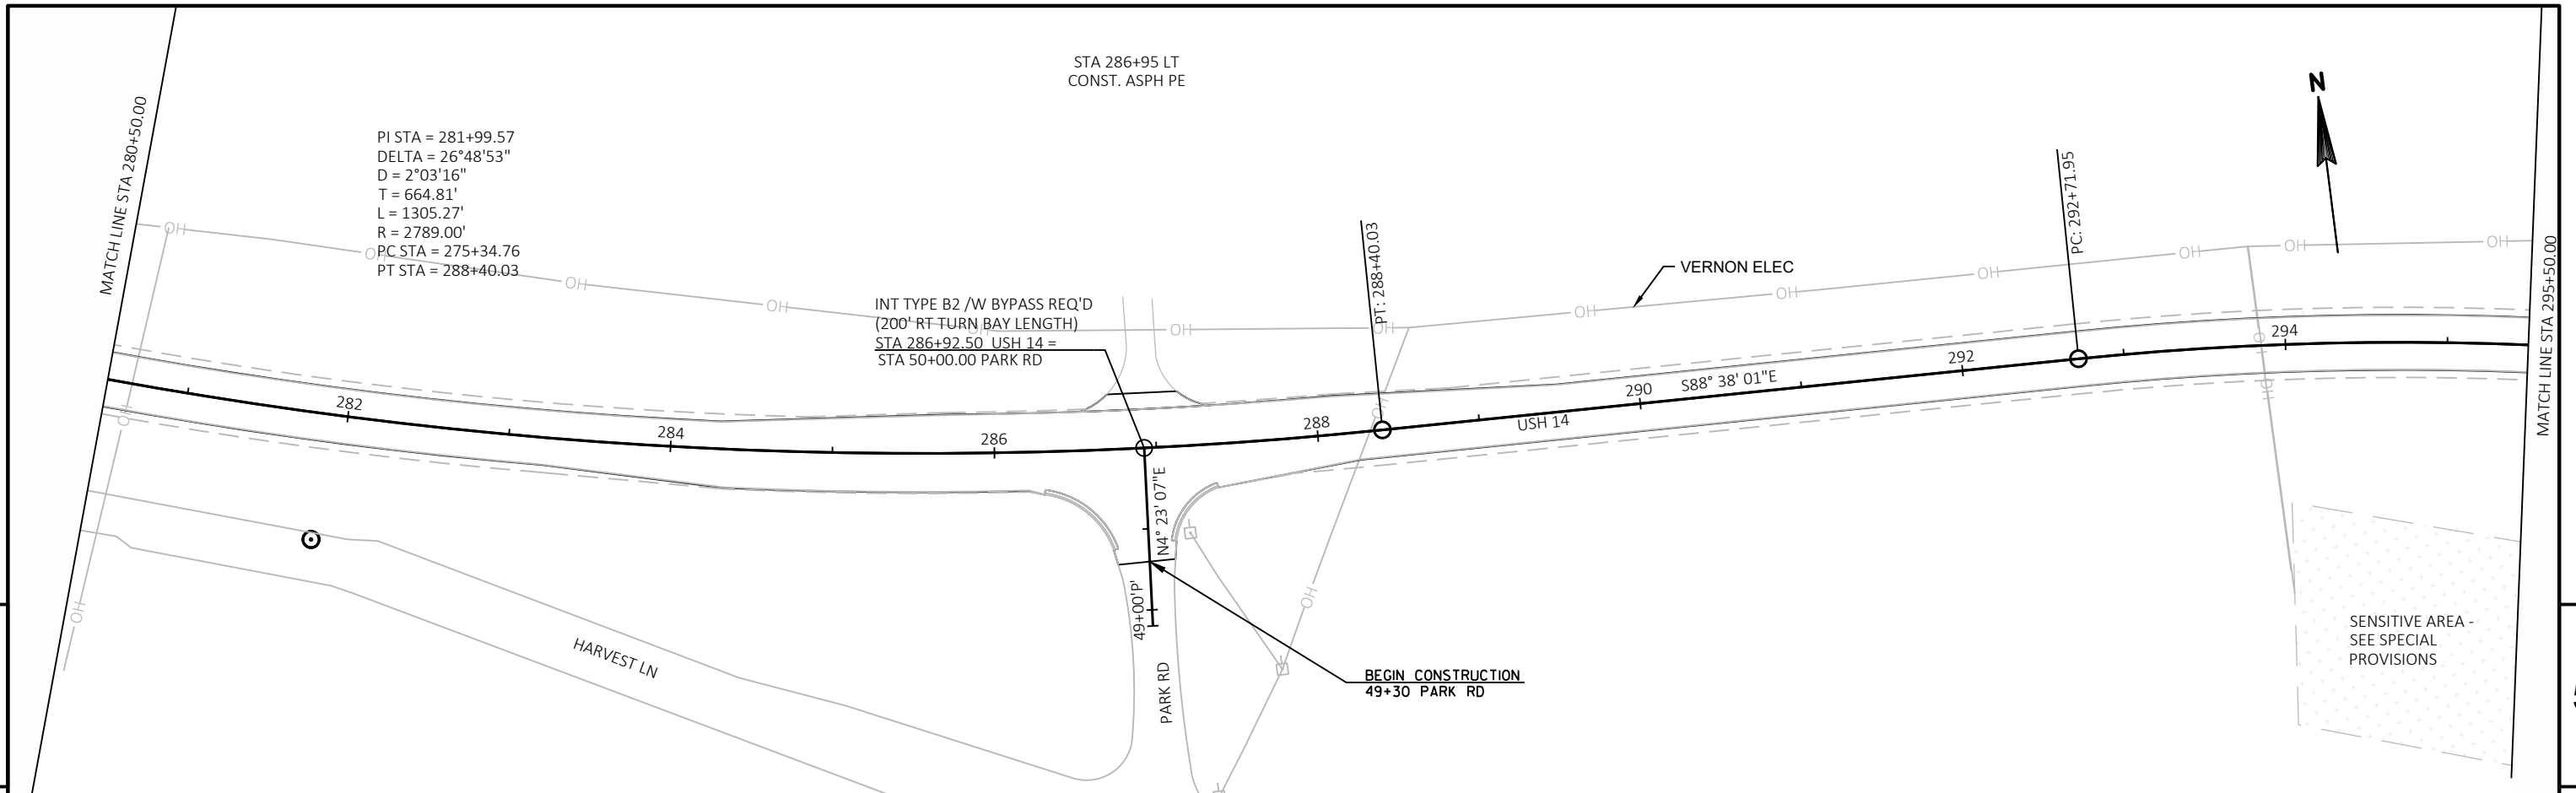


PROJECT NO: 1640-03-61	HWY: USH 14	COUNTY: LA CROSSE	PLAN SHEETS	SHEET	E
------------------------	-------------	-------------------	-------------	-------	---

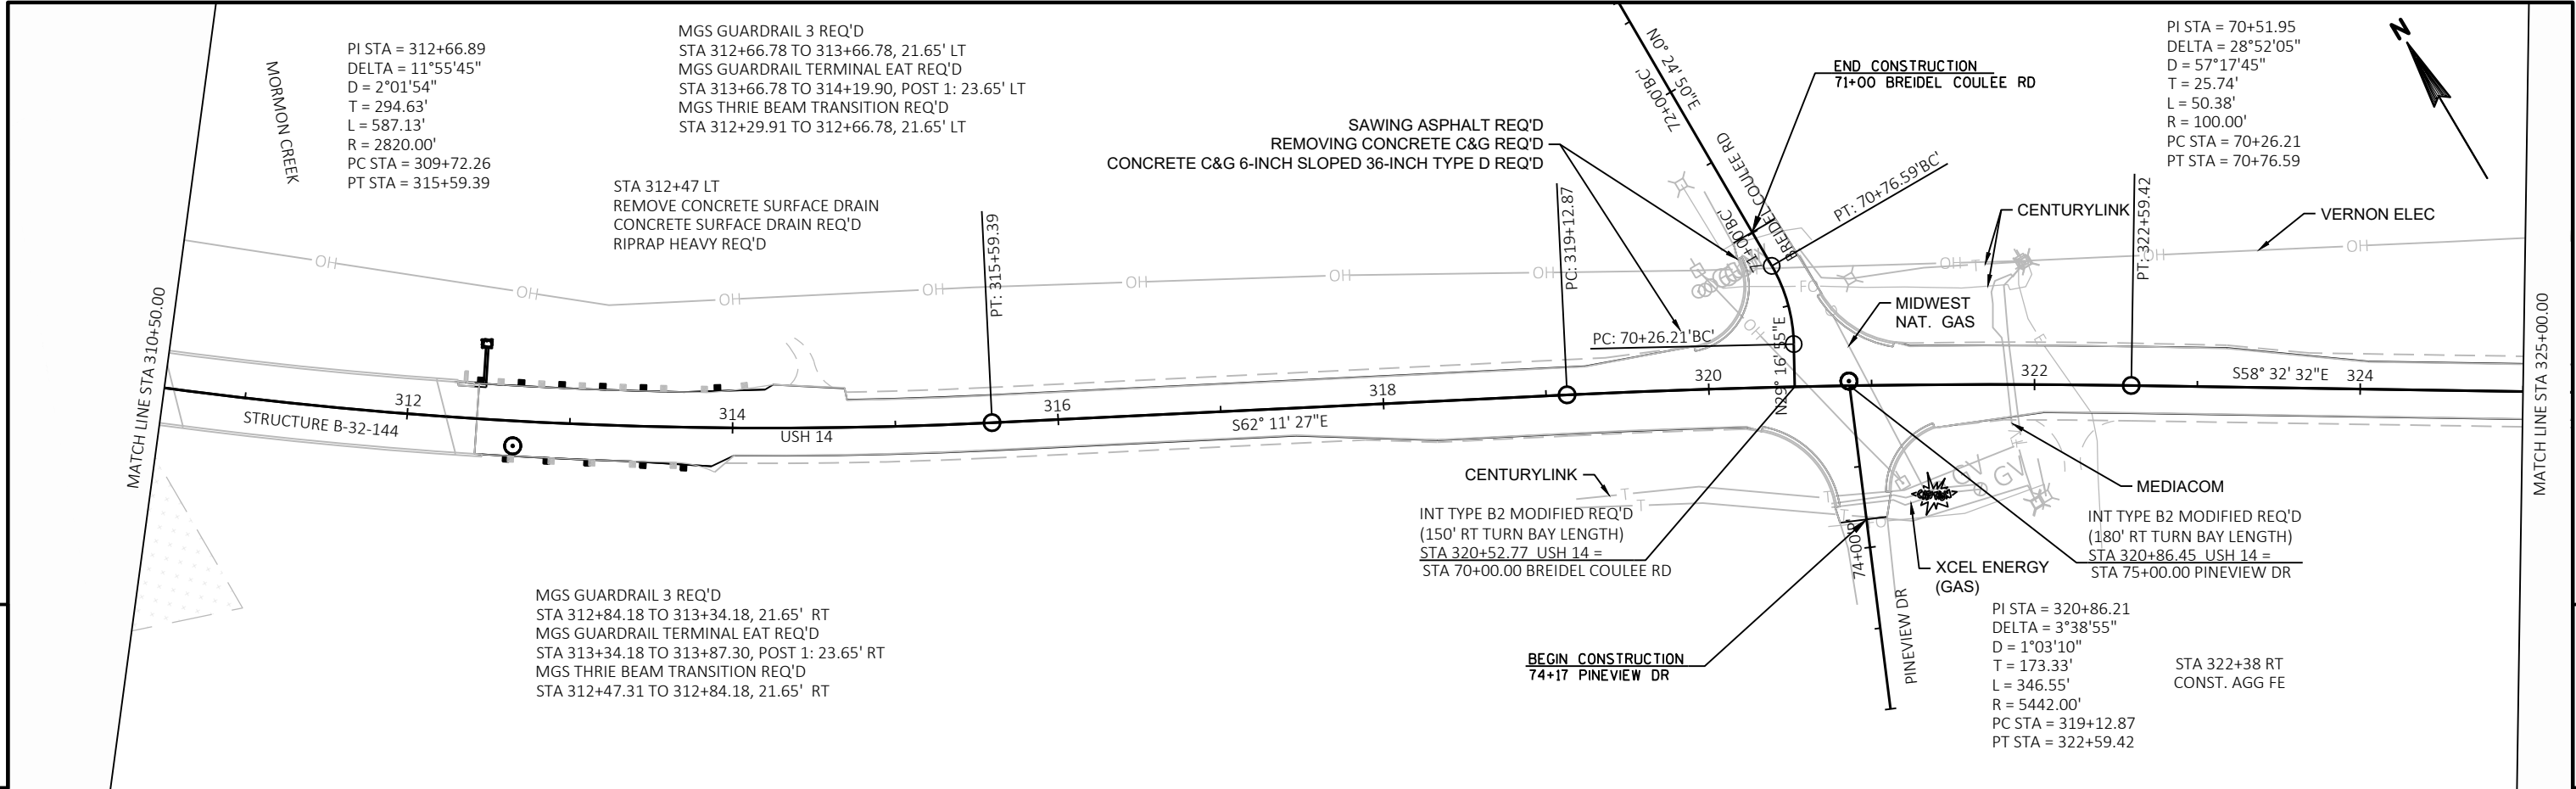


5

5

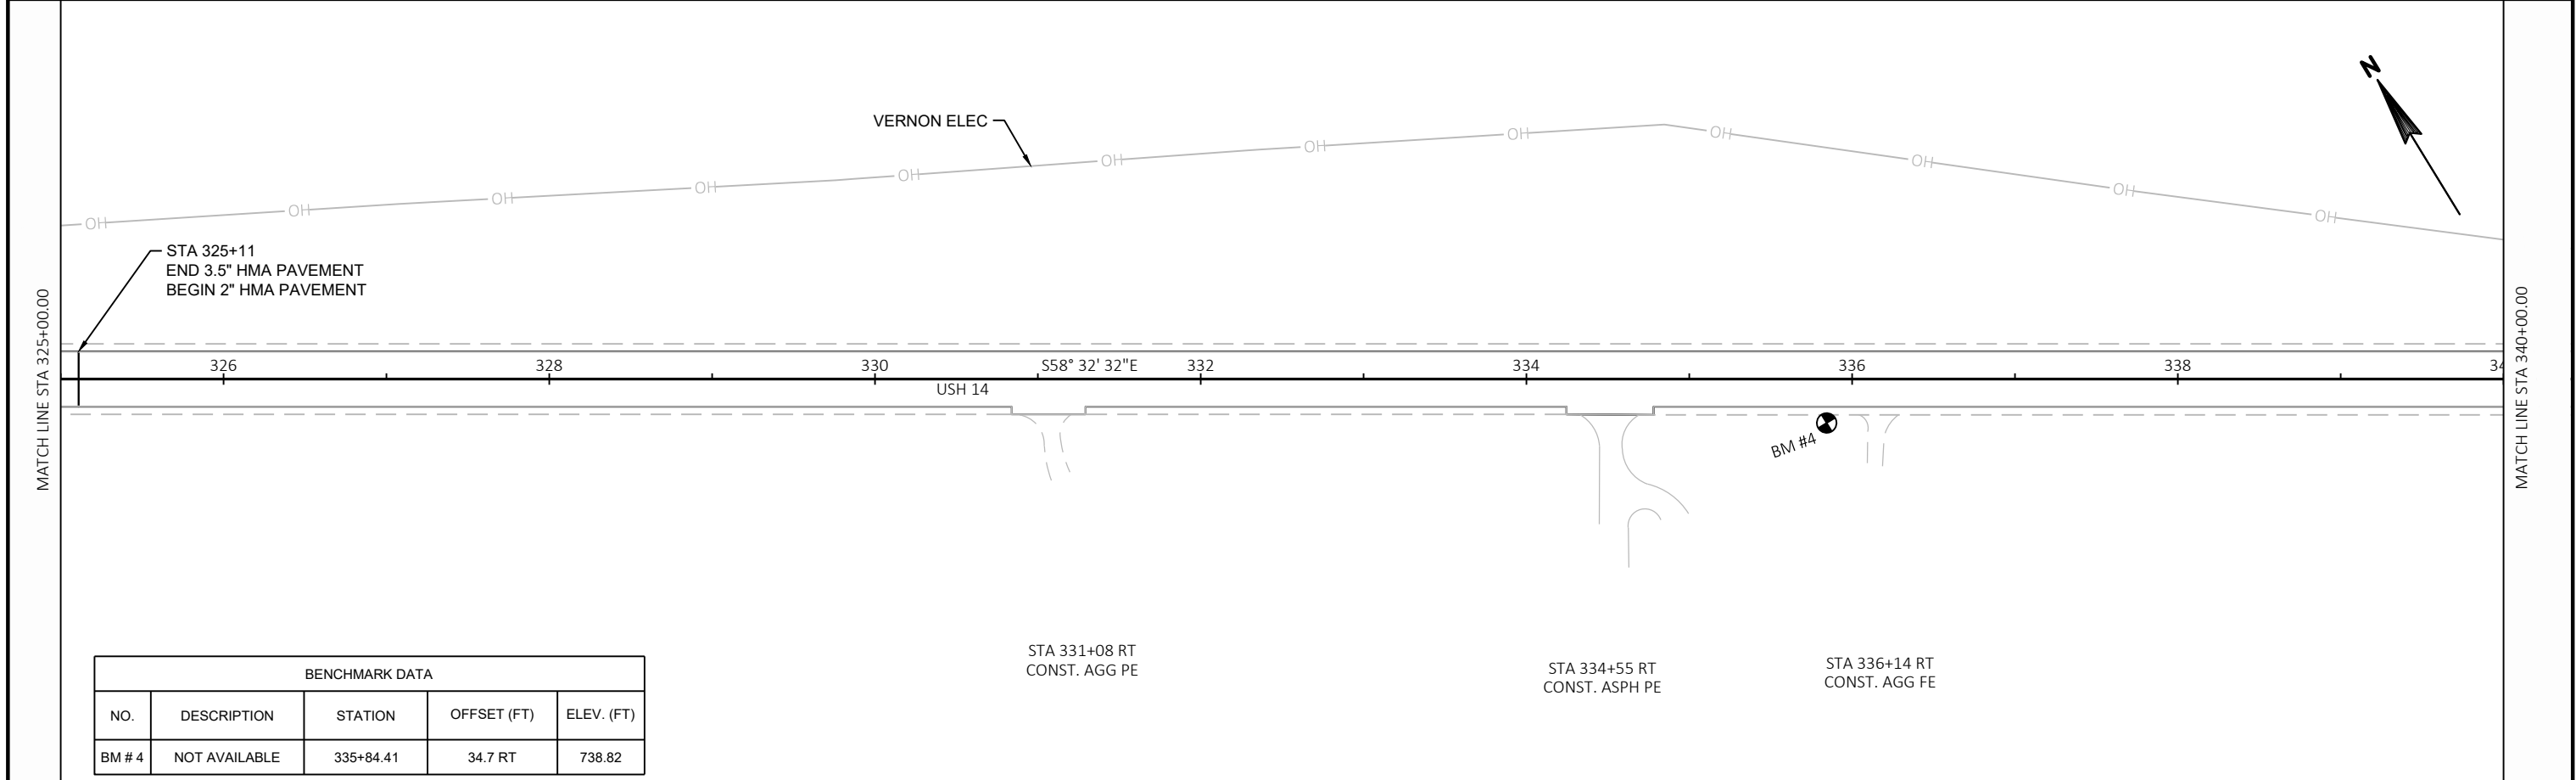

BENCHMARK DATA				
NO.	DESCRIPTION	STATION	OFFSET (FT)	ELEV. (FT)
BM # 4	NOT AVAILABLE	335+84.41	34.7 RT	738.82

PROJECT NO: 1640-03-61      HWY: USH 14      COUNTY: LA CROSSE      PLAN SHEETS      SHEET      E

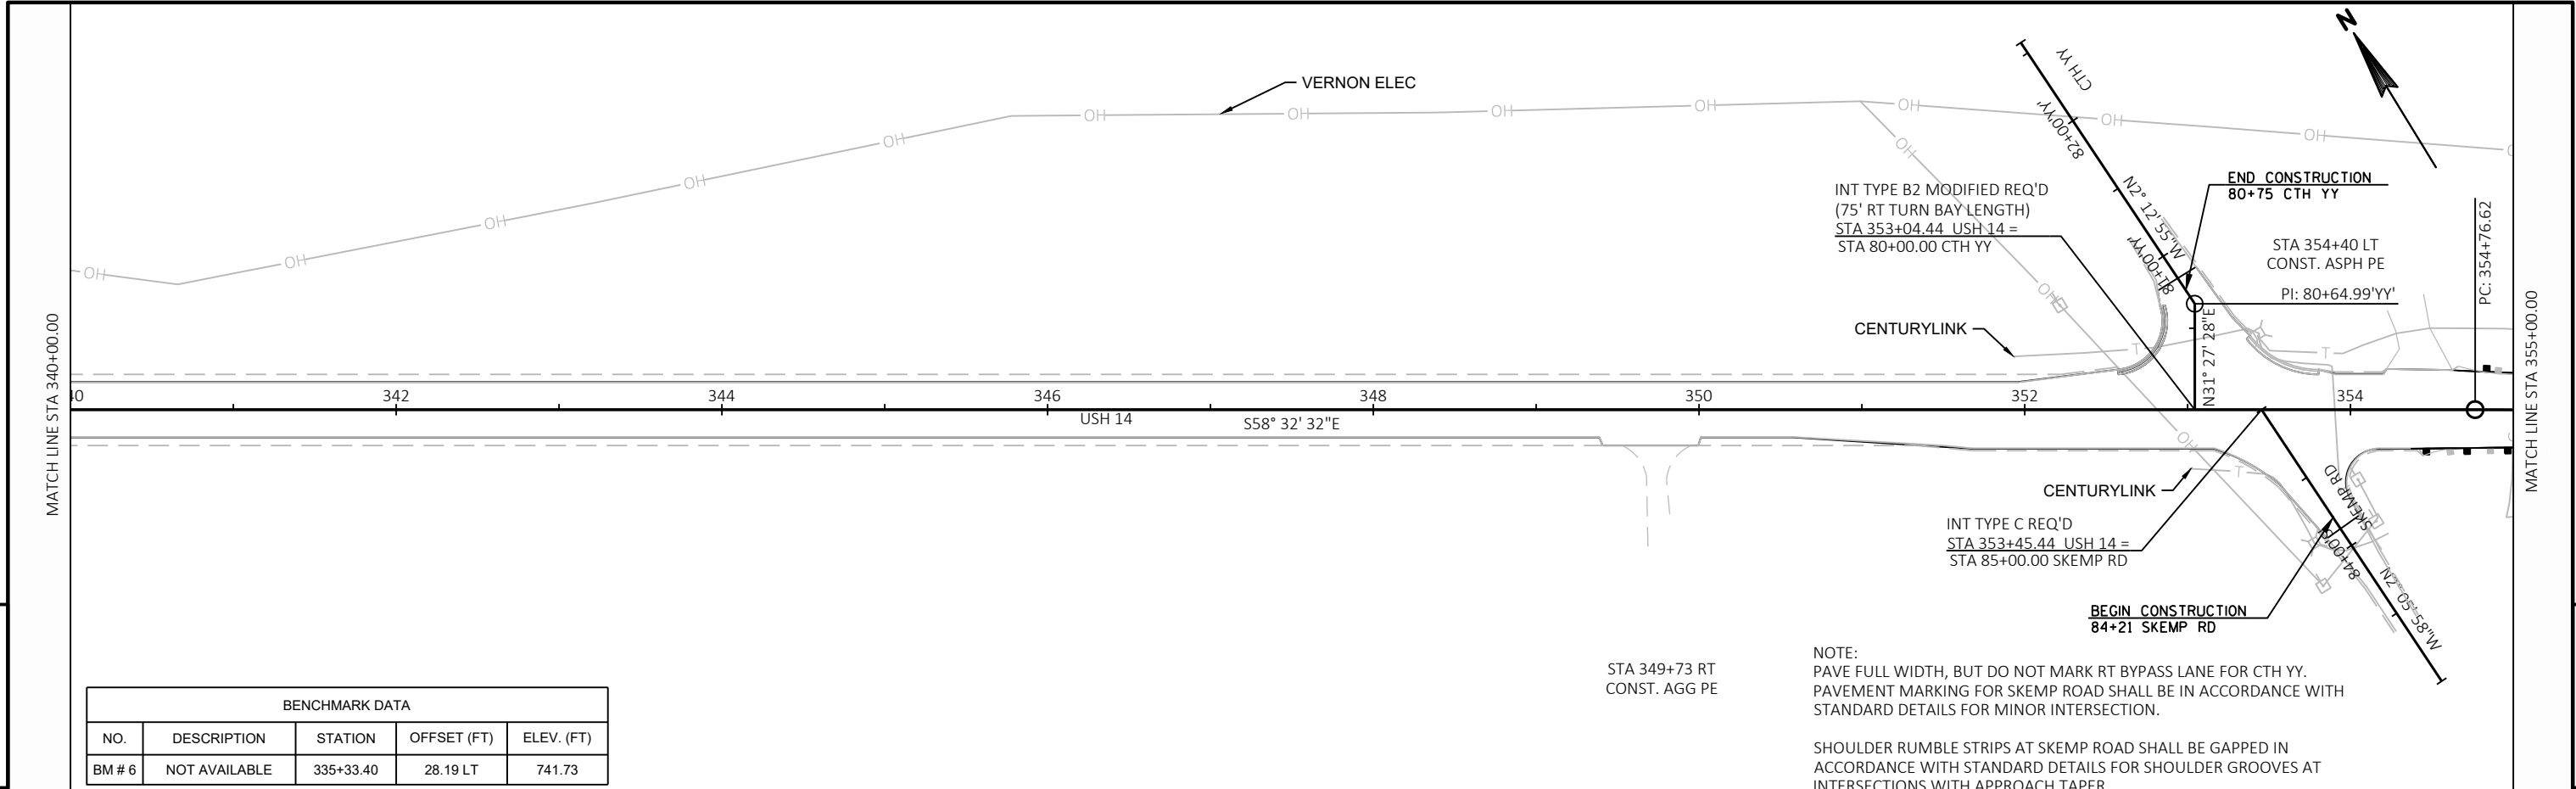


**BENCHMARK DATA**

NO.	DESCRIPTION	STATION	OFFSET (FT)	ELEV. (FT)
BM # 6	NOT AVAILABLE	335+33.40	28.19 LT	741.73


**NOTE:**  
PAVE FULL WIDTH, BUT DO NOT MARK RT BYPASS LANE FOR CTH YY.  
PAVEMENT MARKING FOR SKEMP ROAD SHALL BE IN ACCORDANCE WITH STANDARD DETAILS FOR MINOR INTERSECTION.

SHOULDER RUMBLE STRIPS AT SKEMP ROAD SHALL BE GAPPED IN ACCORDANCE WITH STANDARD DETAILS FOR SHOULDER GROOVES AT INTERSECTIONS WITH APPROACH TAPER.

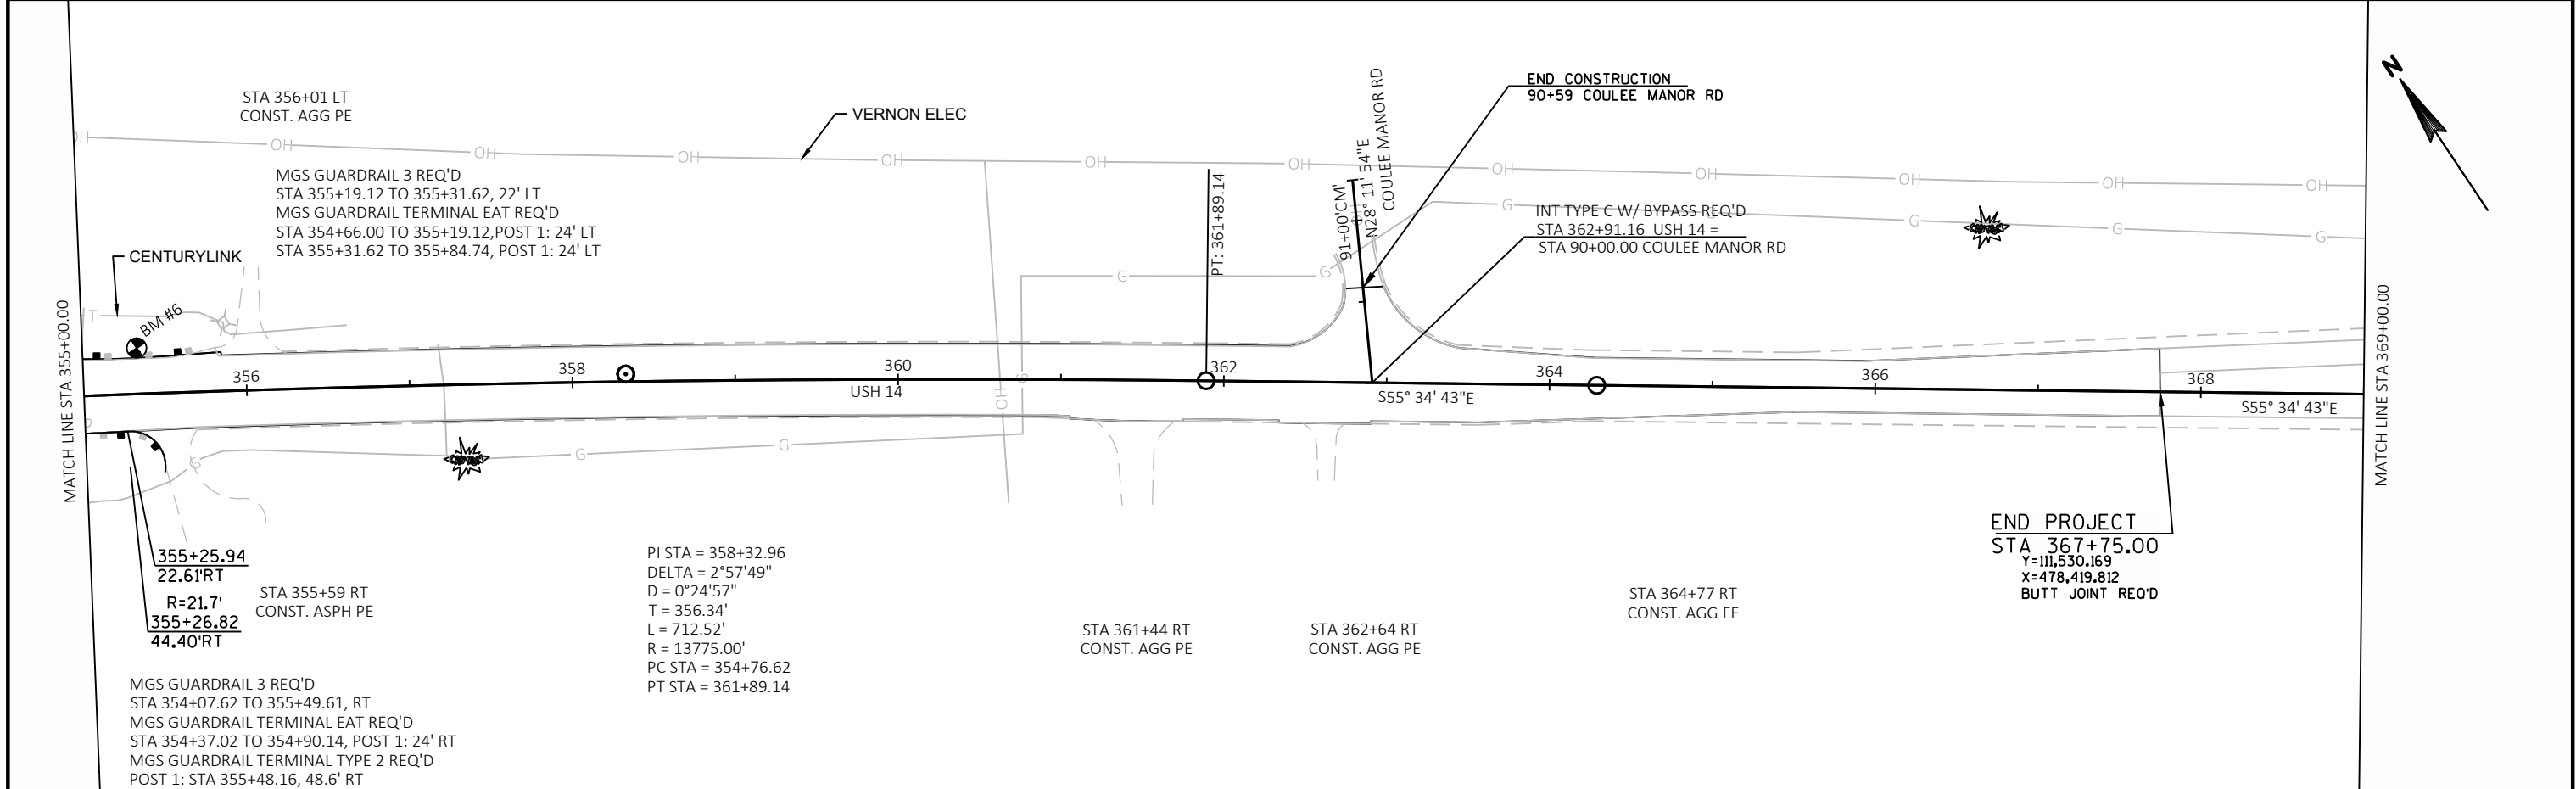


## Standard Detail Drawing List


08D01-21A	CONCRETE CURB & GUTTER
08D01-21B	CONCRETE CURB, TIES AND CURB AND GUTTER APPLICATIONS
08D02-07A	CONCRETE SURFACE DRAINS FLUME TYPE AT STRUCTURES
08D02-07B	CONCRETE SURFACE DRAINS FLUME TYPE AT STRUCTURES
08D02-07C	CONCRETE SURFACE DRAINS FLUME TYPE AT STRUCTURES
08D22-01	DRIVEWAYS WITHOUT CURB & GUTTER RESURFACING PROJECTS RURAL
08E08-03	TYPICAL INSTALLATIONS OF EROSION BALES / TEMPORARY DITCH CHECKS
08E09-06	SILT FENCE
09A01-13A	AT-GRADE SIDE ROAD INTERSECTION, TYPES "B1", "B2", "C" AND D AND TEE INTERSECTION BYPASS LANE
13A10-02A	2-LANE RURAL SHOULDER RUMBLE STRIP, MILLING
13A10-02C	2-LANE RURAL SHOULDER RUMBLE STRIP, MILLING
13A10-02D	2-LANE RURAL SHOULDER RUMBLE STRIP, MILLING
13A11-03A	2-LANE RURAL CENTER LINE RUMBLE STRIP, MILLING
13A11-03B	2-LANE RURAL CENTER LINE RUMBLE STRIP, MILLING
13C19-02	HMA LONGITUDINAL JOINTS
14B28-03	GUARDRAIL MOW STRIP
14B29-01	SAFETY EDGE
14B42-06A	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B42-06B	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B42-06C	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B42-06D	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B44-04A	MIDWEST GUARDRAIL SYSTEM ENERGY ABSORBING TERMINAL (MGS)
14B44-04B	MIDWEST GUARDRAIL SYSTEM ENERGY ABSORBING TERMINAL (MGS)
14B44-04C	MIDWEST GUARDRAIL SYSTEM ENERGY ABSORBING TERMINAL (MGS)
14B45-05A	MIDWEST GUARDRAIL SYSTEM THREE BEAM TRANSITION (MGS)
14B45-05B	MIDWEST GUARDRAIL SYSTEM THREE BEAM TRANSITION (MGS)
14B45-05C	MIDWEST GUARDRAIL SYSTEM THREE BEAM TRANSITION (MGS)
14B45-05D	MIDWEST GUARDRAIL SYSTEM THREE BEAM TRANSITION (MGS)
14B47-02A	MIDWEST GUARDRAIL SYSTEM (MGS) TYPE 2 TERMINAL
14B47-02B	MIDWEST GUARDRAIL SYSTEM (MGS) TYPE 2 TERMINAL
14B47-02C	MIDWEST GUARDRAIL SYSTEM (MGS) TYPE 2 TERMINAL
15C04-05	TRAFFIC CONTROL, ADVANCE WARNING SIGNS 45 M. P. H. OR GREATER TWO-WAY UNDIVIDED ROAD OPEN TO TRAFFIC
15C08-20A	LONGITUDINAL MARKING (MAINLINE)
15C08-20B	PAVEMENT MARKING (TURN LANES)
15C08-20C	PAVEMENT MARKING (TURN LANES)
15C12-07	TRAFFIC CONTROL FOR LANE CLOSURE WITH FLAGGING OPERATION
15C19-06A	MOVING PAVEMENT MARKING OPERATION TWO-LANE TWO-WAY ROADWAY
15C35-04A	PAVEMENT MARKING (INTERSECTIONS)
15D28-04	TRAFFIC CONTROL, WORK ON SHOULDER OR PARKING LANE, UNDIVIDED ROADWAY
15D38-02A	TEMPORARY TRAFFIC CONTROL SIGN MOUNTING
15D38-02B	ATTACHMENT OF SIGNS TO POSTS
15D39-02	TRAFFIC CONTROL, DROP-OFF SIGNING

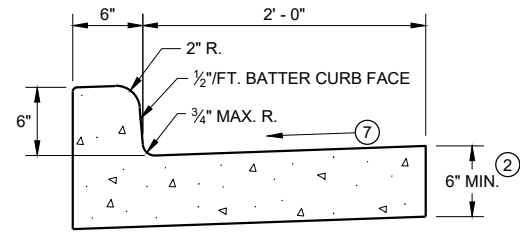


TYPES A<sup>①</sup> & D

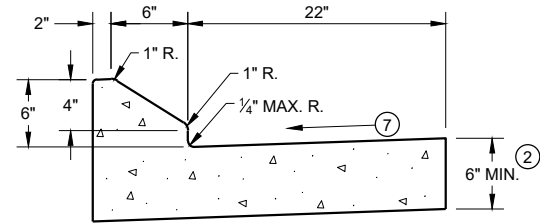


6" SLOPED CURB TYPES G<sup>①</sup> & J

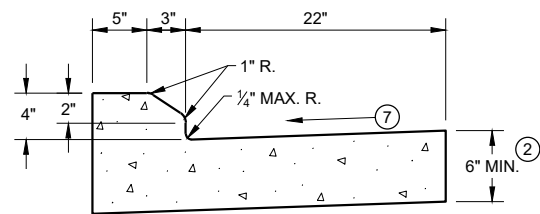

4" SLOPED CURB TYPES G<sup>①</sup> & J

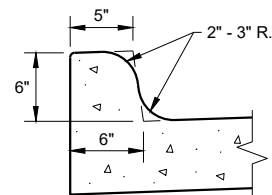


TYPES K<sup>①</sup> & L  
(OPTIONAL CURB SHAPE)

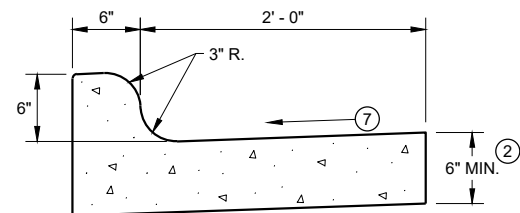


TYPES K<sup>①</sup> & L

CONCRETE CURB AND GUTTER 30"

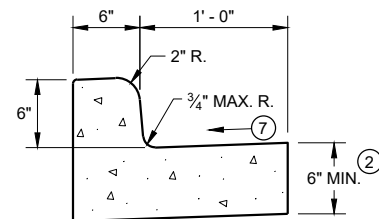


TYPES A<sup>①</sup> & D


CONCRETE CURB AND GUTTER 18"

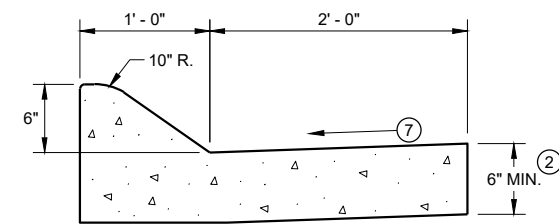

6" SLOPED CURB TYPES A<sup>①</sup> & D

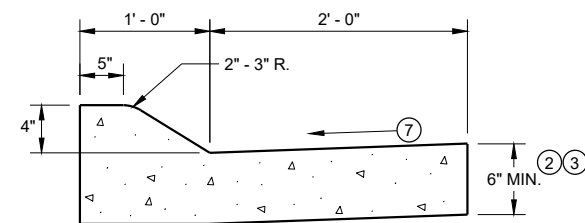


4" SLOPED CURB TYPES A<sup>①</sup> & D

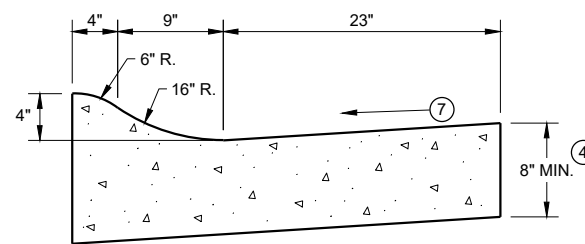

4" SLOPED CURB TYPES R<sup>①</sup> & T<sup>⑤</sup>

CONCRETE CURB AND GUTTER 36"

TBT & TBTT	X
30"	22"
36"	28"

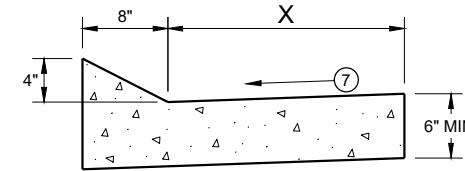


TYPES TBT & TBTT<sup>①</sup>

CONCRETE CURB AND GUTTER


PAVEMENT THICKNESS AND MAXIMUM CONCRETE PANEL WIDTH TABLE

PAVEMENT THICKNESS	MAXIMUM PANEL WIDTH
LESS THAN 10"	12'
10" & ABOVE	15'

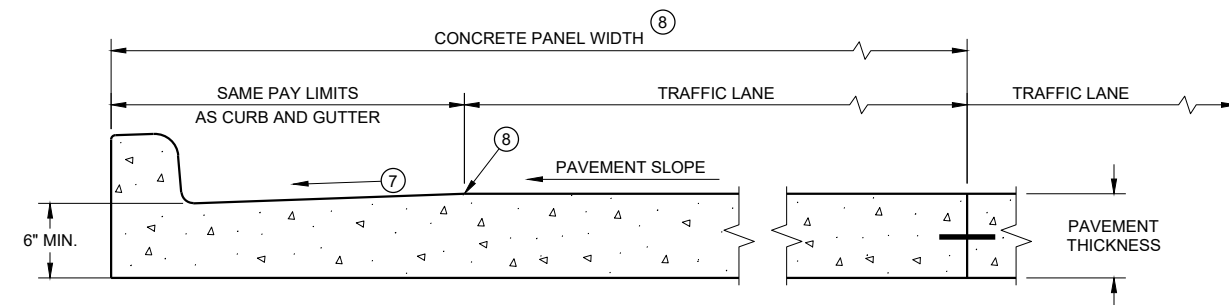

PARTIAL SECTION OF PAVEMENT \*  
WITH INTEGRAL CURB AND GUTTER

\* BIKE LANE IS NOT SHOWN

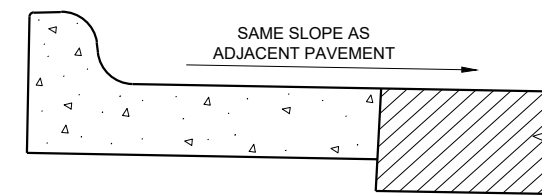

REVERSE SLOPE GUTTER<sup>⑥</sup>  
(TYPICAL FOR ALL CURB & GUTTER TYPES)

GENERAL NOTES

DETAILS OF CONSTRUCTION AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

PAVEMENT TIES AND TIE BARS SHALL BE EPOXY COATED IN CONFORMANCE WITH SUBSECTION 505.2.6.2 OF THE STANDARD SPECIFICATIONS.

INTEGRAL CURB AND GUTTER SHALL CONFORM TO THE DETAILS SHOWN FOR CONCRETE CURB AND GUTTER INCLUDING THE TRANSVERSE GUTTER SLOPE.


UNLESS OTHERWISE SHOWN ON THE TYPICAL CROSS SECTIONS, THE BASE AGGREGATE AND COMMON EXCAVATION LIMITS ARE 2' - 0" BEHIND THE BACK OF CURBS.

- ① TIE BARS ARE REQUIRED FOR CURB AND GUTTERS TYPES A, G, K, R, AND TBTT.
- ② THE BOTTOM OF CURB AND GUTTER MAY BE CONSTRUCTED EITHER LEVEL OR PARALLEL TO THE SLOPE OF THE SUBGRADE OR BASE AGGREGATE PROVIDED A 6" MINIMUM GUTTER THICKNESS IS MAINTAINED.
- ③ USE 8" MINIMUM GUTTER THICKNESS WHEN USED WITH AN ADJACENT CONCRETE TRUCK APRON PLACED BEHIND BACK OF CURB.
- ④ THE BOTTOM OF CURB AND GUTTER MAY BE CONSTRUCTED EITHER LEVEL OR PARALLEL TO THE SLOPE OF THE SUBGRADE OR BASE AGGREGATE PROVIDED A 8" MINIMUM GUTTER THICKNESS IS MAINTAINED.
- ⑤ THE FACE OF CURB IS 6" FROM THE BACK OF CURB.
- ⑥ WHEN REVERSE SLOPE GUTTER IS REQUIRED, THE LOCATION(S) WILL BE SHOWN ELSEWHERE IN THE PLAN.
- ⑦ USE 4% GUTTER CROSS SLOPE UNLESS OTHERWISE NOTED IN THE PLANS.
- ⑧ INCLUDE LONGITUDINAL JOINT AND TIE BARS ALONG LANE EDGE WHEN CONCRETE PANEL WIDTH EXCEEDS THE MAXIMUM WIDTH PER TABLE BELOW. LONGITUDINAL JOINT(S) ARE NOT ALLOWED WITHIN TRAFFIC LANES AND BIKE LANES. LONGITUDINAL JOINT MAY BE SAWED.


CONCRETE CURB AND GUTTER

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION



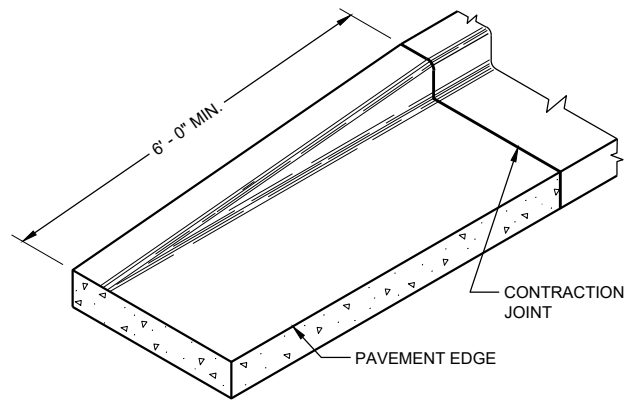

END SECTION CURB AND GUTTER

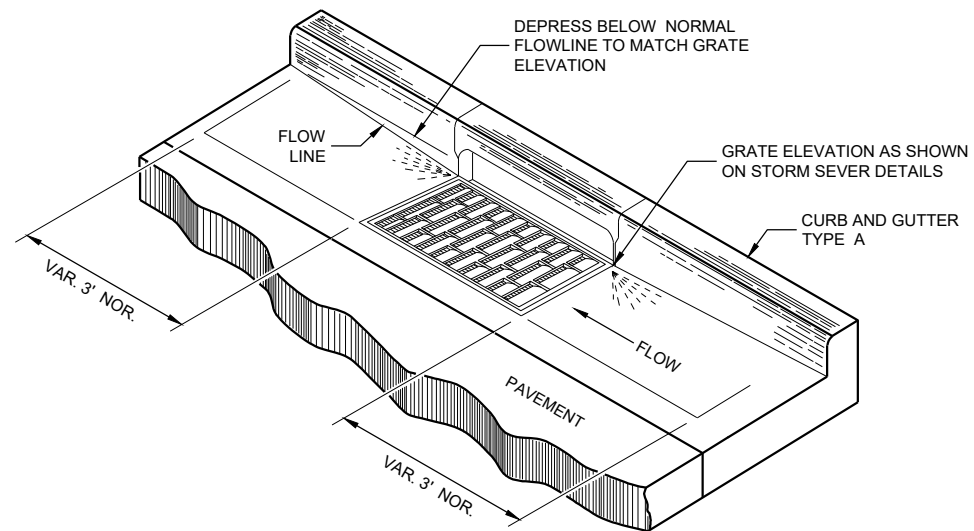

DETAIL OF CURB AND GUTTER AT INLETS  
(TYPICAL H INLET COVER SHOWN)


**GENERAL NOTES**

DETAILS OF CONSTRUCTION AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.


PAVEMENT TIES AND TIE BARS SHALL BE EPOXY COATED IN CONFORMANCE WITH SUBSECTION 505.2.6.2 OF THE STANDARD SPECIFICATIONS.

UNLESS OTHERWISE SHOWN ON THE TYPICAL CROSS SECTIONS, THE BASE AGGREGATE AND COMMON EXCAVATION LIMITS ARE 2' - 0" BEHIND THE BACK OF CURBS.


- ① TIE BARS ARE REQUIRED FOR CURB AND GUTTERS TYPES A, G, K, R, AND TBTT.
- ② THE BOTTOM OF CURB AND GUTTER MAY BE CONSTRUCTED EITHER LEVEL OR PARALLEL TO THE SLOPE OF THE SUBGRADE OR BASE AGGREGATE PROVIDED A 6" MINIMUM GUTTER THICKNESS IS MAINTAINED.
- ⑨ REFER TO SDD 08D18 AND 08D19 FOR ADDITIONAL DRIVEWAY ENTRANCE CURB DETAILS.

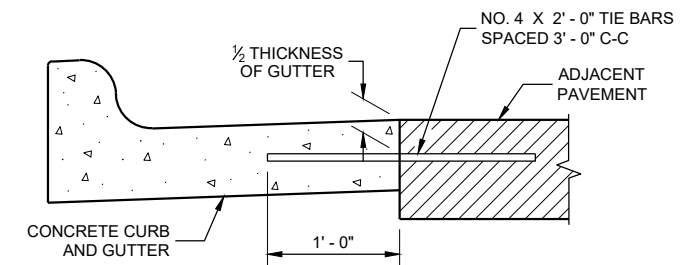

TYPICAL TIE BAR LOCATION ①

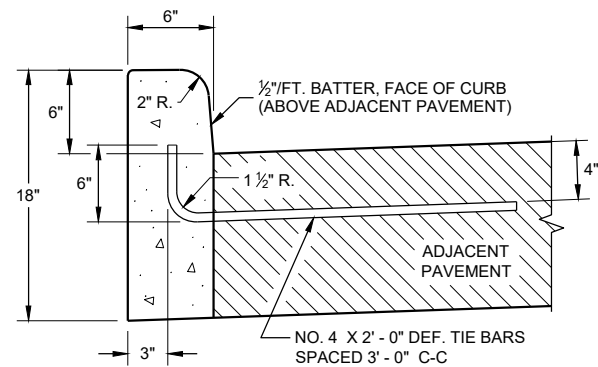


TYPES A ① & D

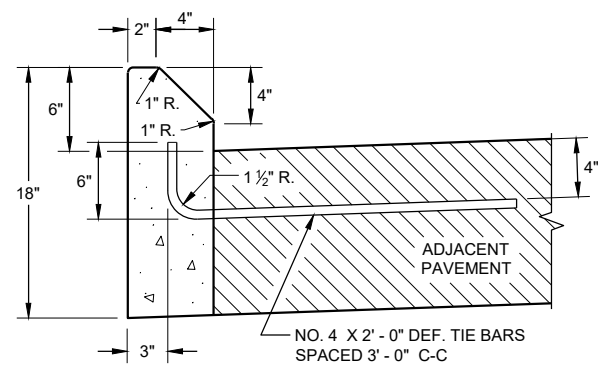


TYPES G ① & J

CONCRETE CURB

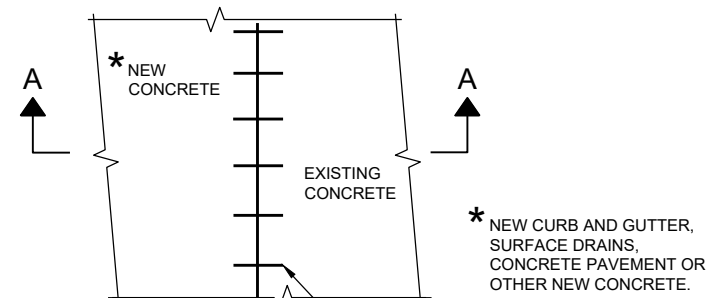


PLAN VIEW

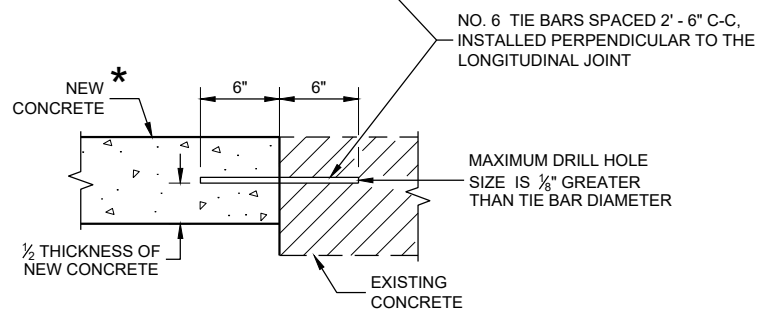

SECTION A - A

TIE BARS DRILLED INTO EXISTING PAVEMENT



DRIVEWAY ENTRANCE CURB ⑨  
(WHEN DIRECTED BY THE ENGINEER)

**CONCRETE CURB, TIES AND CURB AND GUTTER APPLICATIONS**

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

APPROVED  
February 2020 /S/ Rodney Taylor  
DATE ROADWAY STANDARDS DEVELOPMENT  
ENGINEER

FHWA


**GENERAL NOTES**

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.


ALL STEEL REINFORCEMENT SHALL BE EMBEDDED 2 INCHES CLEAR UNLESS OTHERWISE SHOWN OR NOTED.

- ① USE A JOINT SEALANT CONFORMING TO STANDARD SPECIFICATION 415.2.6.
- ② NO. 4 X 2' - 0" TIE BARS SPACED AT 12" C-C TO BE PLACED BY BRIDGE CONTRACTOR OR DRILLED TIE BARS PLACED AS DIRECTED BY THE ENGINEER.
- ③ PAVED CONCRETE SHOULDER (SDD 13A03) OR CONCRETE DRAINAGE SLAB.
- ④ CONCRETE PAVEMENT APPROACH SLAB (SHOWN) OR STRUCTURE APPROACH SLAB AND CONCRETE PAVEMENT APPROACH SLAB. SEE SDD 13B02.
- ⑤ PAVED CONCRETE SHOULDER (SDD 13A03) OR ASPHALT SHOULDER.

- ⑥ CONCRETE CURB AND GUTTER 4-INCH SLOPED 36-INCH TYPE TBT OR TBTT. USE TYPE TBTT CURB WITH NO. 4 X 2' - 0" TIE BARS SPACED AT 3' - 0" C-C ONLY WHEN ADJACENT TO CONCRETE PAVEMENTS.
- ⑦ PLACE FLUME BEFORE MSG THRIE BEAM TRANSITION POST 1 (SEE SDD 14B45)
- ⑧ CENTER FLUME BETWEEN POSTS. 6-INCH MINIMUM SEPARATION FROM OUTSIDE EDGE OF FLUME TO POSTS.
- ⑨ MINIMUM REINFORCEMENT SHALL BE 4" X 4" - W3.0 X W3.0 OR NO. 3 BARS LONGITUDINAL AND TRANSVERSE SPACING 12" C-C.
- ⑩ SEE ROADWAY PLANS FOR FLUME LOCATION.
- ⑪ START CURB AND GUTTER TRANSITION OR END SECTION.
- ⑫ DEPRESS FLOW LINE (SEE DETAIL)

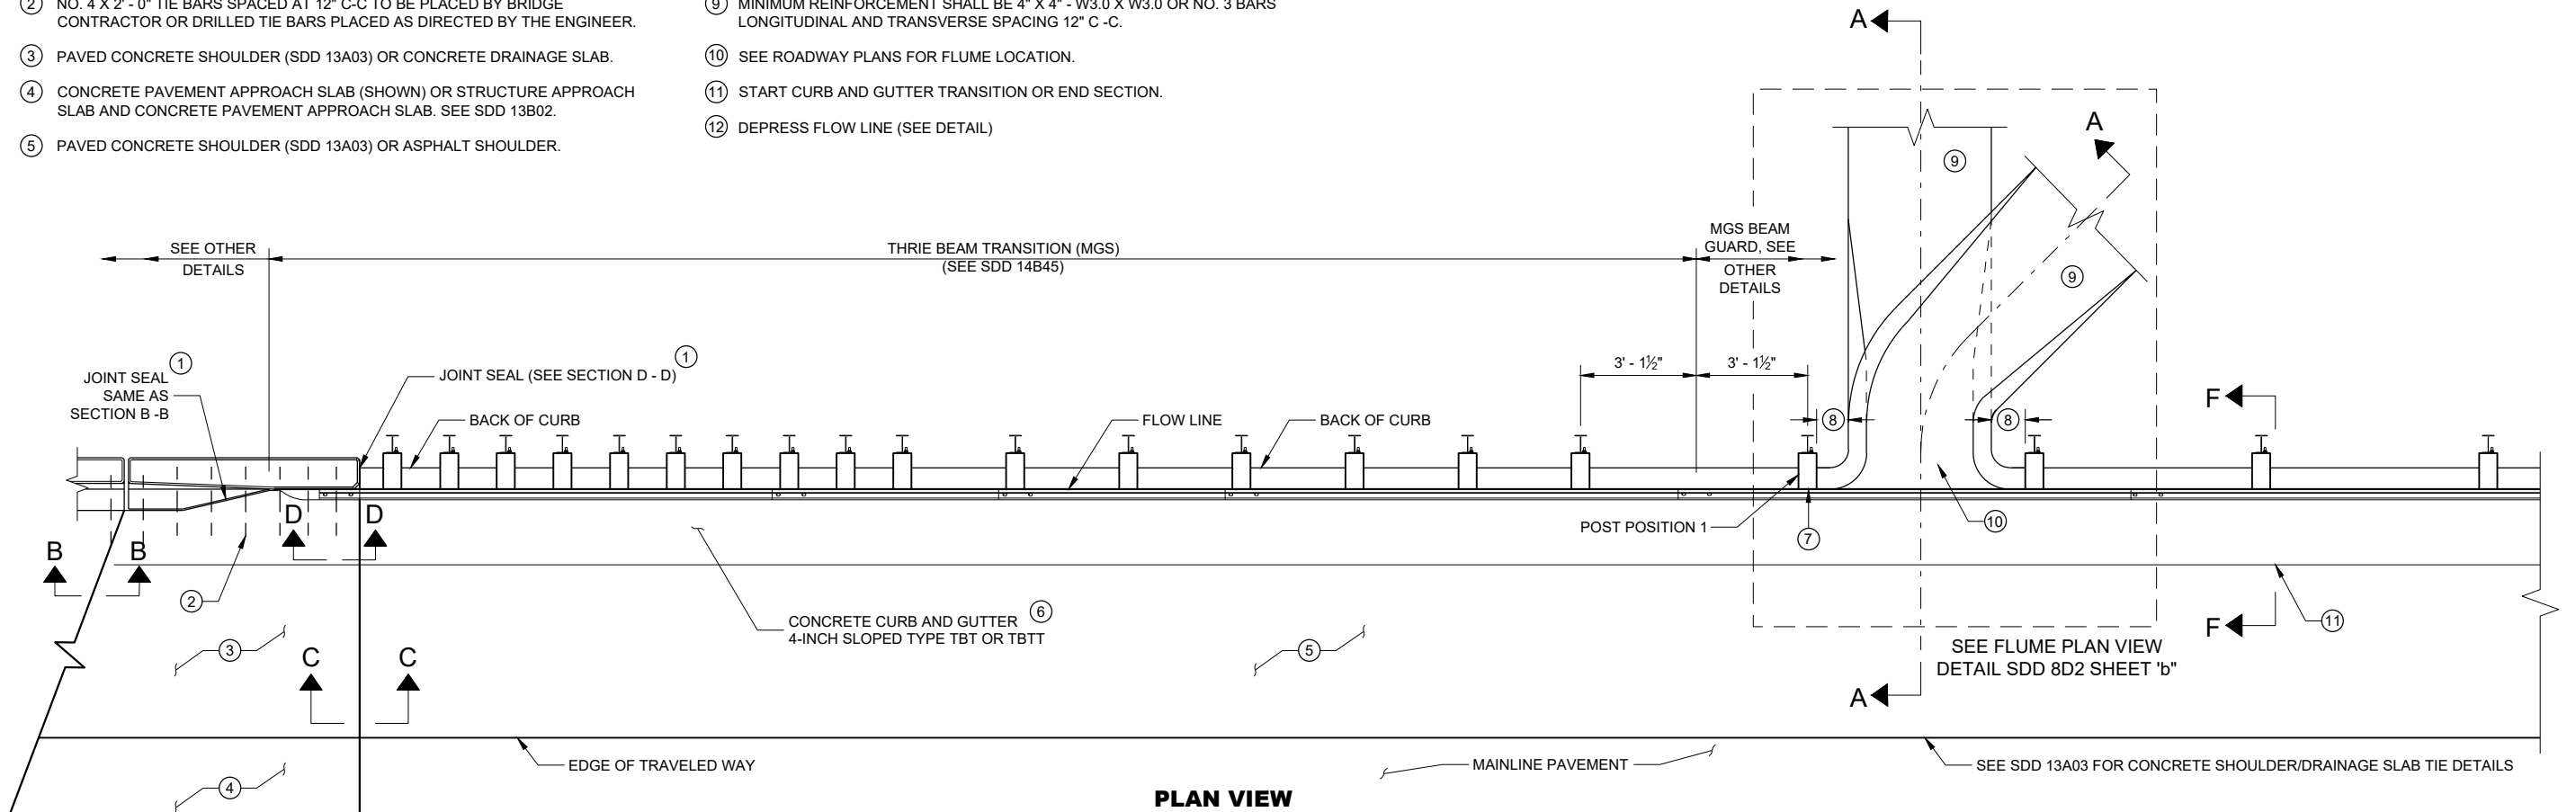


**PLAN VIEW**

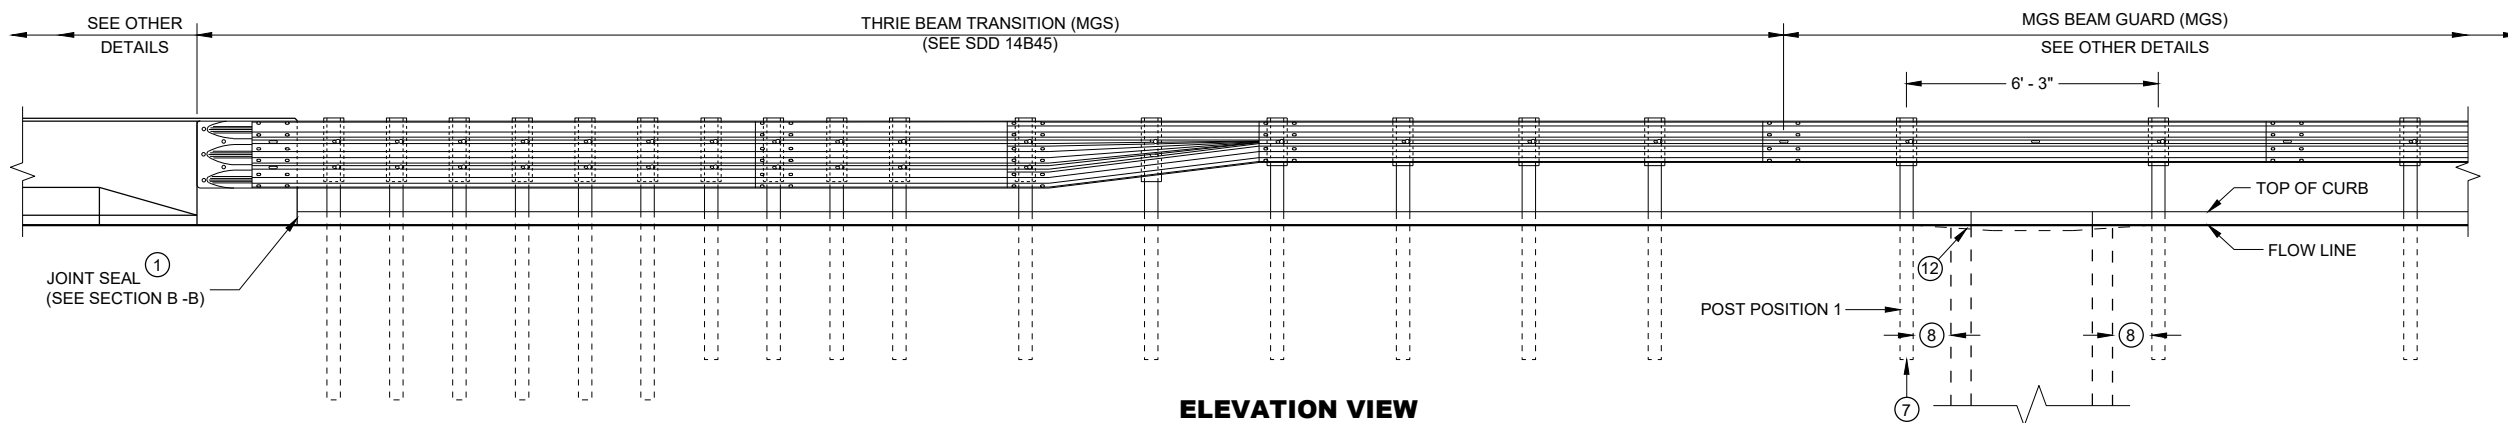


**ELEVATION VIEW**

**CONCRETE SURFACE  
DRAINS FLUME TYPE  
AT STRUCTURES**


STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

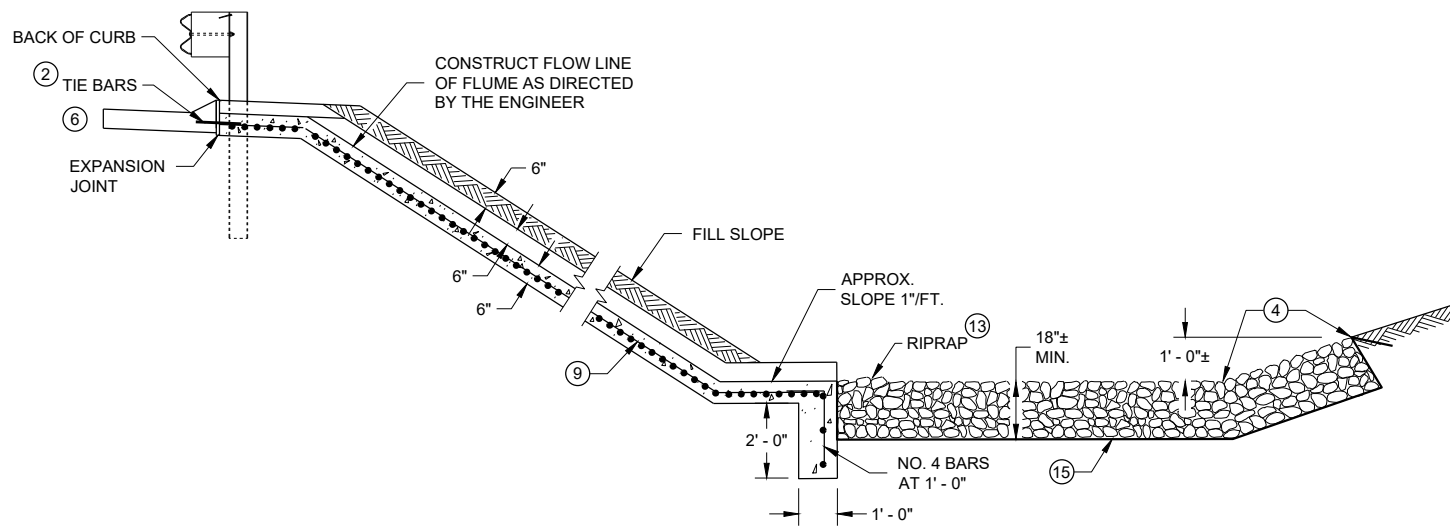


**SECTION A - A**

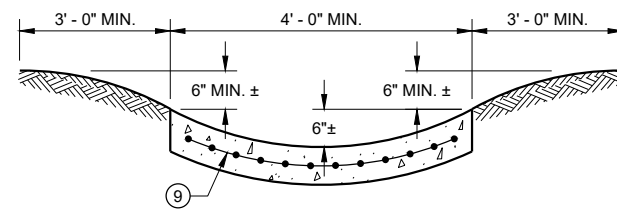


**SECTION G - G**

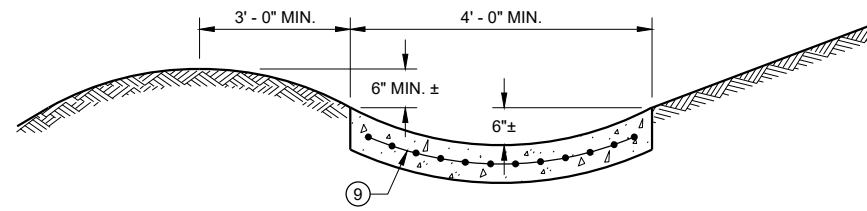


**SECTION H - H**

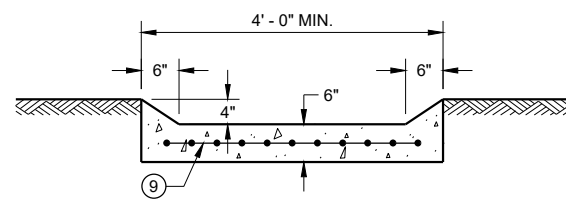

**SECTION I - I**

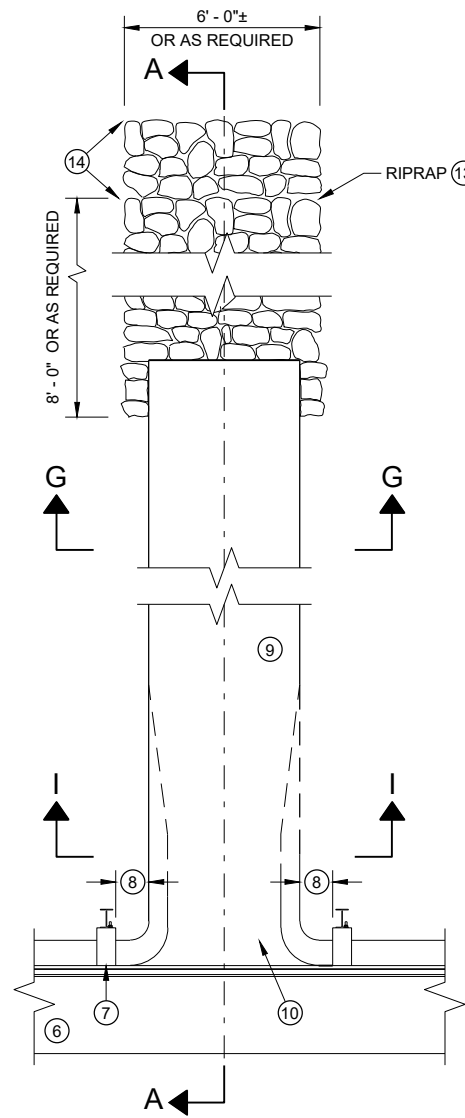

**PLAN VIEW  
PERPENDICULAR FLUME**

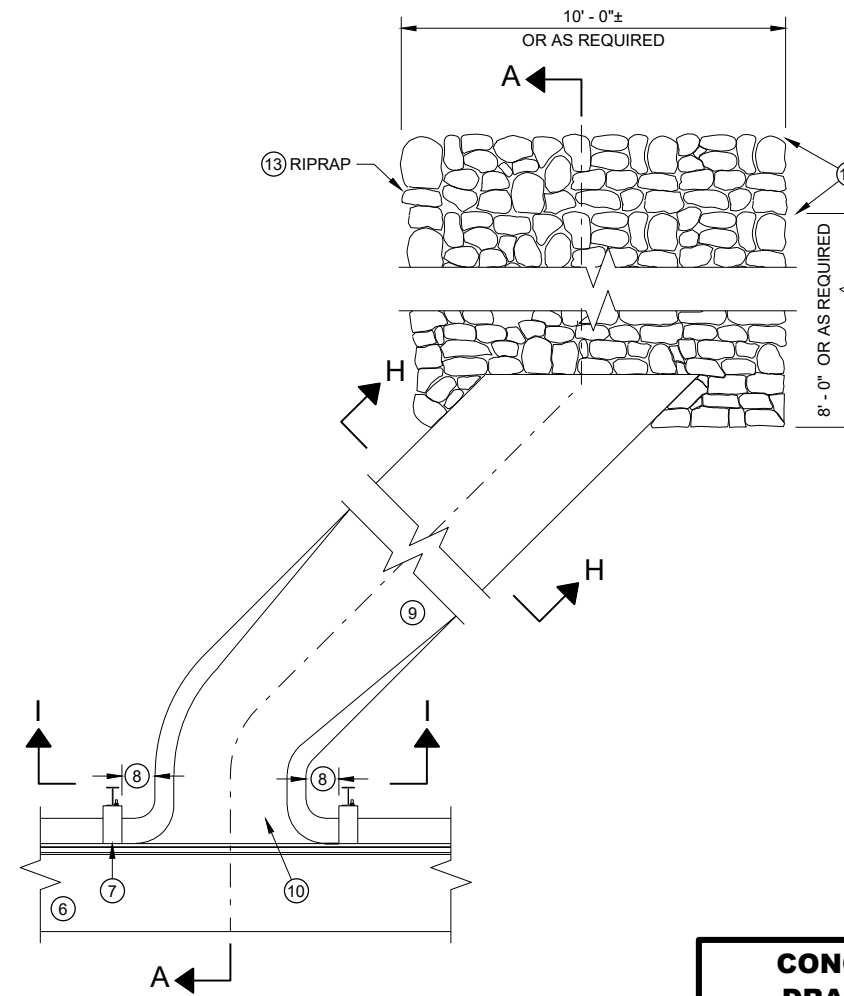

**PLAN VIEW  
SKEWED FLUME**

**GENERAL NOTES**

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.


ALL STEEL REINFORCEMENT SHALL BE EMBEDDED 2 INCHES CLEAR UNLESS OTHERWISE SHOWN OR NOTED.

- ① USE A JOINT SEALANT CONFORMING TO STANDARD SPECIFICATION 415.2.6.
- ② NO. 4 X 2'-0" TIE BARS SPACED AT 12" C-C TO BE PLACED BY BRIDGE CONTRACTOR OR DRILLED TIE BARS PLACED AS DIRECTED BY THE ENGINEER.
- ③ PAVED CONCRETE SHOULDER (SDD 13A03) OR CONCRETE DRAINAGE SLAB.
- ④ CONCRETE PAVEMENT APPROACH SLAB (SHOWN) OR STRUCTURE APPROACH SLAB AND CONCRETE PAVEMENT APPROACH SLAB. SEE SDD 13B02 AND STRUCTURE PLANS.
- ⑤ PAVED CONCRETE SHOULDER (SDD 13A03) OR ASPHALT SHOULDER.
- ⑥ CONCRETE CURB AND GUTTER 4-INCH SLOPED 36-INCH TYPE TBT OR TBTT. USE TYPE TBTT CURB WITH NO. 4 X 2'-0" TIE BARS SPACED AT 3'-0" C-C ONLY WHEN ADJACENT TO CONCRETE PAVEMENTS.


- ⑦ PLACE FLUME BEFORE MSG THRIE BEAM TRANSITION POST 1 (SEE SDD 14B45)
- ⑧ CENTER FLUME BETWEEN POSTS. 6-INCH MINIMUM SEPARATION FROM OUTSIDE EDGE OF FLUME TO POSTS.
- ⑨ MINIMUM REINFORCEMENT SHALL BE 4" X 4" - W3.0 X W3.0 OR NO. 3 BARS LONGITUDINAL AND TRANSVERSE SPACING 12" C -C.
- ⑩ SEE ROADWAY PLANS FOR FLUME LOCATION.
- ⑪ START CURB AND GUTTER TRANSITION OR END SECTION.
- ⑫ DEPRESS FLOW LINE (SEE DETAIL)
- ⑬ MEDIUM RIPRAP UNLESS OTHERWISE SPECIFIED.
- ⑭ LIMITS OF ADDITIONAL RIPRAP WHEN SPECIAL DITCH AS REQUIRED.
- ⑮ GEOTEXTILE FABRIC TYPE HR.

**CONCRETE SURFACE  
DRAINS FLUME TYPE  
AT STRUCTURES**


STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

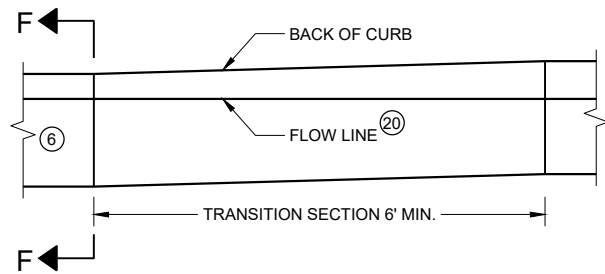

**CURB AND GUTTER TRANSITION SECTION  
CONCRETE CURB AND GUTTER 4-INCH SLOPED  
36 INCH TYPE TBT OR TBTT**

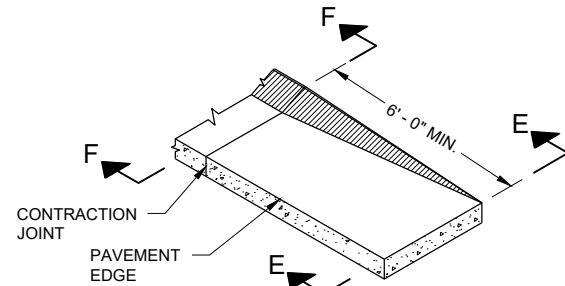

**CURB AND GUTTER END SECTION  
CONCRETE CURB AND GUTTER 4-INCH SLOPED  
36 INCH TYPE TBT OR TBTT**

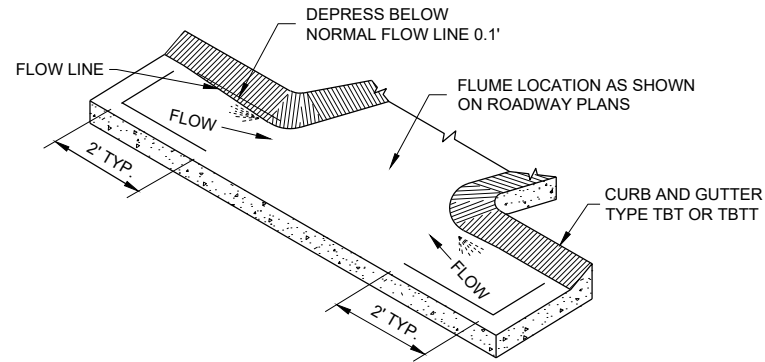


**CURB AND GUTTER FLOW LINE DEPRESSION  
AT FLUMES CONCRETE CURB AND GUTTER  
4-INCH SLOPED 36 INCH TYPE TBT OR TBTT**

**GENERAL NOTES**


DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

ALL STEEL REINFORCEMENT SHALL BE EMBEDDED 2 INCHES CLEAR UNLESS OTHERWISE SHOWN OR NOTED.


- ① USE A JOINT SEALANT CONFORMING TO STANDARD SPECIFICATION 415.2.6.
- ② NO. 4 X 2' - 0" TIE BARS SPACED AT 12" C-C TO BE PLACED BY BRIDGE CONTRACTOR OR DRILLED TIE BARS PLACED AS DIRECTED BY THE ENGINEER.
- ③ PAVED CONCRETE SHOULDER (SDD 13A03) OR CONCRETE DRAINAGE SLAB.
- ④ CONCRETE PAVEMENT APPROACH SLAB (SHOWN) OR STRUCTURE APPROACH SLAB AND CONCRETE PAVEMENT APPROACH SLAB. SEE SDD 13B02 AND STRUCTURE PLANS.
- ⑤ PAVED CONCRETE SHOULDER (SDD 13A03) OR ASPHALT SHOULDER.
- ⑥ CONCRETE CURB AND GUTTER 4-INCH SLOPED 36-INCH TYPE TBT OR TBTT. USE TYPE TBTT CURB WITH NO. 4 X 2' - 0" TIE BARS SPACED AT 3' - 0" C-C ONLY WHEN ADJACENT TO CONCRETE PAVEMENTS.
- ⑦ PLACE FLUME BEFORE MSG THRIE BEAM TRANSITION POST 1 (SEE SDD 14B45)
- ⑧ CENTER FLUME BETWEEN POSTS. 6-INCH MINIMUM SEPARATION FROM OUTSIDE EDGE OF FLUME TO POSTS.
- ⑨ MINIMUM REINFORCEMENT SHALL BE 4" X 4" - W3.0 X W3.0 OR NO. 3 BARS LONGITUDINAL AND TRANSVERSE SPACING 12" C-C.
- ⑩ SEE ROADWAY PLANS FOR FLUME LOCATION.
- ⑪ START CURB AND GUTTER TRANSITION OR END SECTION.
- ⑫ DEPRESS FLOW LINE (SEE DETAIL)
- ⑬ MEDIUM RIPRAP UNLESS OTHERWISE SPECIFIED.
- ⑭ LIMITS OF ADDITIONAL RIPRAP WHEN SPECIAL DITCH IS REQUIRED.
- ⑮ GEOTEXTILE FABRIC TYPE HR.
- ⑯ MINIMUM REINFORCEMENT SHALL BE 6" X 6" - W4.0 X W4.0 OR NO. 3 BARS LONGITUDINAL AND TRANSVERSE SPACING 12" C-C.
- ⑰ MSG THRIE BEAM TRANSITION POST 1. SEE SDD 14B45 FOR ADDITIONAL CONSTRUCTION DETAILS AND ACCEPTABLE MATERIALS.
- ⑱ MAINTAIN WIDTH, THICKNESS AND CROSS SLOPE OF ADJACENT TYPE TBT OR TBTT CURB. SEE NOTE 6 FOR TIE BAR SPACING.
- ⑲ ALIGN FACE OF POST BLOCK WITH FLOW LINE.
- ⑳ MAINTAIN FLOW LINE AT EDGE OF PAVEMENT/FACE OF BEAM GUARD AS APPLICABLE.
- ㉑ DO NOT CONSTRUCT AN EXPANSION JOINT OR INSTALL DOWEL BARS WHEN ABUTTING HMA PAVEMENTS.

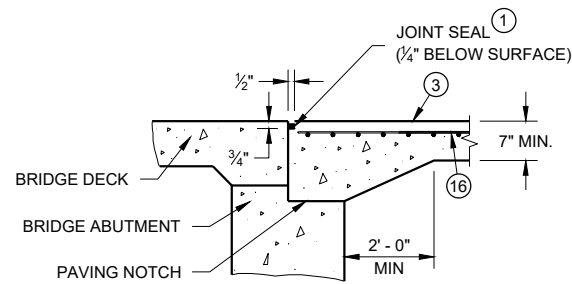


**SECTION B-B**

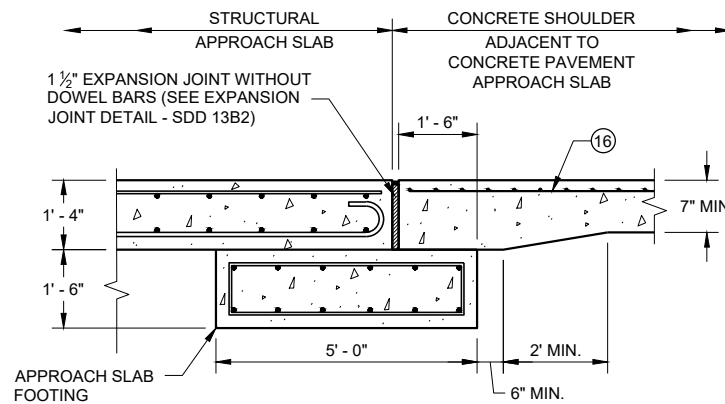


**SECTION C - C  
JOINT DETAIL FOR BRIDGE WITH STRUCTURAL  
APPROACH SLAB AND CONCRETE APPROACH SLAB**

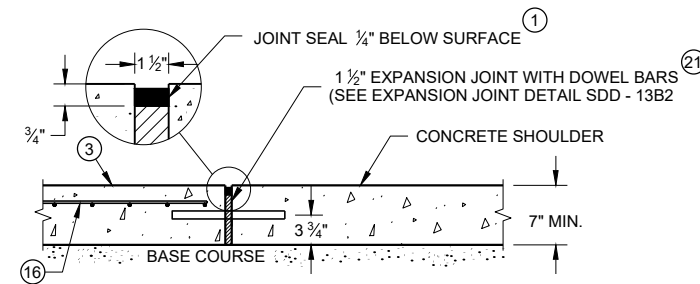


**SECTION C - C  
JOINT DETAIL FOR BRIDGE APPROACH  
WITH CONCRETE SHOULDERS**

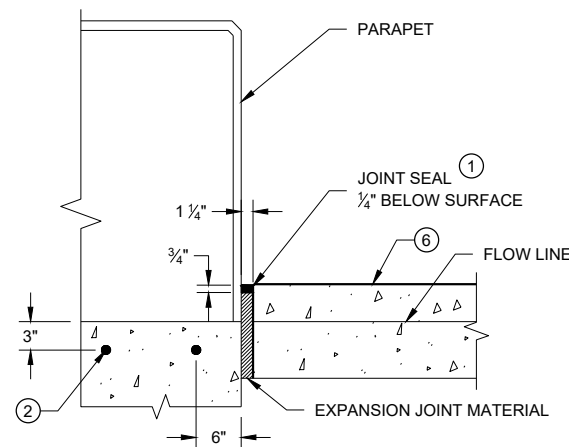

**SECTION D - D**

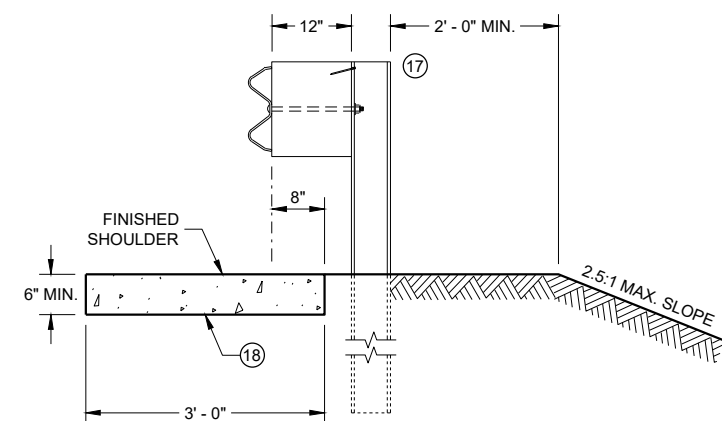

**SECTION E - E**

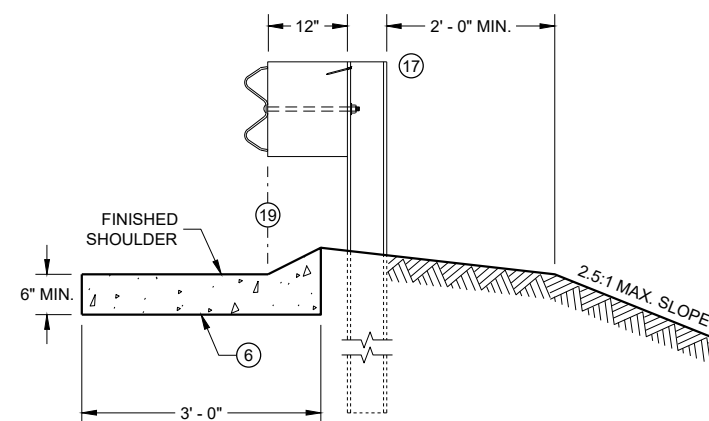

**SECTION F - F**

6

6

SDD08D02 - 07C

SDD08D02 - 07C

**CONCRETE SURFACE  
DRAINS FLUME TYPE  
AT STRUCTURES**


STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

APPROVED  
February 2020 /S/ Rodney Taylor  
DATE ROADWAY STANDARDS DEVELOPMENT  
ENGINEER

FHWA


**GENERAL NOTES**

- ① DESIGN WILL DETERMINE FINAL DRIVEWAY ASPHALTIC THICKNESS BASED ON TYPE OF USAGE AND LOADINGS.

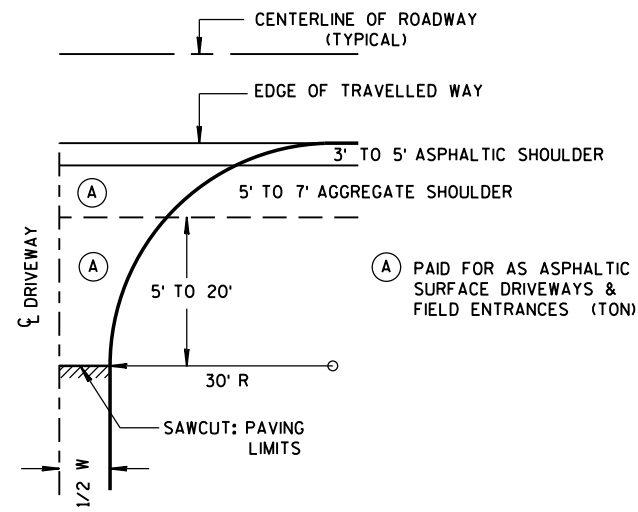


W MIN. = 16'  
W MAX. = 24'

**PLAN VIEW  
HALF SECTION**

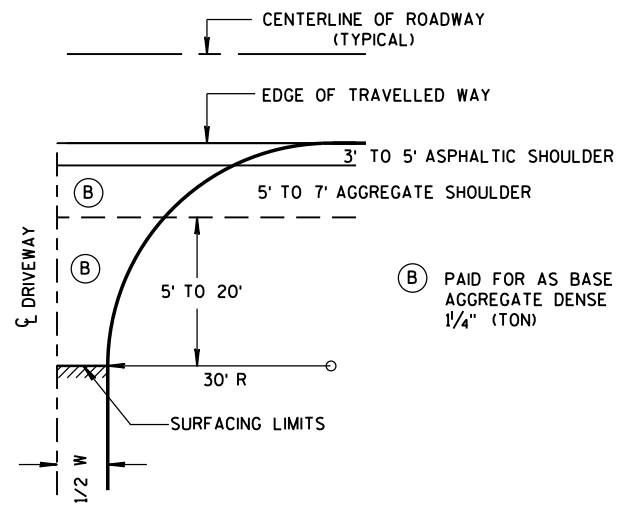


② PAID FOR AS BASE  
AGGREGATE DENSE  
1 1/4" (TON)

**PLAN VIEW  
HALF SECTION**

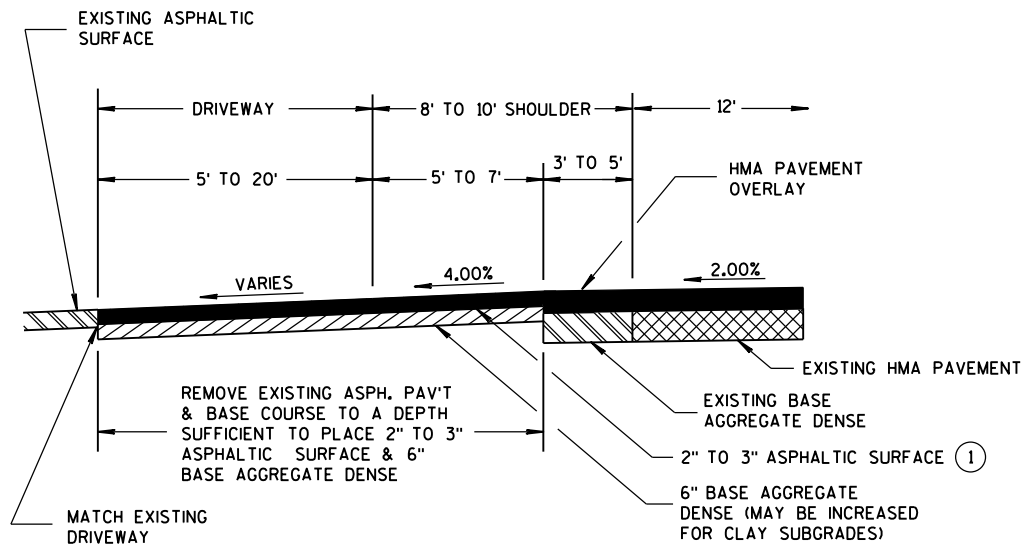

**PROFILE VIEW  
RURAL ENTRANCE  
WITH ASPHALTIC SURFACE  
RESURFACING PROJECTS**

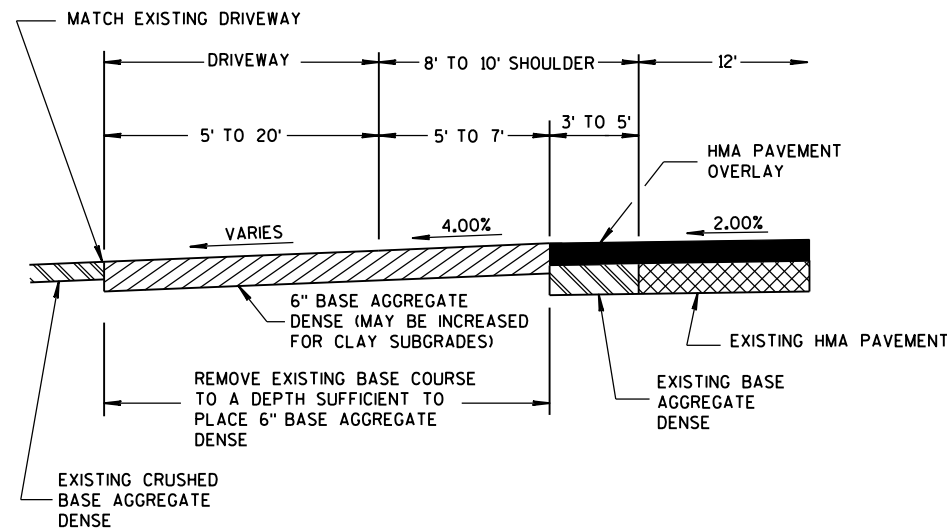


**PROFILE VIEW  
RURAL ENTRANCE  
WITH AGGREGATE SURFACE  
6" BASE AGGREGATE DENSE  
RESURFACING PROJECTS**

6

6

<b>DRIVEWAYS WITHOUT CURB &amp; GUTTER RESURFACING PROJECTS RURAL</b>	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED December, 2016	/s/ Rodney Taylor ROADWAY STANDARDS DEVELOPMENT UNIT SUPERVISOR
DATE	
FHWA	



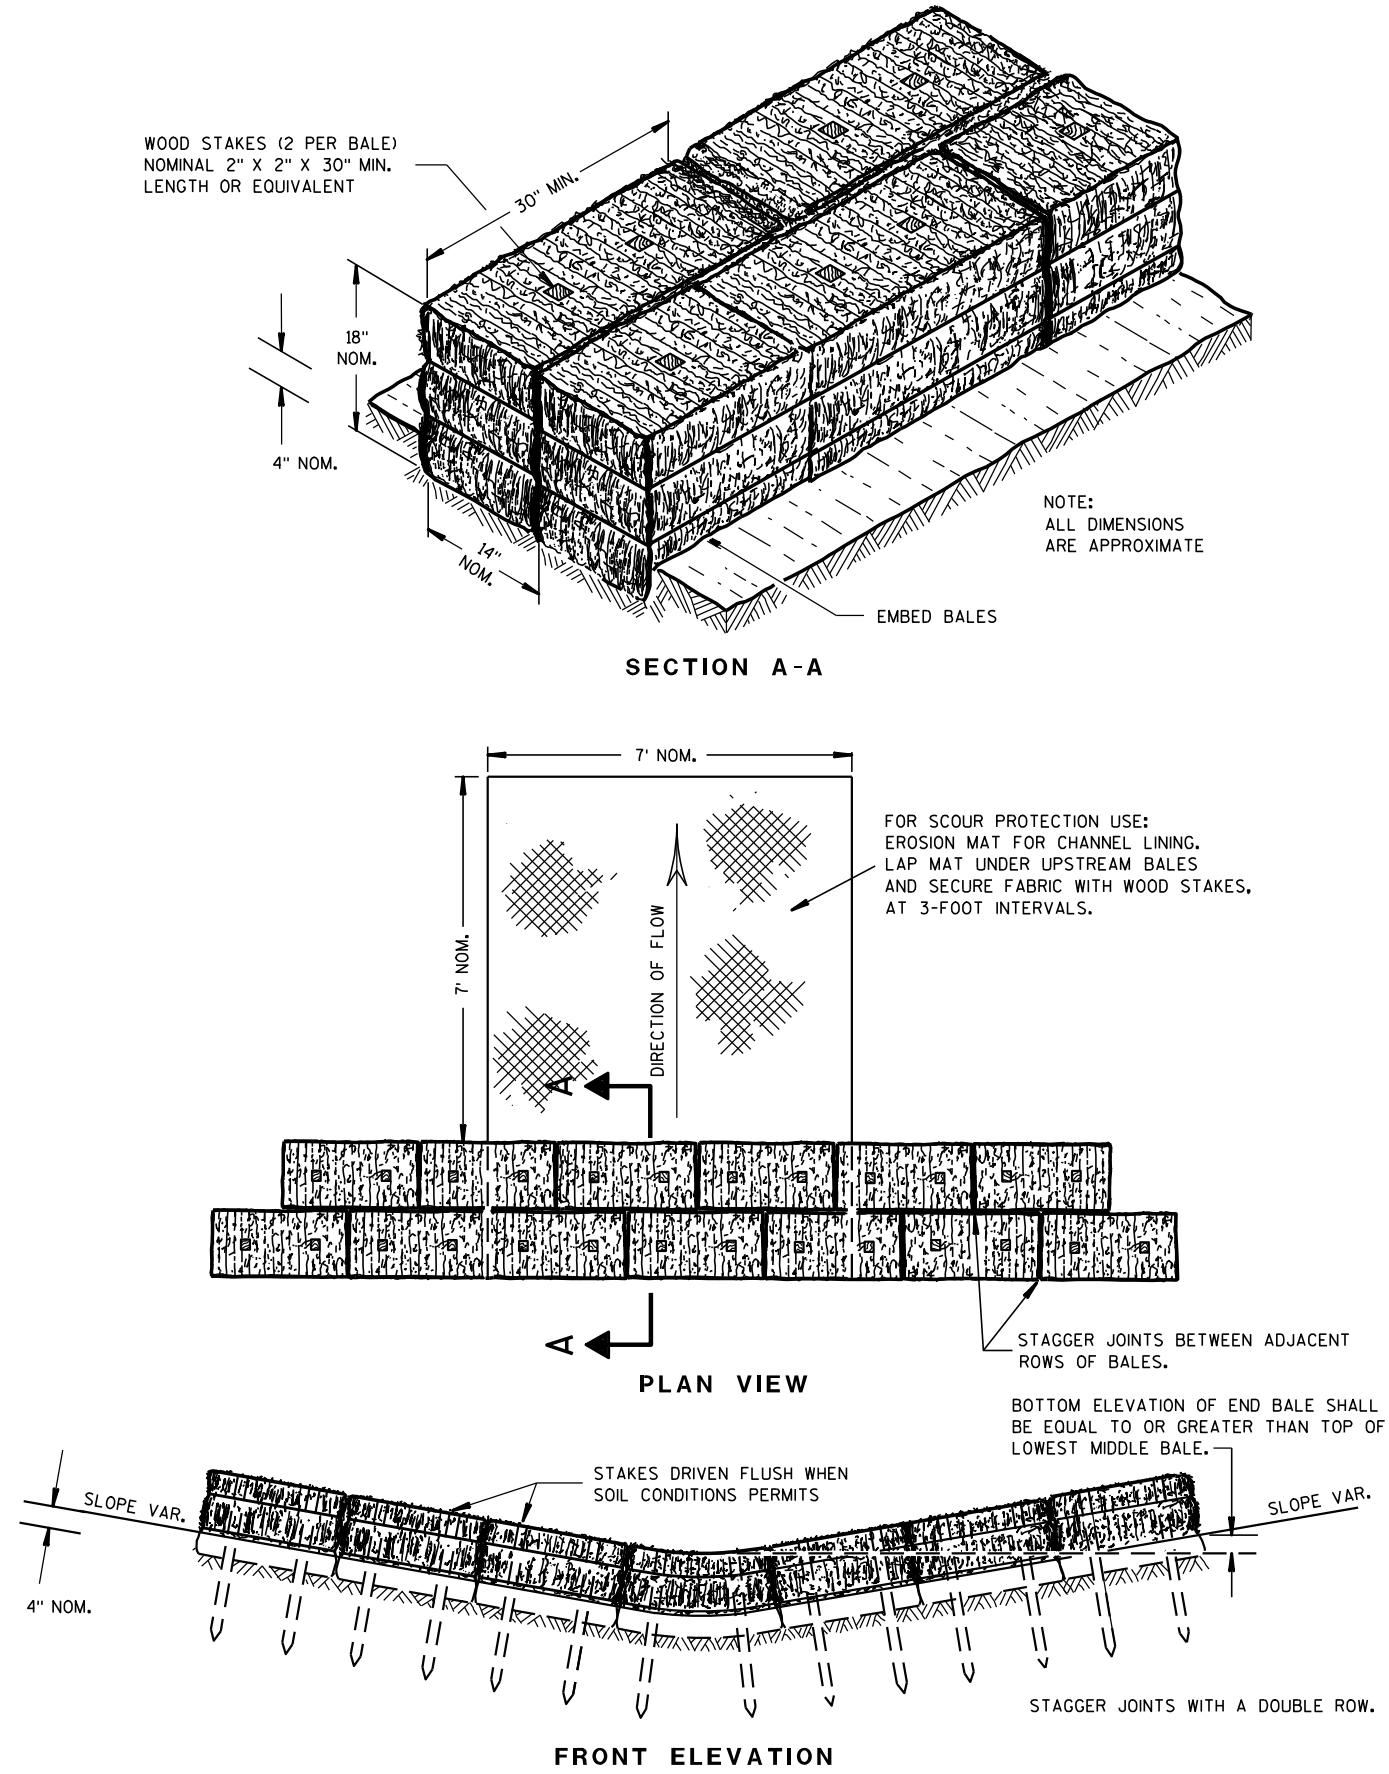


TEMPORARY DITCH CHECK USING EROSION BALES ①

**GENERAL NOTES**

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

- ① TEMPORARY DITCH CHECKS EITHER EROSION BALES OR MANUFACTURED SHALL BE PAID FOR UNDER THE BID ITEM OF TEMPORARY DITCH CHECK. THE DEPARTMENT WILL NOT PAY FOR TEMPORARY DITCH CHECKS CONSTRUCTED OF A SINGLE ROW OF EROSION BALES.

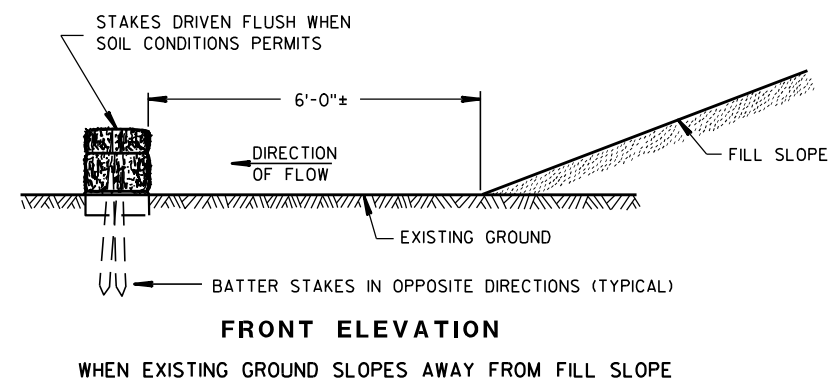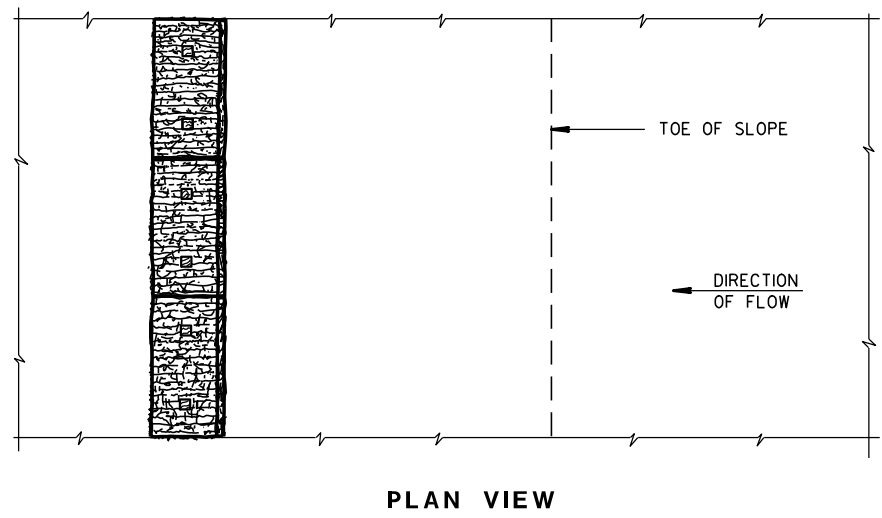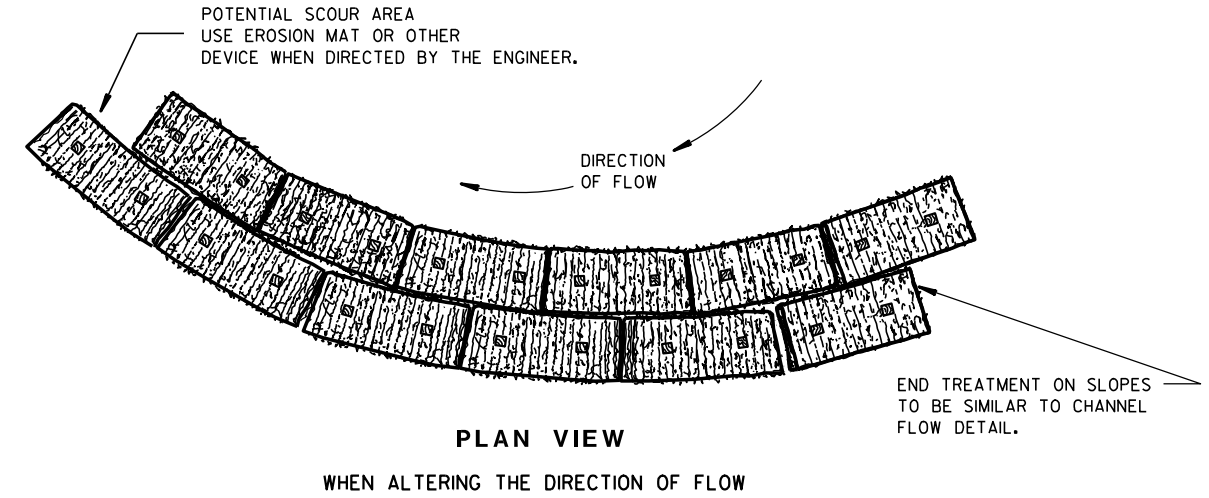


EROSION BALES FOR SHEET FLOW


**TYPICAL INSTALLATIONS OF EROSION BALES / TEMPORARY DITCH CHECKS**

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

APPROVED  
6/04/02 /S/ Beth Canestra  
DATE CHIEF ROADWAY DEVELOPMENT ENGINEER  
FHWA

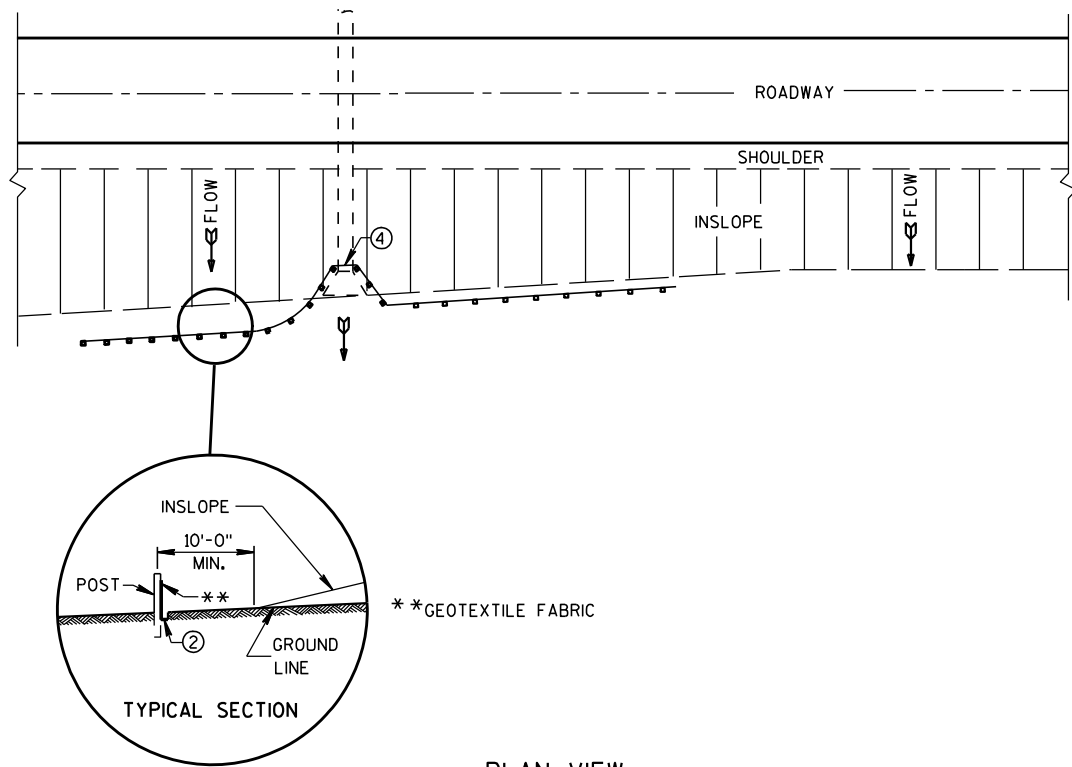

PLAN VIEW  
TYPICAL APPLICATION OF SILT FENCE

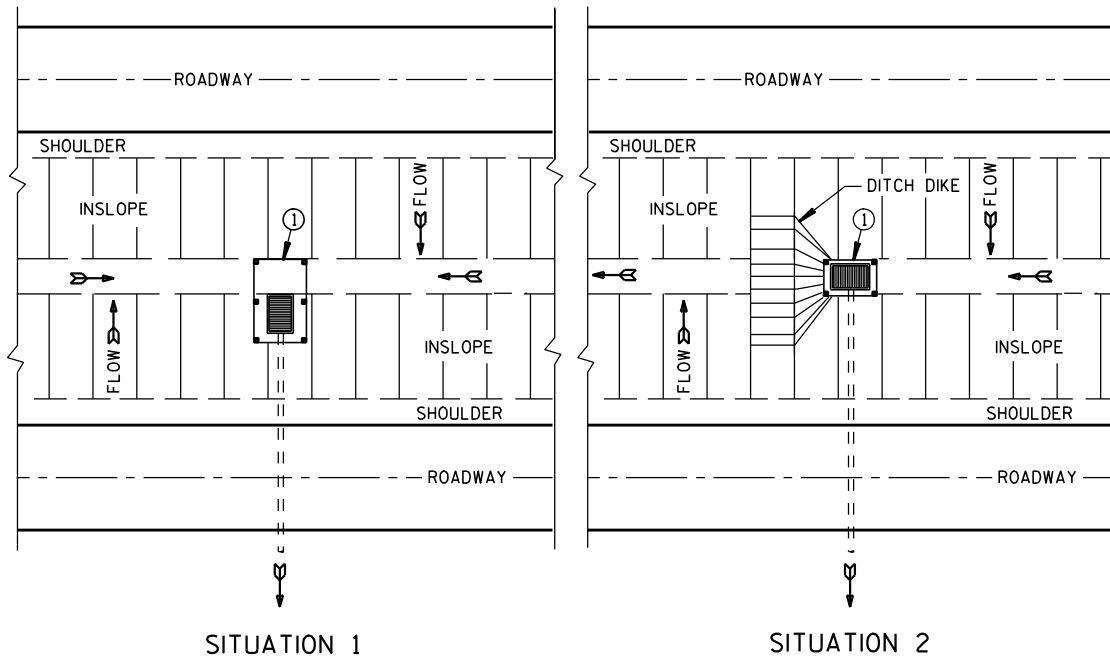


SITUATION 1 SITUATION 2  
PLAN VIEW  
SILT FENCE AT MEDIAN SURFACE DRAINS

**GENERAL NOTES**


DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND APPLICABLE SPECIAL PROVISIONS.

- ① HORIZONTAL BRACE REQUIRED WITH 2" X 4" WOODEN FRAME OR EQUIVALENT AT TOP OF POSTS.
- ② FOR MANUAL INSTALLATIONS THE TRENCH SHALL BE A MINIMUM OF 4" WIDE & 6" DEEP TO BURY AND ANCHOR THE GEOTEXTILE FABRIC. FOLD MATERIAL TO FIT TRENCH AND BACKFILL & COMPACT TRENCH WITH EXCAVATED SOIL.
- ③ WOOD POSTS SHALL BE A MINIMUM SIZE OF 1 1/8" X 1 1/8" OF OAK OR HICKORY.
- ④ SILT FENCE TO EXTEND ACROSS THE TOP OF THE PIPE.
- ⑤ CONSTRUCT SILT FENCE FROM A CONTINUOUS ROLL IF POSSIBLE BY CUTTING LENGTHS TO AVOID JOINTS. IF A JOINT IS NECESSARY USE ONE OF THE FOLLOWING TWO METHODS; A) OVERLAP THE END POSTS AND TWIST, OR ROTATE, AT LEAST 180 DEGREES, B) HOOK THE END OF EACH SILT FENCE LENGTH.

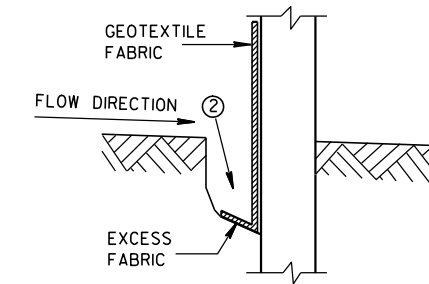


TRENCH DETAIL

NOTE: ADDITIONAL POST DEPTH OR TIE BACKS MAY BE REQUIRED IN UNSTABLE SOILS

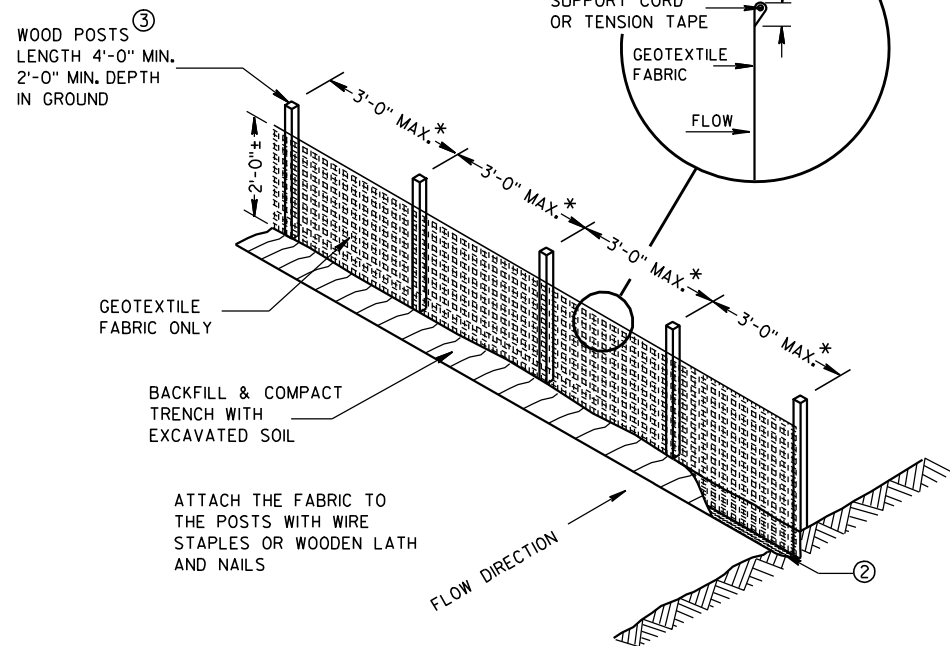


SILT FENCE

\* NOTE: 8'-0" POST SPACING ALLOWED IF A WOVEN GEOTEXTILE FABRIC IS USED.

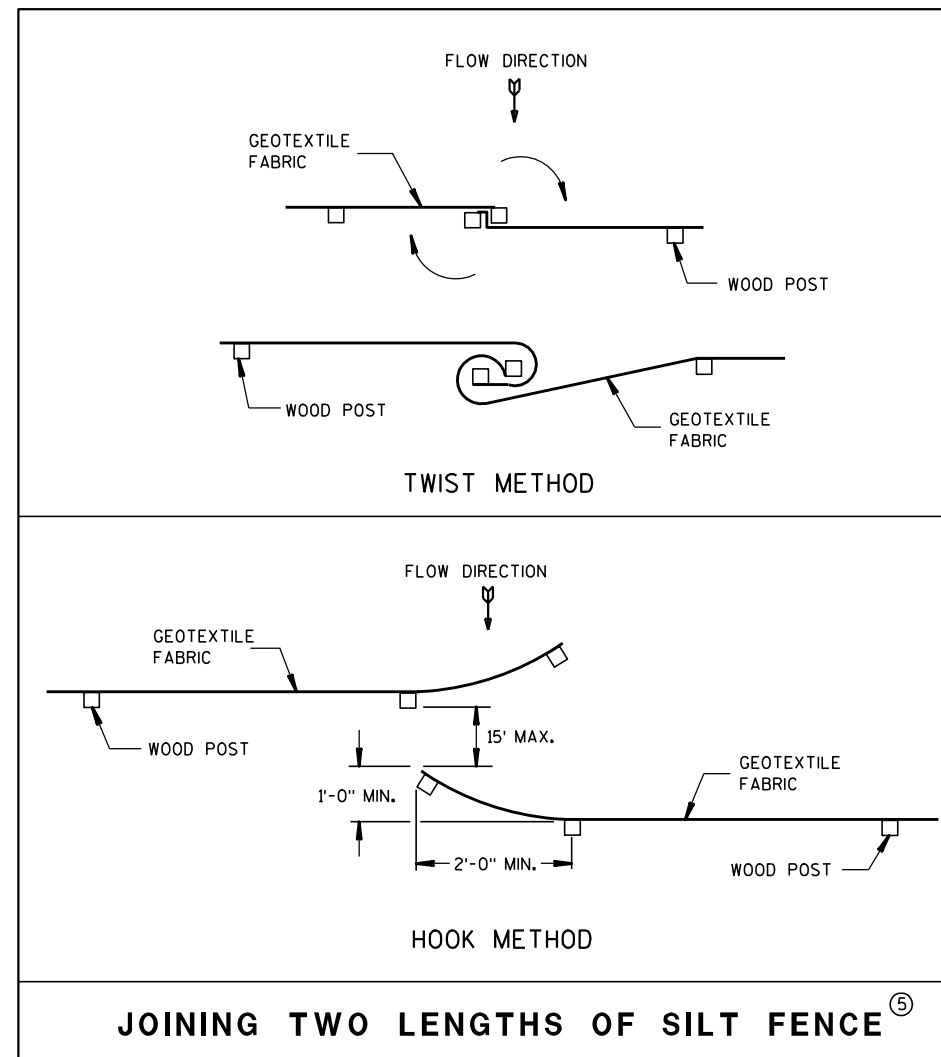

JOINING TWO LENGTHS OF SILT FENCE ⑤


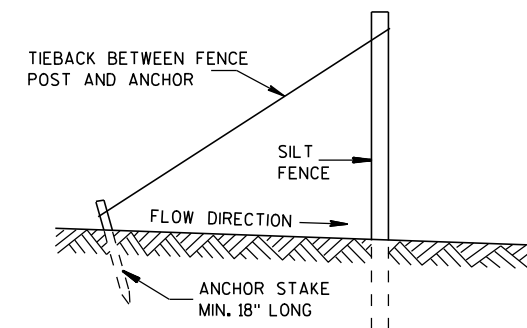


SILT FENCE TIE BACK  
(WHEN REQUIRED BY THE ENGINEER)

**SILT FENCE**

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

APPROVED  
4-29-05 /S/ Beth Cannestra  
DATE CHIEF ROADWAY DEVELOPMENT ENGINEER  
FHWA

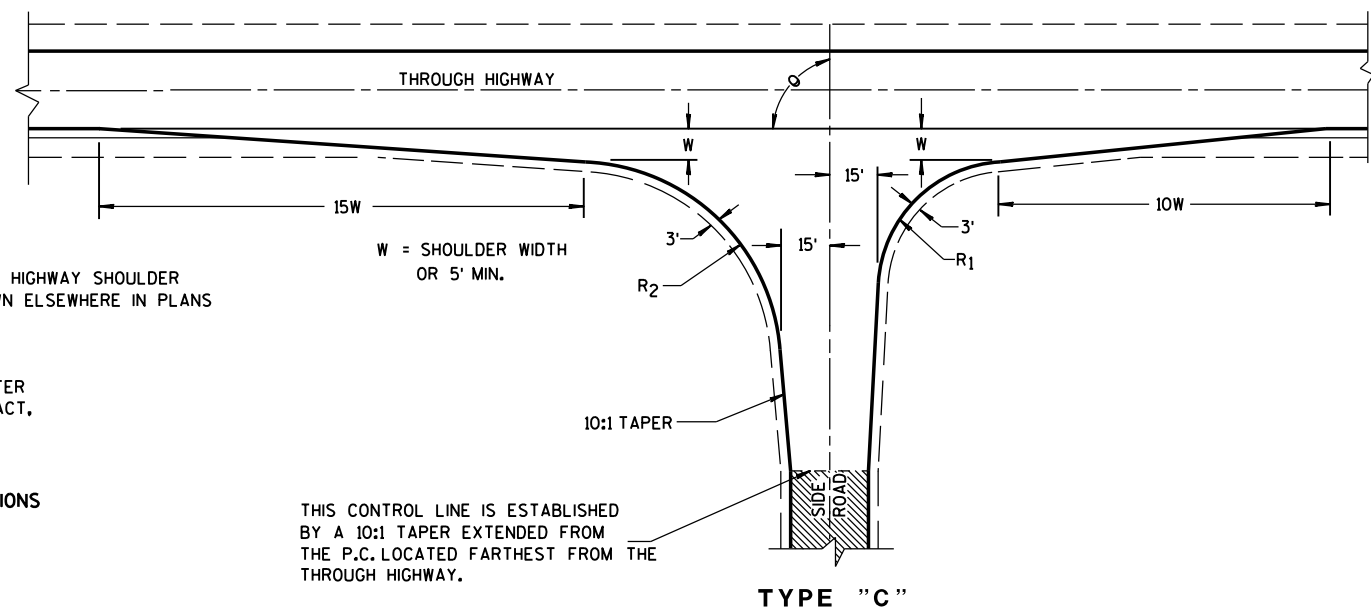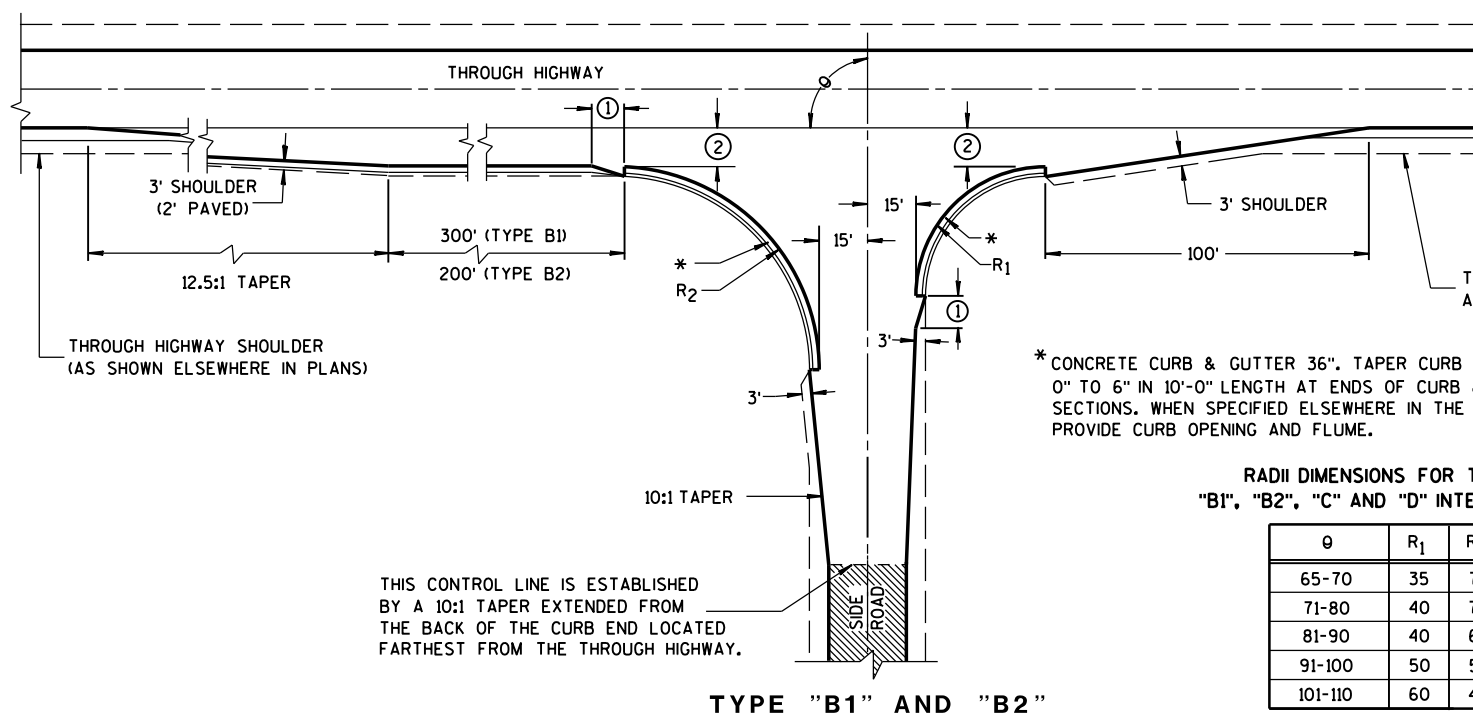

RADII DIMENSIONS FOR TYPES "B1", "B2", "C" AND "D" INTERSECTIONS

θ	R <sub>1</sub>	R <sub>2</sub>
65-70	35	70
71-80	40	70
81-90	40	60
91-100	50	55
101-110	60	45

**GENERAL NOTES**

DESIGNS MAY BE USED INTERCHANGEABLY IN COMBINATION OR SEPARATELY FOR ANY ONE COMPLETE INTERSECTION DEPENDING UPON INTERSECTION ANGLE AND SURFACING OF EACH APPROACH ROADWAY.

**SIDE ROAD SURFACING NOTE**

WHEN THE SIDE ROAD IS NOT PRESENTLY PAVED, PAVEMENT SHALL BE PLACED TO THE LIMITS SHOWN UNLESS OTHERWISE PROVIDED IN THE CONTRACT. WHERE THE CONSTRUCTION LIMITS ARE BEYOND THE PAVING LIMITS, CRUSHED AGGREGATE SURFACING SHALL BE PLACED BETWEEN THE PAVING LIMITS AND CONSTRUCTION LIMITS.


WHEN THE SIDE ROAD IS PRESENTLY PAVED, NEW PAVEMENT SHALL BE PLACED TO THE LIMITS OF DESIGN AS SHOWN AND BEYOND, IF NECESSARY, TO MEET EXISTING PAVEMENT.

WHEN THE SIDE ROAD IS THE CONSTRUCTION PROJECT, THE INTERSECTION SURFACING SHALL BE THE SAME AS FOR THE PROJECT.


EXISTING PAVED SURFACE

BYPASS LANE

- ① 10-FT TYPICAL.
- ② 12-FT\*\* PLUS ADDITIONAL WIDTH FOR BIKE LANE IF SHOWN ELSEWHERE IN THE PLAN.  
  
\*\*10-FT MAY BE USED ON TYPE B2 ON RESURFACING PROJECTS IF SPECIFIED IN THE CONTRACT.
- ③ BYPASS LANE PAVED SURFACE WIDTH OUTSIDE OF TRAVEL LANE  
-ASPHALT = 12-FT PLUS PAVED SHOULDER WIDTH.  
-PC CONCRETE = 13-FT PLUS PAVED SHOULDER WIDTH.
- ④ BYPASS LANE PAVED SHOULDER WIDTH = THE GREATER OF 1-FT OR THE PAVED SHOULDER WIDTH OF THE THROUGH HIGHWAY.

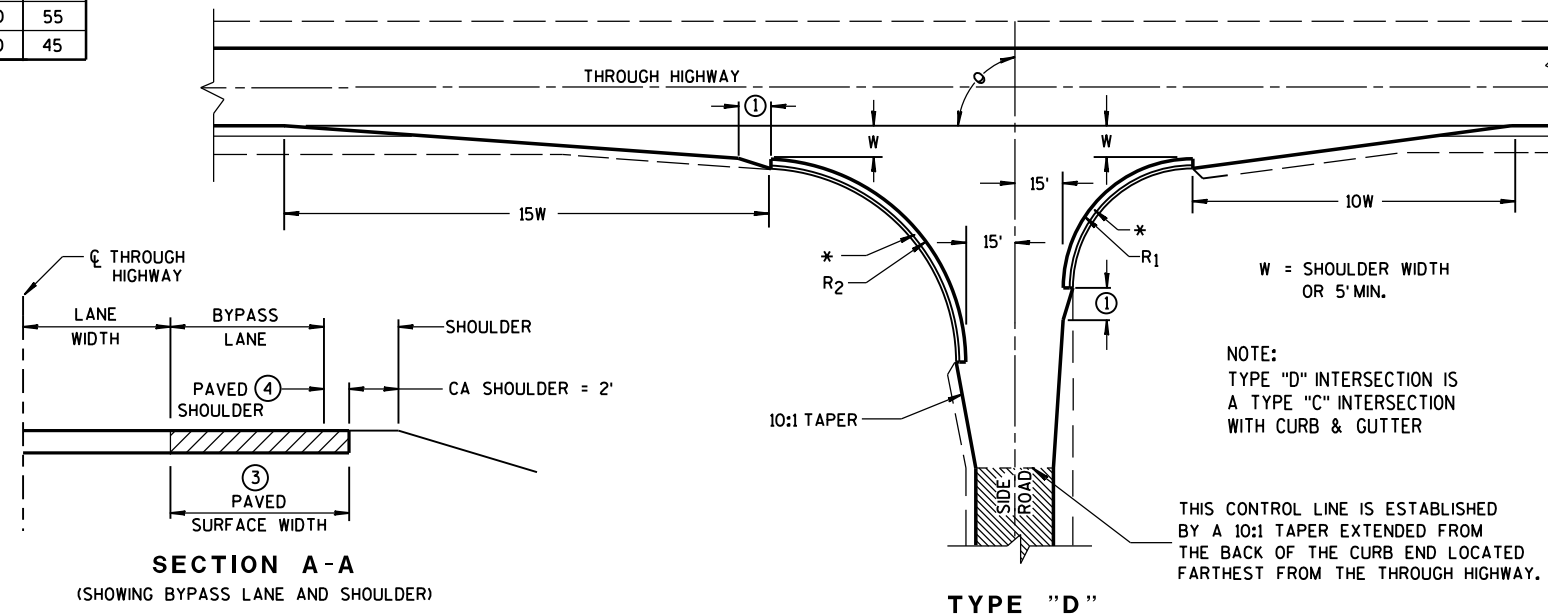

**SECTION A-A**  
(SHOWING BYPASS LANE AND SHOULDER)

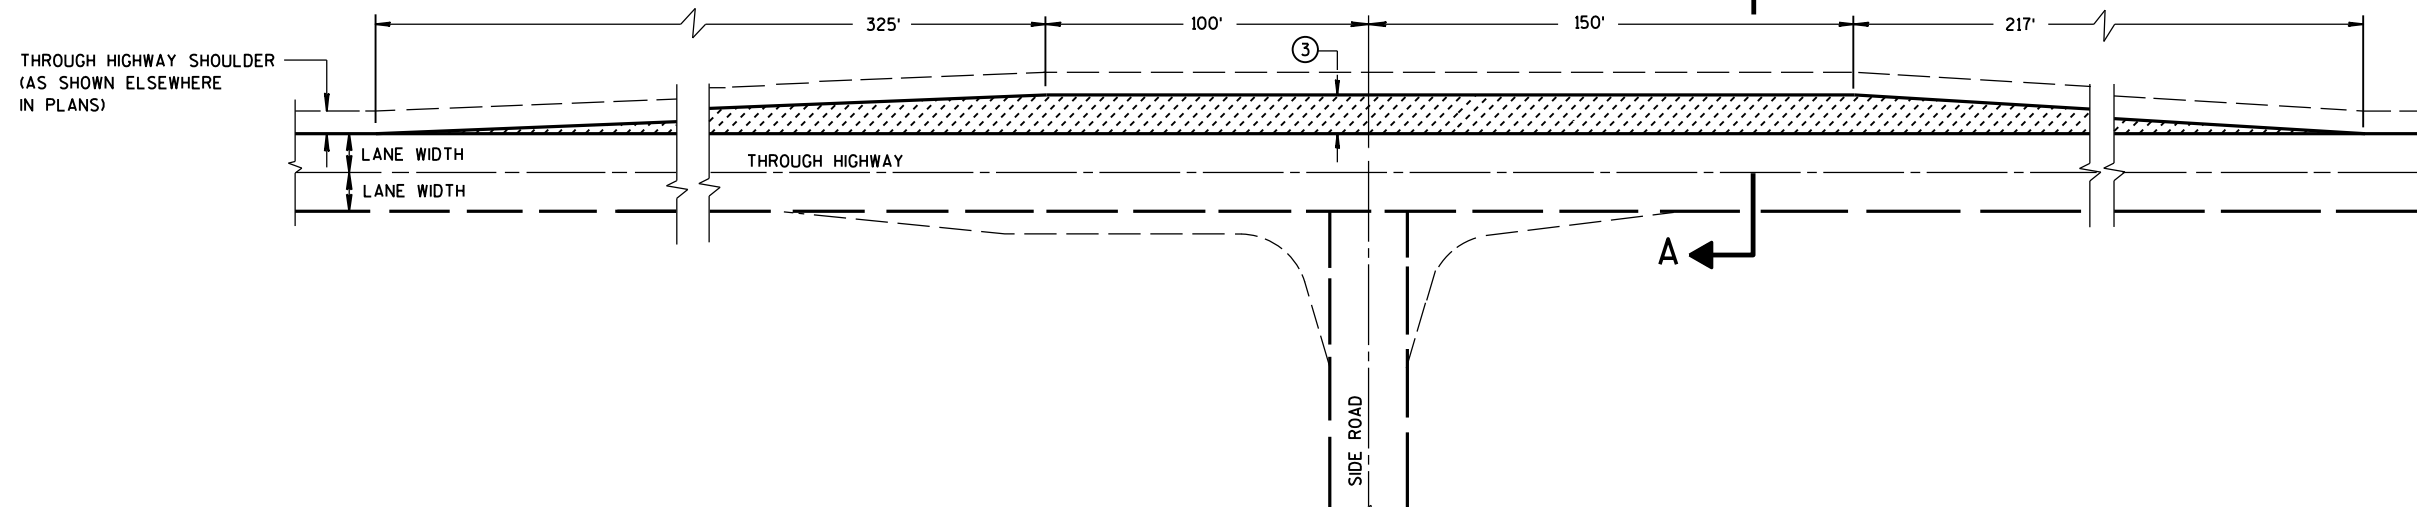


**TEE INTERSECTION BYPASS LANE DETAIL**

AT-GRADE SIDE ROAD INTERSECTION, TYPES "B1", "B2", "C" AND "D" AND TEE INTERSECTION BYPASS LANE

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION



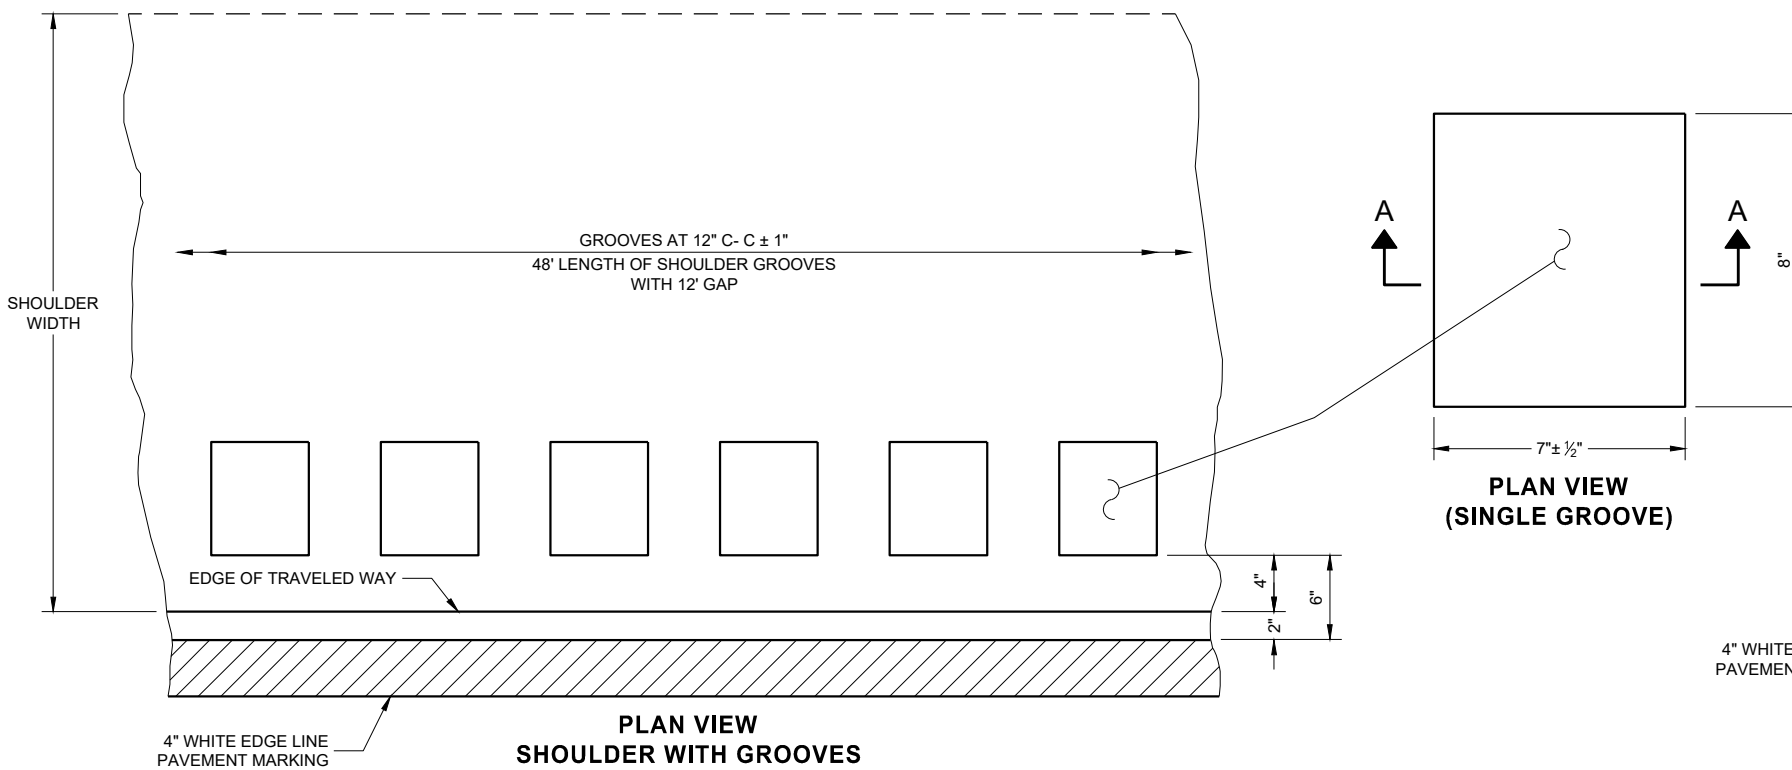


**PLAN VIEW SHOULDER WITH GROOVES**  
**PLACEMENT DETAIL FOR TYPE 1 MILLED RUMBLE STRIP**

**GENERAL NOTES**


DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND APPLICABLE SPECIAL PROVISIONS.

DO NOT MILL SHOULDER GROOVES THROUGH ANY INTERSECTION, MARKED CROSSWALK, NON-MOTORIZED PATH CROSSING, OR SNOWMOBILE CROSSING.


- ① SHOULDER GROOVES MAY BE OMITTED IN AREAS WITH HIGH CONCENTRATIONS OF DRIVEWAYS. WHEN DIRECTED BY THE ENGINEER.

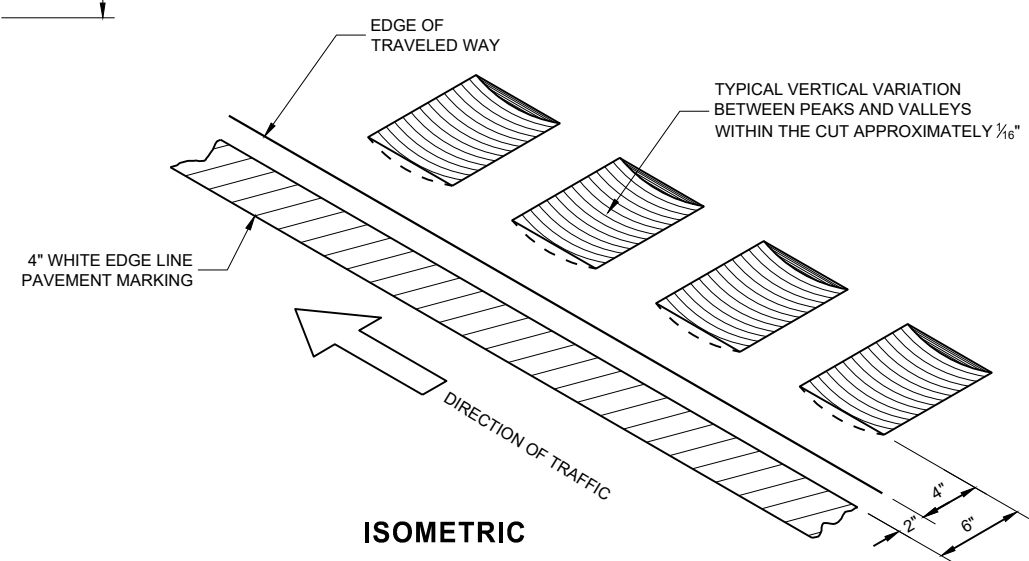

**ISOMETRIC**

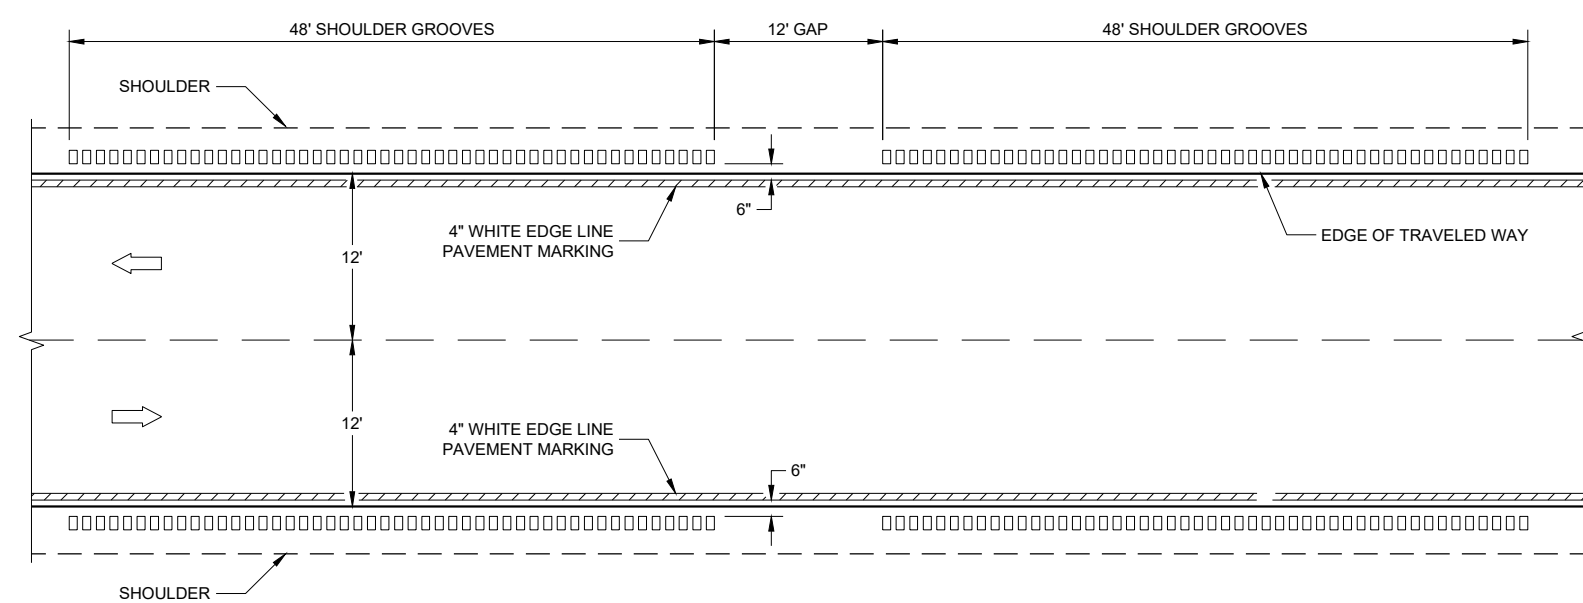


**TYPE 1**  
**2 - LANE SHOULDER RUMBLE STRIP**

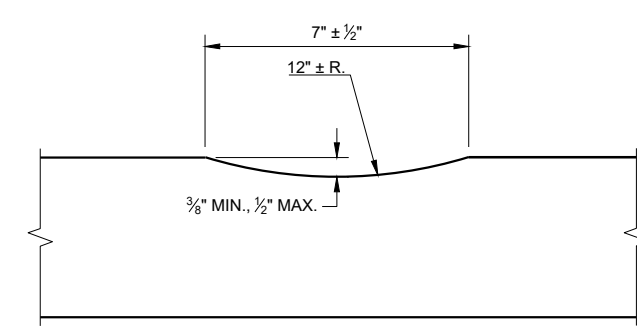


**SECTION A - A**

**2-LANE RURAL SHOULDER RUMBLE STRIP, MILLING**


STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

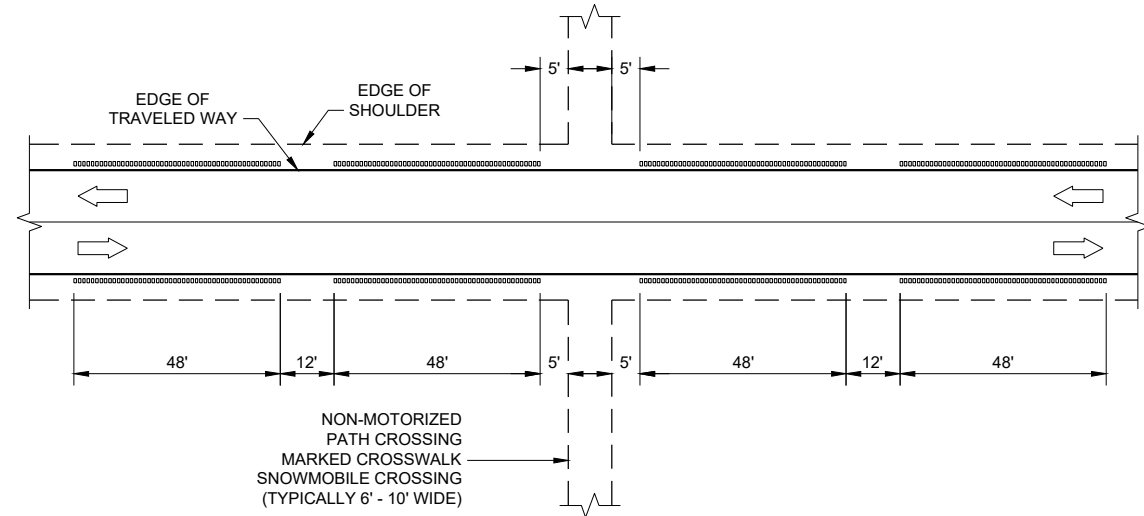


**SHOULDER GROOVES AT MISCELLANEOUS CROSSINGS**

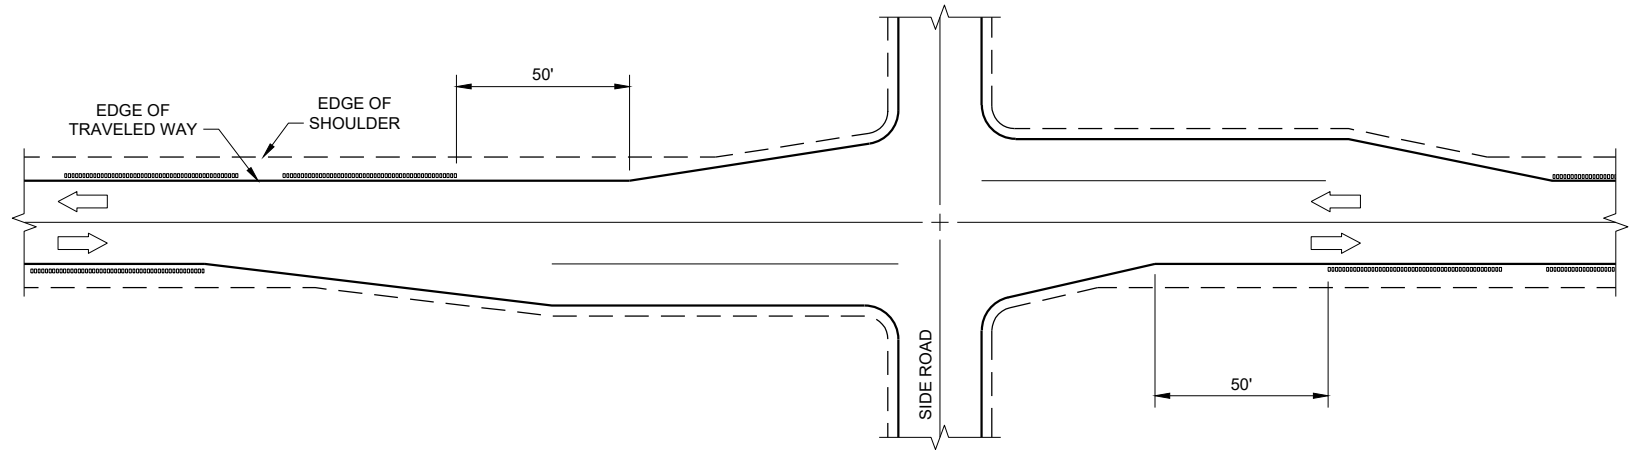

**SHOULDER GROOVES AT RIGHT TURN LANE**

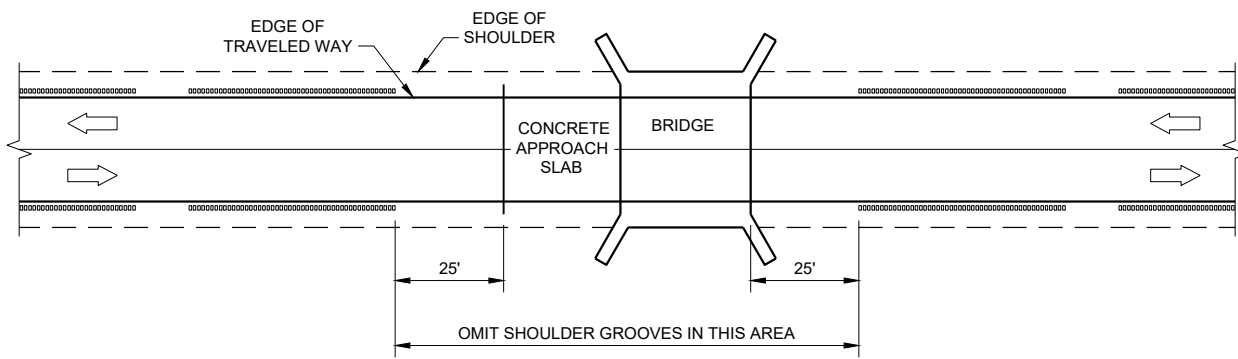


**SHOULDER GROOVES AT BRIDGES**

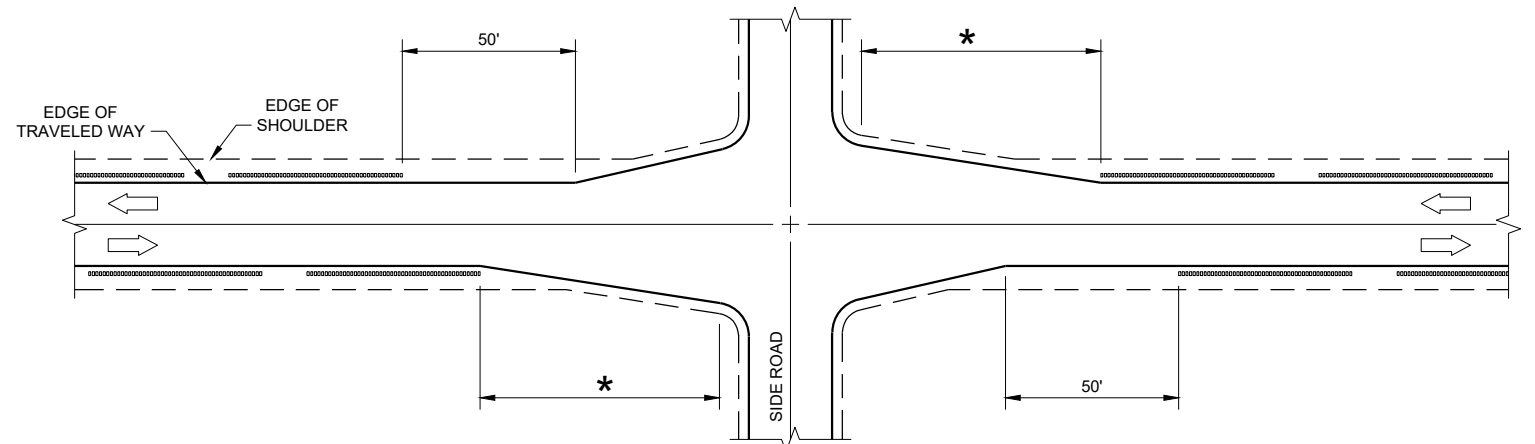

\* GREATER OF 100' OR APPROACH TAPER LENGTH

**SHOULDER GROOVES AT INTERSECTIONS WITH APPROACH TAPER**

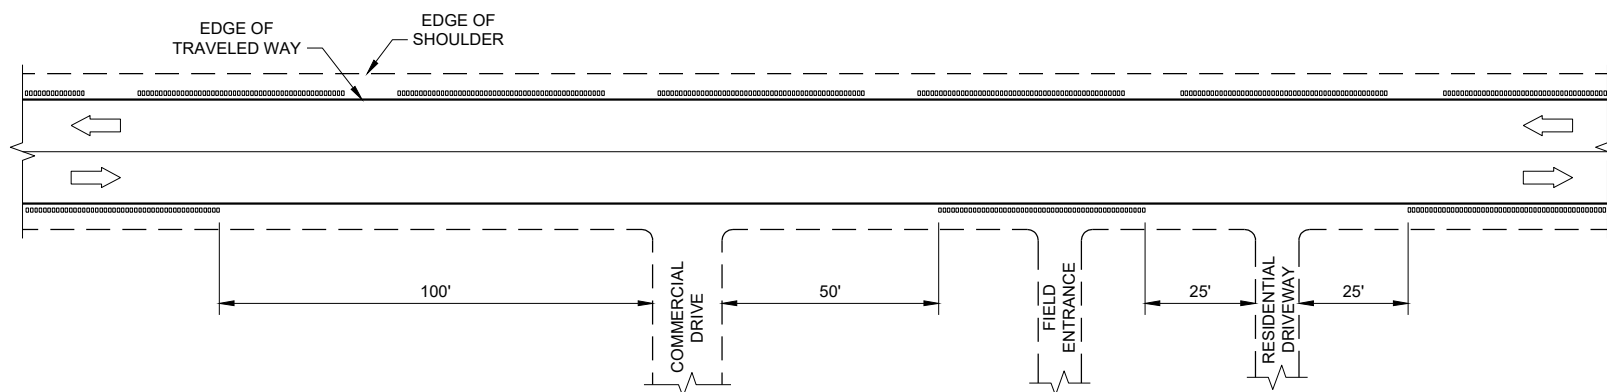


**SHOULDER GROOVES AT DRIVEWAYS<sup>①</sup>**

**GENERAL NOTES**


- ① SHOULDER GROOVES MAY BE OMITTED IN AREAS WITH HIGH CONCENTRATIONS OF DRIVEWAYS. WHEN DIRECTED BY THE ENGINEER.

**2-LANE RURAL SHOULDER  
RUMBLE STRIP, MILLING**


STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

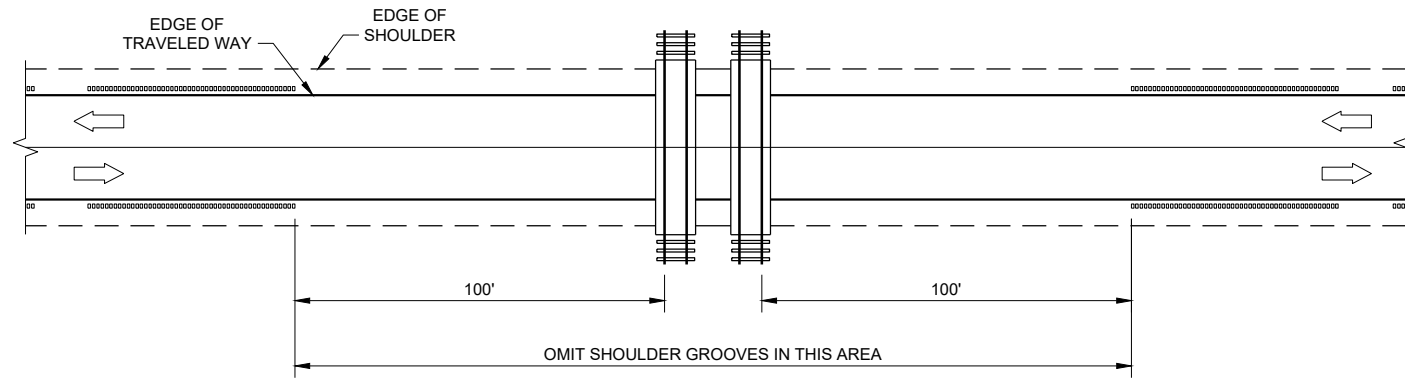

**SHOULDER GROOVES AT RAILROADS**

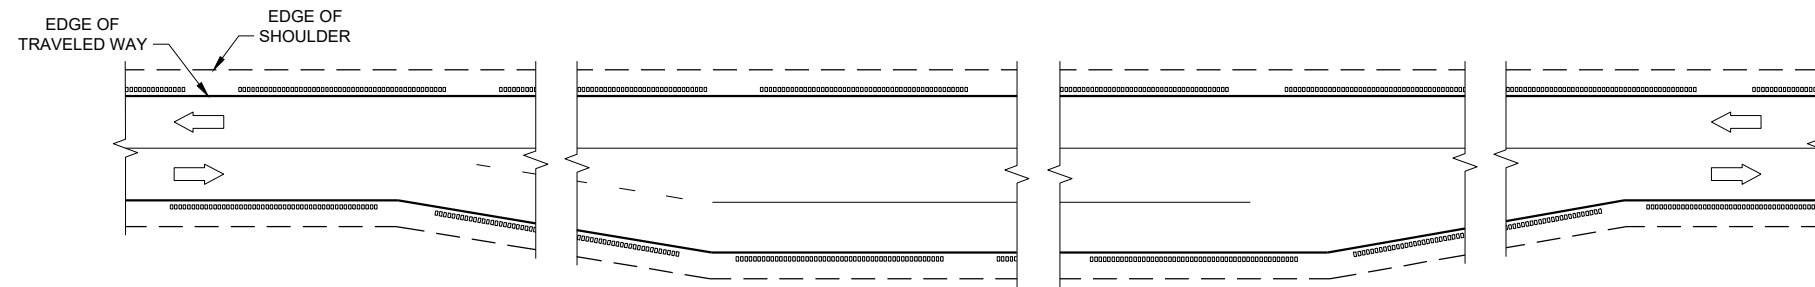

**SHOULDER GROOVES AT PASSING AND CLIMBING LANES**

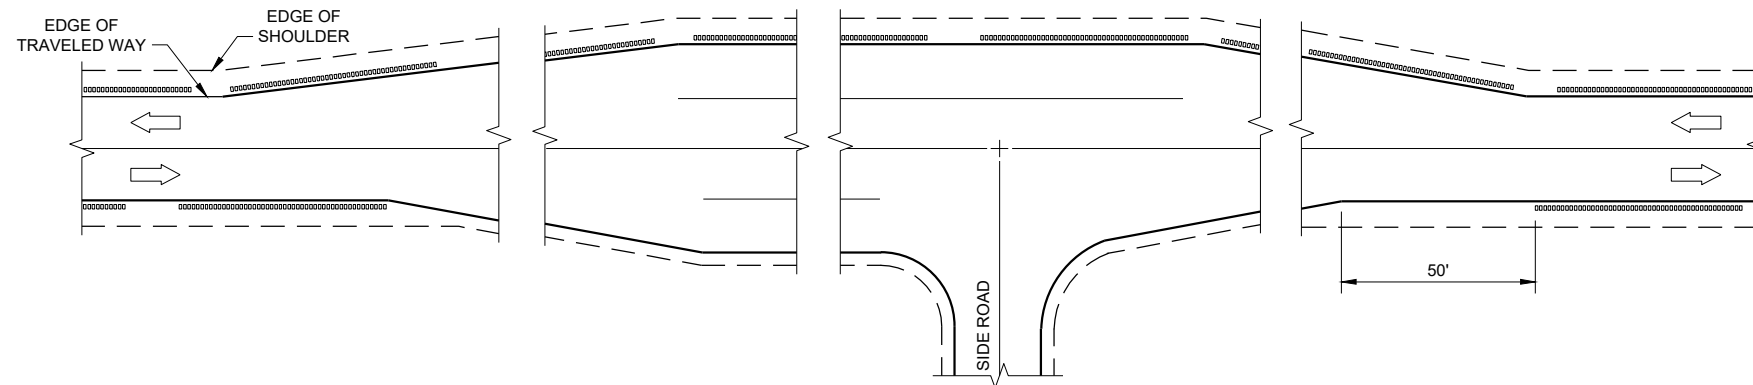

**SHOULDER GROOVES AT BYPASS LANES**

**2-LANE RURAL SHOULDER RUMBLE STRIP, MILLING**

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

APPROVED  
7/2018 DATE /S/ Rodney Taylor  
ROADWAY STANDARDS DEVELOPMENT ENGINEER

FHWA

**GENERAL NOTES**


DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND APPLICABLE SPECIAL PROVISIONS.

DO NOT MILL CENTERLINE GROOVES THROUGH ANY INTERSECTION, MARKED CROSSWALK, NON-MOTORIZED PATH CROSSING, OR SNOWMOBILE CROSSING.


INSTALL PAVEMENT MARKING AFTER THE GROOVES ARE INSTALLED.

SEE SIGNING PLAN FOR SIGN REQUIREMENTS THAT MAY BE NEEDED.


- ① CENTERLINE GROOVES MAY BE OMITTED IN AREAS WITH HIGH CONCENTRATIONS OF DRIVEWAYS, WHEN DIRECTED BY THE ENGINEER.

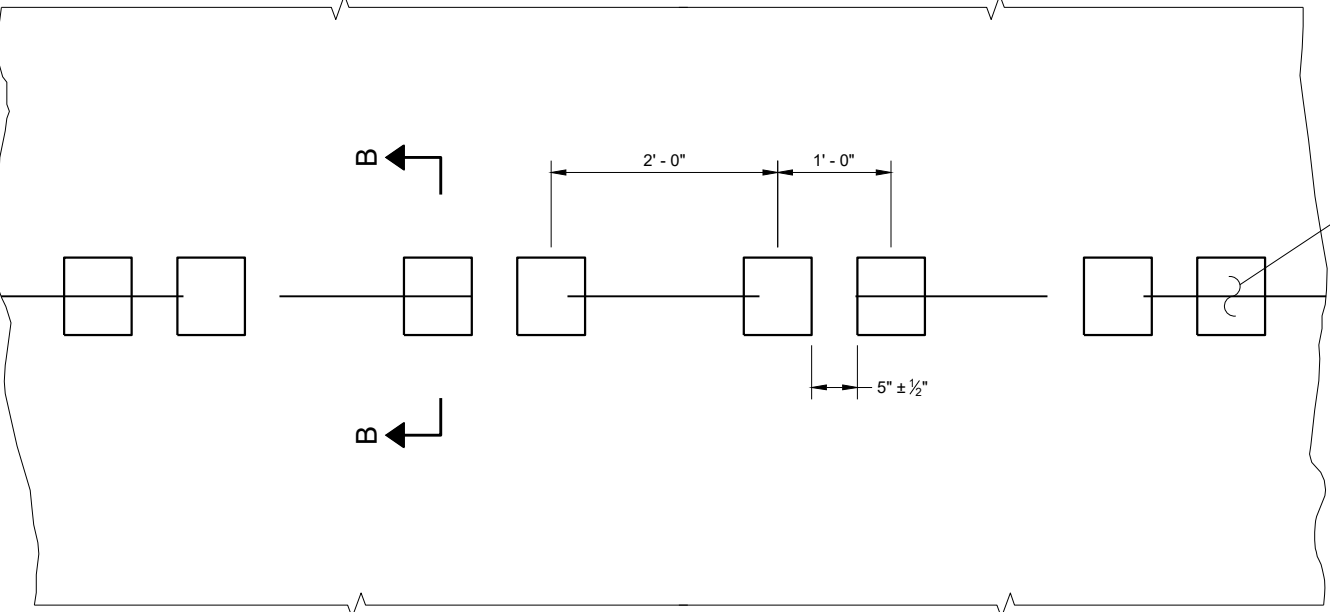

**PLAN VIEW  
SHOULDER WITH GROOVES**

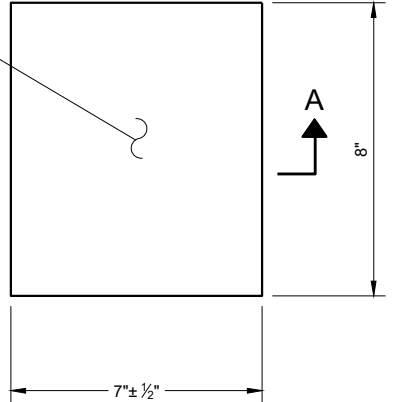


**PLAN VIEW  
(SINGLE GROOVE)**

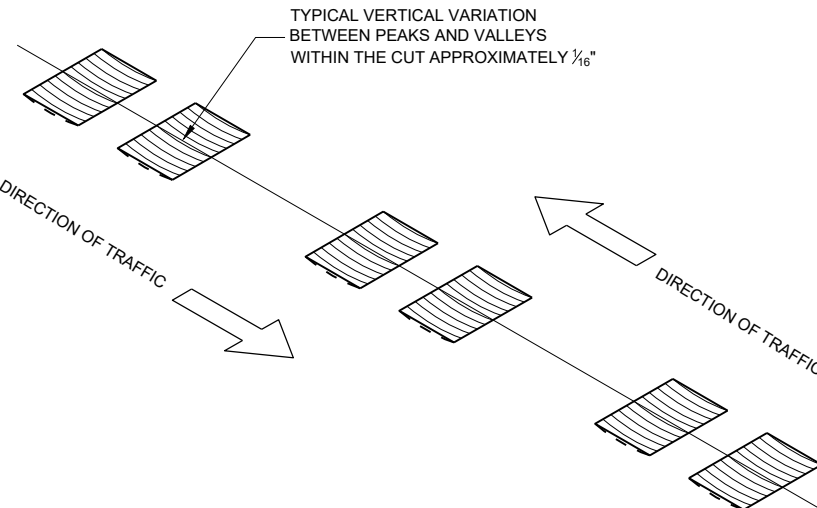


**ISOMETRIC**


**PLACEMENT DETAIL FOR TYPE 1 MILLED RUMBLE STRIP**

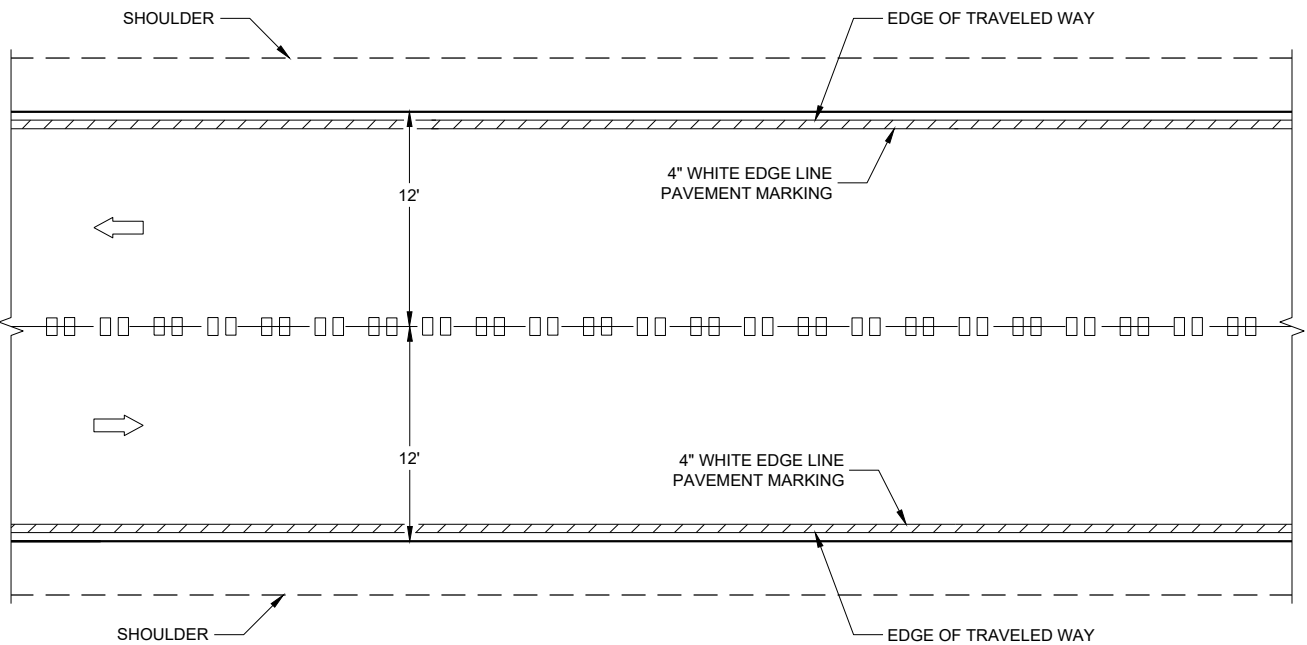


**CENTERLINE GROOVES ON TWO-WAY ROADWAYS**

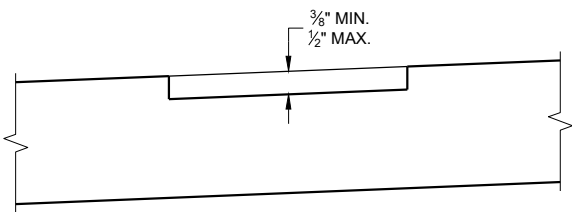

**SECTION B - B  
SUPERELEVATED ROADWAY**

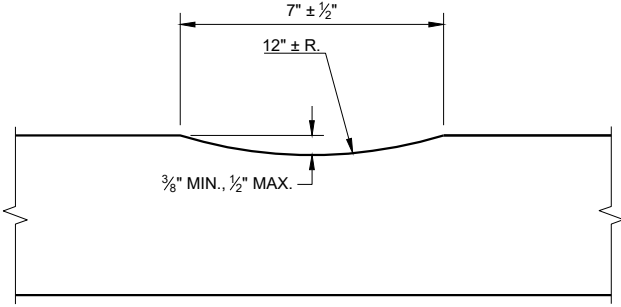


**SECTION A - A**

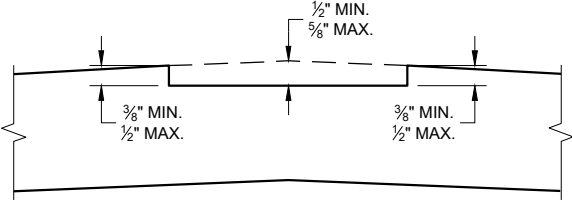


**SECTION B - B  
CROWNED ROADWAY**

**2-LANE RURAL  
CENTER LINE RUMBLE STRIP,  
MILLING**


STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

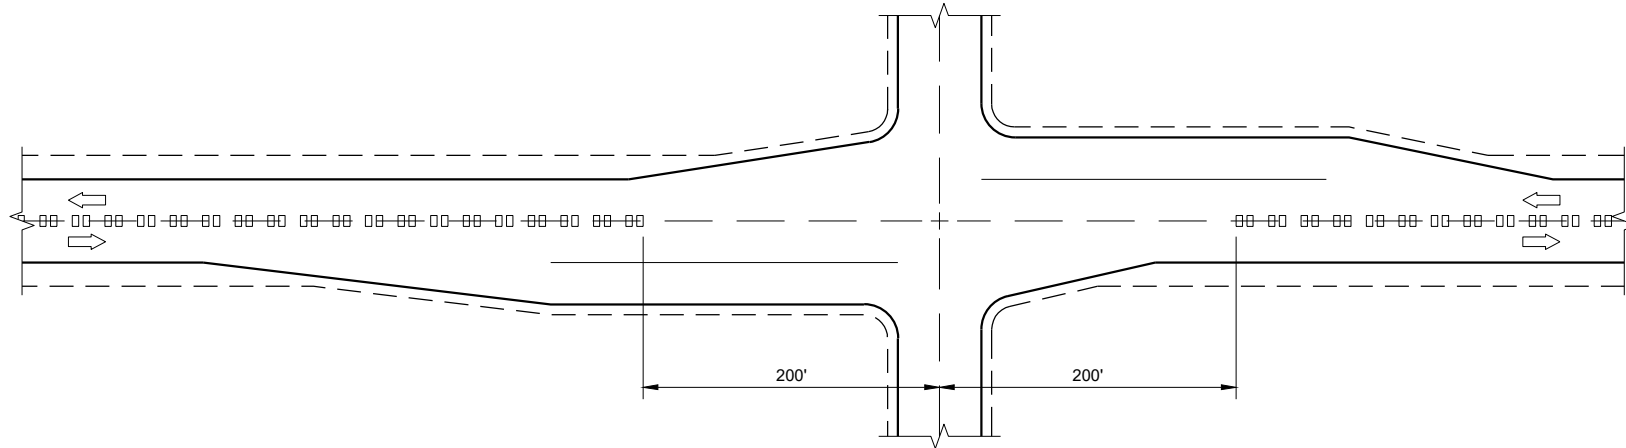

**CENTERLINE GROOVES AT INTERSECTIONS**

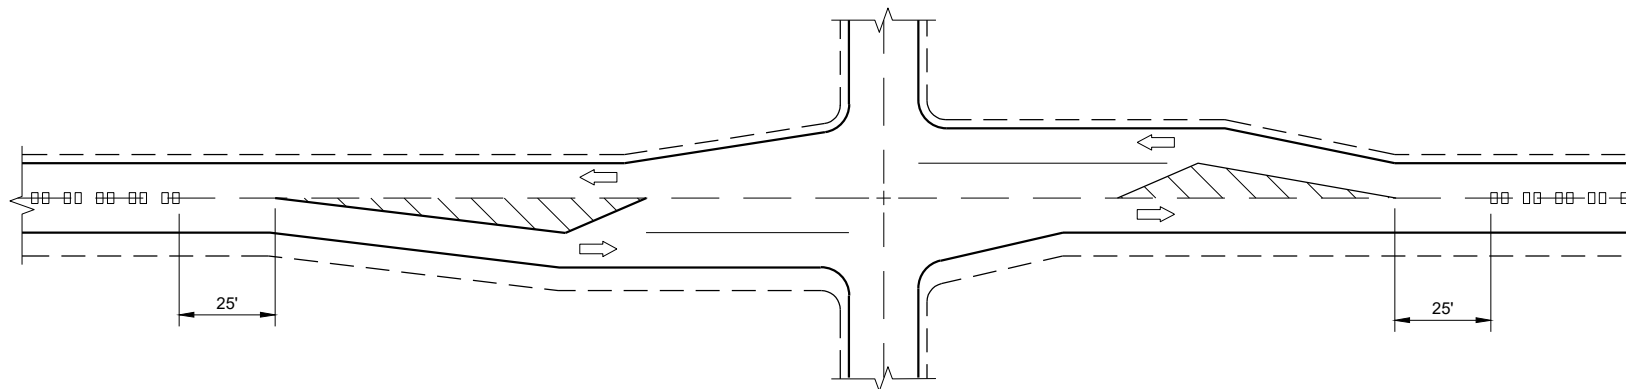


**CENTERLINE GROOVES AT INTERSECTIONS  
(WITH LEFT TURN LANES)**

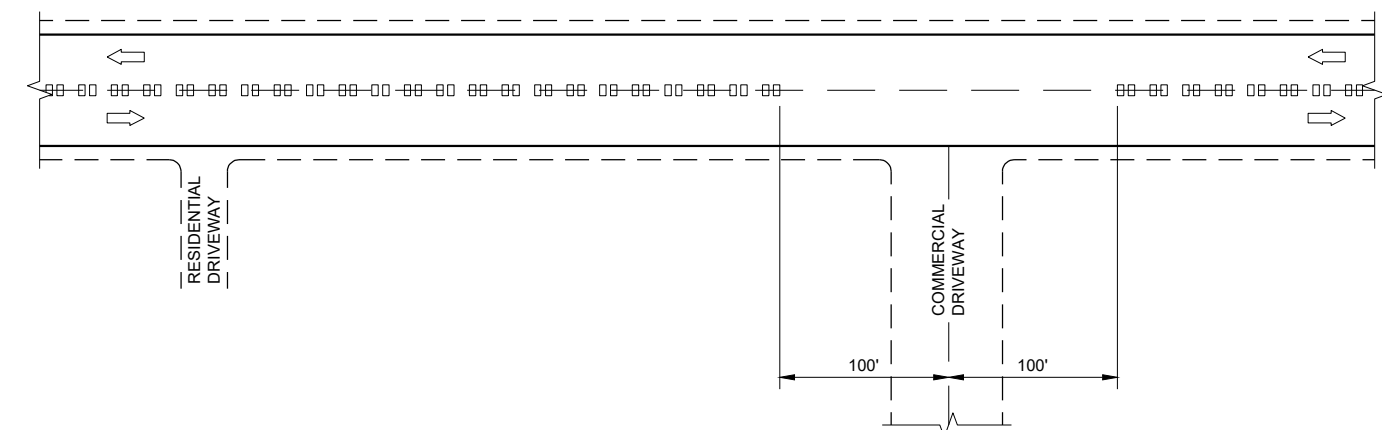


**CENTERLINE GROOVES AT DRIVEWAYS<sup>①</sup>**

**GENERAL NOTES**

- ① CENTERLINE GROOVES MAY BE OMITTED IN AREAS WITH HIGH CONCENTRATIONS OF DRIVEWAYS. WHEN DIRECTED BY THE ENGINEER.

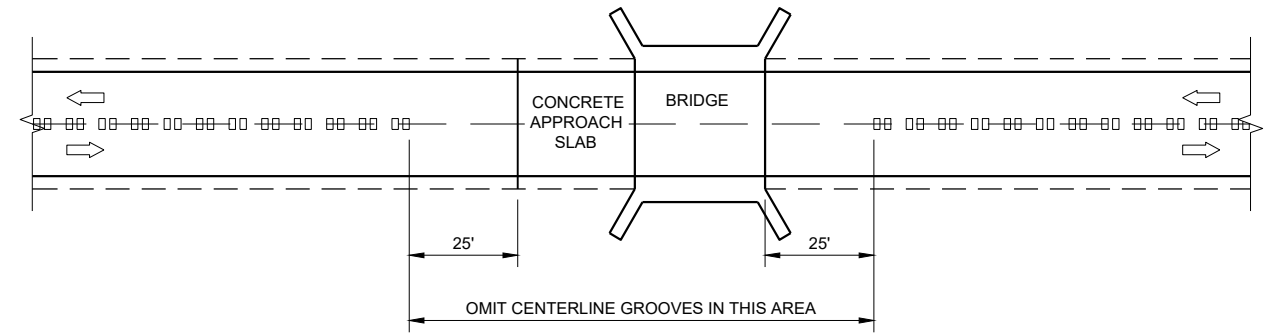

**CENTERLINE GROOVES AT BRIDGES**

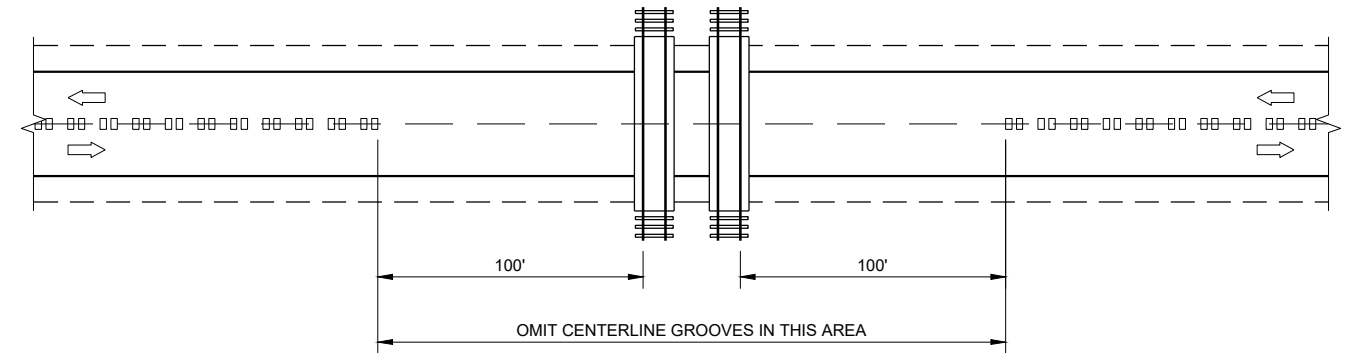

**CENTERLINE GROOVES AT RAILROADS**


6

6


SDD 13A11 - 03b

SDD 13A11 - 03b


<b>2-LANE RURAL CENTERLINE RUMBLE STRIP, MILLING</b>	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED DATE 7/2018	/S/ Rodney Taylor ROADWAY STANDARDS DEVELOPMENT ENGINEER
FHWA	

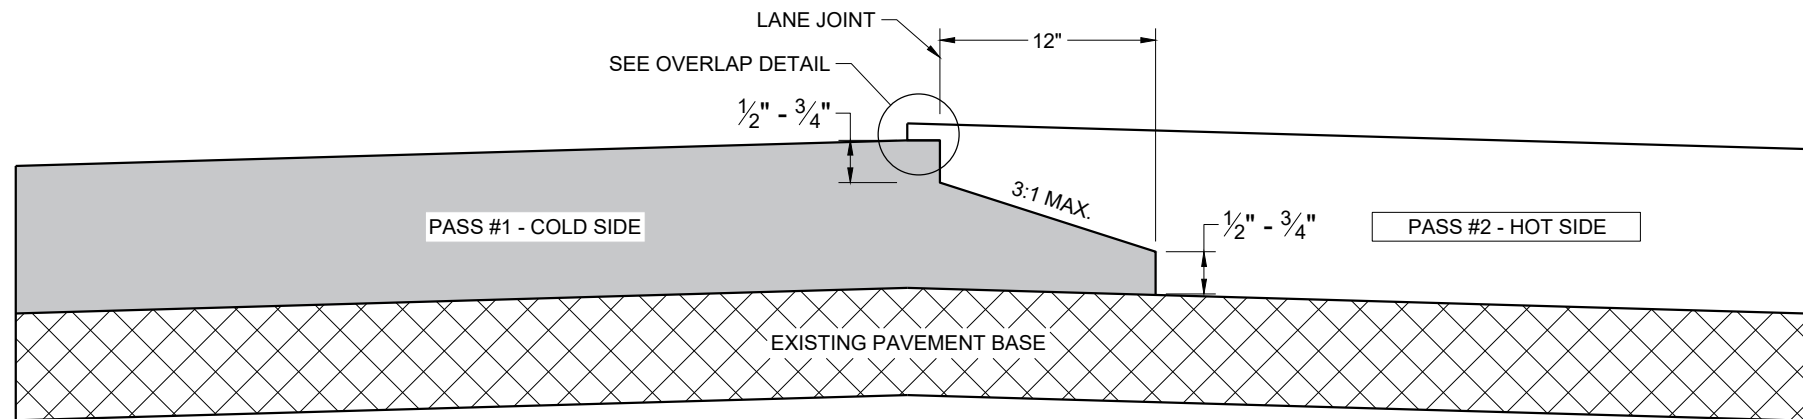

**TYPICAL PAVEMENT CROSS SECTION OF NOTCHED WEDGE LONGITUDINAL JOINT**

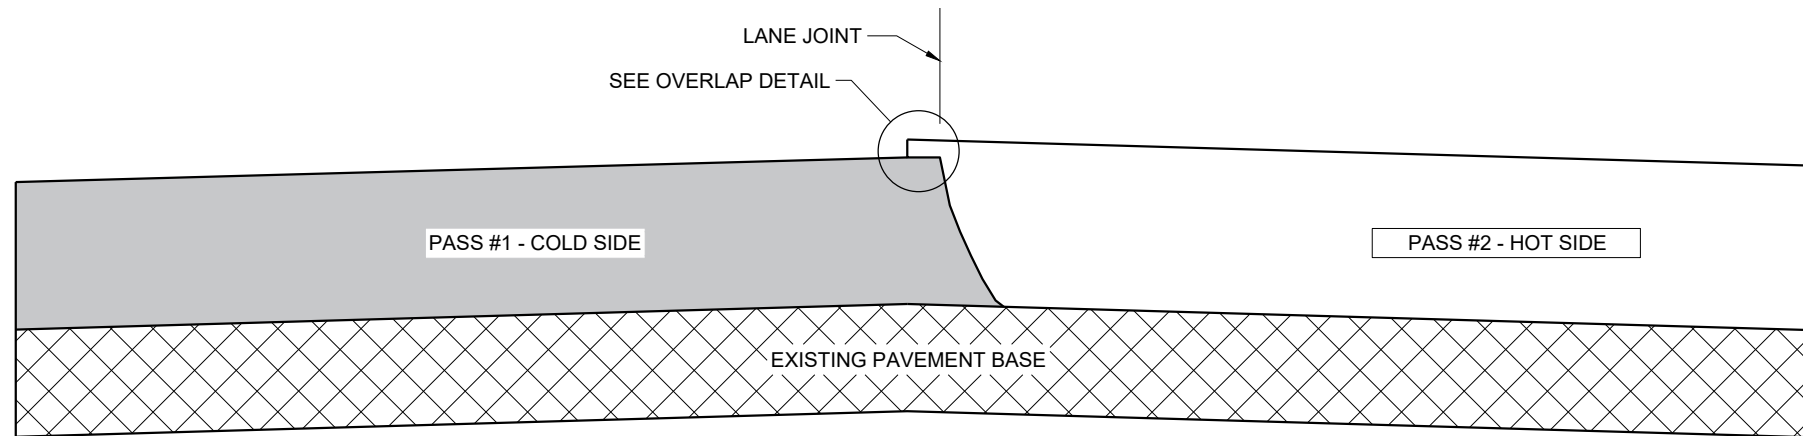

**TYPICAL PAVEMENT CROSS SECTION OF VERTICAL LONGITUDINAL JOINT**

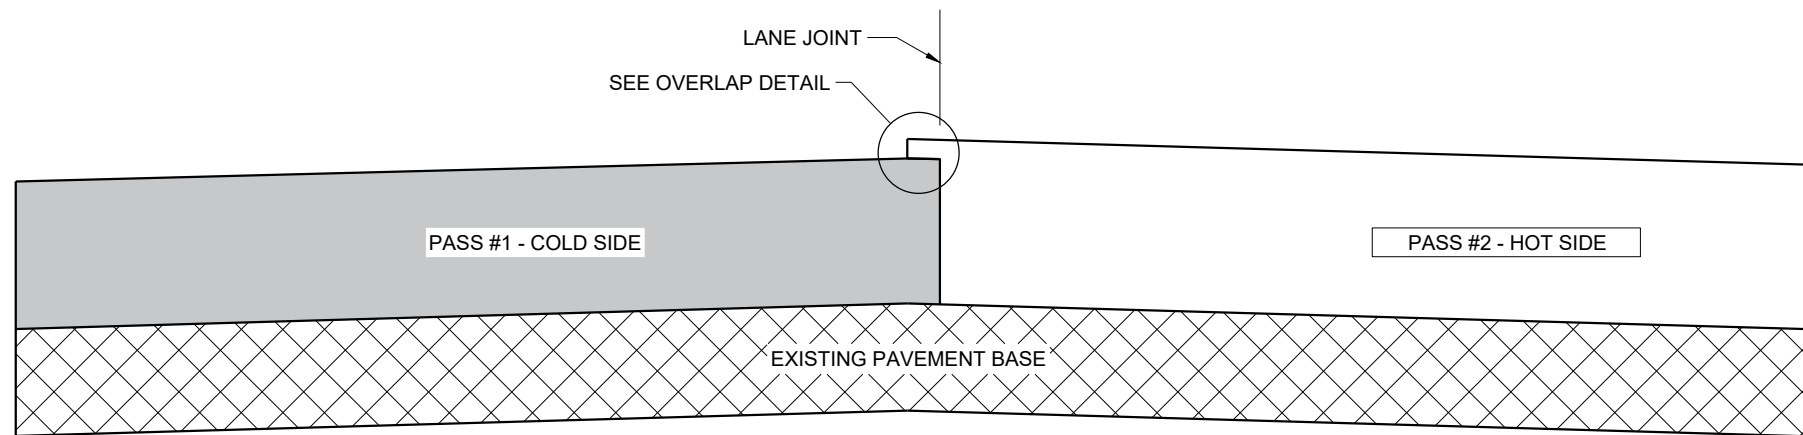

**TYPICAL PAVEMENT CROSS SECTION OF MILLED LONGITUDINAL JOINT**

**GENERAL NOTES**


IN ADDITION TO THE DETAILS PROVIDED IN THIS DRAWING, CONFORM TO STANDARD SPECIFICATION 450.3.2.8 FOR WHEN A NOTCHED WEDGE JOINT IS REQUIRED AND FOR GENERAL JOINT CONSTRUCTION REQUIREMENTS.

FOR ALL LONGITUDINAL JOINTS, ENSURE THE PAVER SCREED OVERLAPS THE PREVIOUSLY PLACED PAVEMENT BY 1" ± 0.5" AND THE HOT SIDE OF THE JOINT REMAINS HIGHER THAN THE COLD SIDE BY APPROXIMATELY 0.1" AFTER FINAL COMPACTION.

ONLY REMOVE THE LONGITUDINAL NOTCHED WEDGE JOINT FOR SMA PAVEMENT OR AS DIRECTED BY THE ENGINEER TO ADDRESS SPECIFIC LENGTHS OF JOINT DAMAGED BY TRAFFIC.

WHEN MILLING BACK OR REMOVING ANY LONGITUDINAL JOINT, LIMIT THE MATERIAL REMOVED TO 2" FROM THE TOP NOTCH OR FROM THE VERTICAL JOINT EDGE ON THE COLD SIDE OF THE JOINT.

USE LONGITUDINAL MILLED JOINT AS PLANS SHOW OR THE AS THE ENGINEER DIRECTS.

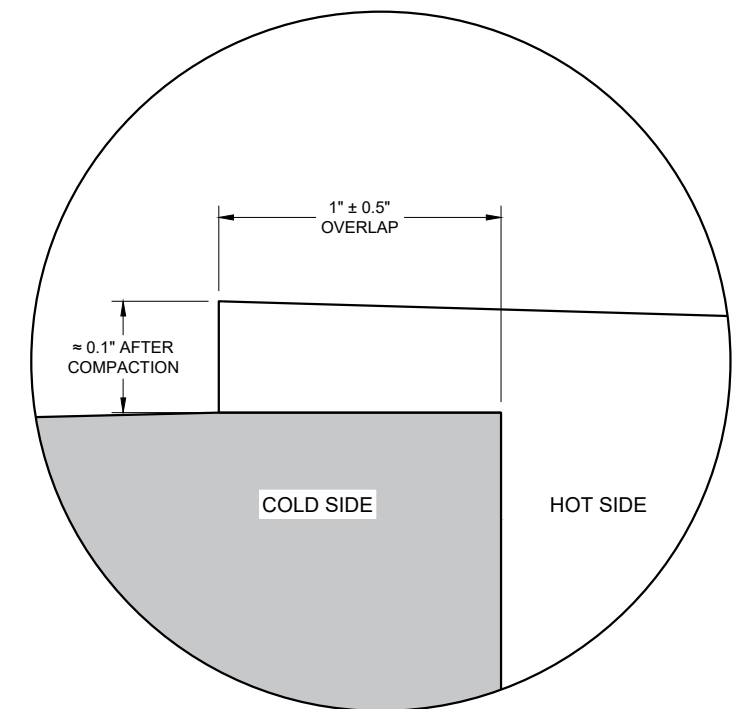

**OVERLAP DETAIL (TYPICAL)**


6

6


SDD 13C19 - 02

SDD 13C19 - 02


<b>HMA LONGITUDINAL JOINTS</b>	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED February 2020 DATE	/S/ Steven Hefel HMA PAVEMENT ENGINEER
FHWA	

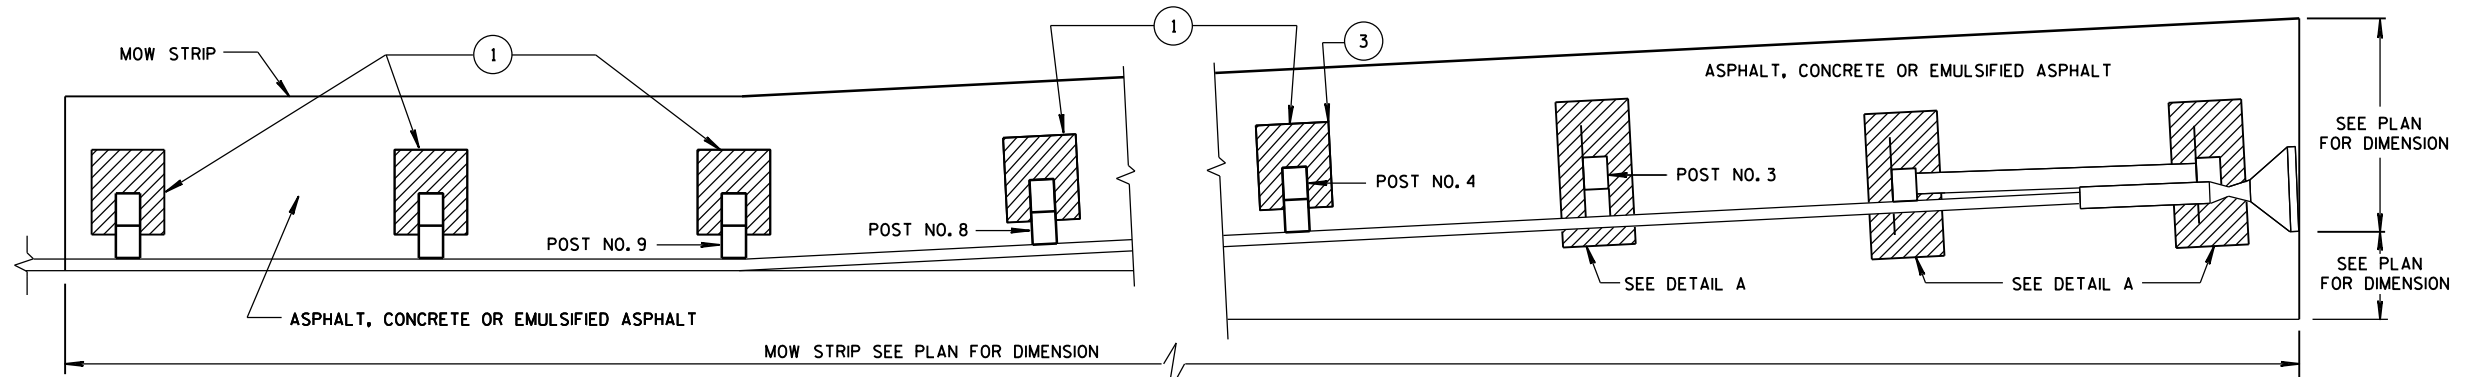


PLAN VIEW  
MOW STRIP LAYOUT FOR ENERGY ABORRING TERMINAL

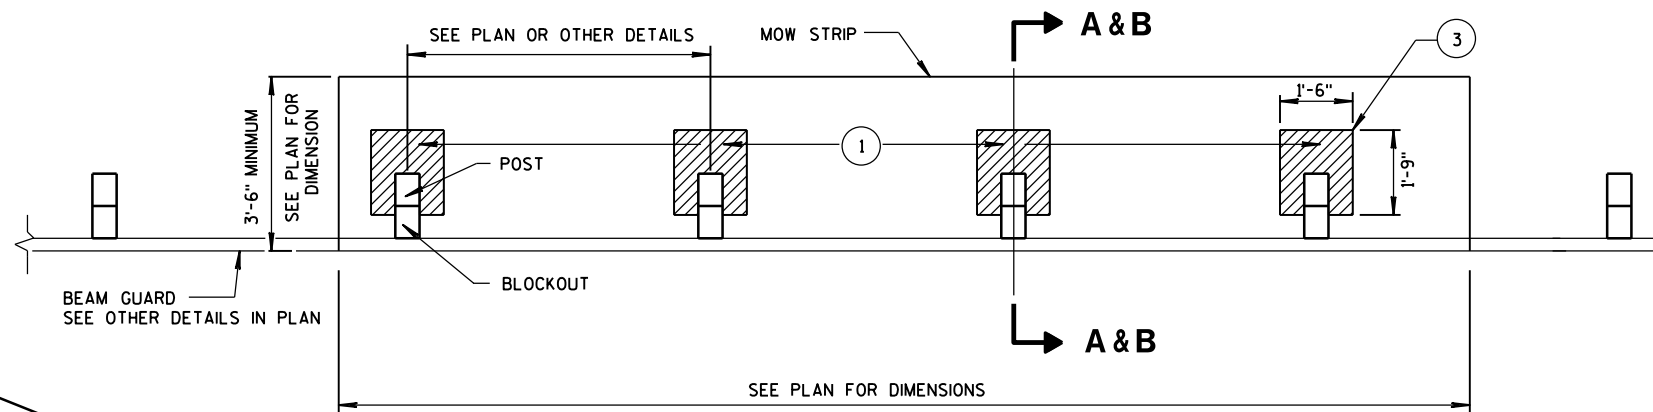


PLAN VIEW  
MOW STRIP FOR TYPICAL BLOCKOUT LAYOUT

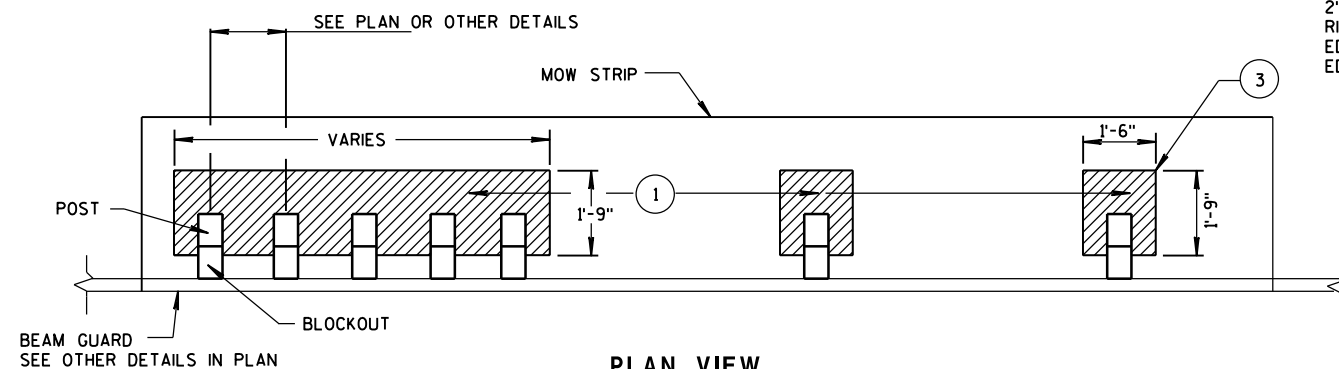


PLAN VIEW  
MOW STRIP FOR TIGHT SPACING LAYOUT

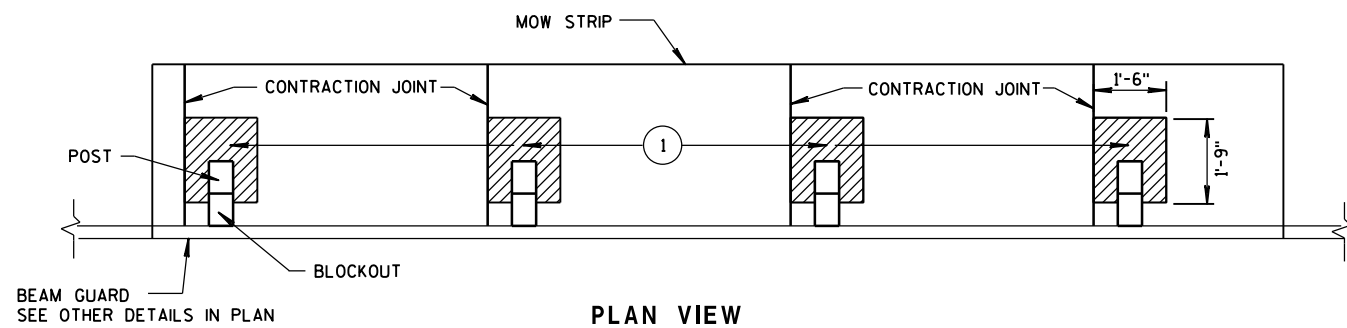

PLAN VIEW  
JOINT PLACEMENT FOR CONCRETE MOW STRIP

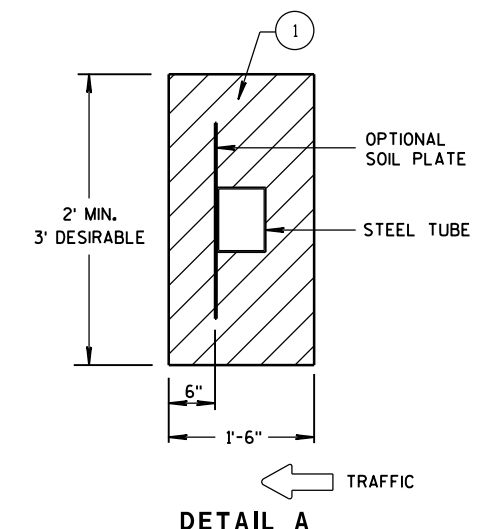


DETAIL A

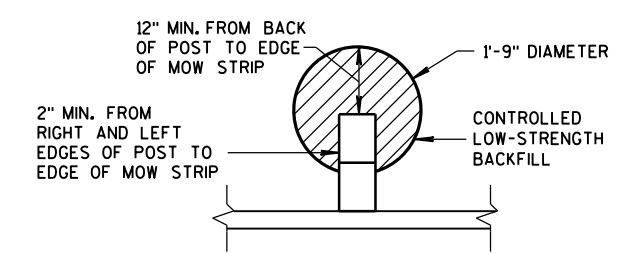


ALTERNATIVE HMA  
MOW STRIP DESIGN

- ① CONTROLLED LOW-STRENGTH BACKFILL OR EMULSIFIED ASPHALT.
- ② DEPTH OF MOW STRIP:  
ASPHALT - 4"  
CONCRETE - 4"  
EMULSIFIED ASPHALT - 1" OR LESS
- ③ FOR EMULSIFIED ASPHALT MOW STRIP LEAVE OUTS NOT REQUIRED. (TYPICAL FOR ALL POSTS.)

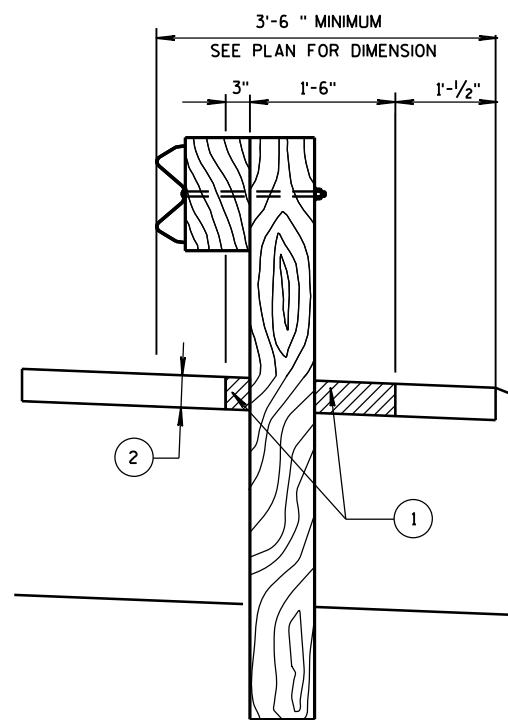

SECTION A-A

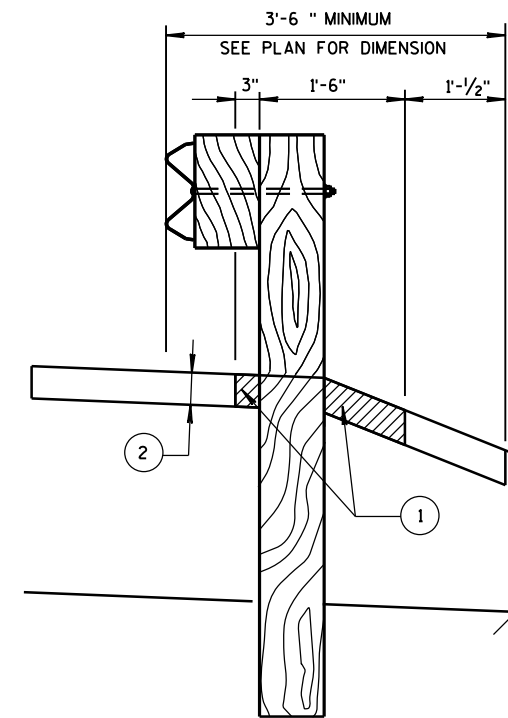

SECTION B-B


6

6


S.D.D. 14 B 28-3

S.D.D. 14 B 28-3


<b>GUARDRAIL MOW STRIP</b>	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED June 2014	/s/ Jerry H. Zogg
DATE	ROADWAY STANDARDS DEVELOPMENT ENGINEER
FHWA	

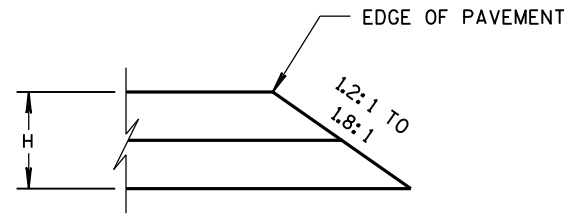


CONSTRUCTED WITH FINAL TWO LAYERS  
FOR H 5" OR LESS

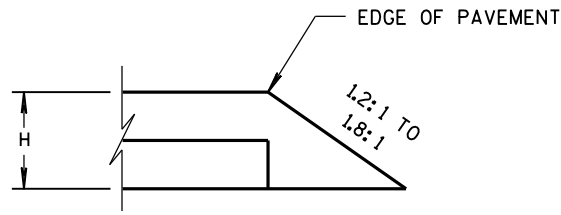

CONSTRUCTED WITH FINAL LAYER  
FOR H 5" OR LESS

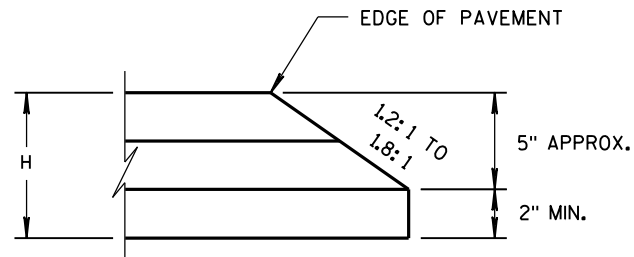


CONSTRUCTED WITH FINAL TWO LAYERS  
FOR H GREATER THAN 5"

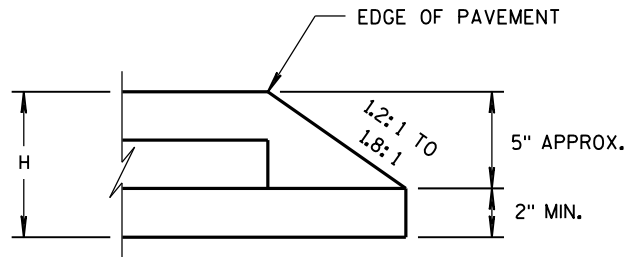

CONSTRUCTED WITH FINAL LAYER  
FOR H GREATER THAN 5"

HMA PAVEMENT AND HMA OVERLAYS

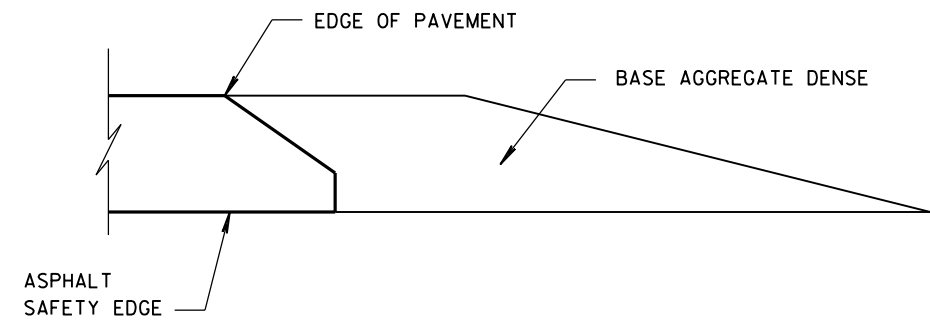

FINISHED SHOULDER AGGREGATE PLACEMENT

6

6










S.D.D. 14 B 29-1

S.D.D. 14 B 29-1

SAFETY EDGE <sub>SM</sub>	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED DATE 11/30/2012	/s/ Jerry H. Zogg ROADWAY STANDARDS DEVELOPMENT ENGINEER
FHWA	




- ① WOOD OR STEEL POSTS (w6X9 OR w6X8.5) MAY BE USED. DO NOT INTERMIX WOOD AND STEEL POSTS. INSTALL STEEL POSTS WITH HOLES ON APPROACHING TRAFFIC SIDE.
- ② USE WOOD OR APPROVED PLASTIC BLOCKOUTS. WOOD BLOCKOUTS MAY BE CONSTRUCTED OUT OF TWO OR MORE WOOD BLOCKOUTS. SEE ALTERNATE WOOD BLOCKOUT DETAIL. DIMENSIONS OF APPROVED PLASTIC BLOCKOUTS MAY VARY.
- ③ IF ROCK IS ENCOUNTERED DURING EXCAVATION, PROVIDE A HOLE 12 INCHES IN DIAMETER EXTENDING 20 INCHES DEEP INTO THE ROCK. PLACE APPROXIMATELY 2 1/2" INCHES OF GRANULAR MATERIAL IN THE BOTTOM OF THE HOLE. CUT THE POSTS THE TO LENGTH AND INSTALL. BACKFILL WITH EXCAVATED MATERIAL AND COMPACT. BACKFILL IS TO BE FREE OF LARGE ROCKS.
- ④ WHEN THE DISTANCE FROM BACK OF POST TO SHOULDER HINGE POINT IS LESS THAN 2 FEET INSTALL LONGER POST AT HALF POST SPACING (K).
- ⑤ FOR NEW MGS INSTALLATION TOP OF W-BEAM RAIL TOLERANCE IS +1". FOR EXISTING MGS INSTALLATION TOP OF W-BEAM IS BETWEEN 27 3/4" TO 32".
- ⑥ WHEN USING STEEL POST AND WOOD BLOCKOUTS INSTALL FOUR 16D GALVANIZED NAILS. INSTALL NAILS AT THE BACK CORNERS OF THE BLOCK AND BEND THE NAILS OVER THE FLANGE OF THE STEEL POST.
- ⑦ TOTAL POST LENGTH FOR TYPE K IS 7' - 0". TOTAL POST LENGTH FOR OTHER MGS TYPES IS 6' - 0".

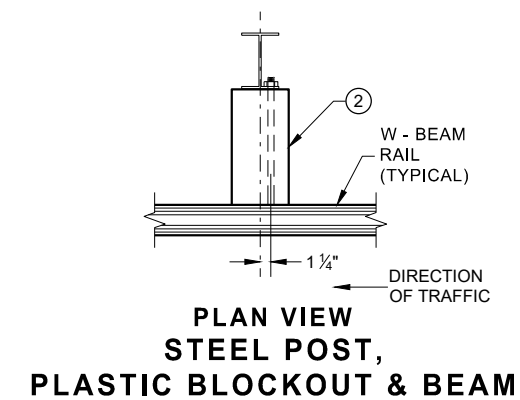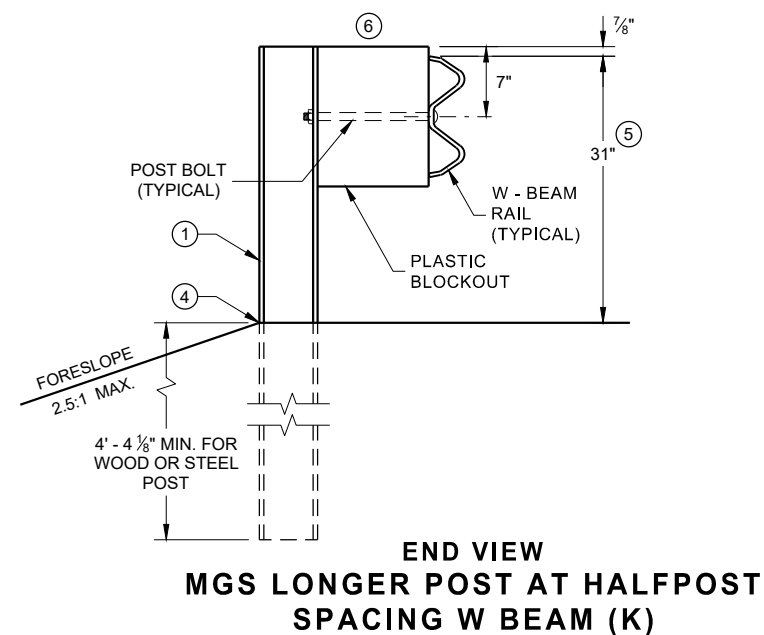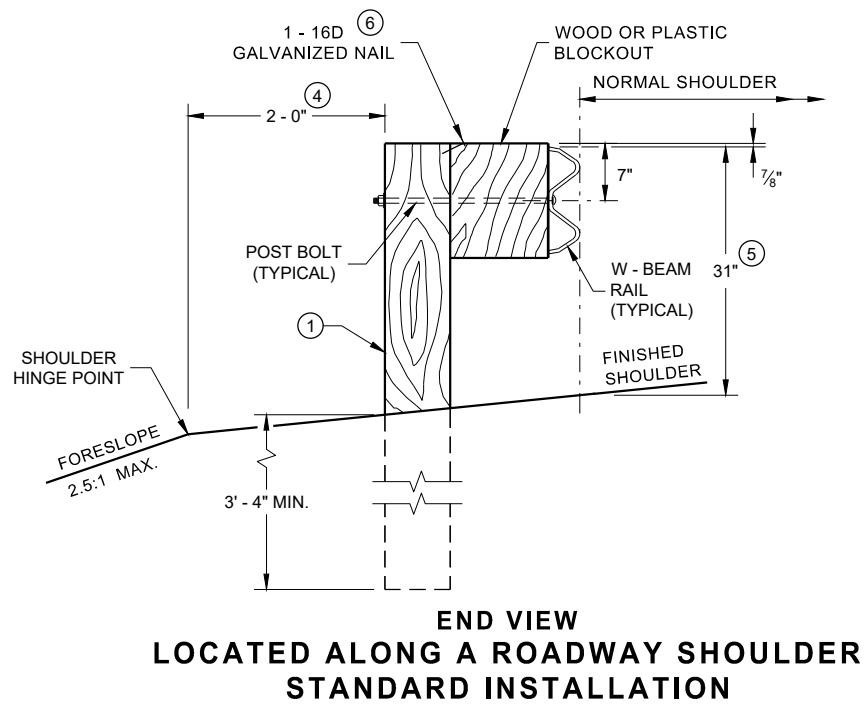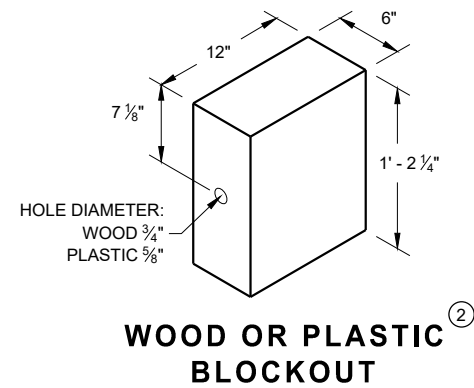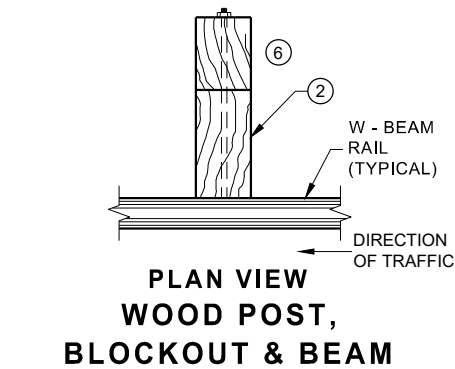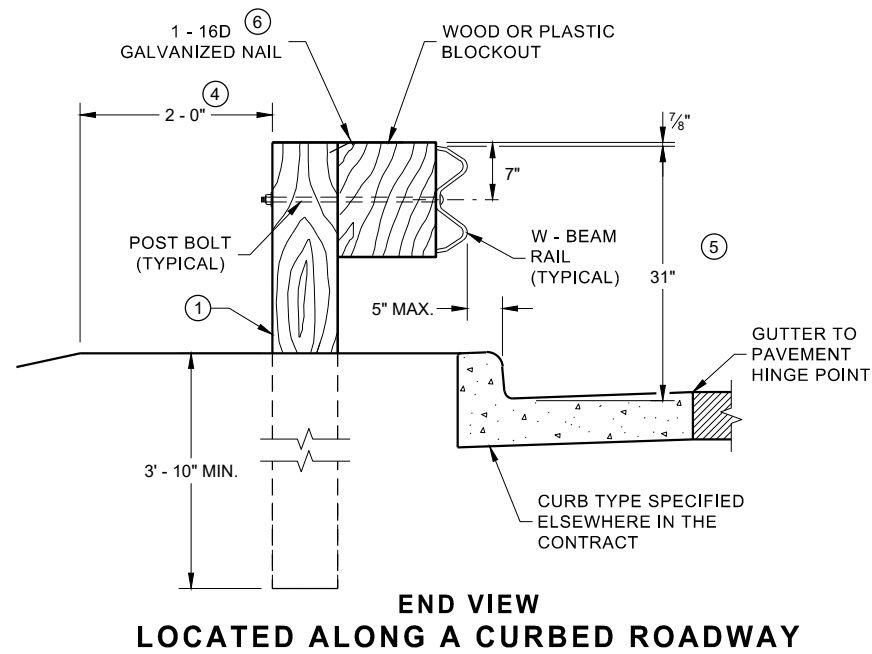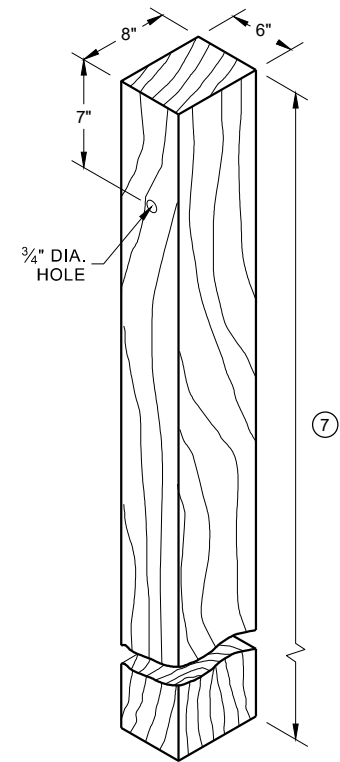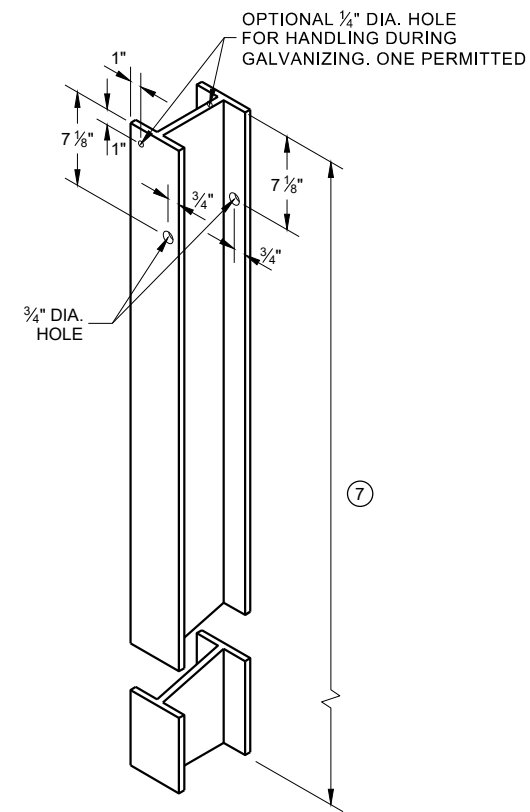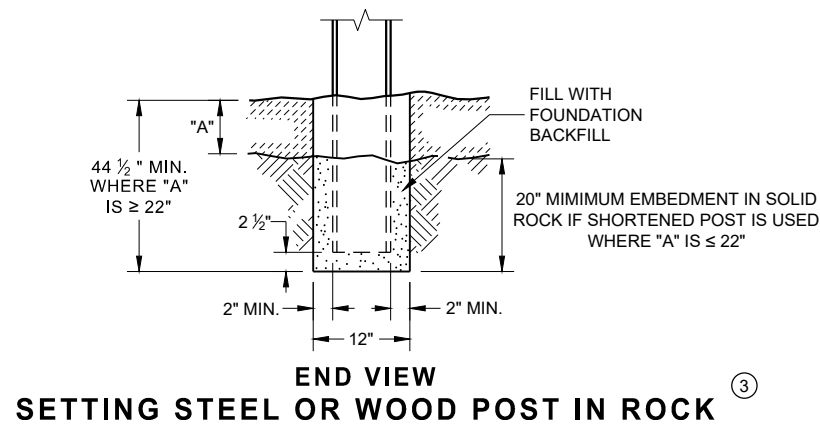


**MIDWEST GUARDRAIL SYSTEM  
(MGS) GUARDRAIL**

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

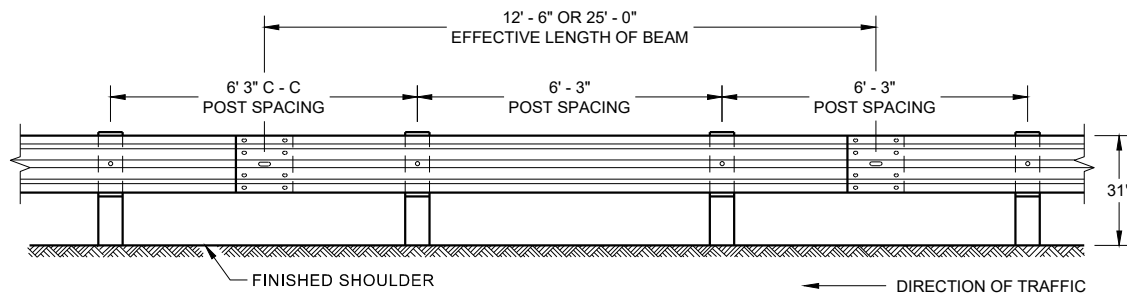


**FRONT VIEW  
POST SPACING STANDARD INSTALLATION**

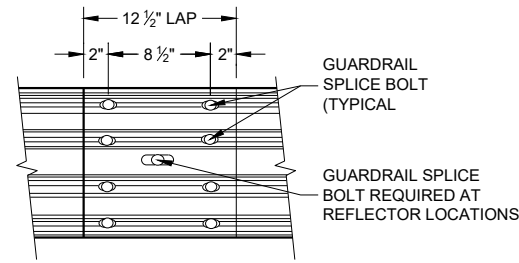


**FRONT VIEW  
MID-SPAN BEAM SPLICE**

**GENERAL NOTES**


- ⑧ DO NOT INSTALL REFLECTORS ON THE FIRST 50 FEET OF THE APPROACH END OF THE ENERGY ABSORBING TERMINAL.
  - ⑨ 25 FEET OF HALF POST SPACING IS REQUIRED ON APPROACH AND DEPARTURE ENDS OF QUARTER POST SPACING.
- POST BOLTS ARE A 3/8" DIAMETER ASTM A307 GUARDRAIL BOLT. A POST BOLT REQUIRES 3/4" DIAMETER A563A DOUBLE RECESSED (DR) HEAVY HEX NUT AND 3/8" DIAMETER F844 FLAT WASHER. POST BOLTS MAY BE LONGER IF MULTIPLE BLOCKOUTS ARE BEING USED.
- GUARD RAIL SPLICE BOLTS ARE A 3/8" DIAMETER ASTM A307 GUARDRAIL HEAD BOLT. A GUARDRAIL SPLICE BOLT REQUIRES 3/8" DIAMETER A563A DOUBLE RECESSED (DR) HEAVY HEX NUT.

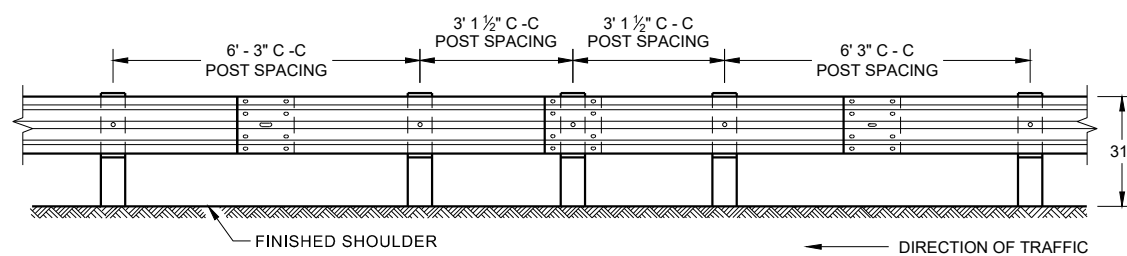


**FRONT VIEW  
HALF POST SPACING (HS) AND  
HALF POST SPACING WITH LONGER POSTS (K)**

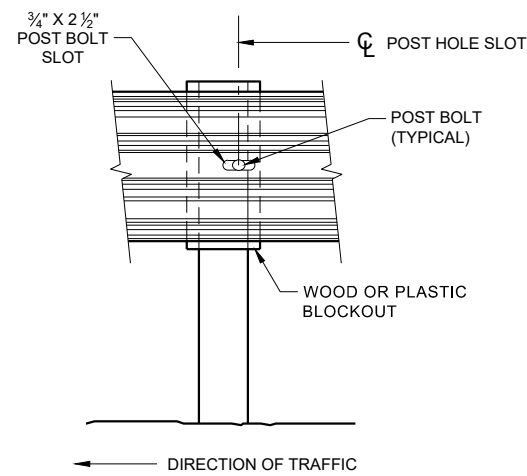


**FRONT VIEW AT STEEL POST**

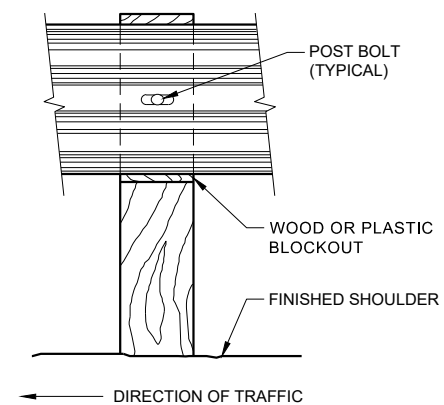


**FRONT VIEW AT WOOD POST**

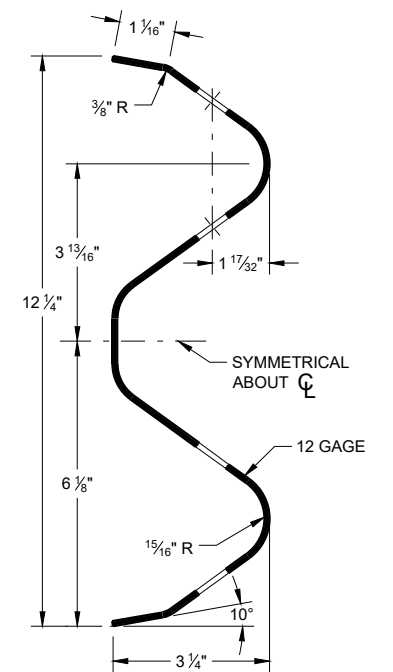

**SECTION THRU W-BEAM RAIL**

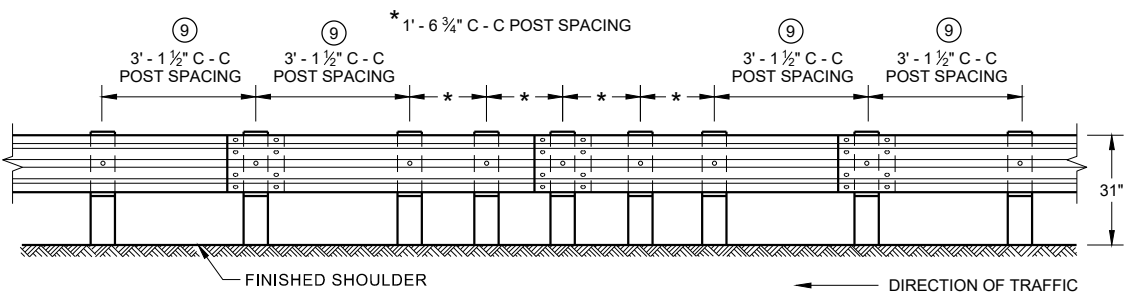

**FRONT VIEW  
QUARTER POST SPACING (QS)**

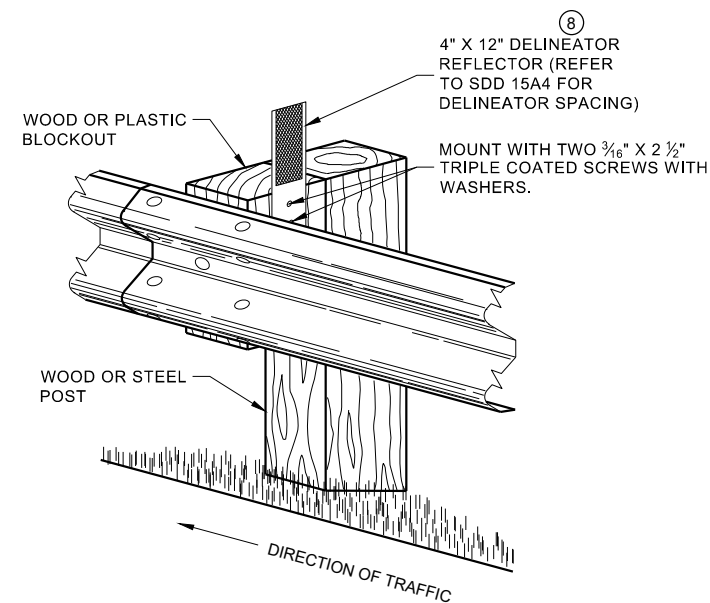

**ONE SIDED REFLECTOR DETAIL  
AND TYPICAL INSTALLATION**

**MIDWEST GUARDRAIL SYSTEM  
(MGS) GUARDRAIL**


STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

6

6

SDD 14B42 - 06b

SDD 14B42 - 06b


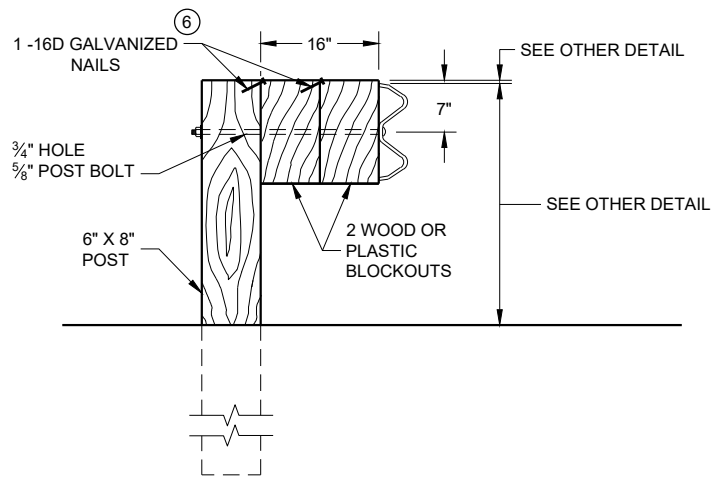


**DETAIL FOR 16" BLOCKOUT DEPTH**


IT IS ACCEPTABLE TO USE BLOCKOUTS UP TO 16" DEEP TO INCREASE THE POST OFFSET TO AVOID UNDERGROUND OBSTACLES. THERE IS NO LIMIT TO THE NUMBER OF POSTS THAT CAN HAVE ADDITIONAL BLOCKOUTS UP TO 16" DEEP.

**NOTE:**


1. ALL FILLETS SHALL HAVE A MINIMUM RADIUS OF 3/16".
2. IF THE BOLT EXTENDS MORE THAN 1/4" FROM THE NUT THE BOLT SHOULD BE TRIMMED BACK.

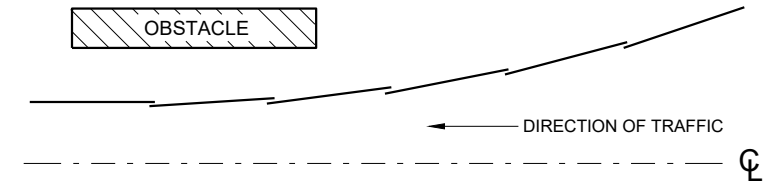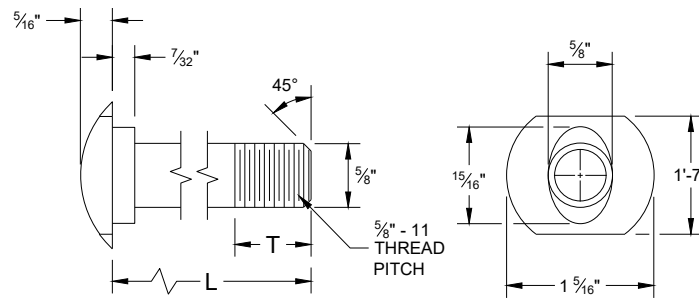

**PLAN VIEW  
BEAM LAPPING DETAIL**

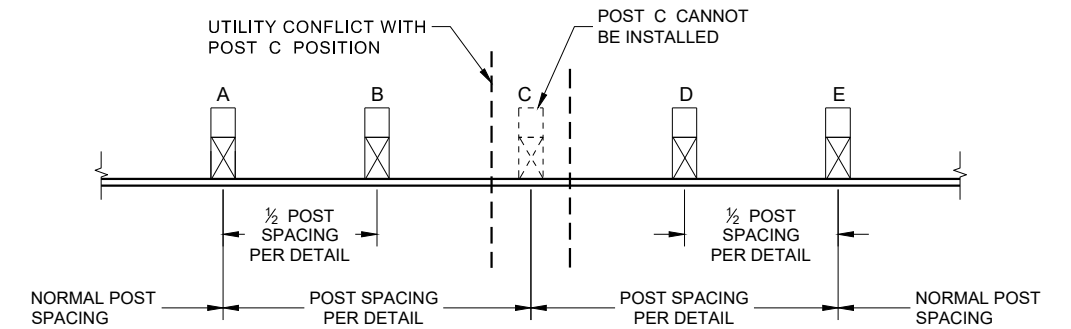

**POST DRIVING FOR CONTINUOUS  
UNDERGROUND OBSTRUCTION**

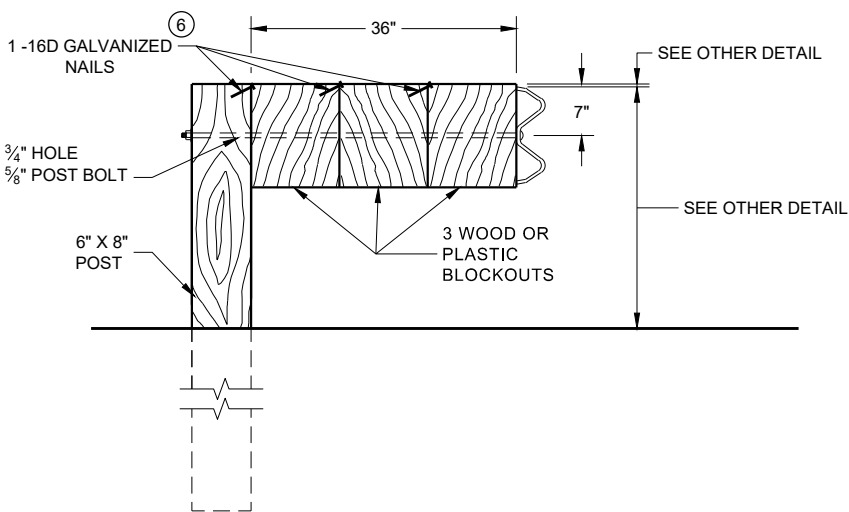


**DETAIL FOR 36" BLOCKOUT DEPTH**


NOTES: UNDER SPECIAL CIRCUMSTANCES, SUCH AS AVOIDING OBSTACLES THAT ARE NOT RELOCATED, IT IS ACCEPTABLE TO INSTALL ADDITIONAL BLOCKOUTS TO OBTAIN UP TO 36" DEPTH FOR ONE OR TWO POSTS IN A SECTION OF GUARDRAIL.  
DO NOT USE 16" OR 36" BLOCKOUTS IF IT CAUSES THE POST TO BE DRIVEN BEYOND SHOULDER HINGE POINT OR CAUSES A FIXED OBJECT TO BE WITHIN THE DEFLECTION DISTANCE OF THE BARRIER.

**POST BOLT TABLE**


L	T (MIN.)
1 1/4"	1 1/8"
2"	1 3/4"
10"	4"
14"	4 1/16"
18"	4"
21"	4 1/16"
25"	4"




**ALTERNATE BOLT HEAD**

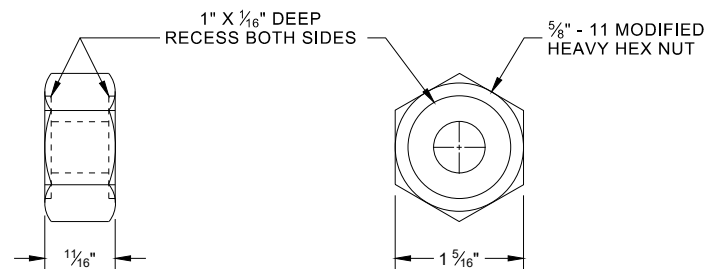

**POST BOLT, SPLICE BOLT  
AND RECESS NUT**

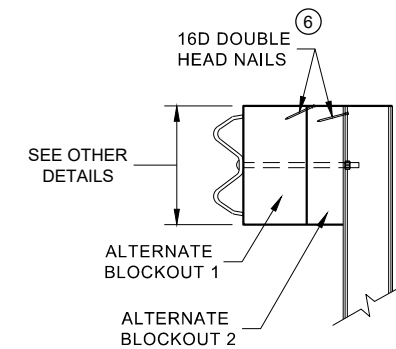

**SIDE VIEW**




**PLAN VIEW**

**ALTERNATE WOOD  
BLOCKOUT DETAIL**


6 WHEN USING STEEL POST AND WOOD BLOCKOUTS, INSTALL FOUR 16D GALVANIZED NAILS. INSTALL NAILS AT THE BACK CORNERS OF THE BLOCK AND BEND THE NAILS OVER THE FLANGE OF THE STEEL POST.

**MIDWEST GUARDRAIL SYSTEM  
(MGS) GUARDRAIL**


STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

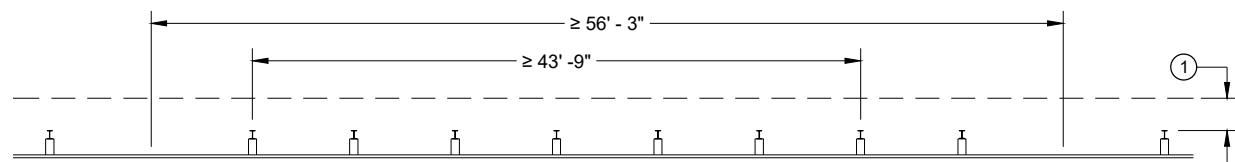


**MISSING POST IN NORMAL BEAM GUARD RUN**

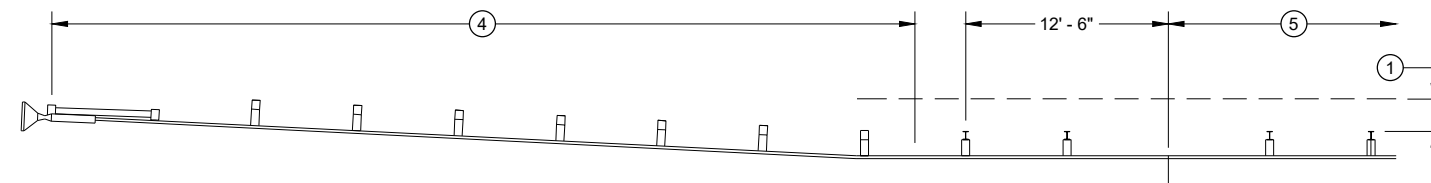


**MISSING POST IN NORMAL BEAM GUARD RUN NEAR EAT**

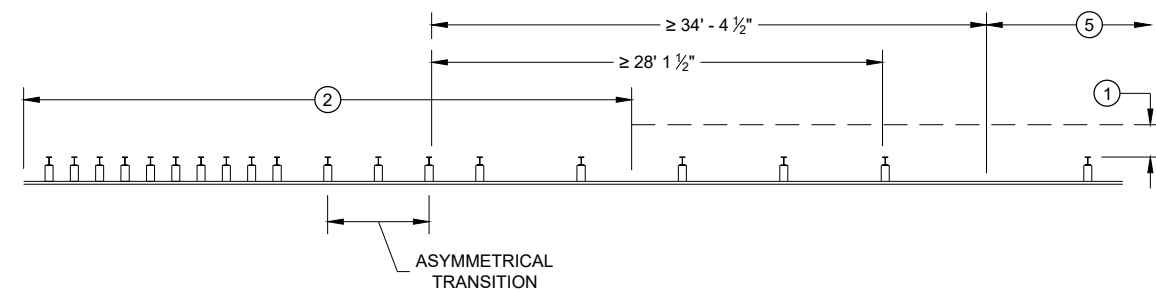


**MISSING POST NEAR APPROACH THRIE BEAM TRANSITION**

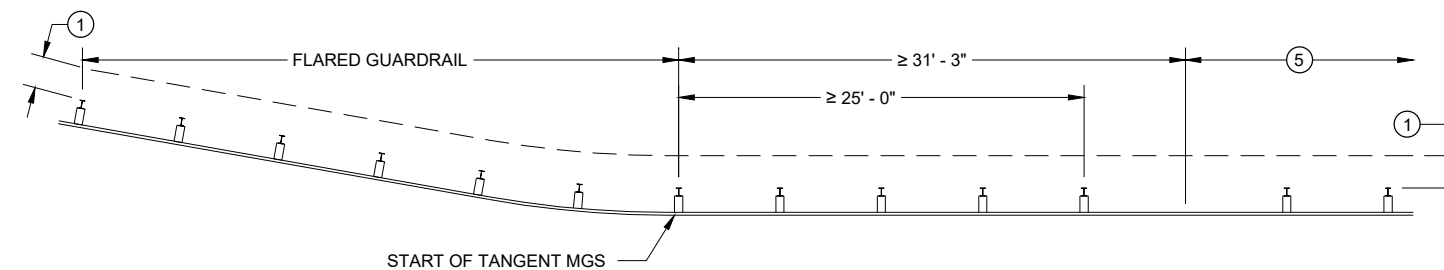

**MISSING POST IN NORMAL BEAM GUARD RUN NEAR FLARED BEAM GUARD**

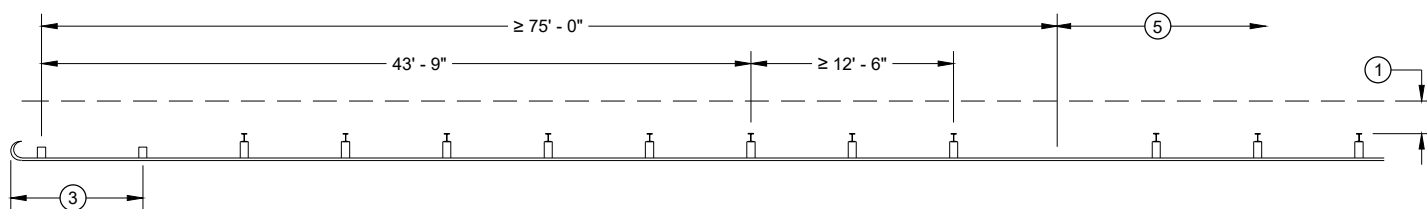

**MISSING POST IN NORMAL BEAM GUARD RUN NEAR TYPE 2 TERMINAL**

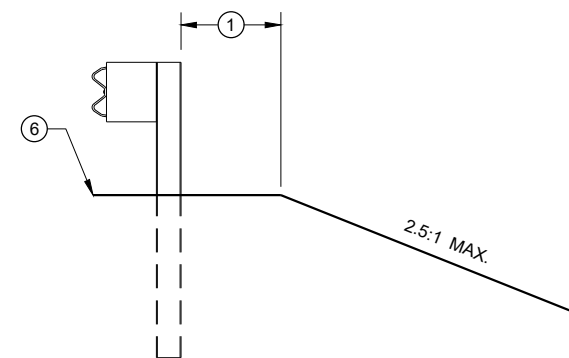

**CROSS SECTION VIEW**

- ① MINIMUM OF 2 FEET OF GRADING BEHIND POST.
- ② SEE SDD 14B45 FOR MORE DETAILS.
- ③ SEE SDD 14B47 FOR MORE DETAILS.
- ④ SEE SDD 14B44 FOR MORE DETAILS.
- ⑤ SEE MISSING POST IN NORMAL BEAM GUARD RUN FOR DISTANCE TO NEXT MISSING POST AND AREA FOR WELL DRAINED, COMPACTED SOILS.
- ⑥ SEE PLAN FOR SHOULDER DESIGN.

6

6

SDD 14B42 - 06d

SDD 14B42 - 06d

**MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL**

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

APPROVED  
7/2018 DATE /S/ Rodney Taylor  
ROADWAY STANDARDS DEVELOPMENT UNIT SUPERVISOR

FHWA

**GENERAL NOTES**

- (A) THE SLOPE IN THE AREA BOUNDED BY THE GRADELINE, THE HINGE POINT LINE AND THE CLEAR ZONE LIMITS (CZL) SHALL BE 4:1 OR FLATTER.
  - (B) AFTER FINAL ASSEMBLY, RECHECK CABLE TO BE SURE IT IS TAUT AND HAS NOT RELAXED
  - (C) DIFFERENT MANUFACTURERS REQUIRE DIFFERENT PERFORATED W - BEAM RAIL END PANELS. SEE MANUFACTURER'S INFORMATION.
  - (D) ATTACH ALUMINUM SHEET TO E.A.T. HEAD USING 4 STAINLESS STEEL SELF - TAPPING SCREWS. ONE SCREW PER CORNER.
  - (E) HARDWARE MAY VARY BETWEEN MANUFACTURER. SEE MANUFACTURER'S DRAWING FOR INFORMATION.
- DIMENSIONS MAY VARY, MANUFACTURER'S INFORMATION.


SEE SDD 14B42 FOR MORE INFORMATION.

\* DO NOT ATTACH BLOCKOUTS TO POST 1 AND 2.


DO NOT INSTALL REFLECTORS ON THE FIRST 50 FEET OF THE APPROACH END OF THE ENERGY ABSORBING TERMINAL.

SEE MANUFACTURER'S DRAWING FOR SPLICE LOCATION, HARDWARE DIMENSIONS AND INSTALLATION INSTRUCTIONS.


THE CENTER OF THE UPPER 3 1/2" DIAMETER HOLE ON POST NUMBER 3 THROUGH POST 9 IS TO BE FLUSH WITH THE GROUND LINE UP TO A MAXIMUM OF 2" ABOVE GROUND LINE. WOOD BLOCKS ON POSTS NUMBERED 3 THROUGH 9 MAY BE ADJUSTED UP TO 3" ABOVE THE TOP OF POST.

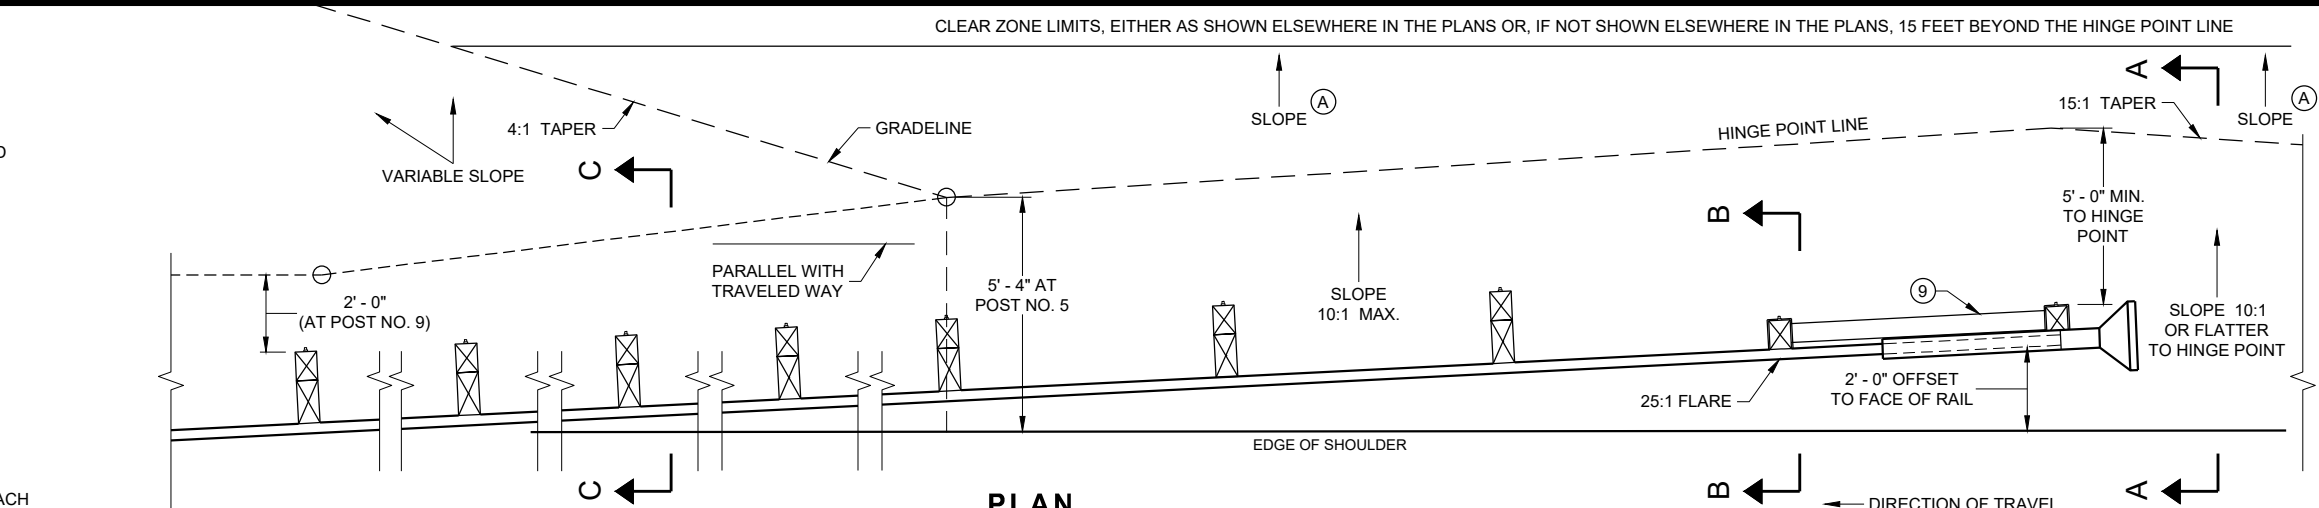


**PLAN**

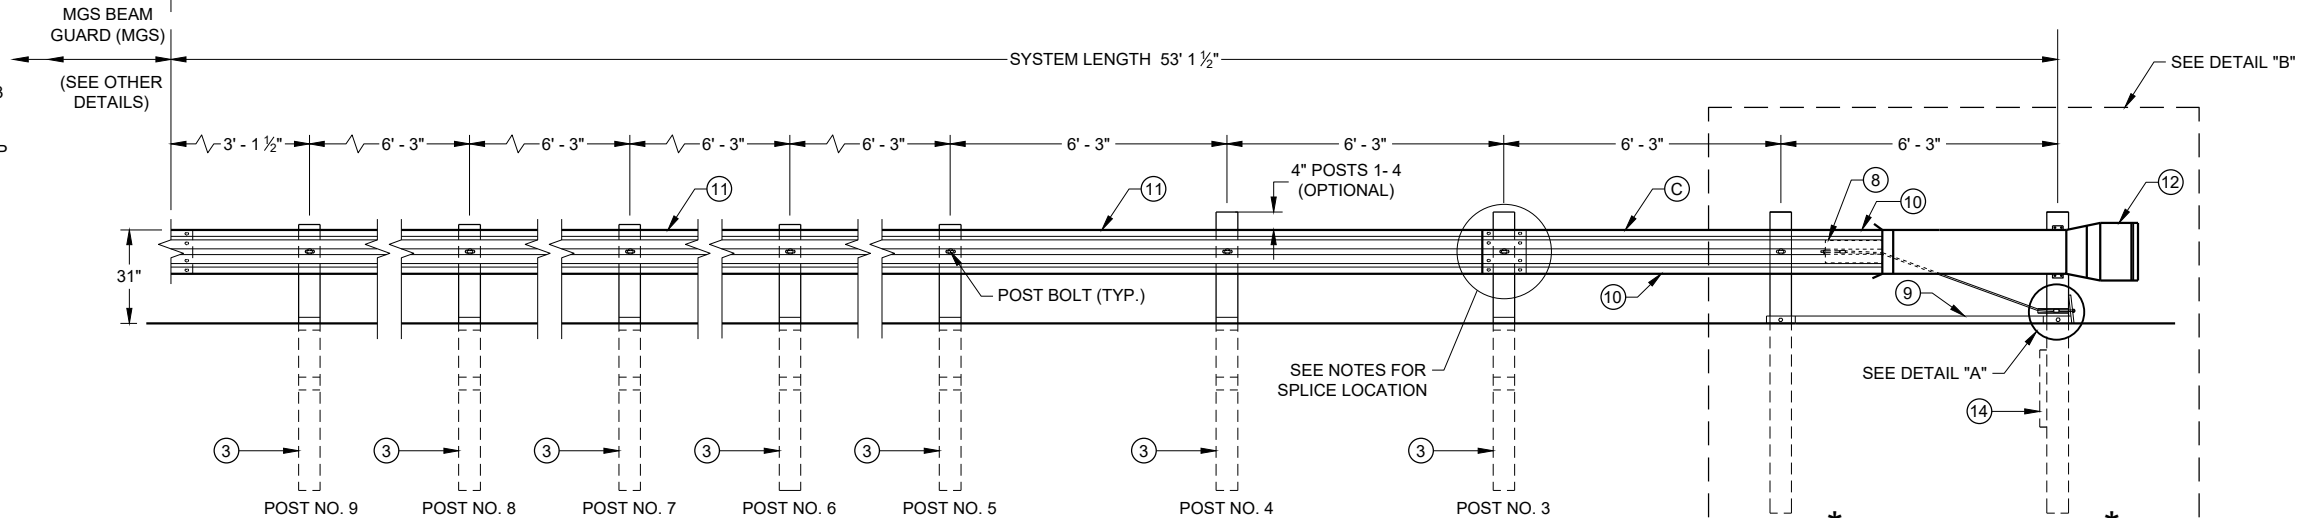


**ELEVATION**

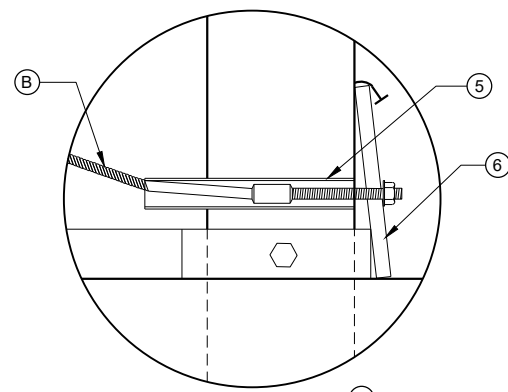


**DETAIL "A"**

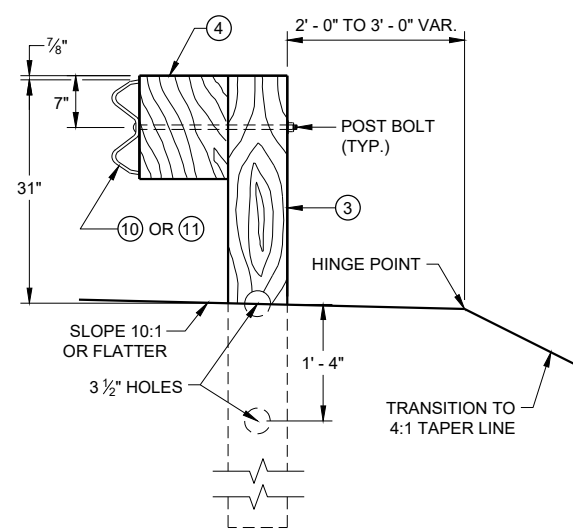


**SECTION C - C  
TYPICAL AT POST NOS. 3 - 9**

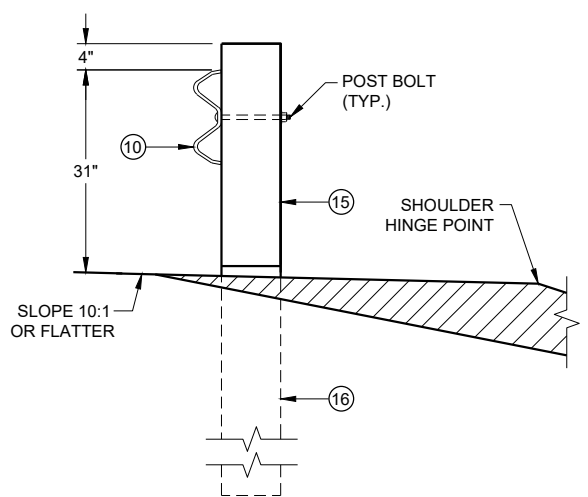

**SECTION B - B  
TYPICAL AT POST NO. 2\***

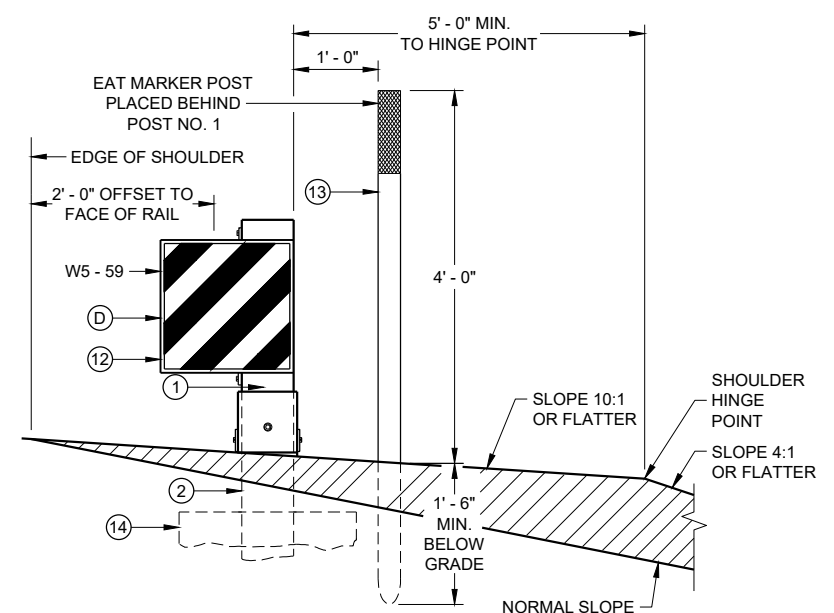

**SECTION A - A  
TYPICAL AT POST NO. 1\***

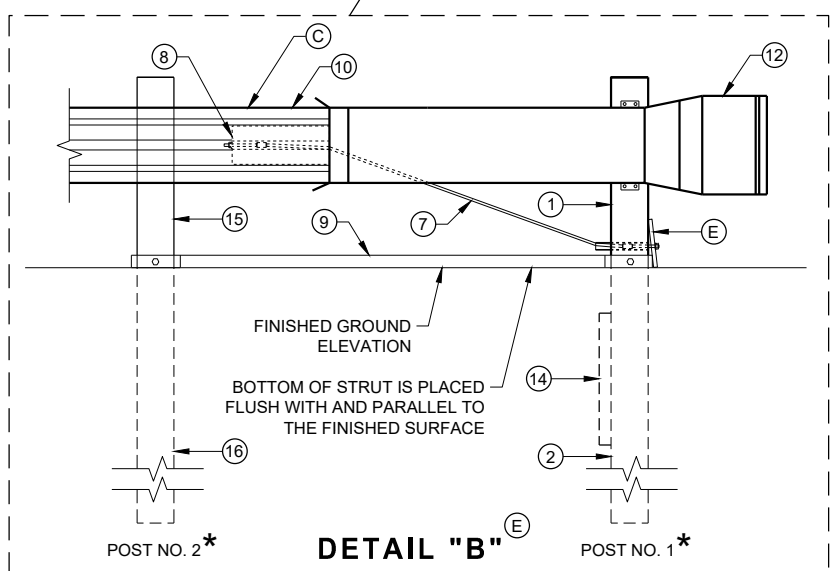

**DETAIL "B"**

**MIDWEST GUARDRAIL SYSTEM  
ENERGY ABSORBING TERMINAL  
(MGS)**

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

6


6

SDD 14B44 - 04a


SDD 14B44 - 04a

**BILL OF MATERIALS**


PART NO.	DESCRIPTION MATERIALS PROVIDED BY MGS EAT MANUFACTURER. SEE MANUFACTURER'S DETAILS FOR MORE INFORMATION.
①	UPPER POST NO. 1 6" X 6" TUBE
②	LOWER POST NO. 1
③	WOOD CRT
④	WOOD BLOCKOUT
⑤	PIPE SLEEVE
⑥	BEARING PLATE
⑦	BCT CABLE ASSEMBLY
⑧	ANCHOR CABLE BOX
⑨	GROUND STRUT
⑩	PERFORATED W-BEAM RAIL END PANEL, 12'-6" LONG.
⑪	STANDARD W-BEAM RAIL. MULTIPLE SECTIONS REQUIRED. SECTIONS VARY IN LENGTH.
⑫	IMPACT HEAD
⑬	EAT MARKER POST - YELLOW (SEE APPROVED PRODUCTS LIST)
⑭	SOIL PLATE
⑮	UPPER POST NO. 2
⑯	LOWER POST NO. 2

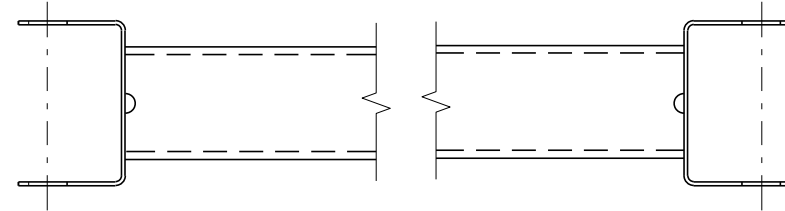


**GENERIC GROUND STRUT** ⑨ ⑤

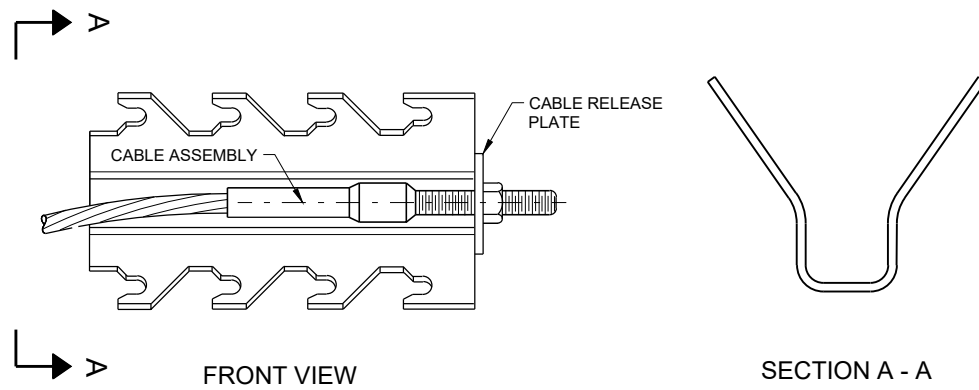


**GENERIC ANCHOR CABLE BOX** ⑨ ⑤

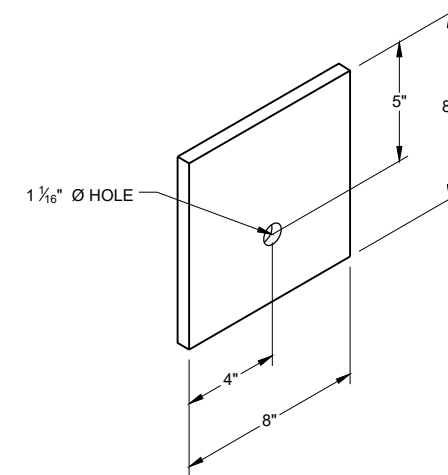


**BEARING PLATE** ⑥ ⑤

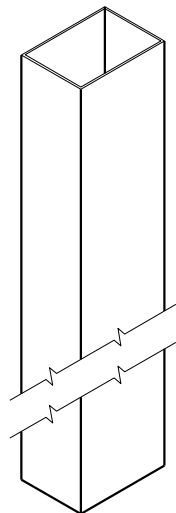


UPPER POST NO. 1 <sup>(1)</sup> (E)

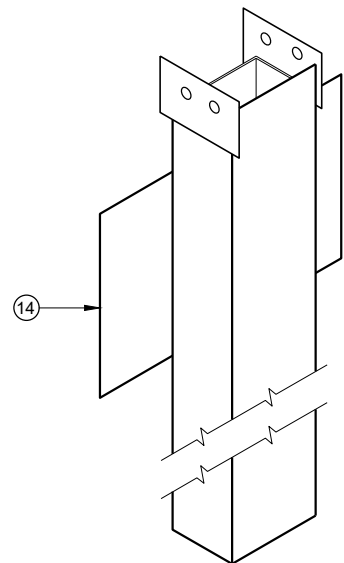


LOWER POST NO. 1 <sup>(2)</sup> (E)

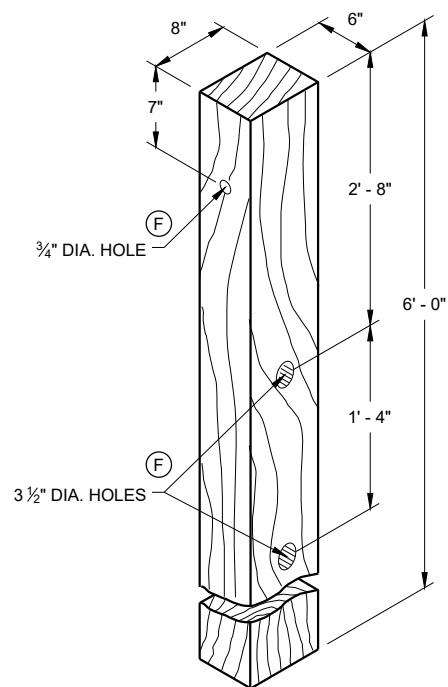


WOOD CRT POST <sup>(3)</sup> (E)  
POSTS NUMBER 3-9



UPPER POST NO. 2 <sup>(15)</sup> (E)




LOWER POST NO. 2 <sup>(16)</sup> (E)

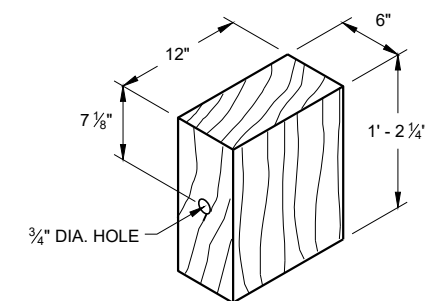

WOOD BLOCKOUT <sup>(4)</sup>  
REQ'D. AT ALL POSTS EXCEPT POST NO'S 1 & 2


6

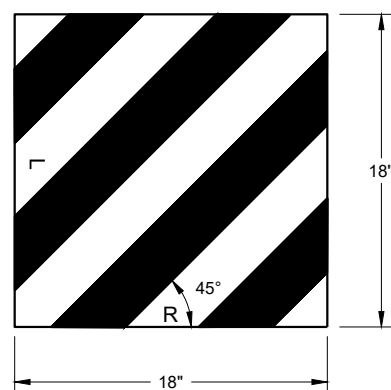


W5 - 59  
REFLECTIVE SHEETING DETAIL <sup>(E)</sup>

TYPE H  
YELLOW REFLECTIVE  
SHEETING 3" X 9".  
SEE STANDARD  
SPECIFICATION 637.


E.A.T. MARKER  
POST (YELLOW)

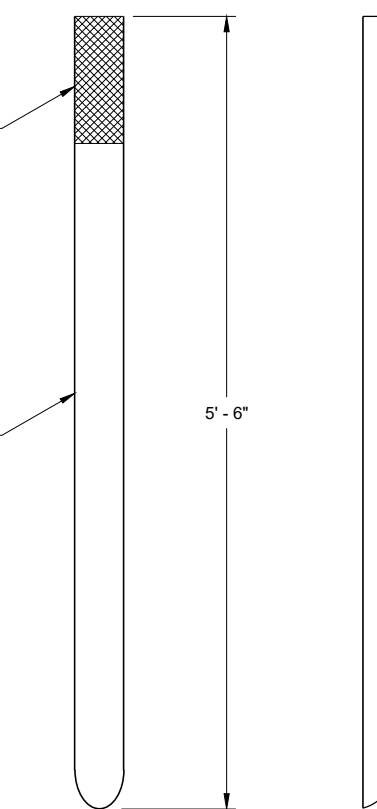

FRONT VIEW SIDE VIEW  
E.A.T. MARKER POST <sup>(13)</sup>



SIDE VIEW

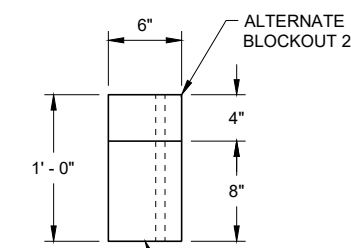

TOP VIEW

ALTERNATE WOOD  
BLOCKOUT DETAIL

6

SDD 14B44 - 04c


SDD 14B44 - 04c

**MIDWEST GUARDRAIL SYSTEM  
ENERGY ABSORBING TERMINAL  
(MGS)**


STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

APPROVED  
7/2018 /S/ Rodney Taylor  
DATE ROADWAY STANDARDS DEVELOPMENT  
UNIT SUPERVISOR

FHWA

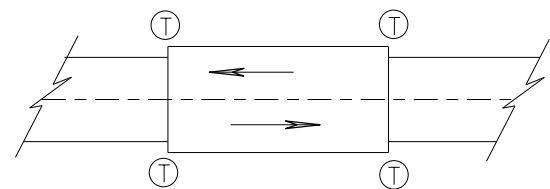

**TWO WAY TRAFFIC**

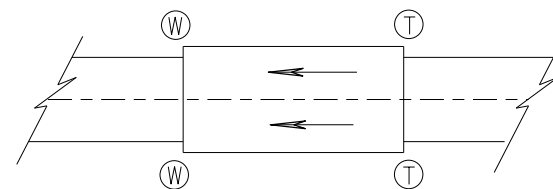

**ONE WAY TRAFFIC**

(T) THRIE BEAM CONNECTION

(W) W-BEAM CONNECTION WHEN REQUIRED

**TYPICAL LOCATIONS OF THRIE BEAM AND W-BEAM CONNECTIONS TO BRIDGE**

**GENERAL NOTES**


IF ROCK IS ENCOUNTERED, REMOVE ROCK TO FULL DEPTH OF POST PLUS 2 1/2", AND 12" DIAMETER AROUND POST. SEE 14B42 FOR MORE DETAILS.

TRANSITION USES STEEL POSTS ONLY.


SEE STANDARD DETAIL DRAWING 14 B 42 FOR MORE INFORMATION.

POST 2 THROUGH 17 USES STEEL POST ONLY

- ① BRIDGE RAILING TYPE "W" DOES NOT REQUIRE A TERMINAL CONNECTOR.
- ② OPTIONAL CURB AND GUTTER OR DRAINAGE FEATURE SEE PLAN FOR INFORMATION.
- ⑬ STEEL OR WOOD POST IS ACCEPTABLE AT POST 1. SEE SDD14B42

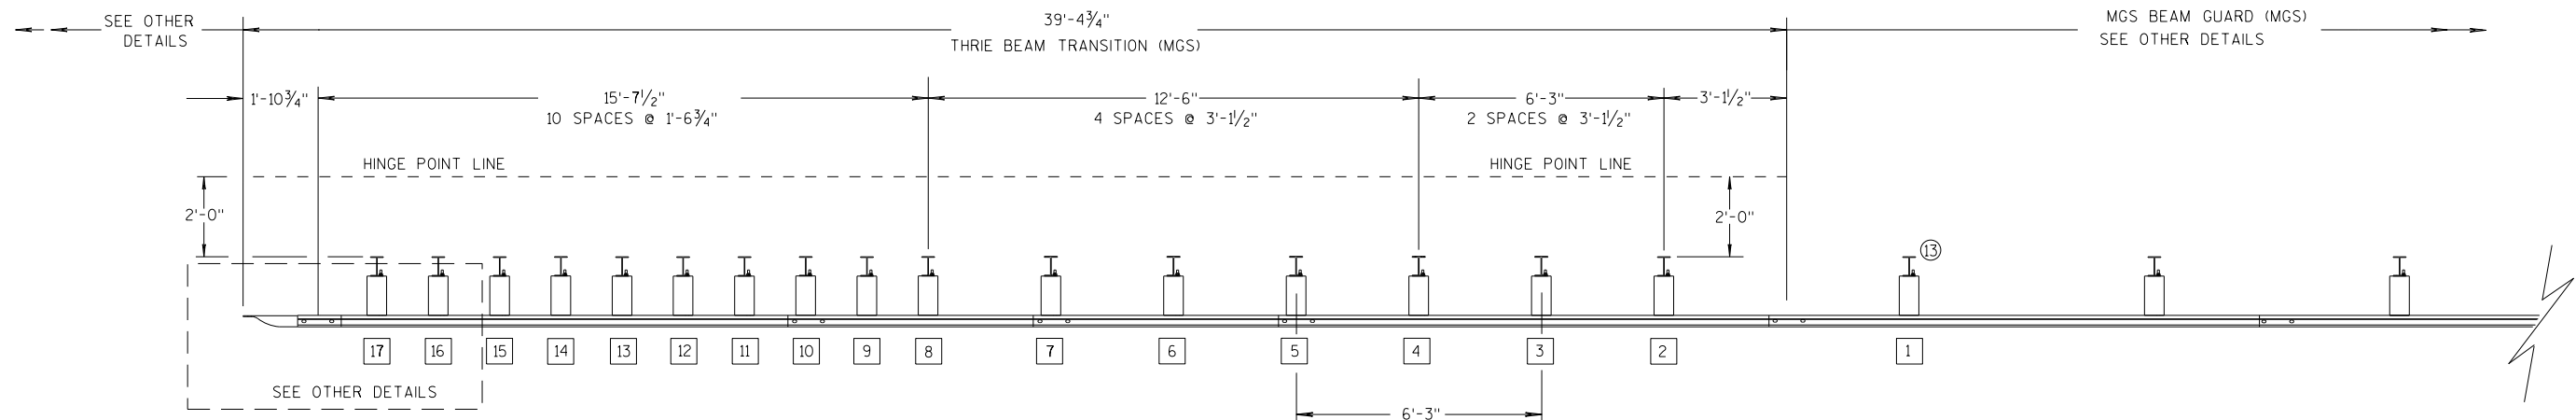

**PLAN VIEW**

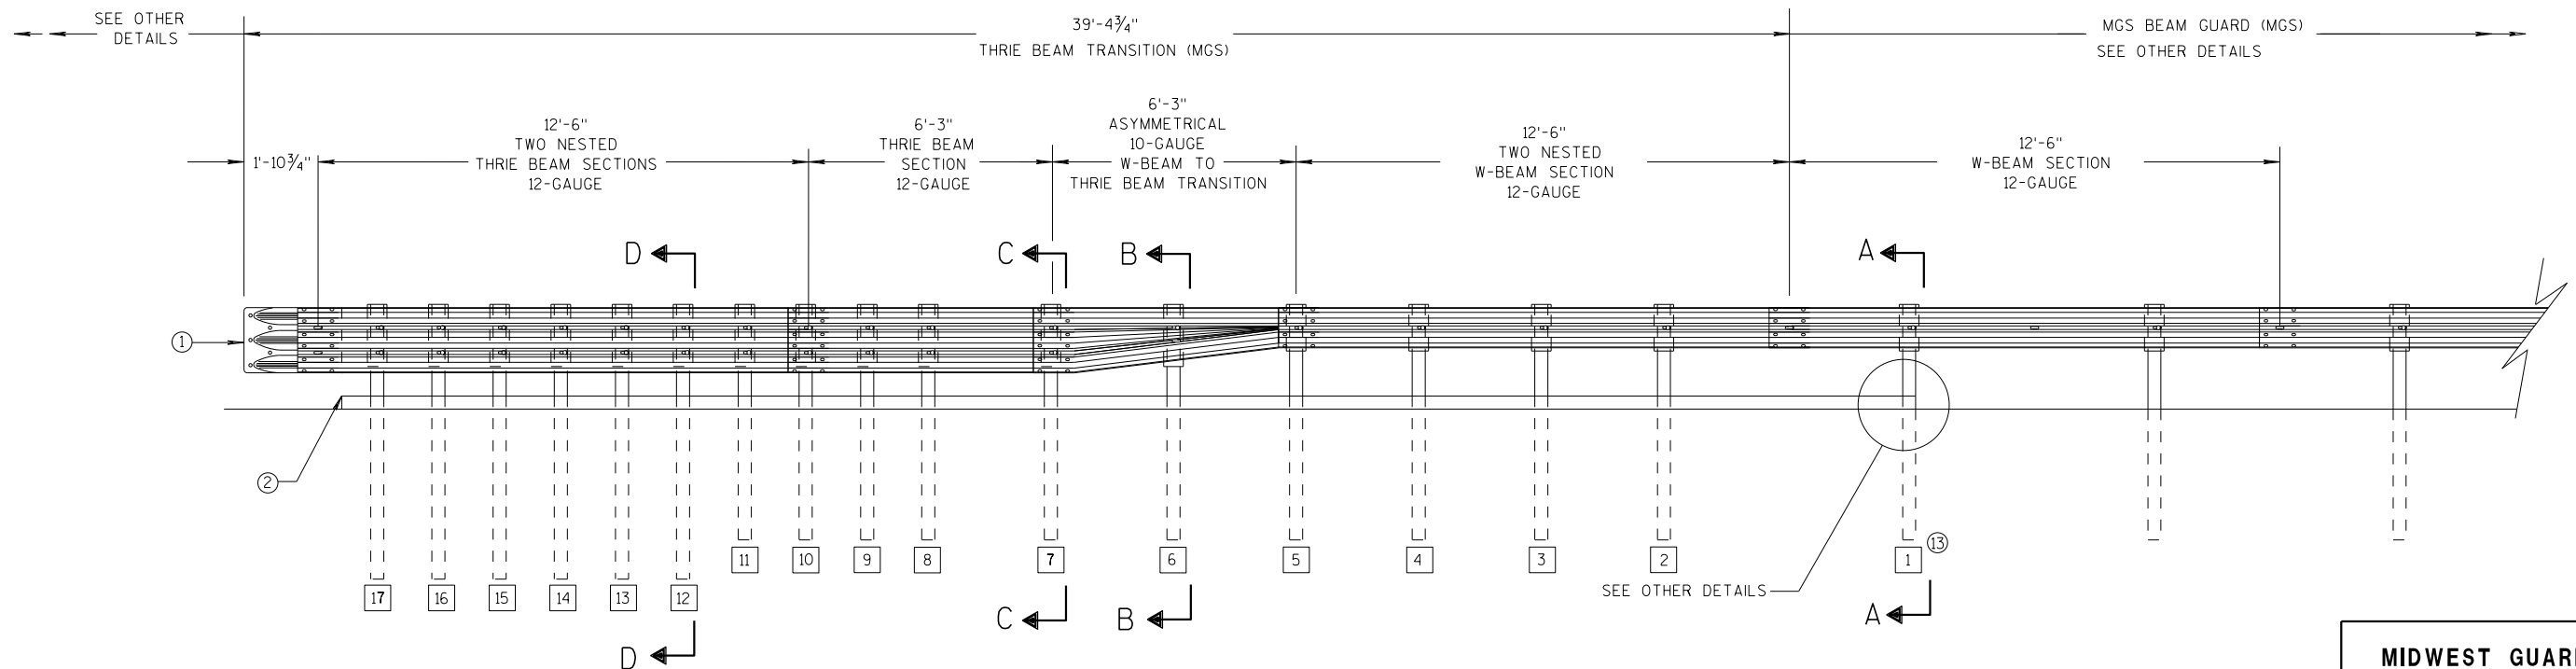

**ELEVATION VIEW**

**MIDWEST GUARDRAIL SYSTEM THRIE BEAM TRANSITION**


**MIDWEST GUARDRAIL SYSTEM  
THRIE BEAM TRANSITION (MGS)**

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION




**GENERAL NOTES**


- ② OPTIONAL CURB AND GUTTER OR DRAINAGE FEATURE SEE PLAN FOR INFORMATION.
- ③ WHEN USING STEEL POSTS AND WOOD BLOCKOUTS INSTALL FOUR 10D GALVANIZED NAILS. INSTALL NAILS AT THE BACK CORNERS OF THE BLOCK AND BEND THE NAILS OVER THE FLANGE OF THE STEEL POST.
- ④ TOLERANCE FOR TOP OF W-BEAM RAIL IS ± 1".
- ⑬ STEEL OR WOOD POST IS ACCEPTABLE AT POST 1. SEE SDD 14B42

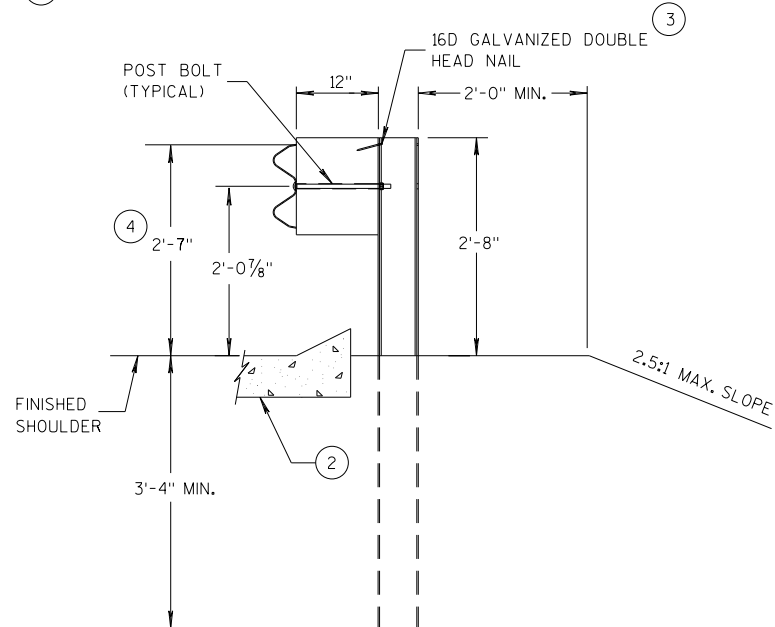


**SECTION A-A  
POSTS 1-5**

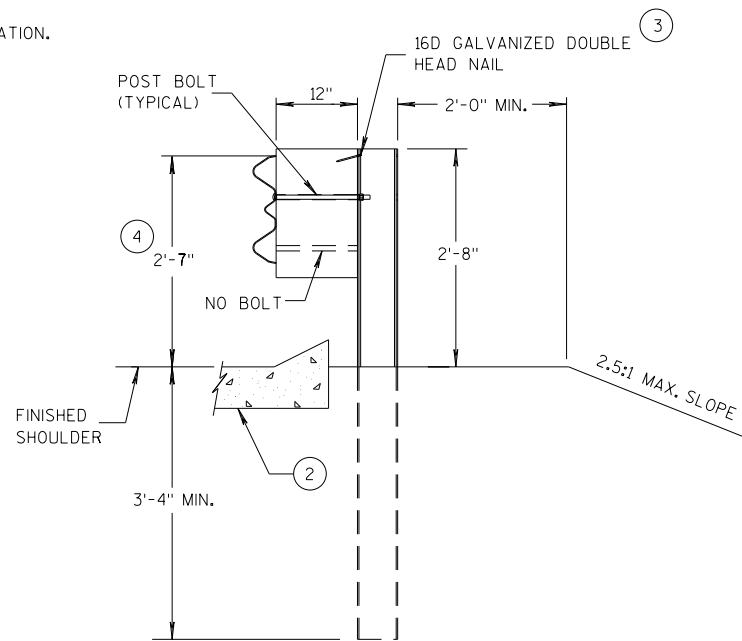


**SECTION B-B  
POST 6**

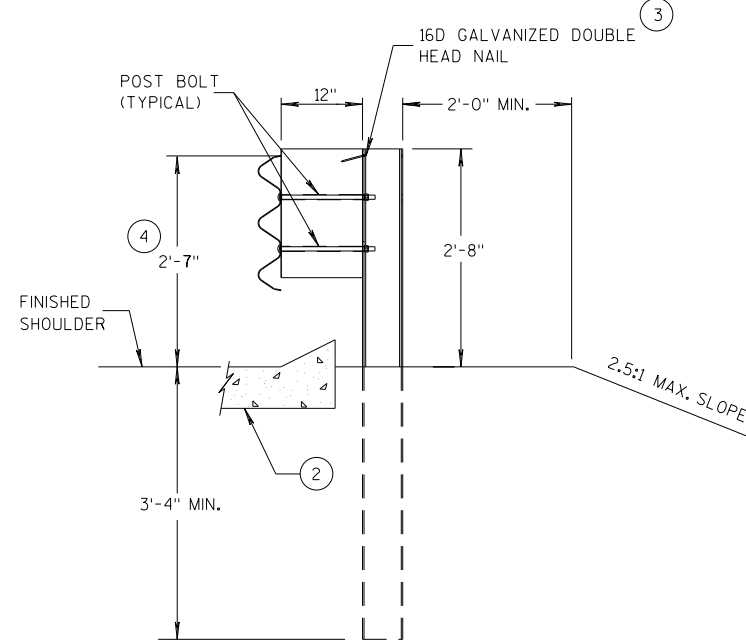


**SECTION C-C  
POSTS 7-11**

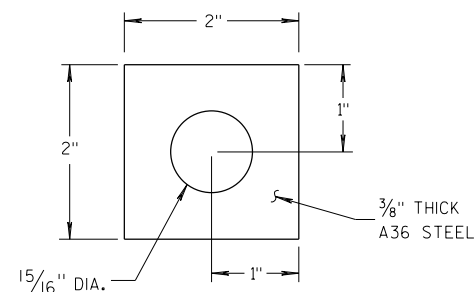


**PLATE WASHER DETAIL**

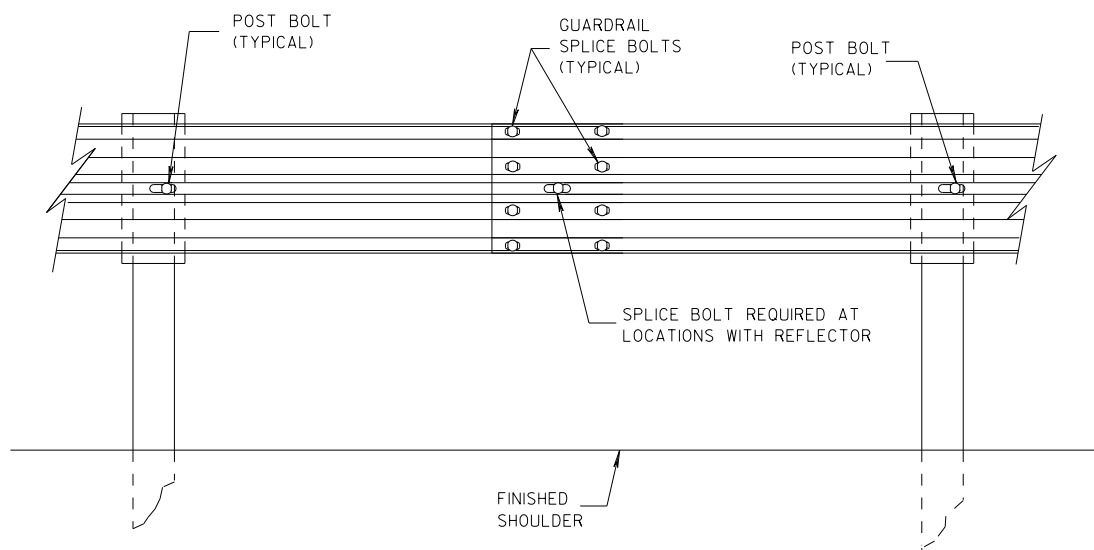

**SPLICE DETAIL**

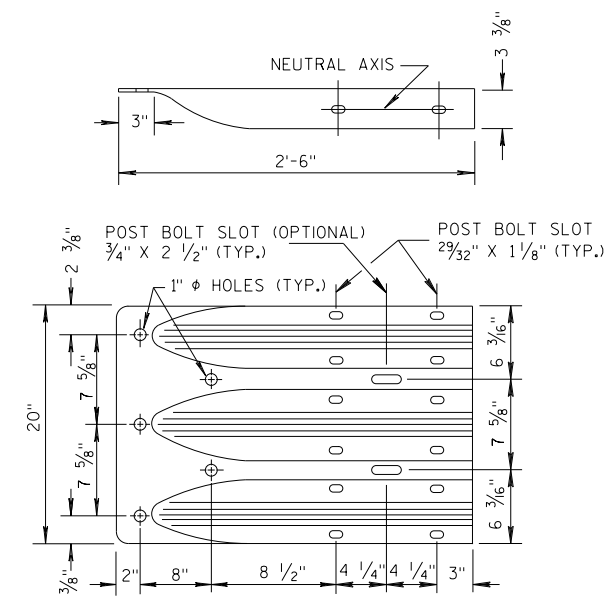


**THRIE BEAM  
TERMINAL CONNECTOR**

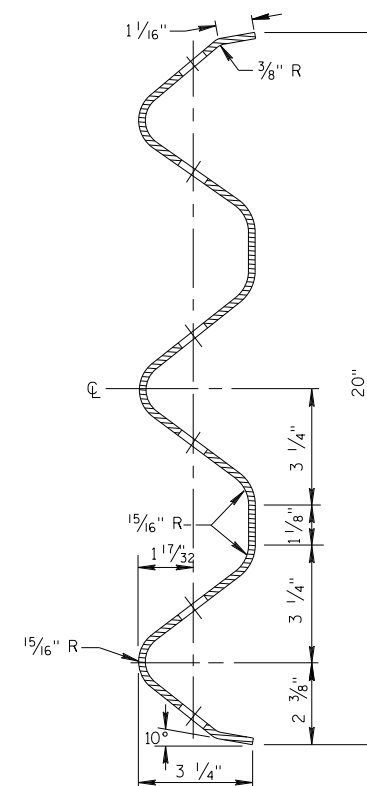


**SECTION THRU THRIE  
BEAM RAIL ELEMENT**

**MIDWEST GUARDRAIL SYSTEM  
THRIE BEAM TRANSITION (MGS)**


STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

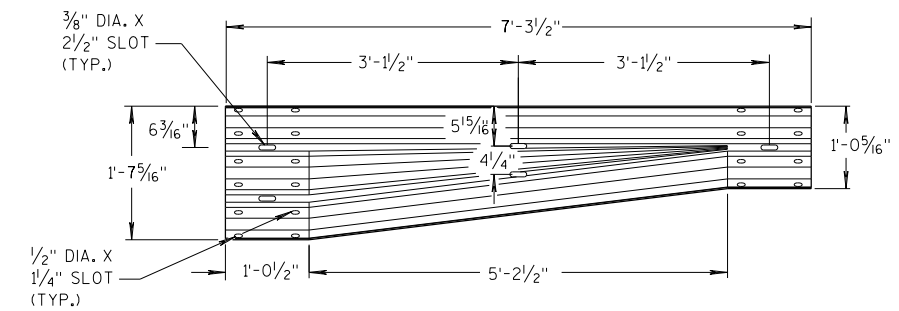


**W-BEAM TO THRIE BEAM TRANSITION SECTION**

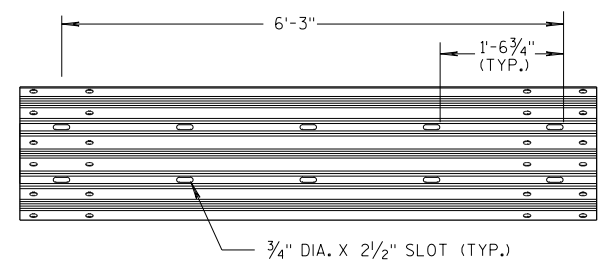


**6'-3\"/>**

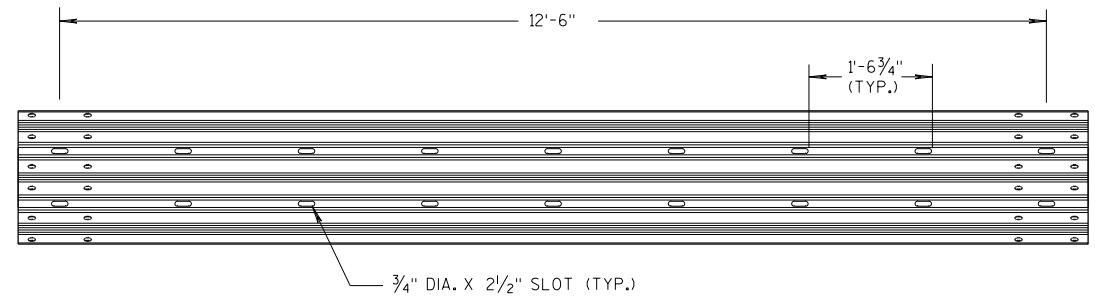


**12'-6\"/>**

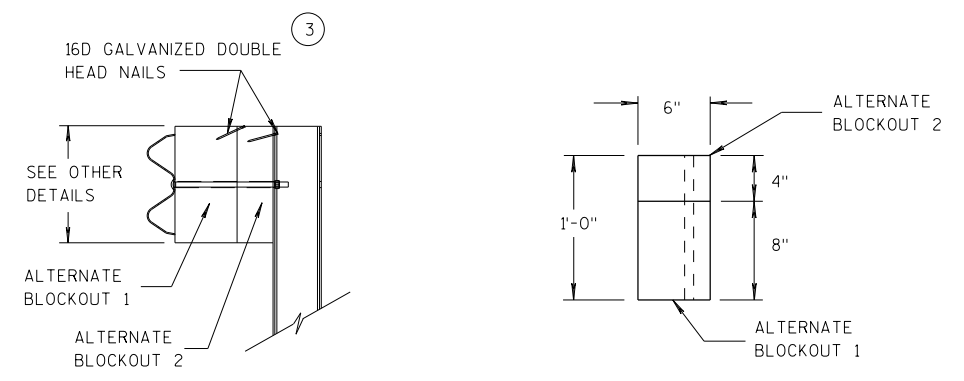


**ALTERNATE WOOD BLOCKOUT DETAIL**

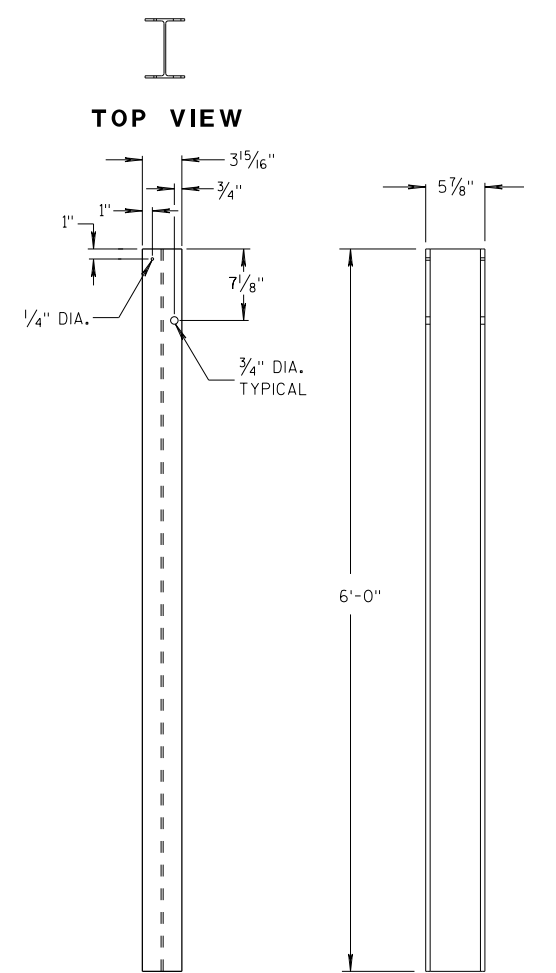


**STEEL POSTS 1-5**

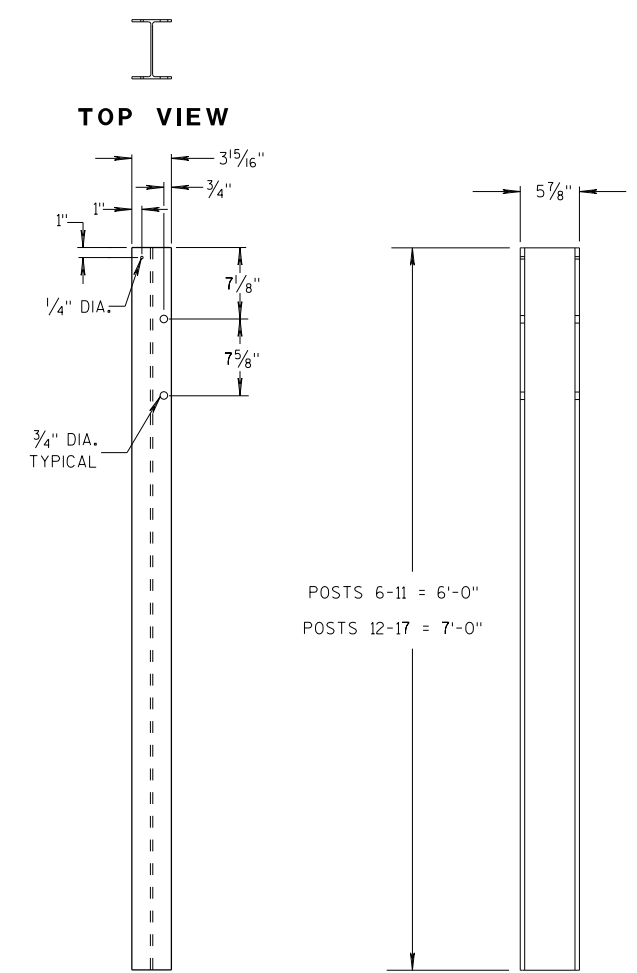


**STEEL POSTS 6-17**




**TOP VIEW**



**BLOCKOUT POSTS 1-5**



**TOP VIEW**



**BLOCKOUT POSTS 6-17**

**GENERAL NOTES**

- STEEL POSTS ARE W6X9 OR W6X8.5.
- BOLT HOLES FOR POST ARE ON FRONT AND OF SIDE OF POST.
- (3) WHEN USING STEEL POSTS AND WOOD BLOCKOUTS INSTALL FOUR 16D GALVANIZED NAILS. INSTALL NAILS AT THE BACK CORNERS OF THE BLOCK AND BEND THE NAILS OVER THE FLANGE OF THE STEEL POST.
- (5) WOOD BLOCKS MAY BE CONSTRUCTED OUT OF 2 WOOD BLOCKS. SEE ALTERNATE WOOD BLOCK DETAIL.
- (13) STEEL OR WOOD POST IS ACCEPTABLE AT POST 1. SEE SDD 14B42.

**MIDWEST GUARDRAIL SYSTEM  
THRIE BEAM TRANSITION (MGS)**


STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

6

6


S.D.D. 14 B 45-5c

S.D.D. 14 B 45-5c

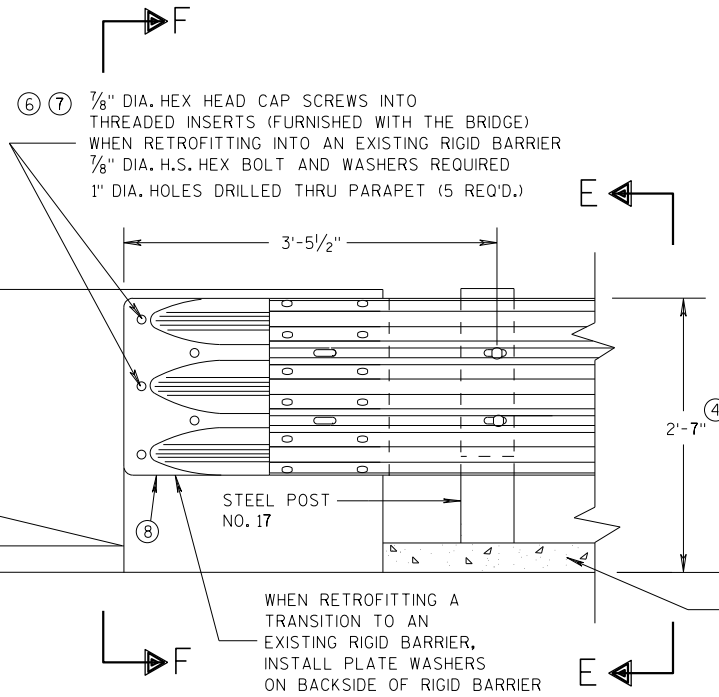


FRONT VIEW

**THRIE BEAM CONNECTION TO BRIDGE PARAPET WITH SQUARE ENDS**

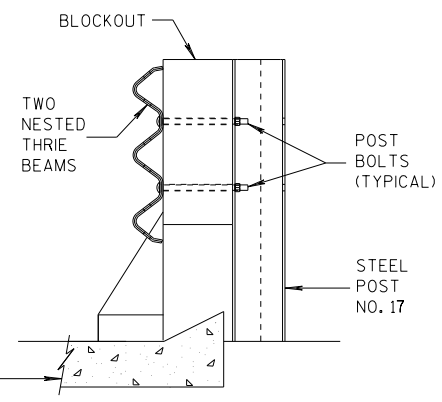


SECTION E-E

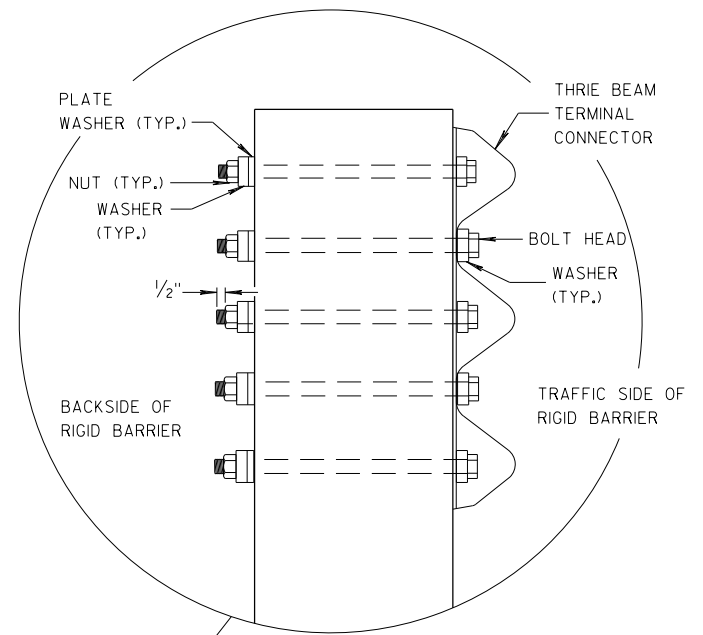


**GENERAL NOTES**

- THESE ARE TYPICAL CONNECTION DETAILS. ADJUST THE POSITION OF CONNECTIONS TO EXISTING BRIDGES TO FIT THE ACTUAL BRIDGE AND SITE DIMENSIONS.
- ② OPTIONAL CURB AND GUTTER OR DRAINAGE FEATURE SEE PLAN FOR INFORMATION.
- ④ TOLERANCE FOR TOP OF BEAM IS ± 1\".
- ⑥ DRILLING BOLT HOLES THROUGH THE PARAPET, BOLTS, NUTS, WASHERS AND REPAIRING DAMAGED CONCRETE ARE INCIDENTAL TO THE CONTRACT.
- ⑦ BOLTS MAY BE A325 BOLTS OR A449 BOLTS. BOLT LENGTH AND THREADING LENGTH ARE TO ALLOW FOR A TIGHT CONNECTION BETWEEN RIGID BARRIER AND THRIE BEAM CONNECTION PLATE. CONTRACTOR IS TO FIELD VERIFY BOLT LENGTH AND THREAD LENGTH. ONE ROUND WASHER REQUIRED BETWEEN BOLT HEAD AND THRIE BEAM CONNECTOR PLATE. BOLTS THAT EXTEND THROUGH THE PARAPET AND OUT THE BACK FACE REQUIRE A HARDENED ROUND STEEL WASHER THAT IS 2\" O.D. X 5/32\" THICK AND ONE PLATE WASHER. REPAIR ANY DAMAGED CONCRETE FROM BOLT INSTALLATION.
- ⑧ THE RECESS FOR A W-BEAM CONNECTION, WHICH EXISTS ON SOME PARAPETS OF THIS TYPE, SHALL BE FILLED WITH A TREATED TIMBER BLOCKOUT. BLOCKOUT SIZE IS 1'-6\" X 2'-0\" X 3 1/2\".

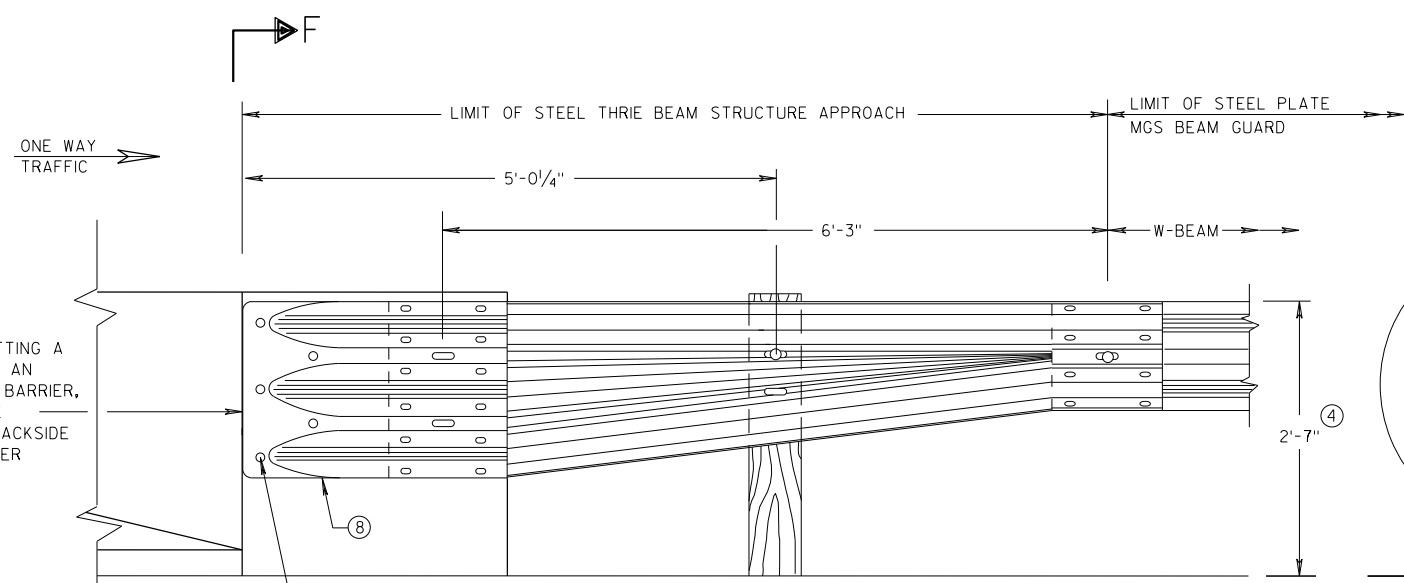


FRONT VIEW

**W BEAM TRANSITION AND CONNECTION TO BRIDGE PARAPETS WITH SQUARE ENDS  
(USE ONLY ON THE TRAFFIC EXIT END OF ONE WAY BRIDGES)**

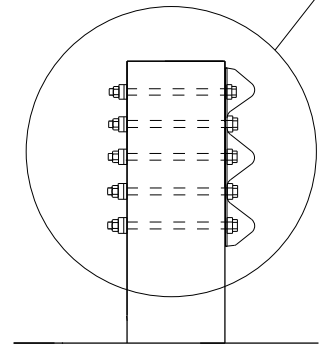

SECTION F-F

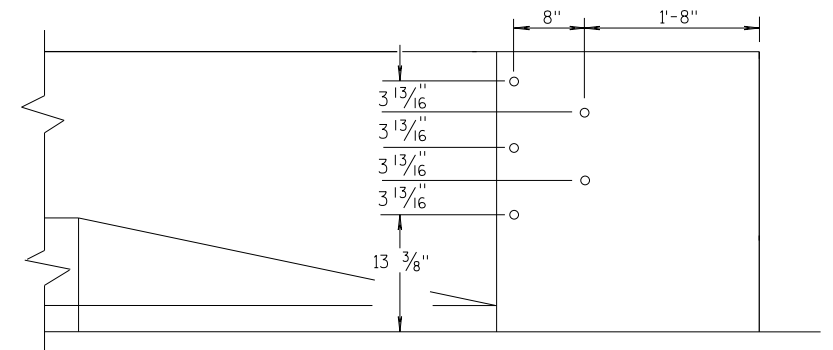

DRILL HOLE LOCATION


<b>MIDWEST GUARDRAIL SYSTEM THRIE BEAM TRANSITION (MGS)</b>	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED 07/2018 DATE	/S/ Rodney Taylor ROADWAY STANDARDS DEVELOPMENT UNIT SUPERVISOR
FHWA	

6


6

S.D.D. 14 B 45-5d

S.D.D. 14 B 45-5d

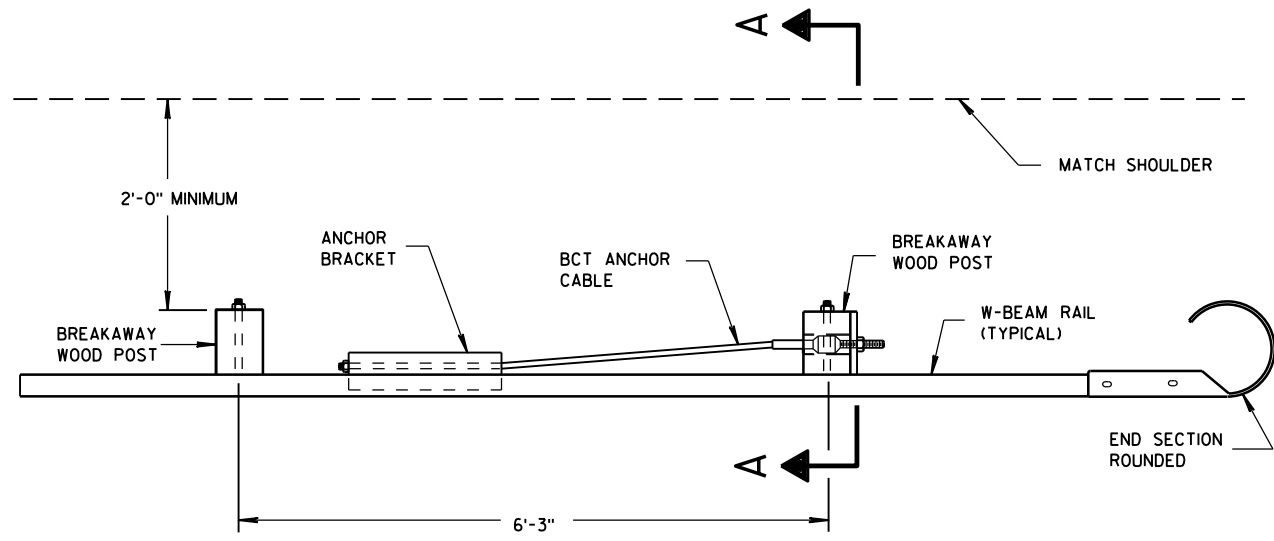

**PLAN VIEW**

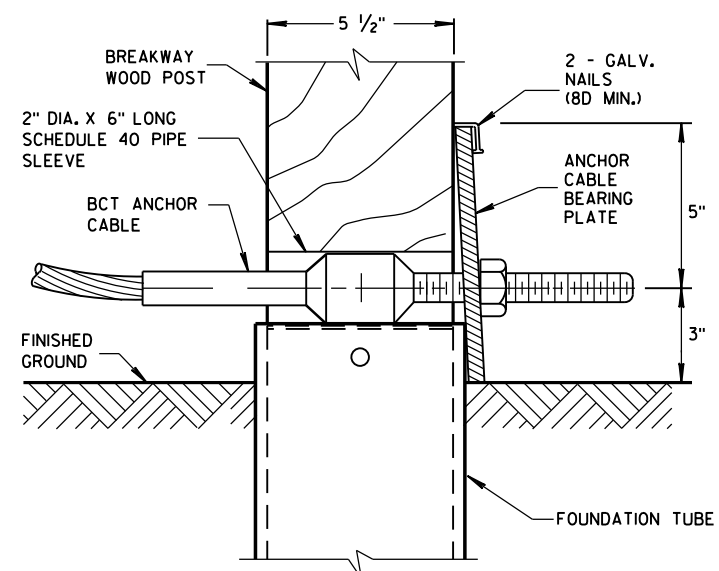

**DETAIL A**

POST NO. 1  
GROUND STRUT NOT SHOWN FOR CLARITY.

**GENERAL NOTES**

SEE SDD 14 B 42 FOR MORE INFORMATION.


END SECTION BOLTS AND NUTS HAVE THE SAME MATERIAL REQUIREMENTS AS SPLICE BOLTS.

FOUNDATION TUBE BOLTS ARE 7/8" DIAMETER ASTM A307 HEX HEAD BOLT. FOUNDATION TUBE BOLTS REQUIRE ASTM A563 A NUT AND TWO ASTM F844 7/8" DIAMETER FLAT WASHERS. INSTALL ONE WASHER UNDER BOLT HEAD AND ONE WASHER UNDER NUT.

ANCHOR BRACKET AND GROUND STRUT BOLTS ARE A 5/8" DIAMETER ASTM A307 HEX HEAD BOLT. ANCHOR BRACKET BOLTS REQUIRE ASTM A563 A NUT AND TWO ASTM F844 5/8" DIAMETER FLAT WASHERS. INSTALL ONE WASHER UNDER BOLT HEAD AND ONE WASHER UNDER NUT.


W-BEAM END SECTION ROUNDED HAS THE SAME MATERIAL PROPERTIES AS STANDARD STEEL RAIL.

- (A) TOP OF FOUNDATION TUBE SHALL BE NO MORE THAN 3" ABOVE FINISHED GROUND.
- (B) FOR NEW CONSTRUCTION TOP OF RAIL IS 31" ± 1". FOR EXISTING INSTALLATIONS TOP OF RAIL IS BETWEEN 27 3/4" TO 32" ± 1".

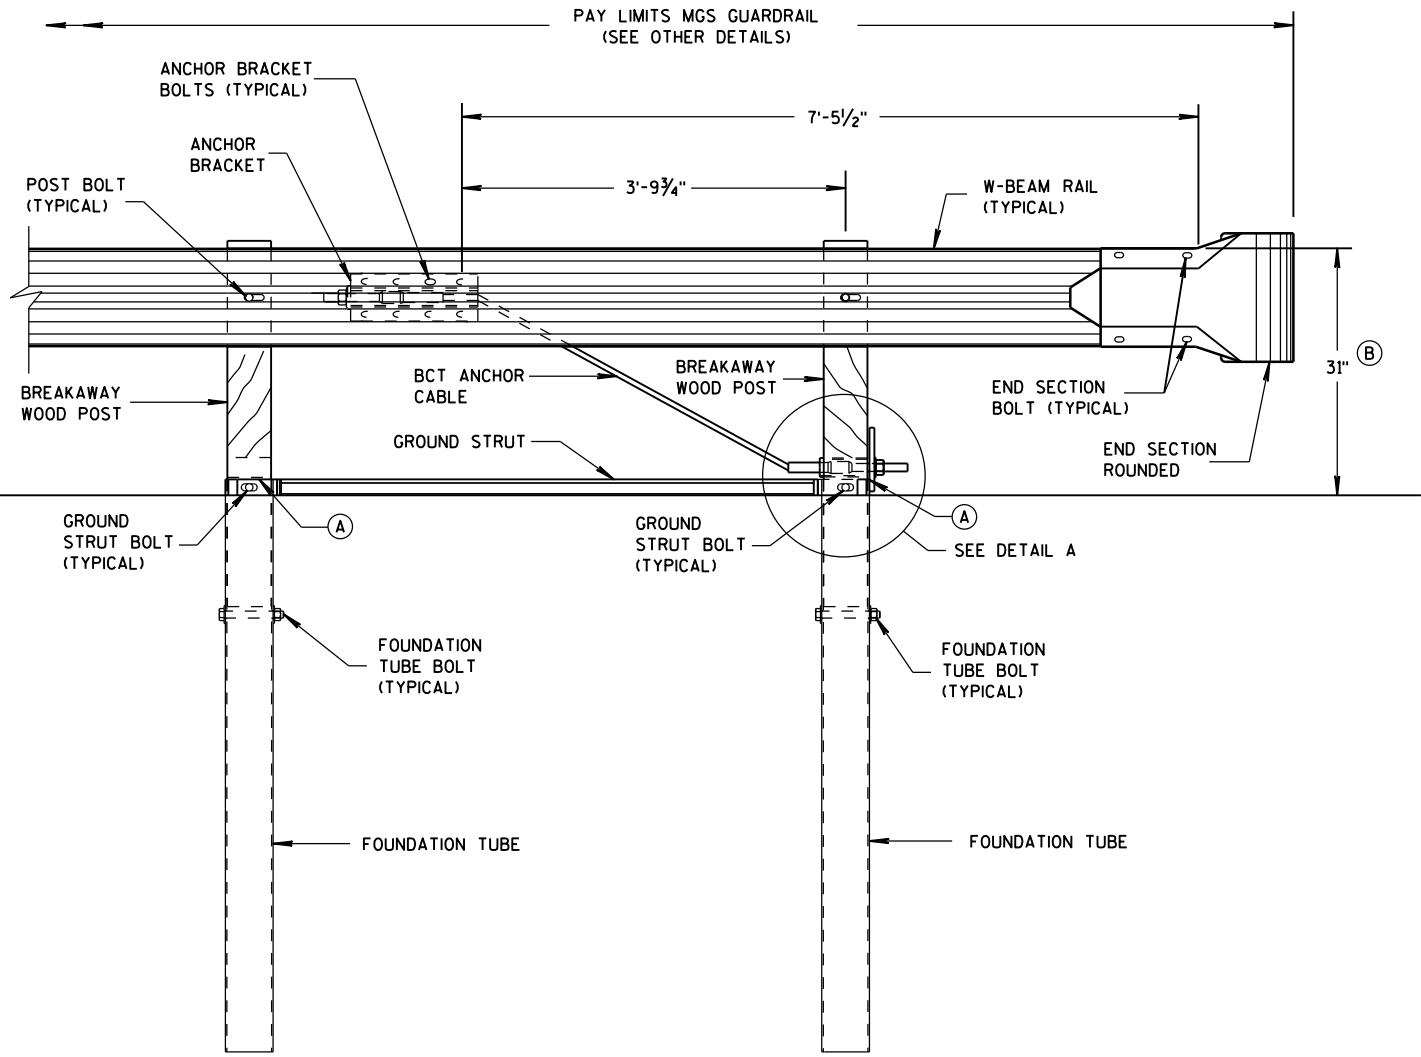


**FRONT VIEW**


**END RAIL DETAIL**

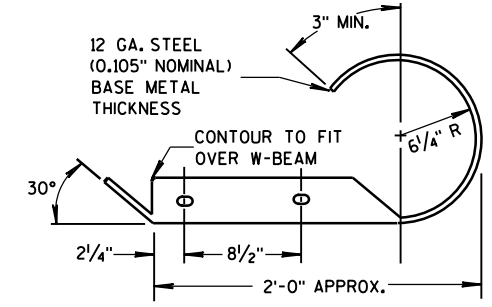

**PLAN VIEW**

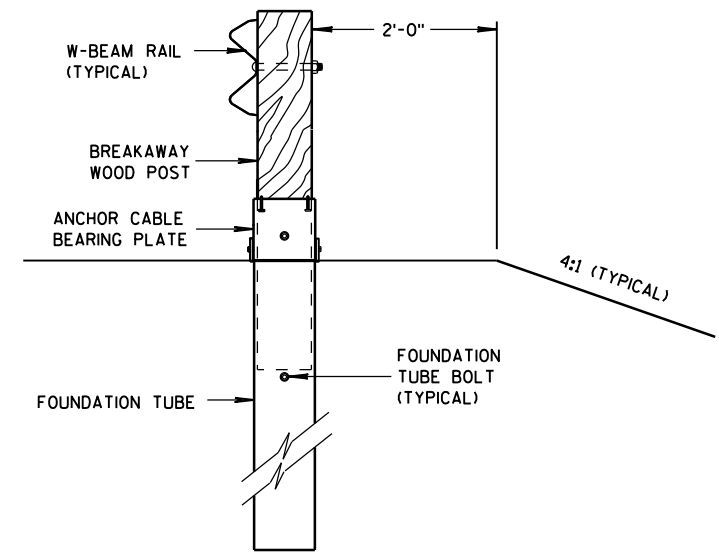

**SECTION A-A**

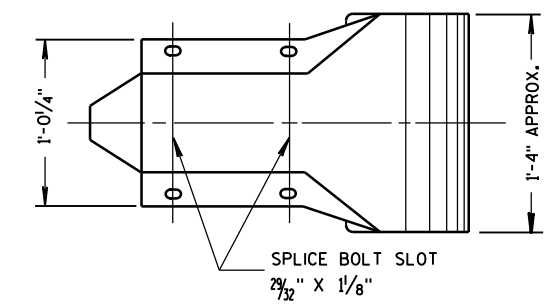

**FRONT VIEW**

**W BEAM END SECTION ROUNDED**

MIDWEST GUARDRAIL  
SYSTEM (MGS) TYPE 2 TERMINAL


STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

6


6

S.D.D. 14 B 47-2a


S.D.D. 14 B 47-2a




PLAN VIEW




PLAN VIEW

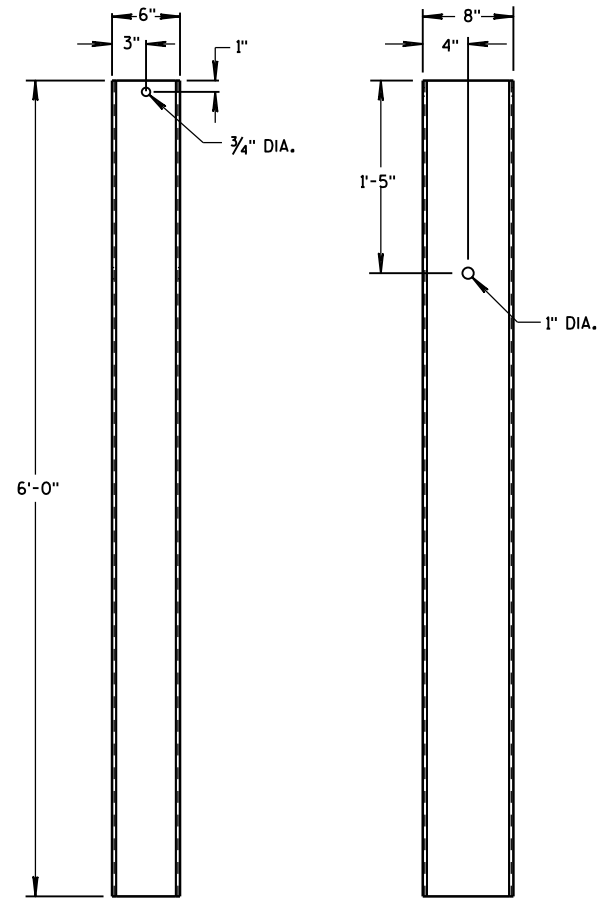


FRONT VIEW SIDE VIEW  
FOUNDATION TUBE

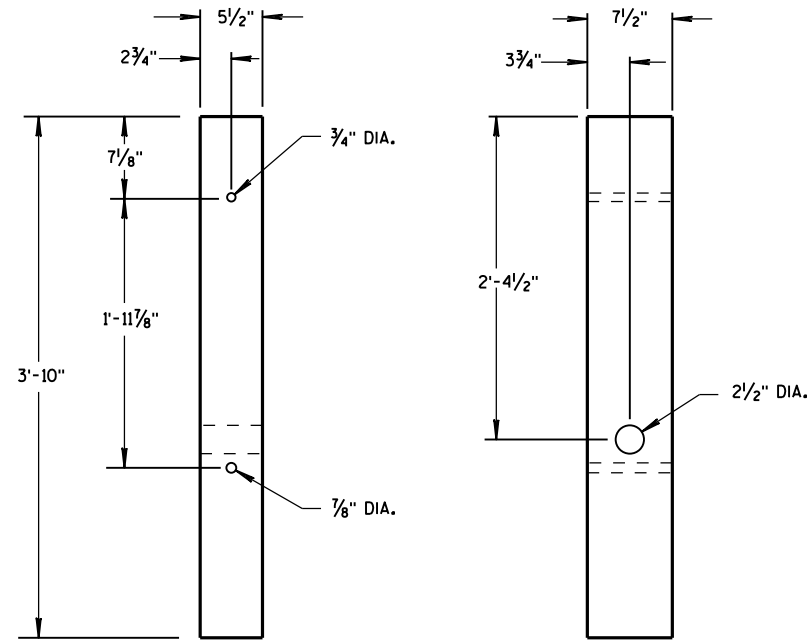


FRONT VIEW SIDE VIEW  
BREAKAWAY WOOD POST

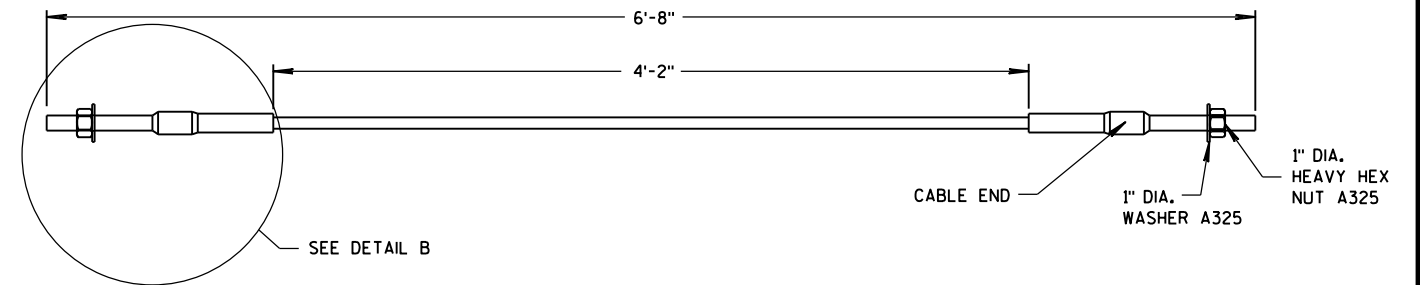

BCT ANCHOR CABLE

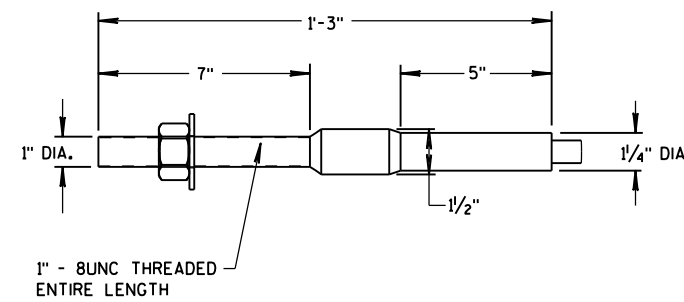

DETAIL B

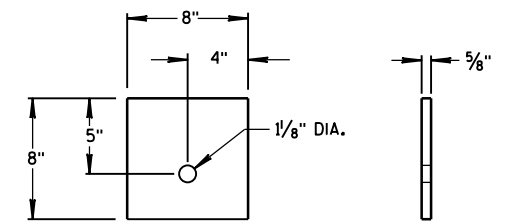

SIDE VIEW FRONT VIEW  
ANCHOR CABLE BEARING PLATE

**GENERAL NOTES**

BCT ANCHOR CABLE IS A 3/4" DIAMETER 6X19 IWRC IPS GALVANIZED WIRE ROPE. THE SWAGED FITTINGS AND STUD ARE REQUIRED. END FITTING SHALL BE MACHINED FROM HOT-ROLLED CARBON STEEL CONFORMING TO ASTM A576 GRADE 1035 AND GALVANIZED ACCORDING TO ASTM A123. TREADED STUD SHALL CONFORM TO ASTM A325 OR SAE GRADE 5. MINIMUM BREAKING STRENGTH OF WIRE ROPE IS 43,000 LB. WIRE ROPE IS TO BE TAUT.


6

6


S.D.D. 14 B 47-2b

S.D.D. 14 B 47-2b


MIDWEST GUARDRAIL  
SYSTEM (MGS) TYPE 2 TERMINAL  
STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

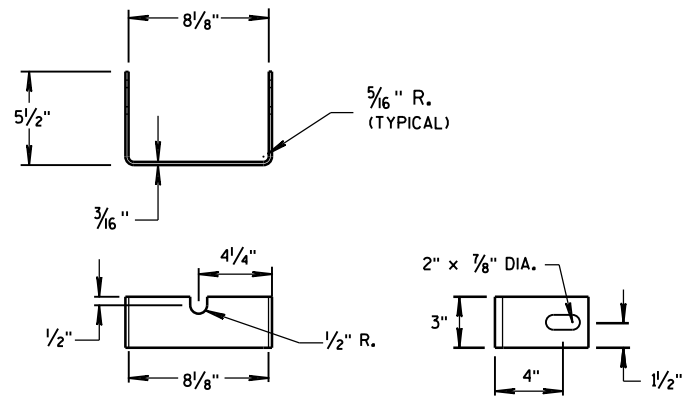


**YOKE DETAIL**

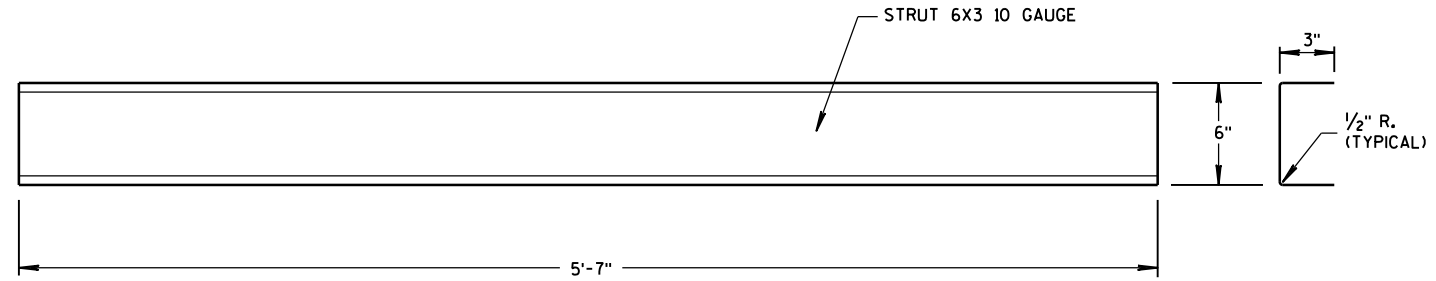


**STRUT DETAIL**

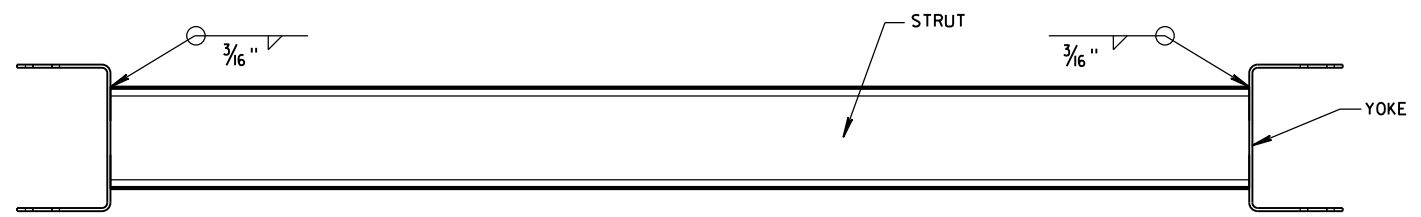


**PLAN VIEW**

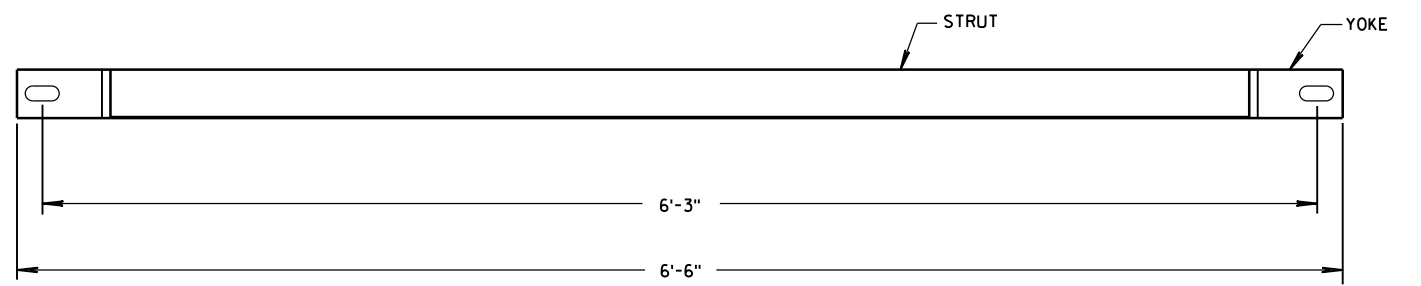

**FRONT VIEW  
GROUND STRUT DETAIL**

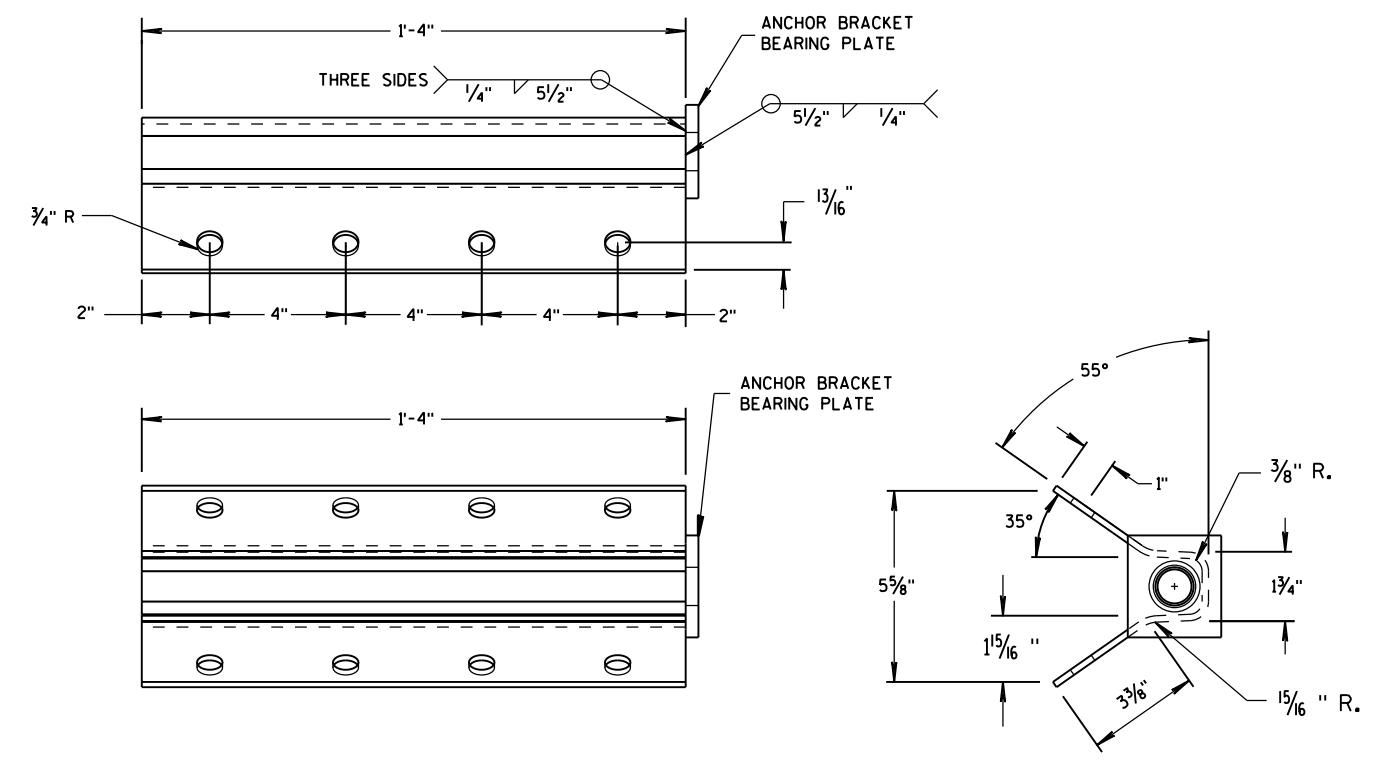

**ANCHOR BRACKET**

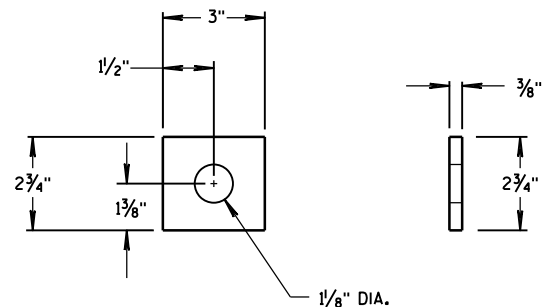

**ANCHOR BRACKET  
BEARING PLATE**

6

6

S.D.D. 14 B 47-2c

S.D.D. 14 B 47-2c

<b>MIDWEST GUARDRAIL SYSTEM (MGS) TYPE 2 TERMINAL</b>	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED June 2014 DATE	/s/ Jerry H. Zogg ROADWAY STANDARDS DEVELOPMENT ENGINEER
FHWA	

**GENERAL NOTES**

THE EXACT NUMBER, LOCATION, AND SPACING OF ALL SIGNS AND DEVICES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS.

THE SPACING BETWEEN TRAFFIC CONTROL SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND SHOULD PROVIDE A MINIMUM OF 200 FEET (500 FEET DESIRABLE) CLEARANCE TO EXISTING SIGNS THAT WILL REMAIN IN PLACE.




ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE NOTED.


SIGNS THAT WILL BE IN PLACE LESS THAN SEVEN CONTINUOUS DAYS AND NIGHTS MAY BE MOUNTED ON PORTABLE SUPPORTS.

IF A "STOP" SIGN MUST BE REMOVED FOR A WORK OPERATION, A TEMPORARY "STOP" SIGN SHALL BE PLACED PRIOR TO THE SIGN REMOVAL, OR A FLAGGER SHALL BE PROVIDED UNTIL THE SIGN IS REESTABLISHED.


- \* OMIT G20-1 SIGNS IF LENGTH OF WORK AREA IS 2 MILES OR LESS
- \*\* PLACE AN ADDITIONAL W20-1A "ROAD WORK AHEAD" SIGN IF WORK AREA WITHIN THE PROJECT IS SEPARATED BY MORE THAN 2 MILES FROM PREVIOUS WORK AREA.

**LEGEND**

-  SIGN ON PERMANENT SUPPORT
-  DIRECTION OF TRAFFIC
-  WORK AREA

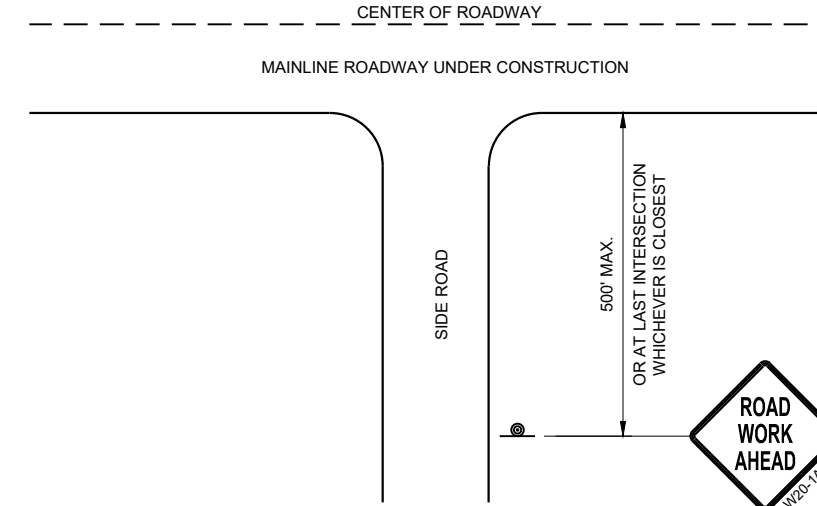

**TYPICAL SIDE ROAD APPROACH WARNING SIGN DETAIL**

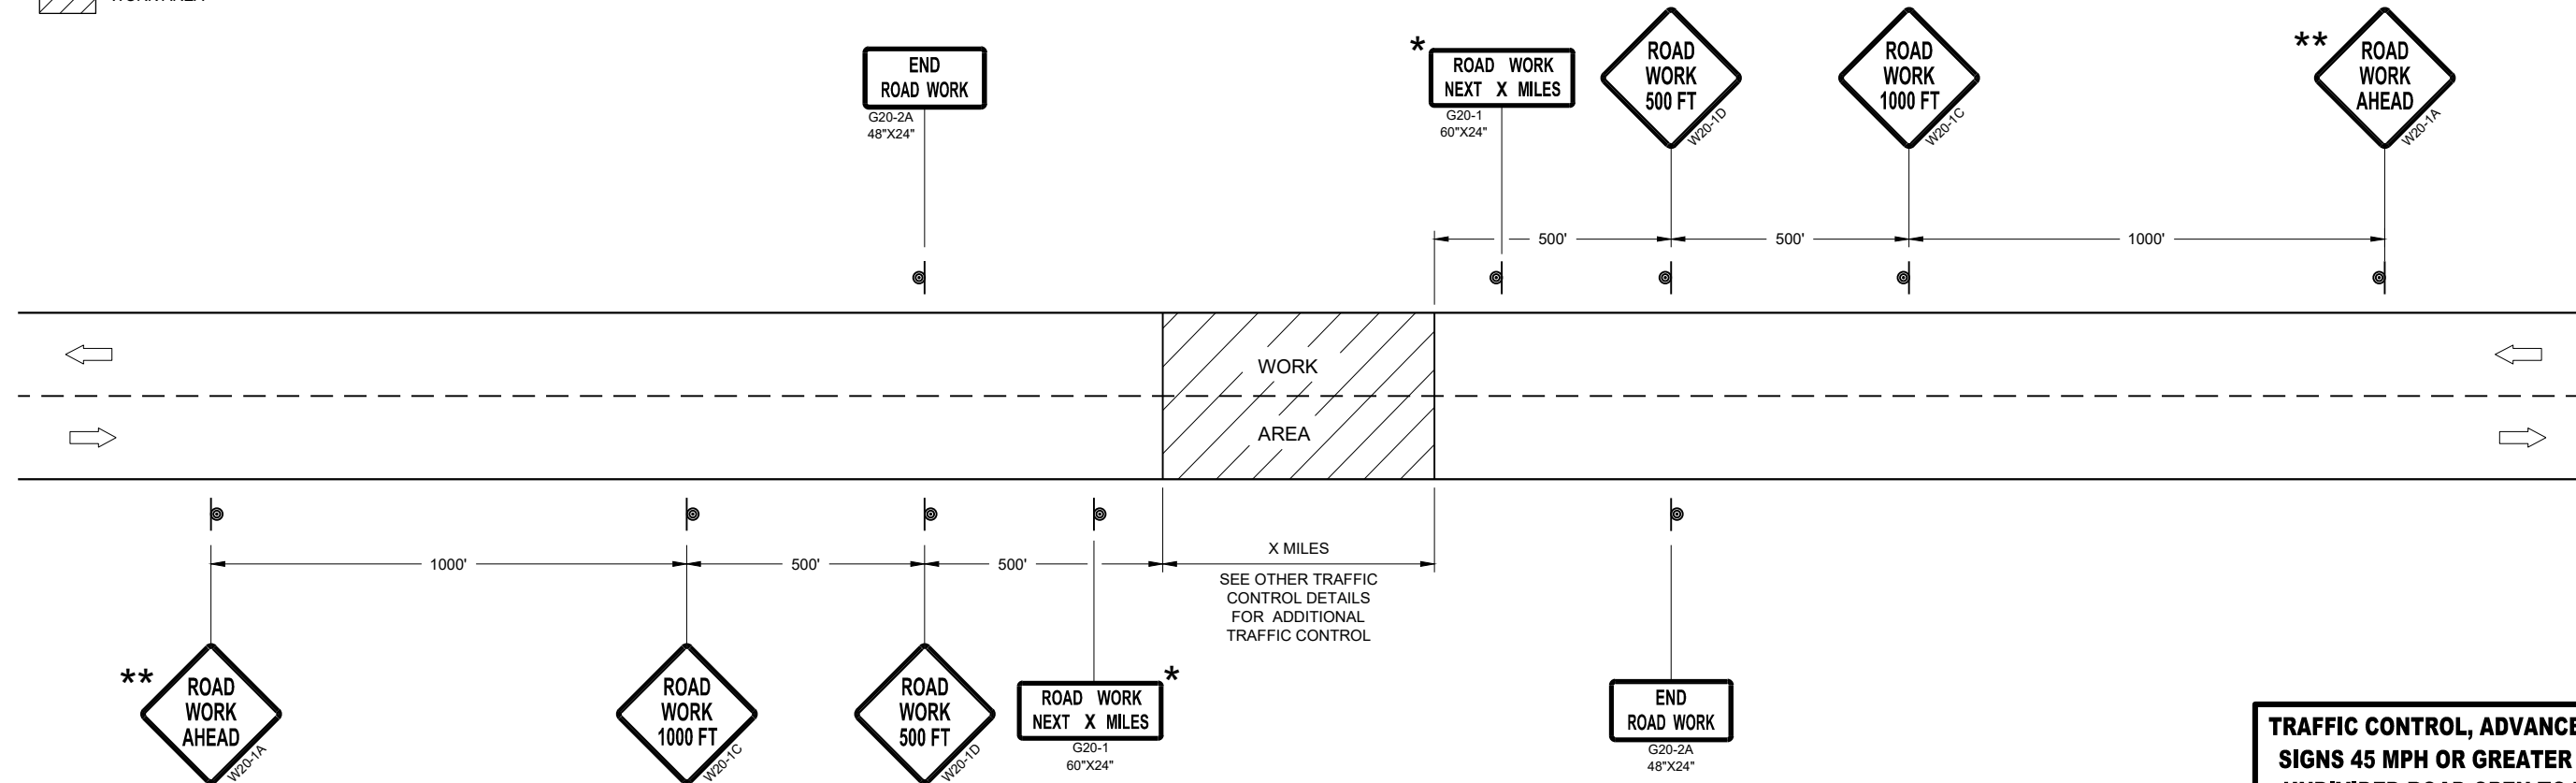


**TRAFFIC CONTROL, ADVANCE WARNING SIGNS 45MPH OR GREATER**

**TRAFFIC CONTROL, ADVANCE WARNING SIGNS 45 MPH OR GREATER TWO-WAY UNDIVIDED ROAD OPEN TO TRAFFICE**


STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

APPROVED  
DATE July 2018 /S/ Andrew Heidtke  
WORK ZONE ENGINEER

FHWA

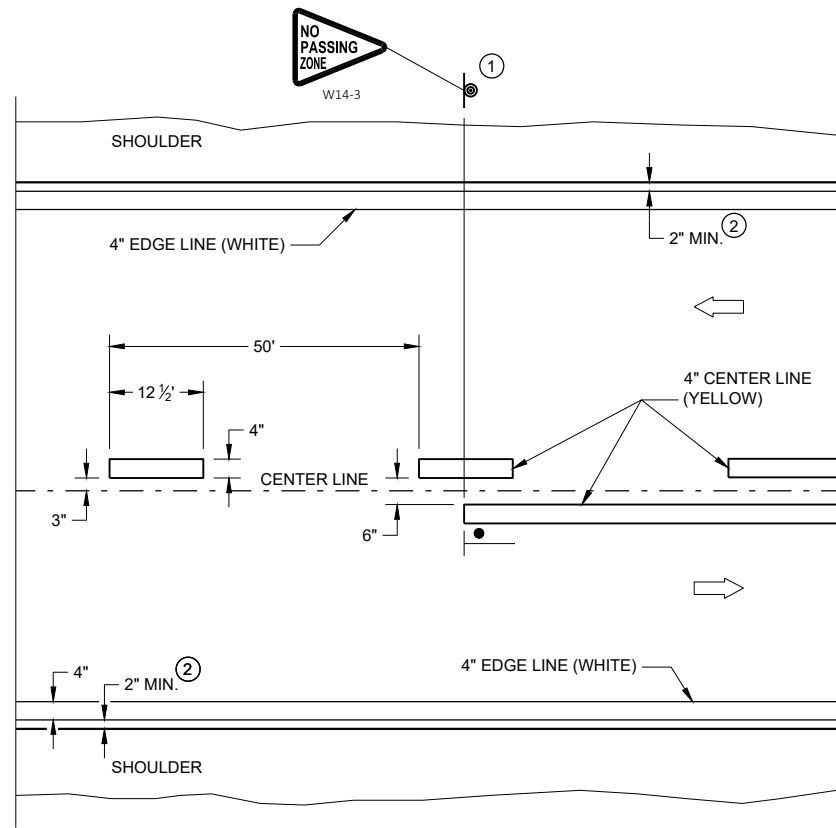


**TWO WAY TRAFFIC**

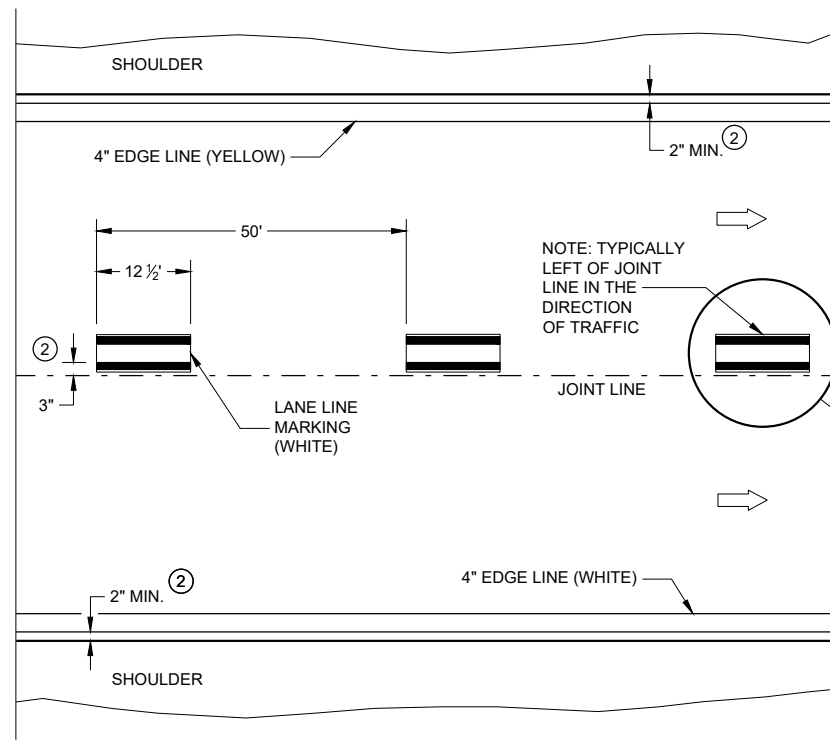


**ONE WAY TRAFFIC**

**PERMANENT PAVEMENT MARKING**

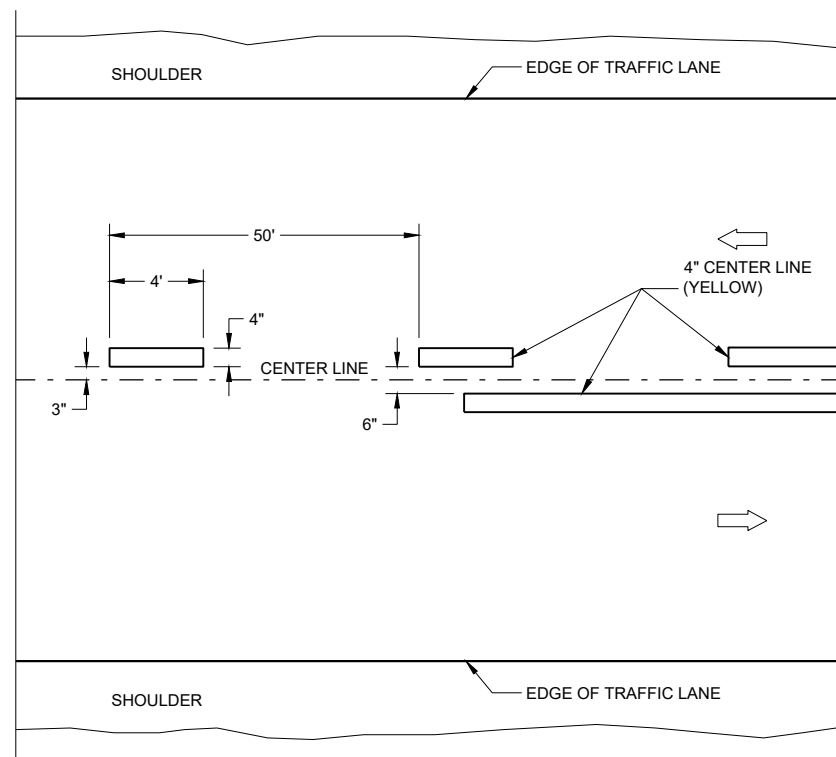

**TWO WAY TRAFFIC**

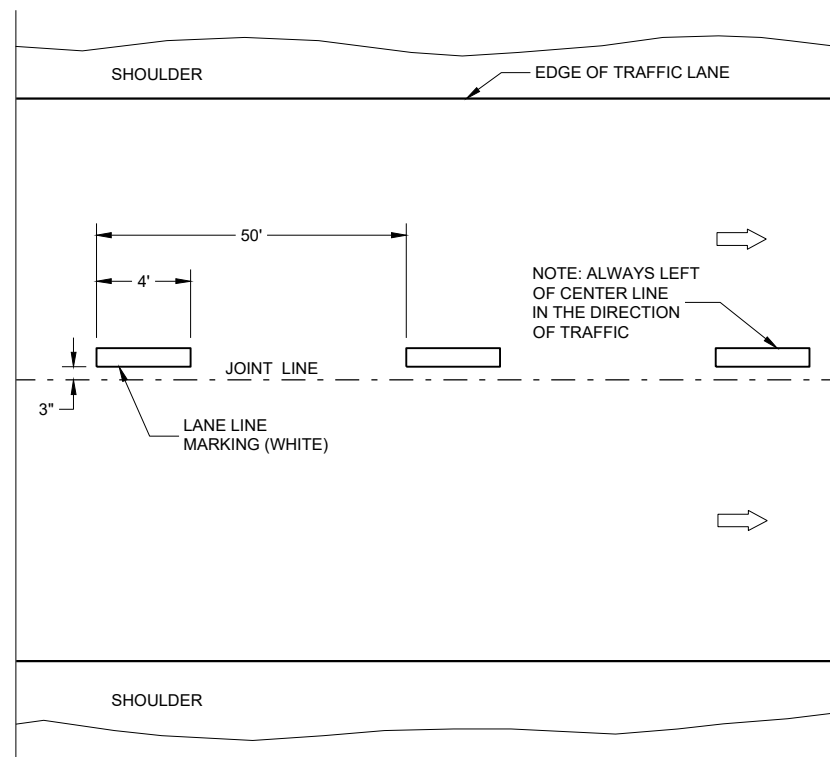

**ONE WAY TRAFFIC**

**TEMPORARY PAVEMENT MARKING**


**GENERAL NOTES**

DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO STANDARD SPECIFICATIONS AND SPECIAL PROVISIONS.

- ① LOCATE THE NO PASSING ZONE W14-3 SIGN WITH 50 FEET OF THE "T" MARKING
- ② MEASURE FROM EDGE OF MARKING TO JOINT LINE. THIS DOES NOT INCLUDE SPACE NEEDED FOR GROOVING OPERATIONS.

**LEGEND**

- "T" MARKING
- SIGN ON PERMANENT SUPPORT
- DIRECTION OF TRAFFIC

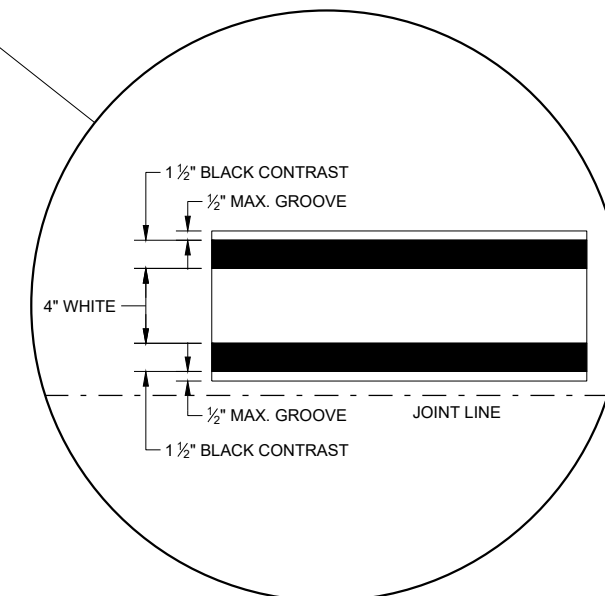

**LONGITUDINAL MARKING (MAINLINE)**

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION


APPROVED  
February 2020 /S/ Matthew Rauch  
DATE STATEWIDE SIGNING AND MARKING  
ENGINEER



**GENERAL NOTES**

- ① A SET OF ARROWS IS REQUIRED EVERY 400 FEET OR NEAR INTERSECTIONS OR DRIVEWAYS WITH TURNING TRAFFIC.
- ② 8" WHITE
- ③ TURN BAY LENGTH OF LESS THAN 48' DOES NOT REQUIRE PAVEMENT ARROWS OR TEXT.

➡ DIRECTION OF TRAFFIC

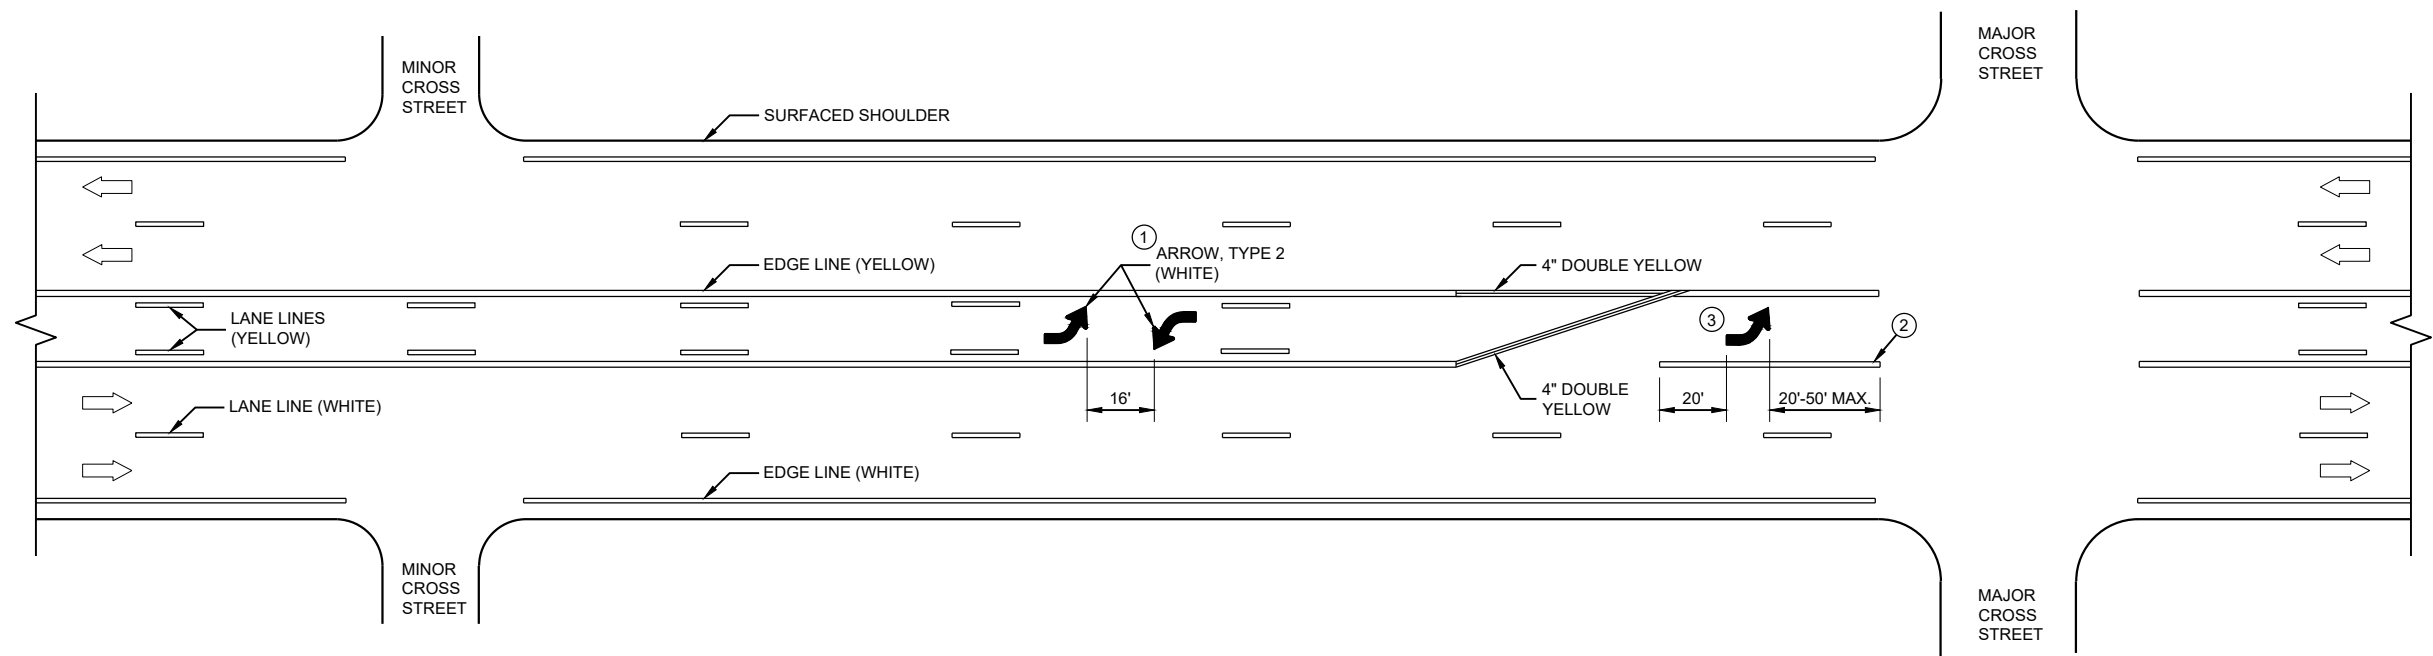

**TWO WAY LEFT TURN LANE**


6

6

SDD 15C08 - 20b




SDD 15C08 - 20b

<p><b>PAVEMENT MARKING (TURN LANES)</b></p>
<p>STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION</p>

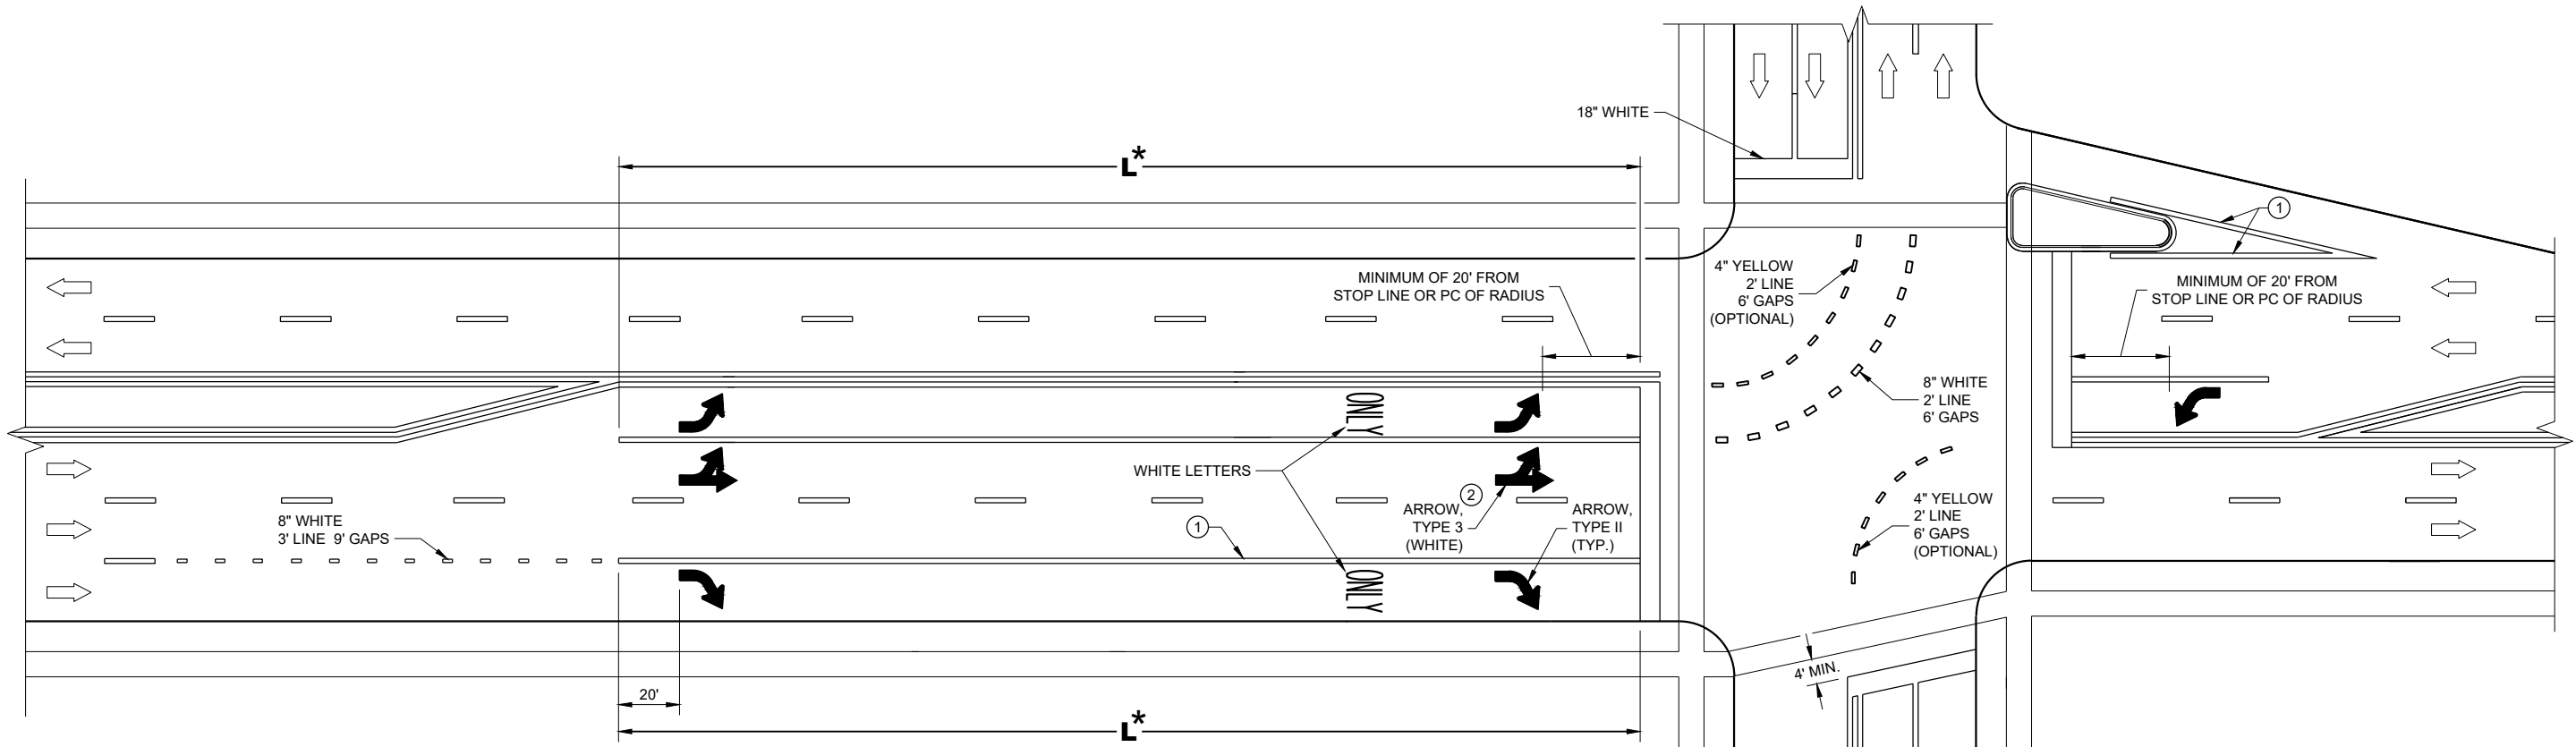

**TURN LANE OPTIONS**

LENGTH OF TURN BAY ( **L** ) OF 0 - 47' DOES NOT REQUIRE PAVEMENT MARKING ARROWS OR WORDS

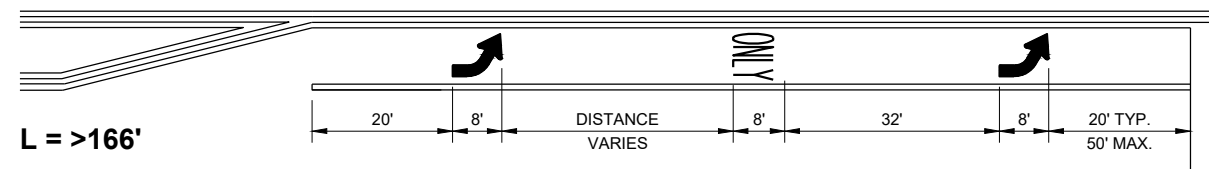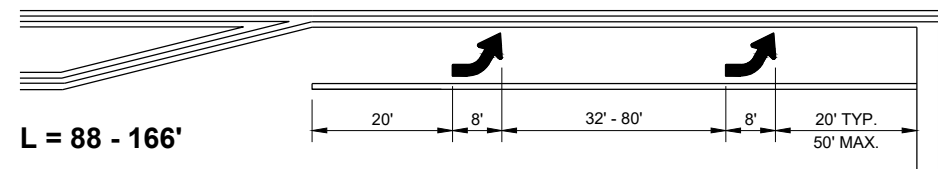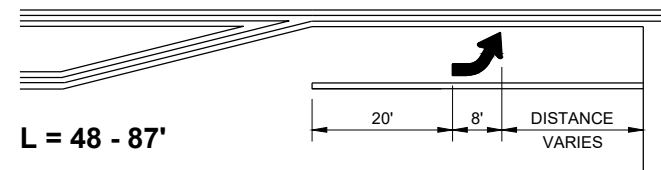

\*(SEE TURN LANE OPTIONS FOR PLACEMENT OF PAVEMENT MARKING ARROWS AND WORDS)

**GENERAL NOTES**

- ① 8" WHITE
- ② QUANTITY AND LOCATION OF TYPE 3 ARROWS ARE THE SAME AS THE TYPE II ARROWS IN THE ADJACENT TURN LANE. FOR TURN LANES WITH A PHYSICAL SEPARATION IN THE SAME DIRECTION OF TRAVEL, THE ARROWS AND "ONLY" MARKING MAY BE ELIMINATED.






➡ DIRECTION OF TRAFFIC

**L** = LENGTH OF TURN BAY

**PAVEMENT MARKING (TURN LANES)**

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

**LEGEND**

-  SIGN ON PORTABLE OR PERMANENT SUPPORT
-  TEMPORARY PORTABLE RUMBLE STRIP ARRAY
-  DIRECTION OF TRAFFIC
-  WORK AREA
-  FLAGGER, EQUIPPED WITH STOP/SLOW PADDLE FASTENED ON SUPPORT STAFF

**GENERAL NOTES**

DETAILS OF TRAFFIC CONTROL DEVICES AND INSTALLATION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS, THE SPECIAL PROVISIONS, AND THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.

ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE NOTED.

"WO" SIGNS ARE THE SAME AS "W" SIGNS EXCEPT THE BACKGROUND IS ORANGE.

THE EXACT NUMBER, LOCATION AND SPACING OF ALL SIGNS, DEVICES, AND LOCATION OF ALL FLAGGERS SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

THE FIRST ADVANCE WARNING SIGN SHOULD TYPICALLY BE LOCATED IN ADVANCE OF THE ANTICIPATED TRAFFIC BACKUP OR QUEUE.


WHEN A SIDE ROAD OR RAMP INTERSECTS THE FACILITY ON WHICH THE WORK IS BEING PERFORMED, ADDITIONAL TRAFFIC CONTROLS SHALL BE PROVIDED AS SPECIFIED IN THE PLANS AND/OR THE SPECIAL PROVISIONS OR AS APPROVED BY THE ENGINEER.

**FLAGGING**

- FLAGGERS SHALL BE IN SIGHT OF EACH OTHER OR IN DIRECT COMMUNICATION AT ALL TIMES. THEY SHALL BE EQUIPPED WITH STOP/SLOW PADDLES FASTENED ON SUPPORT STAFFS. WHEN THE FLAGGING OPERATION IS NOT IN EFFECT REMOVE TEMPORARY PORTABLE RUMBLE STRIPS PRIOR TO COVERING OR REMOVING ALL ADVANCE SIGNING.
- ① FOR MOVING WORK OPERATIONS, POST ADDITIONAL W20-7A FLAGGER SIGNS AT APPROXIMATELY 3,500' INTERVALS IN THE MOVING WORK OPERATION OR AS APPROVED BY THE ENGINEER.
  - ② SIGN NOT REQUIRED IF FLAGGING OPERATION OCCURS WITHIN A SIGNED ROAD WORK ZONE AREA.
- WHEN THE DISTANCE BETWEEN FLAGGERS EXCEEDS 2 MILES, A PILOT CAR IS REQUIRED. WHEN CURVES REDUCE SIGHT DISTANCE BELOW 400', A PILOT CAR IS REQUIRED.

**TEMPORARY PORTABLE RUMBLE STRIPS**

- UTILIZE TEMPORARY PORTABLE RUMBLE STRIPS ON ALL FLAGGING OPERATIONS.
- ③ EACH TEMPORARY PORTABLE RUMBLE STRIP ARRAY CONSISTS OF THREE RUMBLE STRIPS SPACED ACCORDING TO MANUFACTURER'S RECOMMENDATION, PLACED TRANSVERSE ACROSS THE LANE AT LOCATIONS SHOWN.
- ONLY USE TEMPORARY PORTABLE RUMBLE STRIPS FOR THE APPROVED PRODUCTS LIST.
- INSTALL TEMPORARY RUMBLE STRIPS PER MANUFACTURER'S RECOMMENDATIONS.
- PLACE ADVANCE SIGNING PRIOR TO INSTALLING TEMPORARY RUMBLE STRIPS.
- DO NOT INSTALL TEMPORARY PORTABLE RUMBLE STRIPS ON GRAVEL, MILLED SURFACES, OR ASPHALT THAT HAS BEEN PAVED LESS THAN 12 HOURS.

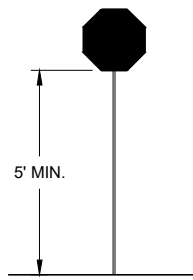


**STOP/SLOW PADDLE ON SUPPORT STAFF**

**SIGN AND TEMPORARY RUMBLE STRIP ARRAY SPACING TABLE**

SPEED LIMIT	SPACING "A"
25-30 MPH	200'
35-40 MPH	350'
45-55 MPH	500'



USE OF W03-4 SIGN IS OPTIONAL. WHEN USED, THIS SIGN SHALL BE LOCATED BETWEEN THE W20-7A AND W20-4A SIGNS, USING SPACING "A".

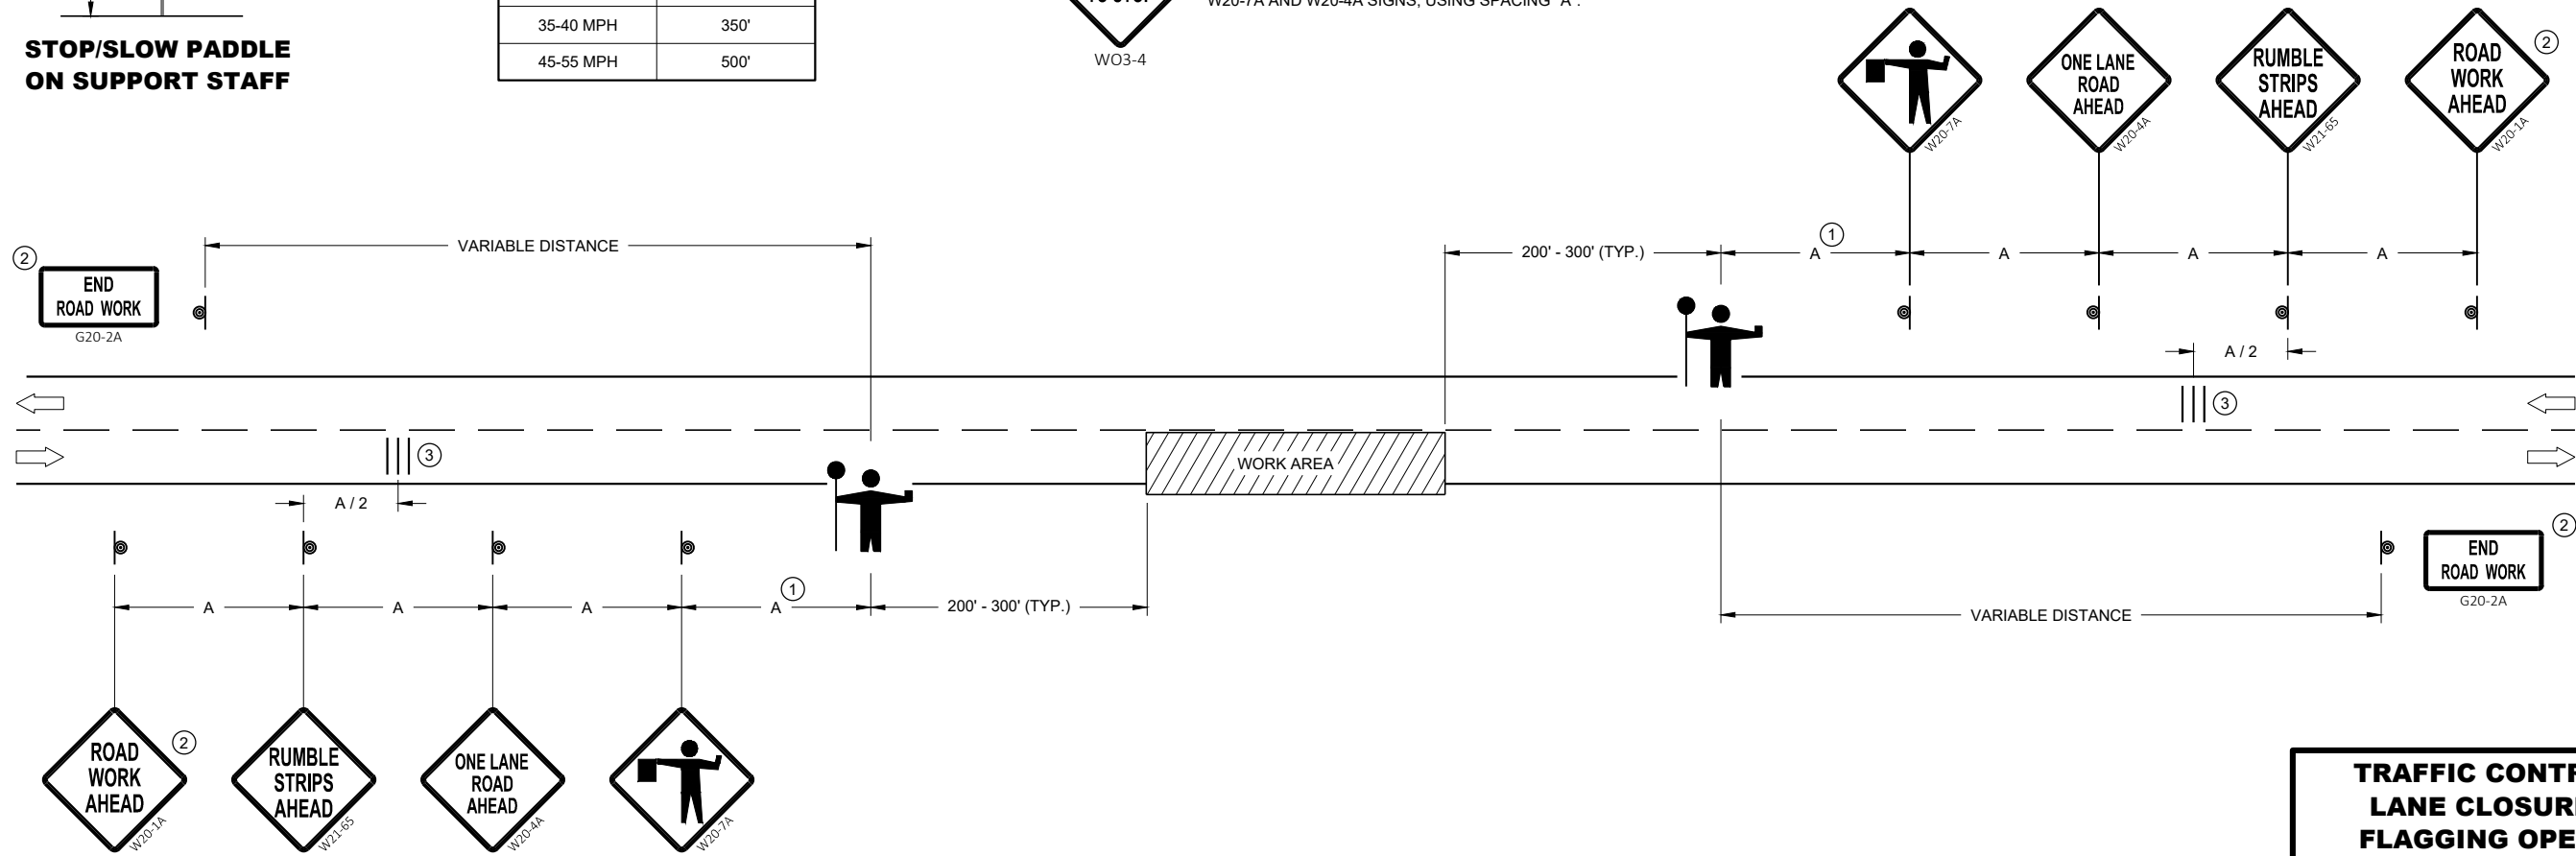

**TRAFFIC CONTROL FOR LANE CLOSURE WITH FLAGGING OPERATION**





**TRAFFIC CONTROL FOR LANE CLOSURE WITH FLAGGING OPERATION**

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

APPROVED  
DATE: May 2019 /S/ Andrew Heidtke  
WORK ZONE ENGINEER

FHWA

**LEGEND**

- V1 LEAD VEHICLE
- V2 MARKING VEHICLE
- V3 SHADOW VEHICLE
-  TRUCK MOUNTED ATTENUATOR (TMA)
-  SIGN ON TEMPORARY SUPPORT
-  DIRECTION OF TRAFFIC
-  FLASHING ARROW PANEL (CAUTION)

**GENERAL NOTES**

ALL VEHICLES SHALL BE EQUIPPED WITH TWO 360 DEGREE HIGH INTENSITY YELLOW FLASHING LIGHTS OR STROBE LIGHTS AND OPERATED WITH HEADLIGHTS TURNED ON.

ALL VEHICLES SHALL BE EQUIPPED WITH REAR FACING TYPE B OR C FLASHING ARROW PANEL OPERATING IN CAUTION MODE. SIGNS PLACED ON VEHICLES MUST NOT OBSCURE THE ARROW PANEL.

ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE SPECIFIED.

DISTANCE BETWEEN VEHICLES MAY VARY ACCORDING TO TERRAIN, SIGHT DISTANCE, PAINT DRYING TIME, AND OTHER FACTORS. WHENEVER ADEQUATE STOPPING SIGHT DISTANCE EXISTS TO THE REAR, SHADOW VEHICLES SHOULD MAINTAIN THE MINIMUM DISTANCE FROM THE WORK VEHICLE AND PROCEED AT THE SAME SPEED AS THE WORK VEHICLE. SHADOW VEHICLES SHOULD SLOW DOWN IN ADVANCE OF VERTICAL AND HORIZONTAL CURVES THAT RESTRICT SIGHT DISTANCE.

THE WORK AND SHADOW VEHICLES SHOULD PULL OVER PERIODICALLY TO ALLOW TRAFFIC TO PASS.

WHEN NO WORK ACTIVITY IS TAKING PLACE, REMOVE OR LAY STATIONARY SIGNS AND SUPPORTS FLAT ON THE GRADE WITH UPRIGHTS ORIENTED PARALLEL TO AND DOWNSTREAM FROM TRAFFIC.


CONES SHOULD BE USED BETWEEN THE MARKING AND SHADOW VEHICLE AT 100 FOOT SPACING. CONES MAY BE OMITTED ON PAINTED LINE IF APPROVED BY THE ENGINEER. CONSIDER PAVEMENT MARKING DRY OR CURE TIMES AND TRAFFIC VOLUME.

CONES SHALL BE A MINIMUM OF 18" FOR WET PAVEMENT MARKING.

- ① SIGNS SHALL BE REPEATED APPROXIMATELY EVERY THREE MILES.
- ② IF CONSTRUCTION WORK ZONE SIGNS ARE IN PLACE, W20-1A OR W21-63 ARE NOT REQUIRED.

6

6

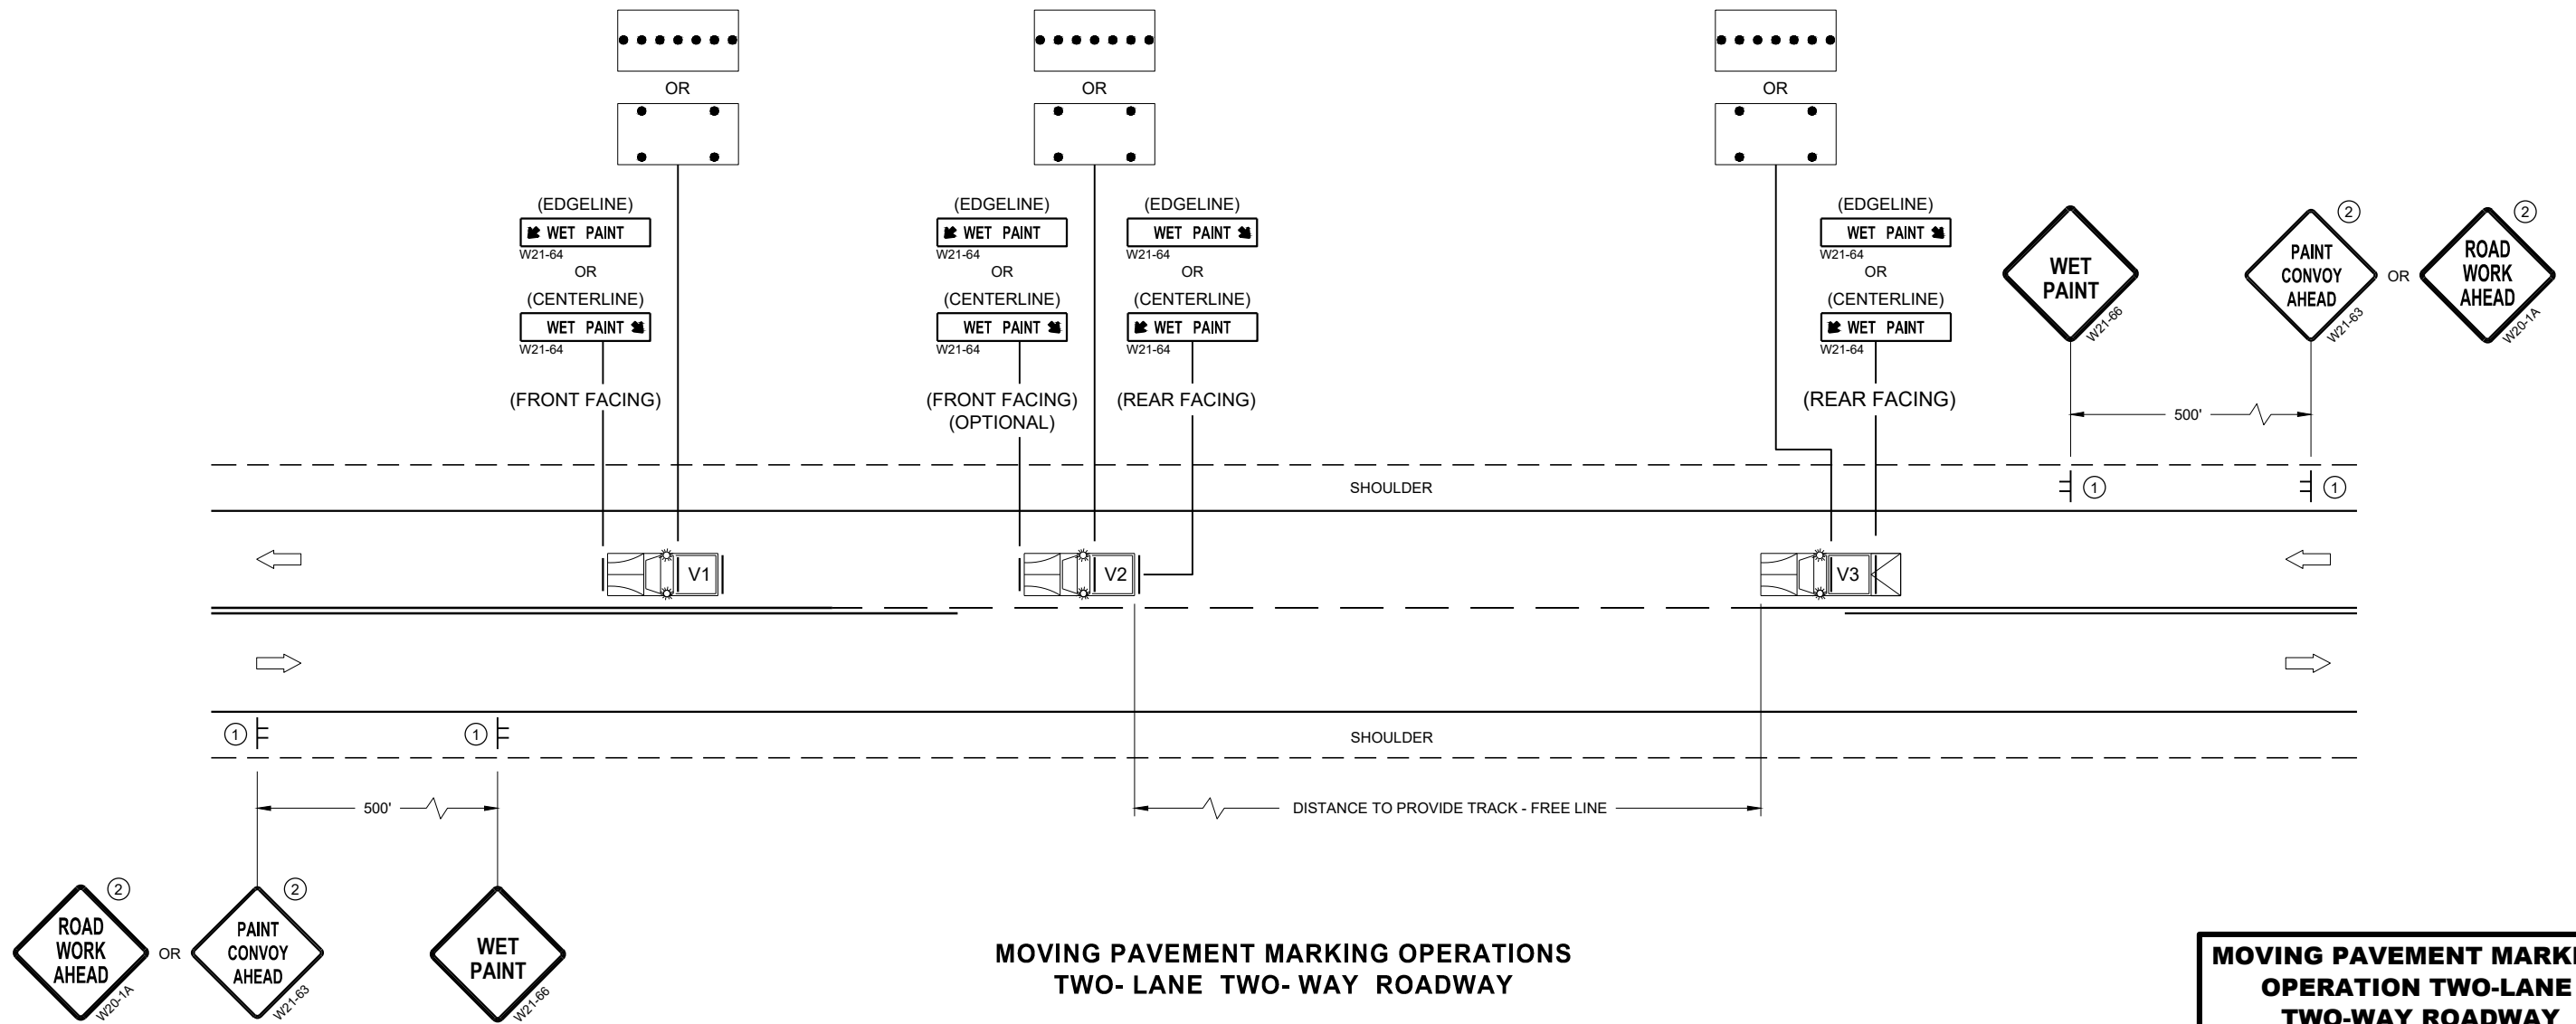

**MOVING PAVEMENT MARKING OPERATIONS  
TWO-LANE TWO-WAY ROADWAY**

SDD 15C19 - 06a

SDD 15C19 - 06a

<b>MOVING PAVEMENT MARKING OPERATION TWO-LANE TWO-WAY ROADWAY</b>	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED November 2019 DATE	/S/ Andrew Heidtke WORK ZONE ENGINEER
FHWA	


**GENERAL NOTES**

OMIT EDGE LINES THROUGH INTERSECTIONS. CONTINUE EDGE LINES THROUGH DRIVEWAYS.


- ① WHEN DISTANCE "A" IS LESS THAN 250 FEET, OMIT LANE LINE.
- ② WHEN DISTANCE "B" IS LESS THAN 100 FEET, OMIT CHANNELIZING LANE LINE.
- ③ BARRIER LINE ENDS AT SIDE ROAD PAVEMENT / SURFACE EDGE EXTENSION.
- ④ BARRIER LINE STARTS 500 FEET PRIOR TO THE BYPASS TAPER.

**LEGEND**


➡ DIRECTION OF TRAVEL

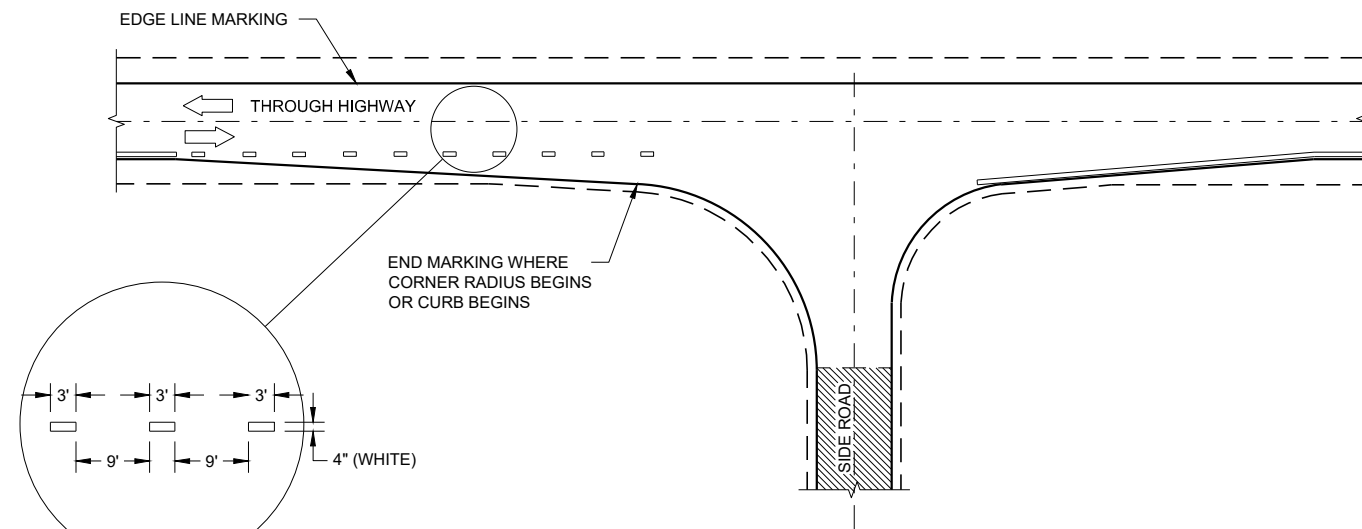

**MINOR INTERSECTION**

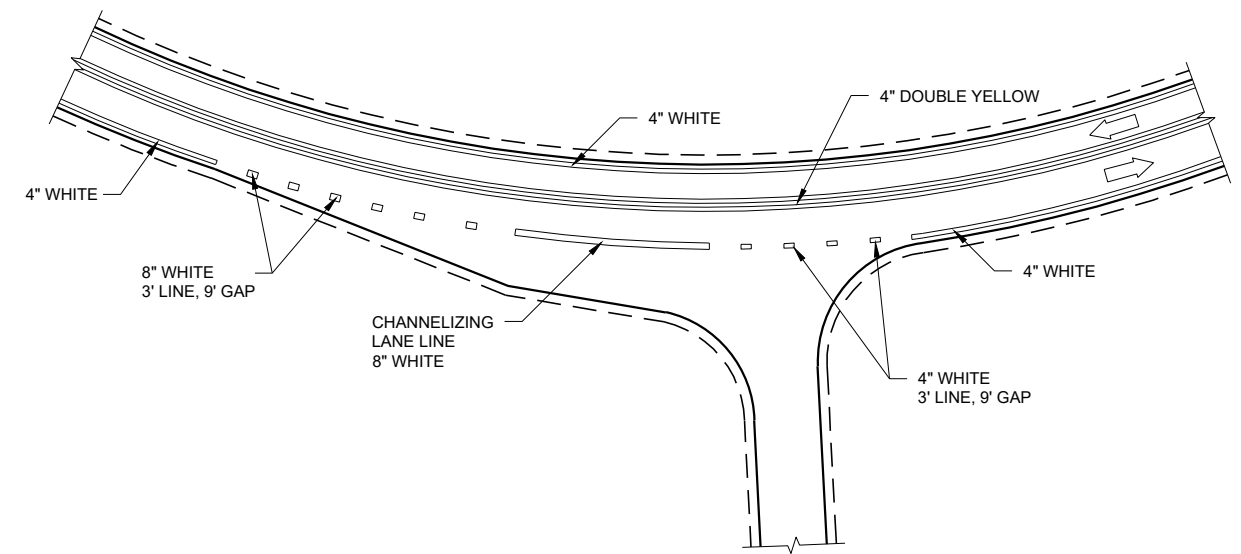


**INTERSECTION ON OUTSIDE OF CURVE**

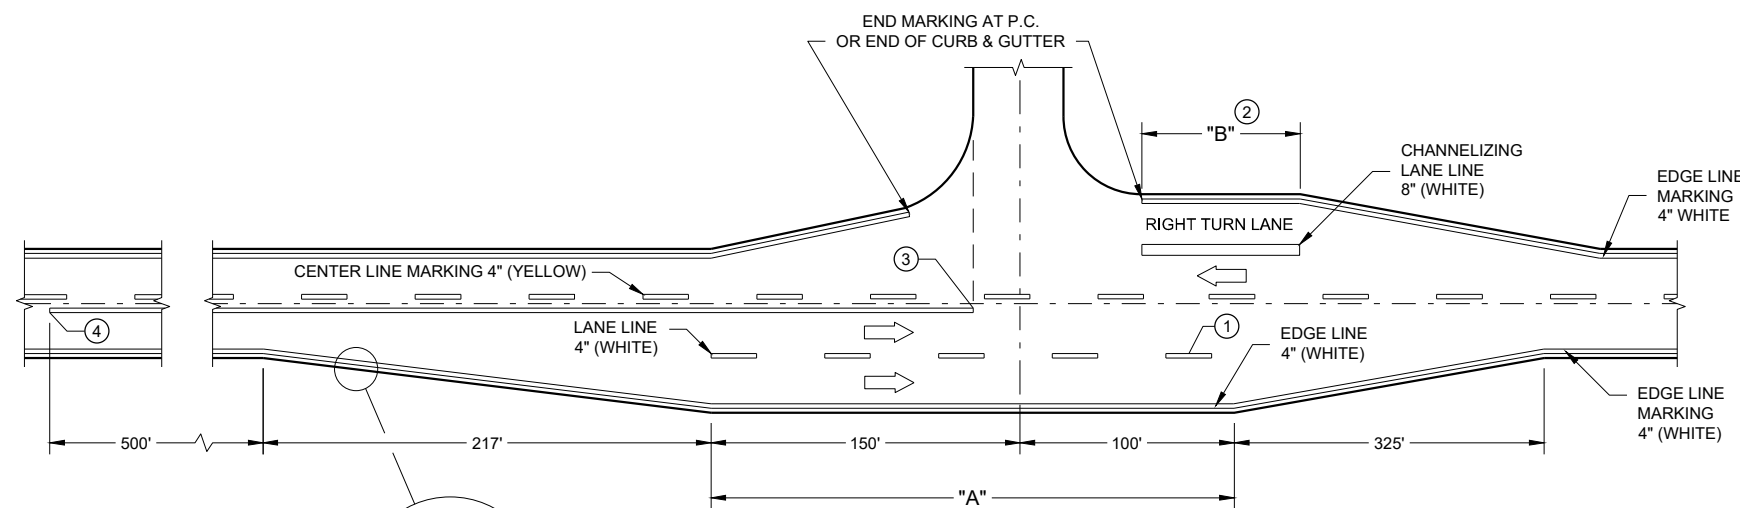

**MAJOR INTERSECTIONS**

(INTERSECTION WITH FULL RIGHT TURN LANE OR BYPASS LANE)





BYPASS LANE PAVED SHOULDER WIDTH (AS SHOWN ELSEWHERE IN PLANS) - PLUS 2 INCHES



**PAVEMENT MARKING  
(INTERSECTIONS)**

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

**LEGEND**

-  SIGN ON PERMANENT SUPPORT
-  TRAFFIC CONTROL DRUM
-  DIRECTION OF TRAFFIC
-  WORK ZONE

**GENERAL NOTES**

ALL SIGNS ARE 48"X48" UNLESS OTHERWISE NOTED. IF NECESSARY DUE TO SPACE CONSTRAINTS IN URBAN AREAS, 36" X 36" SIGNS MAY BE USED IF APPROVED BY THE REGIONAL TRAFFIC UNIT.

"WO" SIGN IS THE SAME AS "W" SIGN EXCEPT THE BACKGROUND IS ORANGE.

ANY SIGNS TEMPORARY OR EXISTING, WHICH CONFLICT WITH THE TRAFFIC CONTROL "IN USE" SHALL BE REMOVED OR COVERED AS NEEDED AND AS APPROVED BY THE ENGINEER.

THE EXACT NUMBER, LOCATION, AND SPACING OF ALL SIGNS AND DEVICES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.


CHANNELIZING DEVICES PLACED ADJACENT TO WORK AREA SHALL BE PULLED BACK FROM THE TRAVEL LANE WHEN WORK IS NOT IN PROGRESS.

SIGNS THAT WILL BE IN PLACE LESS THAN 7 CONTINUOUS DAYS AND NIGHTS MAY BE MOUNTED ON PORTABLE SUPPORTS.

W20-1A AND G20-2A SIGNS ARE NOT REQUIRED IF THE WORK AREA IS WITHIN A LARGER WORK ZONE WHERE THESE SIGNS ARE ALREADY PRESENT. G20-2A SIGNS MAY ALSO BE OMITTED IF DURATION OF WORK IS LESS THAN 7 CONTINUOUS DAYS AND NIGHTS.

6

6

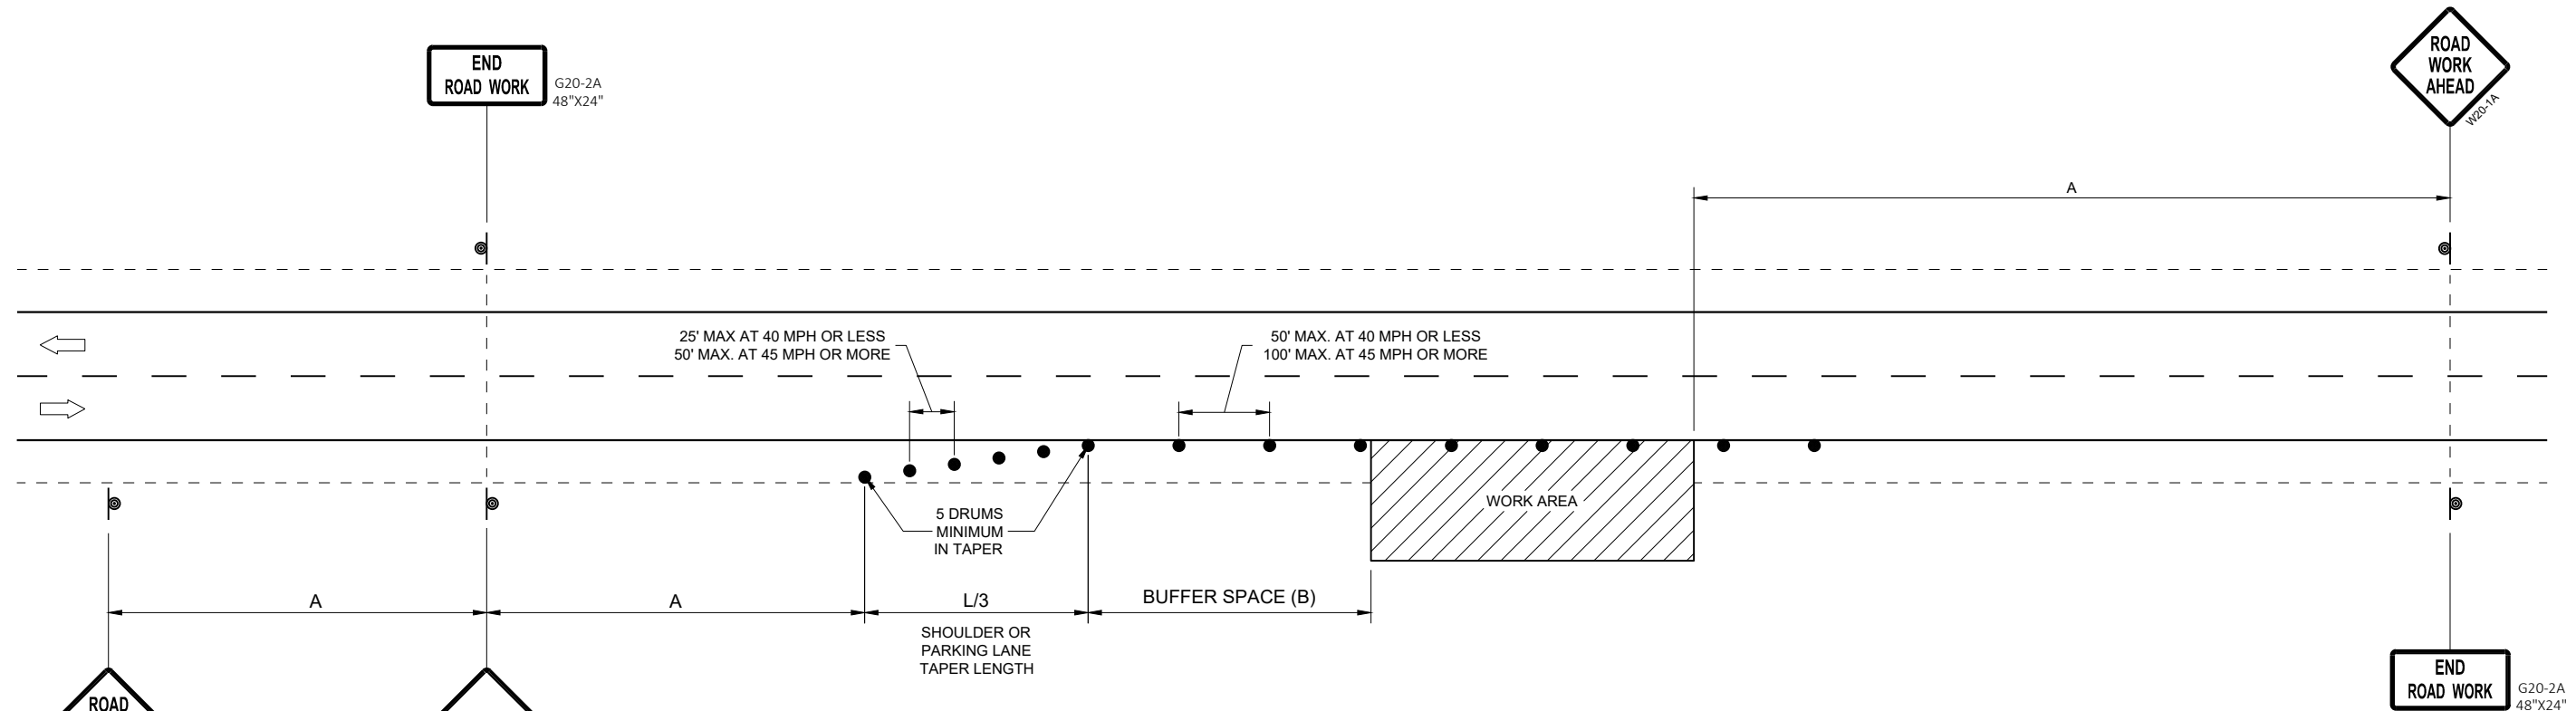

POSTED SPEED LIMIT PRIOR TO WORK STARTING (MPH)	ADVANCE WARNING SIGN SPACING (A) FEET	SHOULDER TAPER L / 3 W, LATERAL OFFSET (FT)						BUFFER SPACE (B) FEET
		3	4	5	6	7	8	
25	200'	10	14	17	21	24	28	55
30	200'	15	20	25	30	35	40	85
35	350'	20	27	34	40	47	54	120
40	350'	26	35	44	53	62	70	170
45	500'	45	59	74	89	104	119	220
50	500'	50	66	83	99	116	132	280
55	500'	54	73	91	109	127	145	335'

OR  
IF TRAFFIC CONTROL DEVICES  
ENCROACH ONTO TRAVELED WAY, USE



**TRAFFIC CONTROL, WORK ON SHOULDER OR PARKING LANE, UNDIVIDED ROADWAY**


STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

APPROVED  
May 2020 /S/ Andrew Heidtke  
DATE STATEWIDE WORK ZONE TRAFFIC SAFETY ENGINEER

FHWA

SDD 15D28 - 04

SDD 15D28 - 04

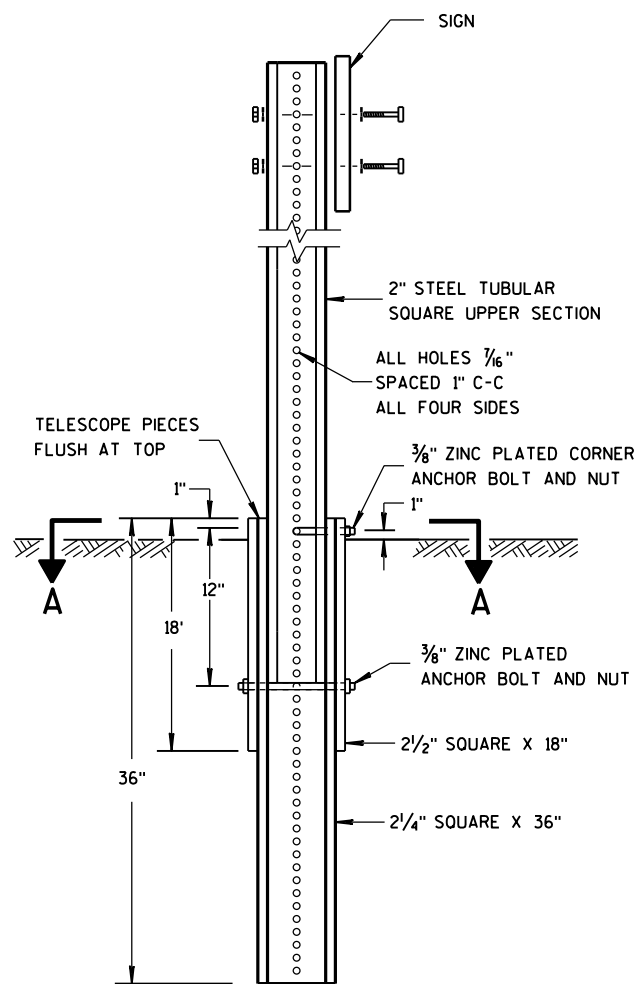


**DETAIL OF TUBULAR STEEL SIGN POST**

**TUBULAR STEEL POSTS**


AREA OF SIGN INSTALLATION (SQ. FT.)	NUMBER OF REQUIRED TUBULAR STEEL POSTS
9 OR LESS	1
GREATER THAN 9 LESS THAN OR EQUAL TO 18	2
GREATER THAN 18 LESS THAN OR EQUAL TO 27	3

SIGNS WIDER THAN 3 FEET OR LARGER THAN 9 SQ. FT. SHALL BE MOUNTED ON MULTIPLE POSTS (SEE ABOVE TABLE).


SIGNS LARGER THAN 27 SQ. FT. SHALL NOT BE MOUNTED ON TUBULAR STEEL POSTS.

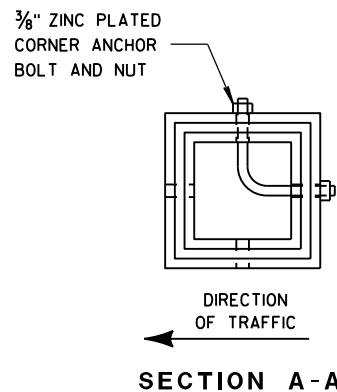


**SECTION A-A**

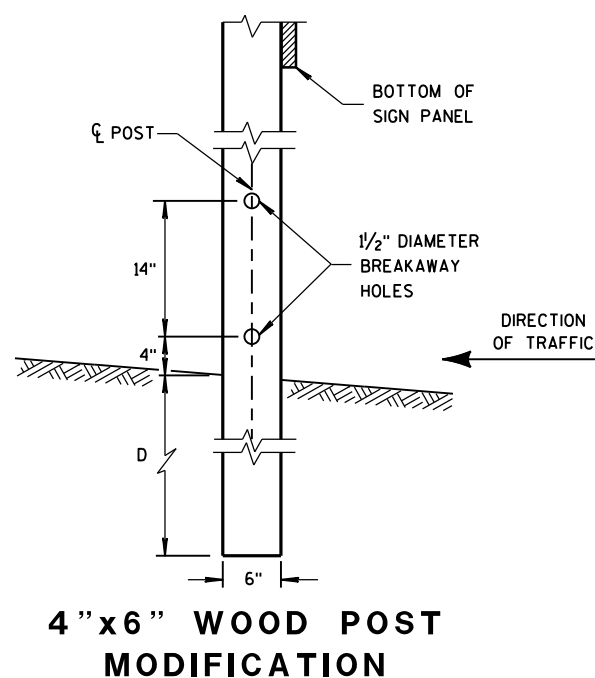

**4" X 6" WOOD POST MODIFICATION**

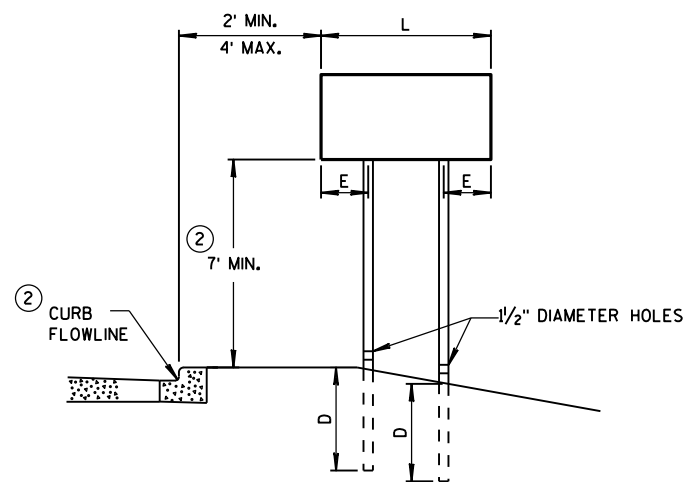

**URBAN AREA**

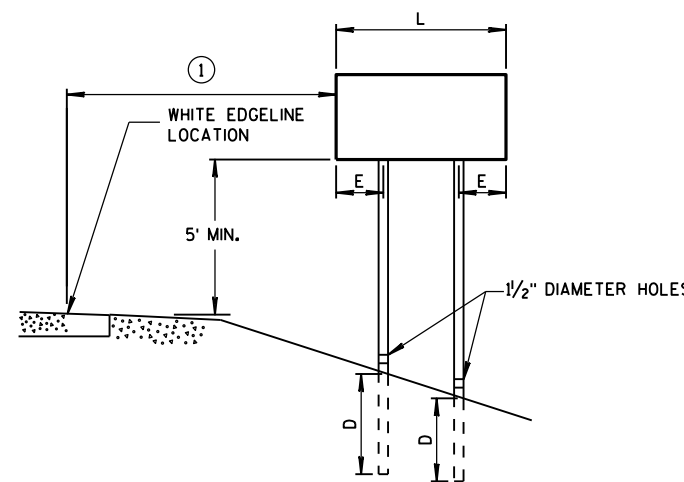

**RURAL AREA**

**POST MOUNTING DETAIL FOR TEMPORARY TRAFFIC CONTROL FIXED MESSAGE SIGNS**

**WOOD POST EMBEDMENT DEPTH**

AREA OF SIGN INSTALLATION (SQ. FT.)	D (MIN)
20 OR LESS	4'
GREATER THAN 20	5'

**4" X 6" WOOD POST**

POST SPACING REQUIREMENTS		NUMBER OF WOOD POSTS REQUIRED
L	E	
48" OR LESS AND LESS THAN 20 SQ. FT.	-	1
LESS THAN 60"	12"	2
60" TO 120"	L/5	2
GREATER THAN 120" LESS THAN 168"	12"	3
168" AND GREATER	12"	4


SEE NOTE ③

**GENERAL NOTES**

- ① 6 FEET FROM THE EDGE OF PAVEMENT (EDGE LINE LOCATION) UNLESS OTHERWISE DIRECTED BY THE PROJECT ENGINEER. LATERAL OFFSET SHOULD BE ADJUSTED TO AVOID THE DITCH FLOWLINE.
- ② THE EXISTENCE OF CURB AND GUTTER DOES NOT IN ITSELF MANDATE THE VERTICAL CLEARANCE ILLUSTRATED. THAT HEIGHT IS TYPICALLY MEASURED WHERE THERE IS SIDEWALK ADJACENT TO THE ROADWAY OR PARKING IS PERMITTED. IN THE ABSENCE OF SIDEWALK, VERTICAL CLEARANCE IS MEASURED FROM THE TOP OF THE CURB. IF NO SIDEWALK AND NO PARKING, VERTICAL CLEARANCE MAY BE REDUCED TO 5 FOOT MINIMUM. OFFSET OF SIGNS IS MEASURED FROM THE CURB FLOWLINE.
- ③ FOR SIGNS REQUIRING 4 POSTS, SPACE INTERMEDIATE POSTS EVENLY.

**TEMPORARY TRAFFIC CONTROL SIGN MOUNTING**

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

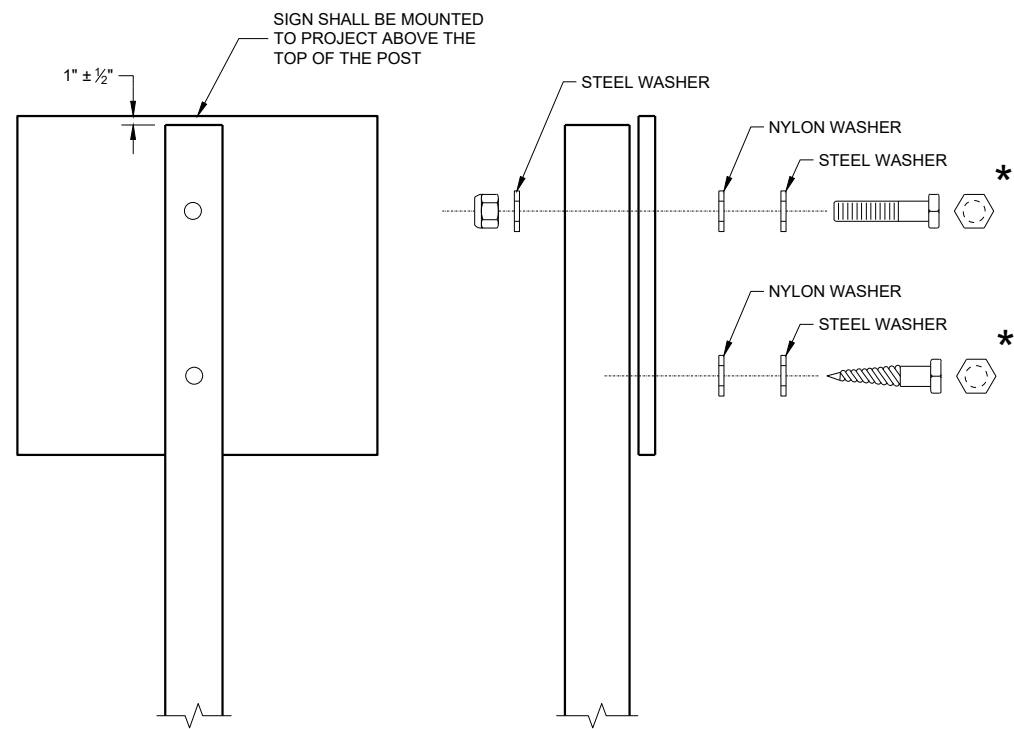

NUTS, BOLTS AND LAGS USED FOR MOUNTING SIGNS SHALL HAVE HEXAGONAL HEADS AND SHALL BE EITHER:

- A. HOT DIP GALVANIZED IN ACCORDANCE WITH ASTM DESIGNATION: A 153, CLASS D, OR SC 3
- B. ELECTRO-GALVANIZED IN ACCORDANCE WITH ASTM DESIGNATION: B 633, TYPE III, SC 3

THREADS ON BOLTS AND NUTS SHALL BE MANUFACTURED WITH SUFFICIENT ALLOWANCE FOR THE CADMIUM PLATE OR GALVANIZED COATING TO PERMIT THE NUTS TO RUN FREELY ON THE BOLTS.

WOOD POST (4" x 6")  
LAG SCREWS - 3/8" x 3"  
MACHINE BOLTS - 5/16" x 6 1/2" OR 7" LENGTH W/NUTS


SQUARE STEEL POST (2" x 2")  
MACHINE BOLTS - 3/8" x 3 1/4" LENGTH W/NUTS  
RIVETS - 3/32" (6605-9-6) BULB-TITE, TRI-FOLD, ALUMINUM  
BODY/MANDREL O.D. FLANGE 0.720 - 0.765 INCH,  
GRIP RANGE 0.042 - 0.375 INCH

WASHERS (ALL POSTS) -  
1 1/4" O.D. x 3/8" I.D. x 1/16" STEEL  
1 1/4" O.D. x 3/8" I.D. x 0.080 NYLON


\* TWO DIFFERENT FASTENING SYSTEMS ARE SHOWN FOR ILLUSTRATION PURPOSES. ON ANY INDIVIDUAL SIGN, EITHER ONE OR THE OTHER SYSTEM SHALL BE USED. ACTUAL NUMBER OF FASTENERS PER SIGN VARIES WITH THE SIGN AREA. FOR A SINGLE POST INSTALLATION, ALL SIGNS GREATER THAN 9 SQ. FT. REQUIRE THE USE OF 3 FASTENERS.

<b>ATTACHMENT OF SIGNS TO POSTS</b>	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED June 2017 DATE	/S/ Andrew Heidtke WORK ZONE ENGINEER
<small>FHWA</small>	




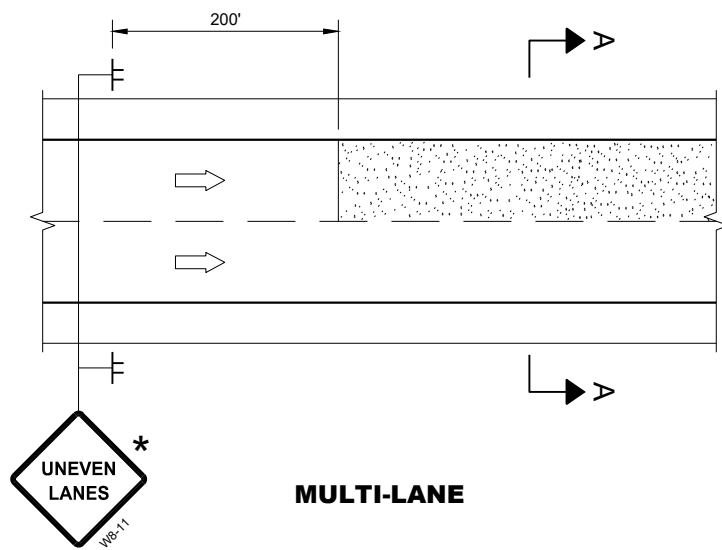

**MULTI-LANE**

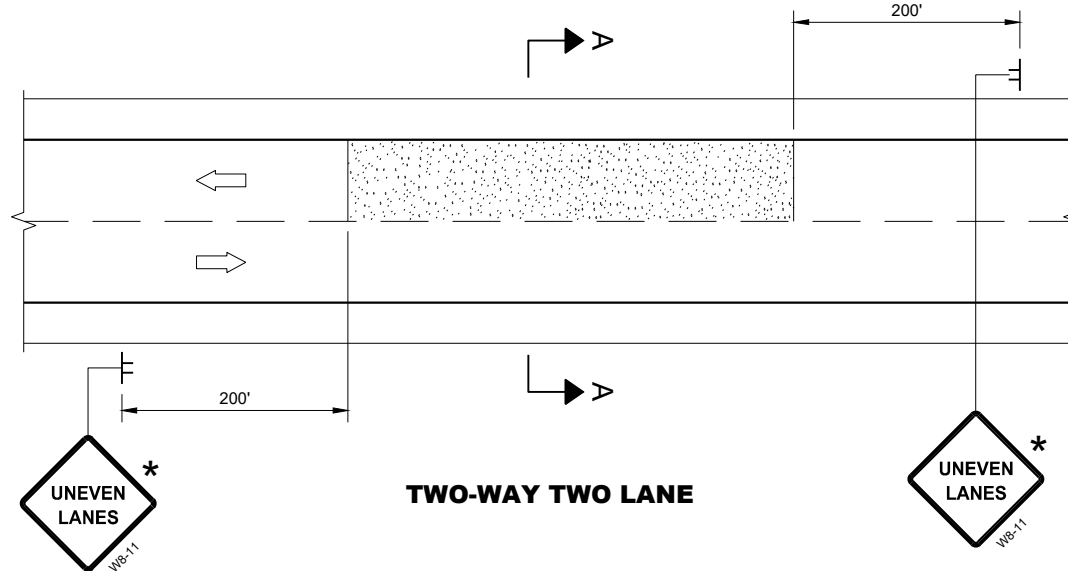


**TWO-WAY TWO LANE**

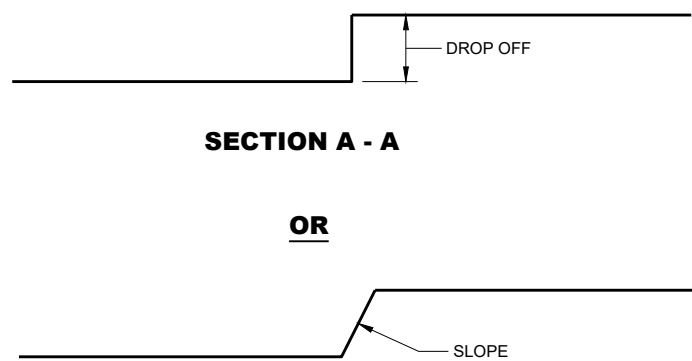

**SECTION A - A**

OR

**SECTION A - A**

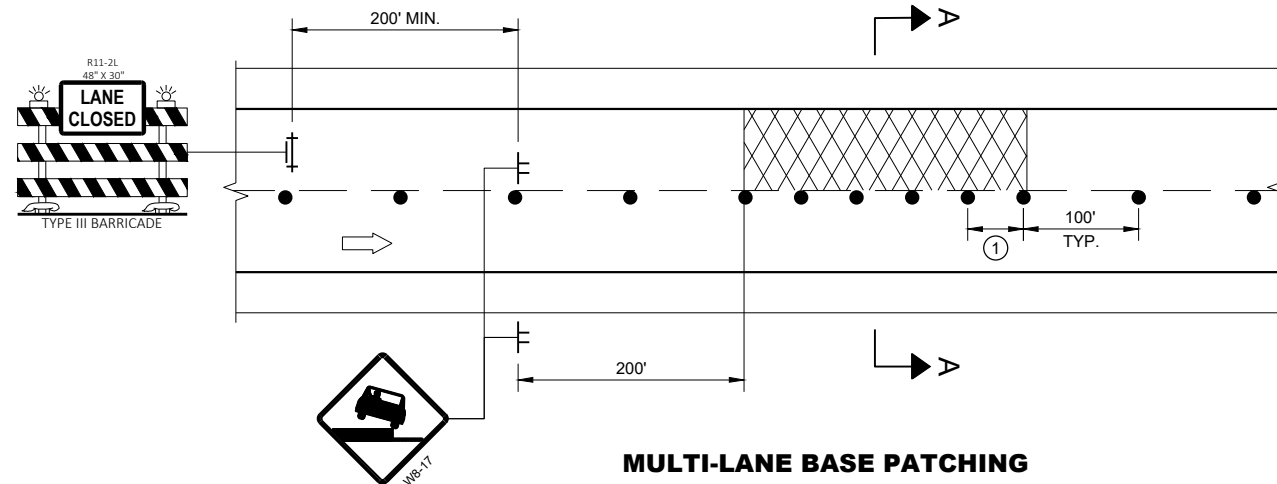

**MULTI-LANE BASE PATCHING**


**ADJACENT LANE DROP-OFFS**

**GENERAL NOTES**


- FOR SPOT LOCATIONS USE ENGINEERING JUDGEMENT WHEN PLACING ADDITIONAL SIGNS.
- ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE NOTED.
- "WO" SIGNS ARE THE SAME AS "W" SIGNS EXCEPT THE BACKGROUND IS ORANGE.
- WARNING LIGHTS ARE NOT REQUIRED IF THE LANE CLOSURE IS A DAYTIME ONLY OPERATION.
- \* IF THE DROP-OFF IS CONTINUOUS ALONG THE PROJECT, PLACE ADDITIONAL SIGNS EVERY 1 MILE AND AFTER EVERY ENTRANCE RAMP.
- ① USE CLOSER SPACING WHEN DELINEATING DROP-OFF.

**LEGEND**

- SIGN ON TEMPORARY SUPPORT
- TRAFFIC CONTROL DRUM
- TYPE III BARRICADE WITH ATTACHED SIGN
- TYPE "A" WARNING LIGHT (FLASHING)
- DIRECTION OF TRAFFIC
- WORK AREA WITH DROP-OFF
- MILLED SURFACE

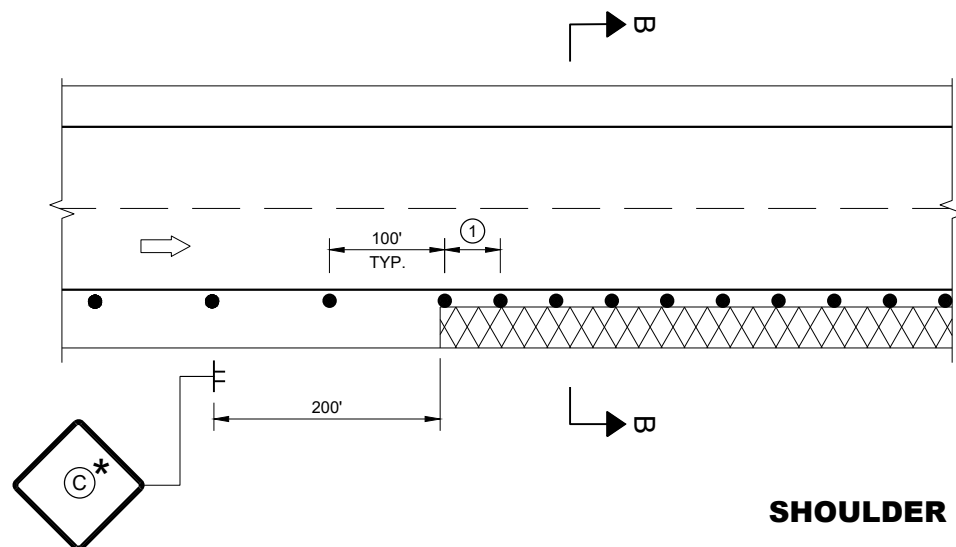

**SHOULDER DROP-OFFS**

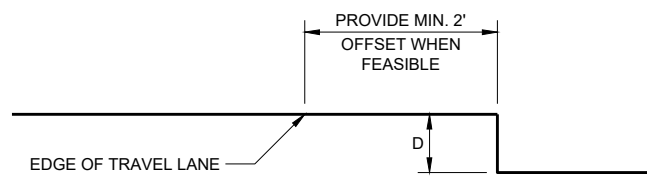

**SECTION B - B**






D	SIGN (C)
< 2" WITH A SLOPE STEEPER THAN 3:1	LOW SHOULDER WO8-9
2" < 6" WITH A SLOPE STEEPER THAN 3:1	SHOULDER DROP-OFF W8-9A PROVIDE A 3:1 OR FLATTER SLOPE OF MATERIAL ADJACENT TO THE PAVEMENT

**TRAFFIC CONTROL,  
DROP-OFF SIGNING**

STATE OF WISCONSIN  
DEPARTMENT OF TRANSPORTATION

APPROVED  
March 2018 /S/ Andrew Heidtke  
DATE DATE WORK ZONE ENGINEER

FHWA

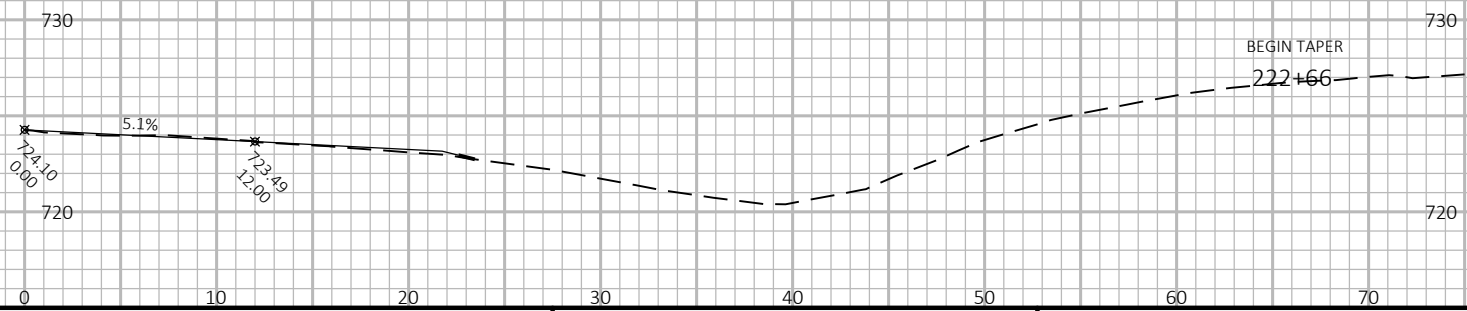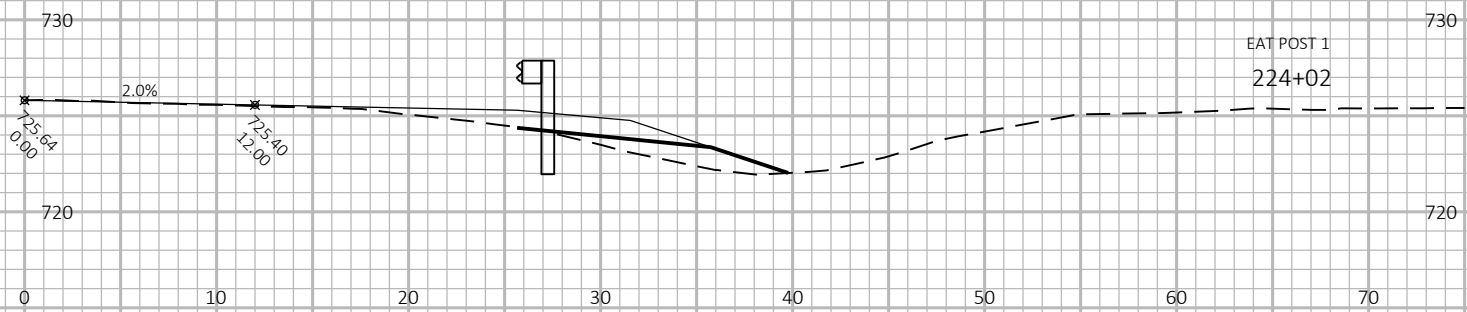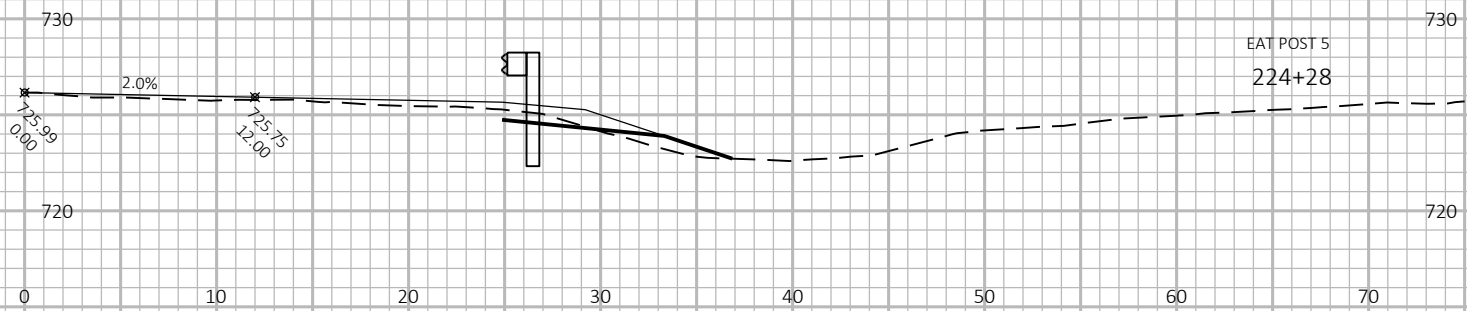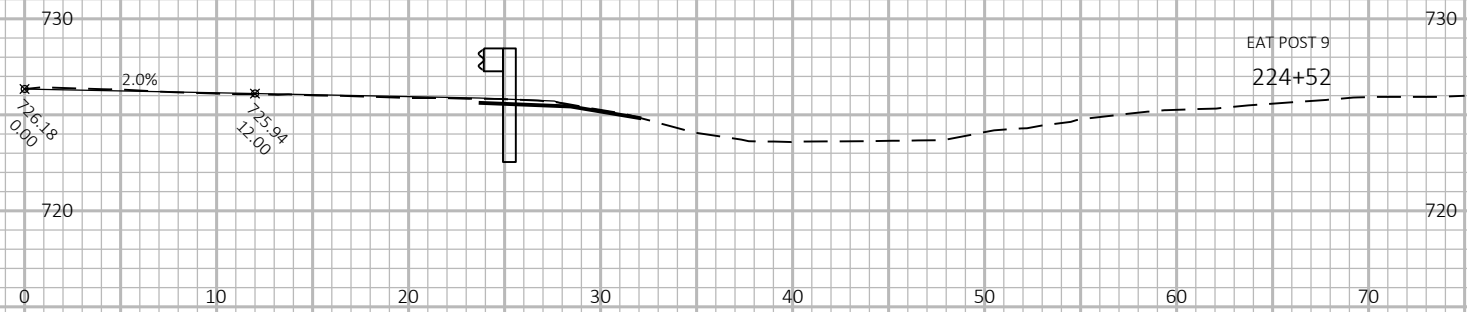

9

9

PROJECT NO: 1640-03-61

HWY: USH 14

COUNTY: LA CROSSE

CROSS SECTIONS: USH 14

SHEET

E

Notes



## *Wisconsin Department of Transportation*

Dedicated people creating transportation solutions through innovation and exceptional service.

<http://www.dot.wisconsin.gov>