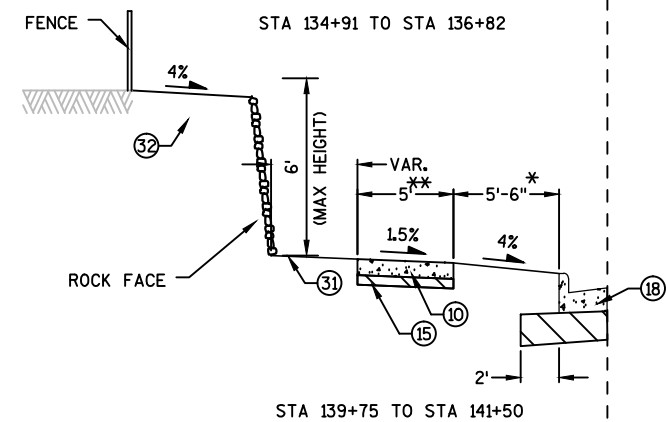
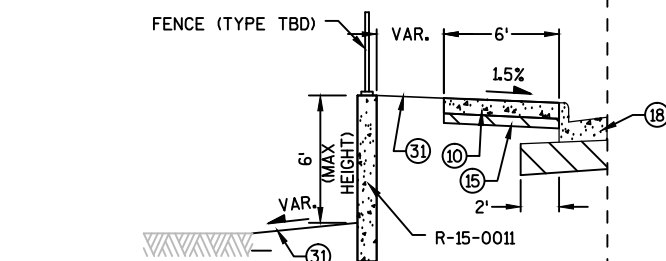
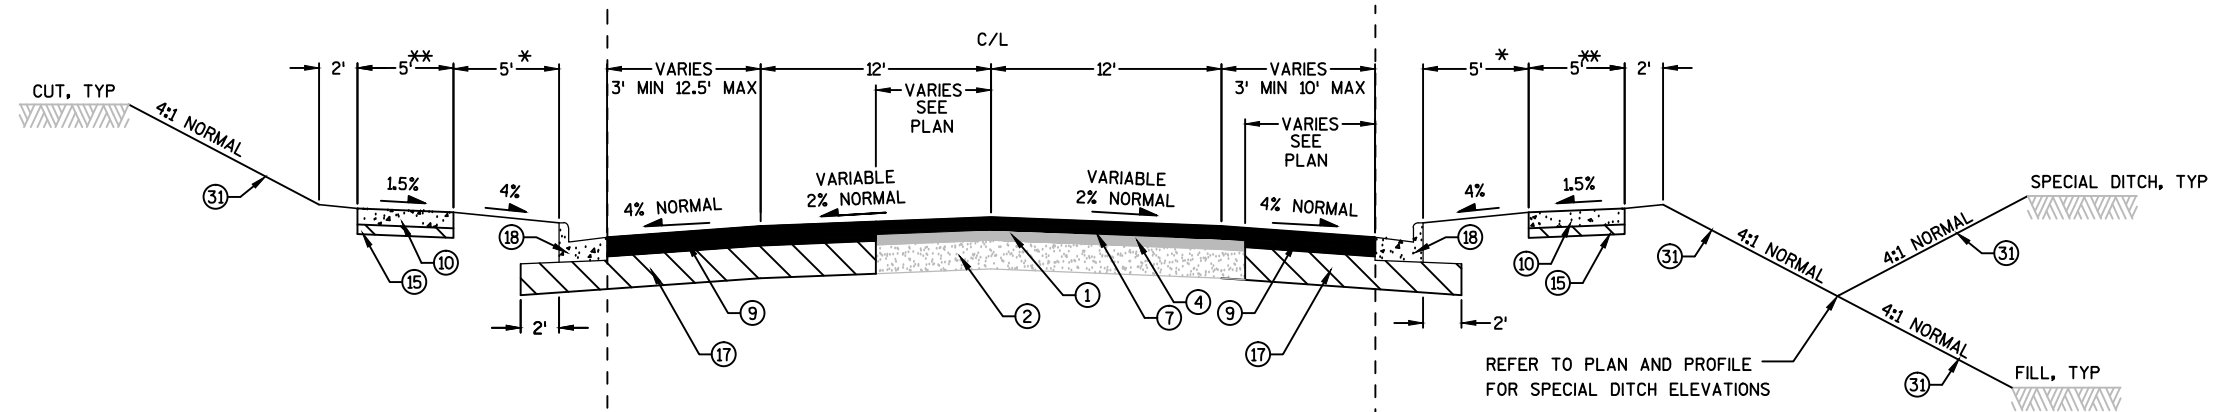


TYPICAL FINISHED SECTION

STH 42

STA 134+35 TO STA 143+68
STA 144+86 TO STA 147+22
STA 148+17 TO STA 152+94.50

CTH F

STA 10'CF'+15 TO STA 10'CF'+81

LEGEND

- ① EXISTING VARIABLE DEPTH ASPHALTIC PAVEMENT
- ② EXISTING CRUSHED AGGREGATE BASECOURSE TO REMAIN
- ④ MILL 2 INCHES EXISTING ASPHALTIC PAVEMENT
- ⑦ 4-INCHES HMA PAVEMENT MT 58-28 S OVERLAY
- ⑨ 6-1/4-INCHES HMA PAVEMENT MT 58-28 S
- ⑩ CONCRETE SIDEWALK 4-INCH
- ⑫ CONCRETE DRIVEWAY 6-INCH
- ⑮ 1-1/4 INCH BASE AGGREGATE DENSE, 3-INCHES
- ⑰ 1-1/4 INCH BASE AGGREGATE DENSE, 12-INCHES
- ⑱ 30-INCH CURB AND GUTTER, TYPE D
- ⑳ SEE EROSION CONTROL PLAN FOR DETAILS
- ㉑ REFER TO STRUCTURE PLANS FOR ADDITIONAL DETAILS

* TERRACE WIDTH IS ZERO BETWEEN STA 134+35 TO 140+78 LEFT AND STA 134+35 TO 141+11 RIGHT

** SIDEWALK WIDTH IS 6' BETWEEN STA 135+09 TO 140+78 LEFT AND STA 134+35 TO 141+11 RIGHT

