


PROJECT ID:
WITH: 5860-00-60

COUNTY:
CRAWFORD

ORDER OF SHEETS

Section No.	1	Title
Section No.	2	Typical Sections and Details
Section No.	3	Estimate of Quantities
Section No.	3	Miscellaneous Quantities
Section No.	4	Right of Way Plat
Section No.	5	Plan and Profile
Section No.	6	Standard Detail Drawings
Section No.	7	Sign Plates
Section No.	8	Structure Plans
Section No.	9	Computer Earthwork Data
Section No.	9	Cross Sections

TOTAL SHEETS =

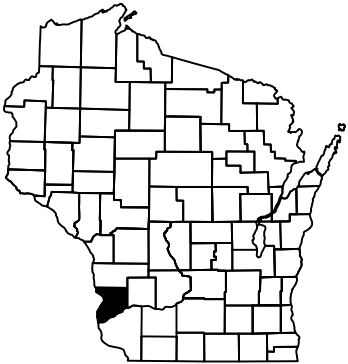

DESIGN DESIGNATION

A.A.D.T.	=
A.A.D.T.	=
D.H.V.	=
D.D.	=
T.	=
DESIGN SPEED	=
ESALS	=

CONVENTIONAL SYMBOLS


PLAN

CORPORATE LIMITS	
PROPERTY LINE	
LOT LINE	
LIMITED HIGHWAY EASEMENT	
EXISTING RIGHT OF WAY	
PROPOSED OR NEW R/W LINE	
SLOPE INTERCEPT	
REFERENCE LINE	
EXISTING CULVERT	
PROPOSED CULVERT (Box or Pipe)	
COMBUSTIBLE FLUIDS	
MARSH AREA	
WOODED OR SHRUB AREA	

PROFILE

GRADE LINE	
ORIGINAL GROUND	
MARSH OR ROCK PROFILE (To be noted as such)	
SPECIAL DITCH	
GRADE ELEVATION	
CULVERT (Profile View)	
UTILITIES	
ELECTRIC	
FIBER OPTIC	
GAS	
SANITARY SEWER	
STORM SEWER	
TELEPHONE	
WATER	
UTILITY PEDESTAL	
POWER POLE	
TELEPHONE POLE	

BEGIN PROJECT
STA 53+20
X = 358832.051
Y = 217818.124

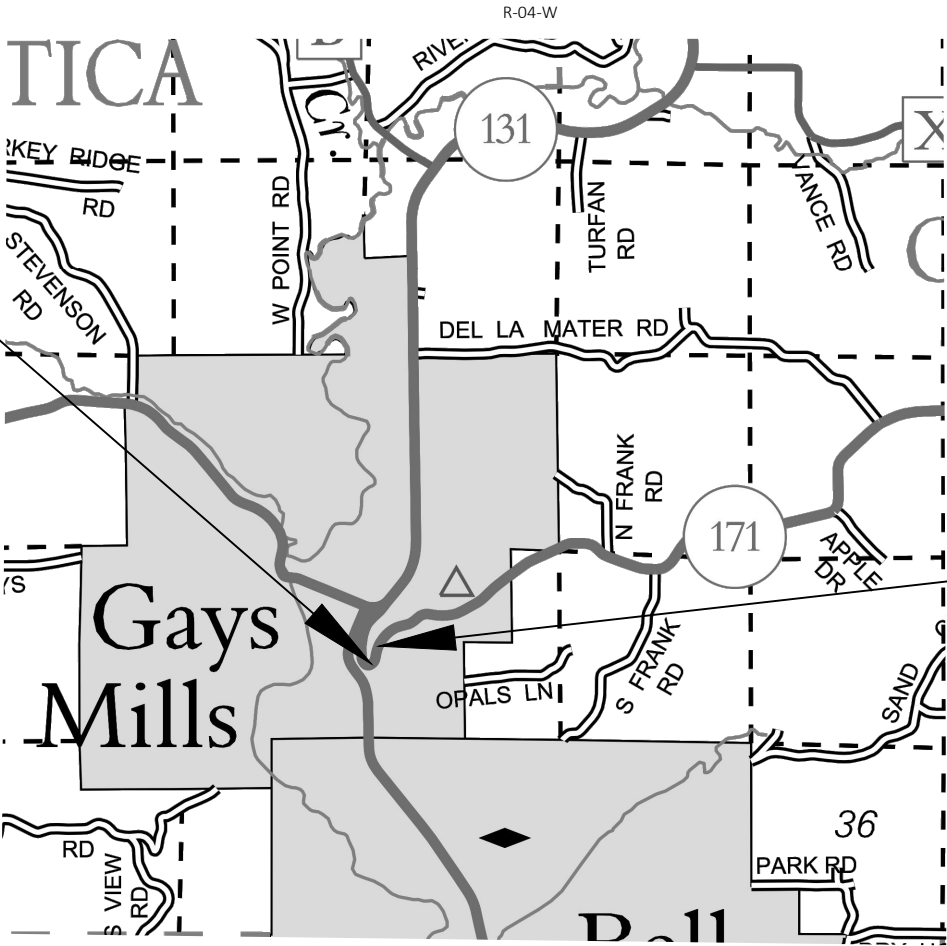


LAYOUT
SCALE 0 1 MI

TOTAL NET LENGTH OF CENTERLINE =


HORIZONTAL POSITIONS SHOWN ON THIS PLAN ARE WISCONSIN COORDINATE REFERENCE SYSTEM (WISCRS), CRAWFORD COUNTY, NAD83 (2011), IN U.S. SURVEY FEET. POSITIONS SHOWN ARE GRID COORDINATES, GRID BEARINGS, AND GRID DISTANCES. GRID DISTANCES ARE THE SAME AS GROUND DISTANCES. ELEVATIONS ARE REFERENCED TO NAVD 88 (2012). GPS DERIVED ELEVATIONS ARE BASED ON GEOID 12A.

STATE PROJECT	FEDERAL PROJECT	
	PROJECT	CONTRACT
5860-00-60		


STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
PREPARED BY	
Surveyor	WISDOT
Designer	MIKE GREINER
Project Manager	JOHN BAINTER
Regional Examiner	SW REGION
Regional Supervisor	JIM SAVOLDELLI
APPROVED FOR THE DEPARTMENT	
DATE: 10/2/2018	

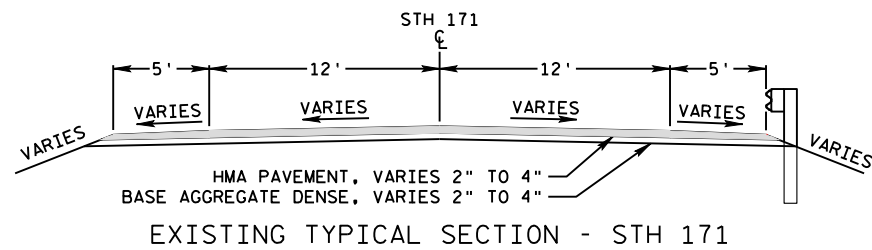


* 4% GUTTER CROSS SLOPE

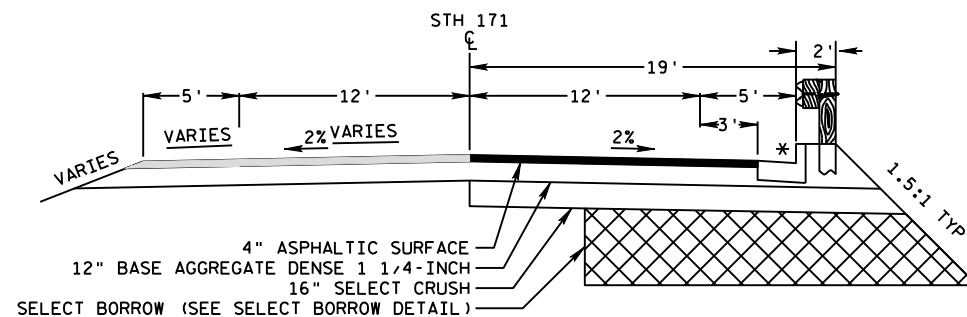


PROPOSED TYPICAL SECTION - STH 171

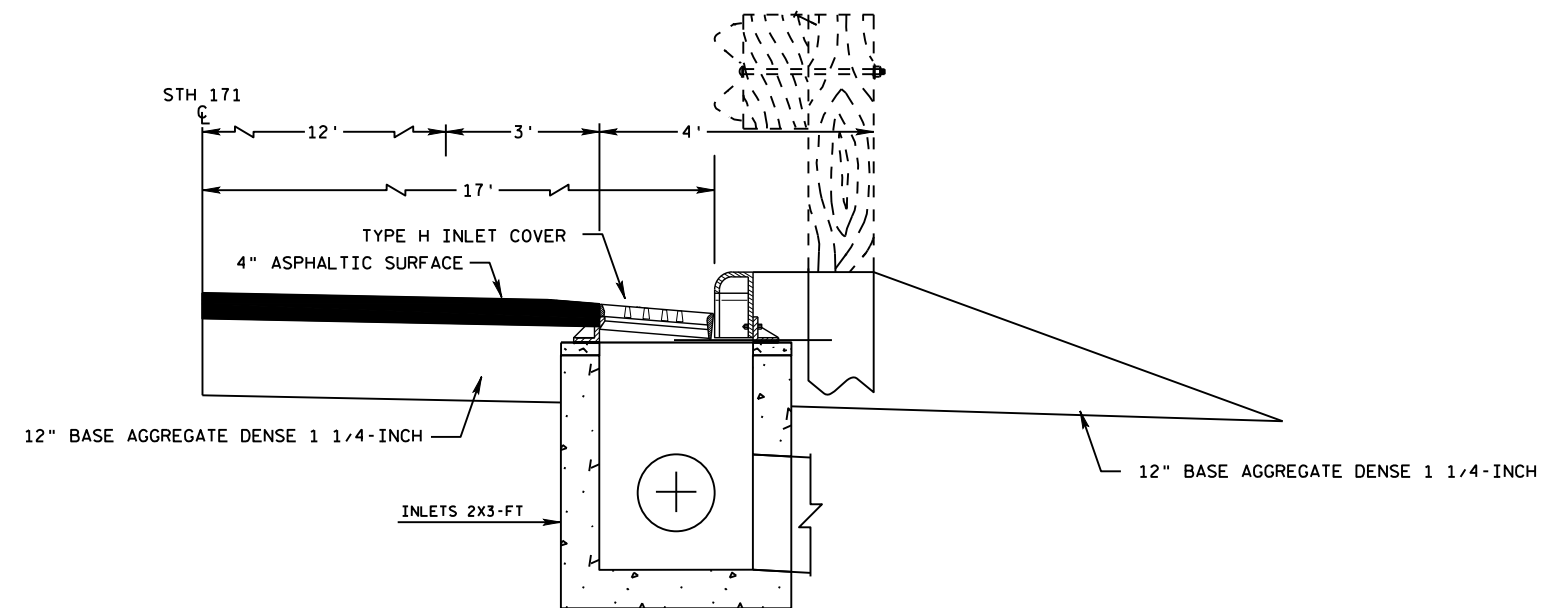

INLET DETAIL

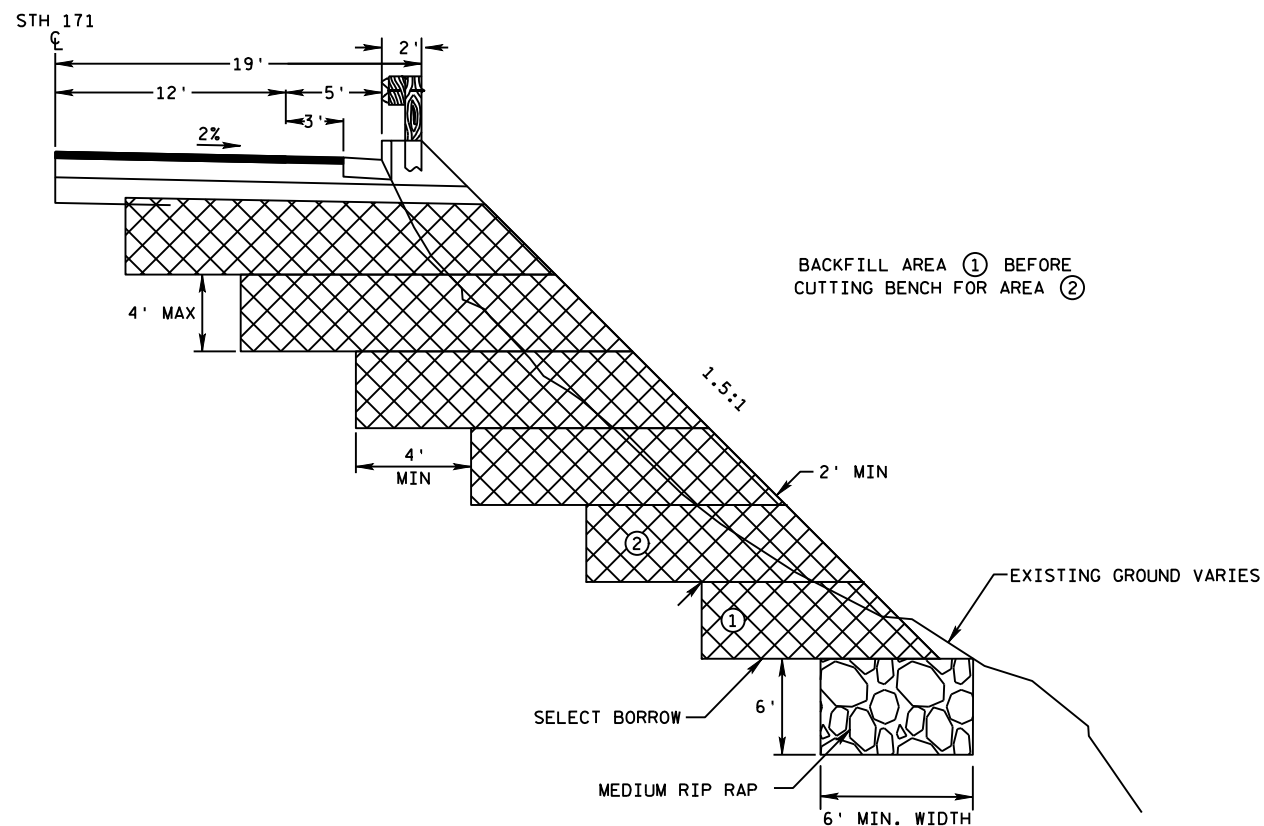

SELECT BORROW DETAIL

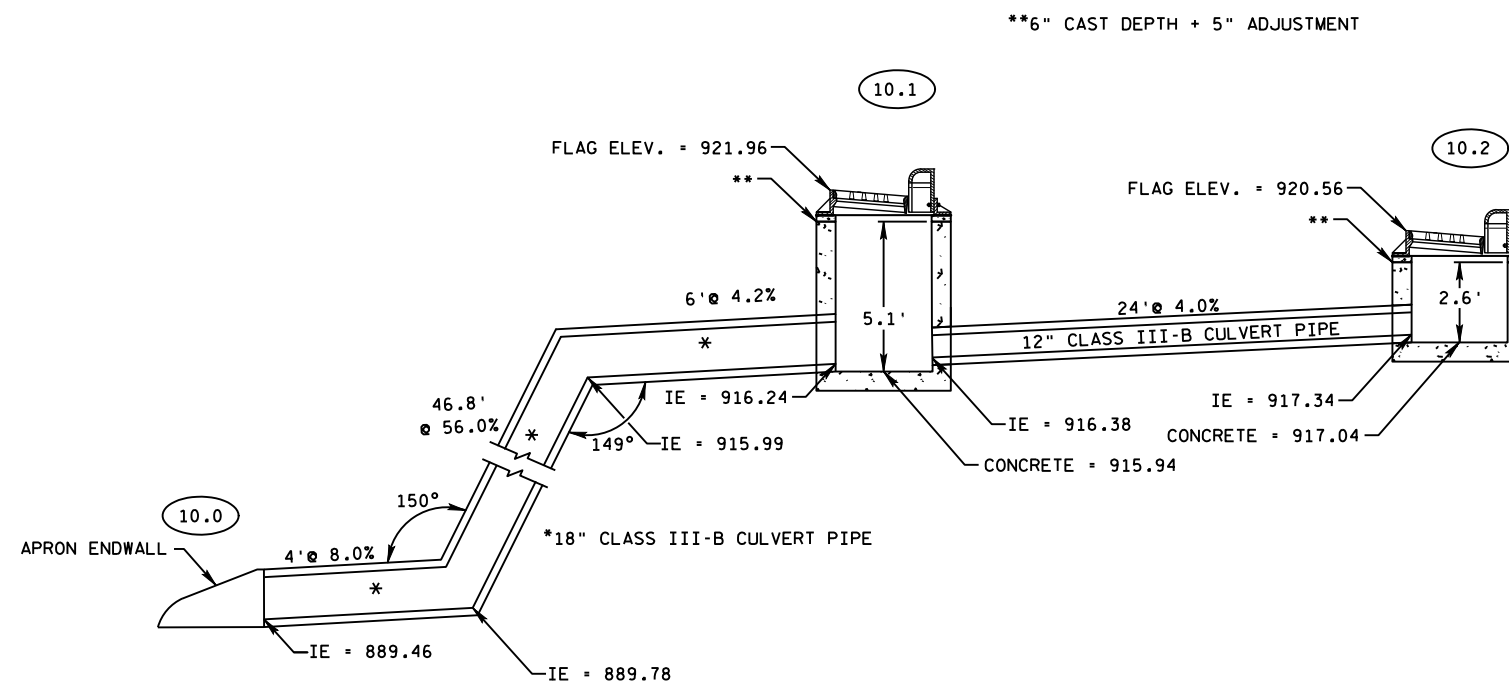

STORM SEWER DETAIL

C.P. INFO
#957
N:217766.569
E:398786.261
ELEV:916.03

#959
N:217968.393
E:398921.899
ELEV:929.64


STRUCTURE	STA.	OFFSET
10.0	53+75	65.84
10.1	53+75	16.00
10.2	53+51	16.00

CURVE #1
PI STA = 51+06.11
Y = 217627.159
X = 398735.630
DELTA = 15°36'02"
D = 14°30'31"
T = 54.10'
L = 107.53'
R = 394.91'
PC STA = 50+52.01
PT STA = 51+59.54


CURVE #2
PI STA = 52+45.12
Y = 217754.497
X = 398793.022
DELTA = 7°04'42"
D = 8°42'04"
T = 40.73'
L = 81.35'
R = 658.49'
PC STA = 52+04.39
PT STA = 52+85.74

* SEE CONSTRUCTION DETAILS
FOR MORE STORM SEWER
INFORMATION.

5

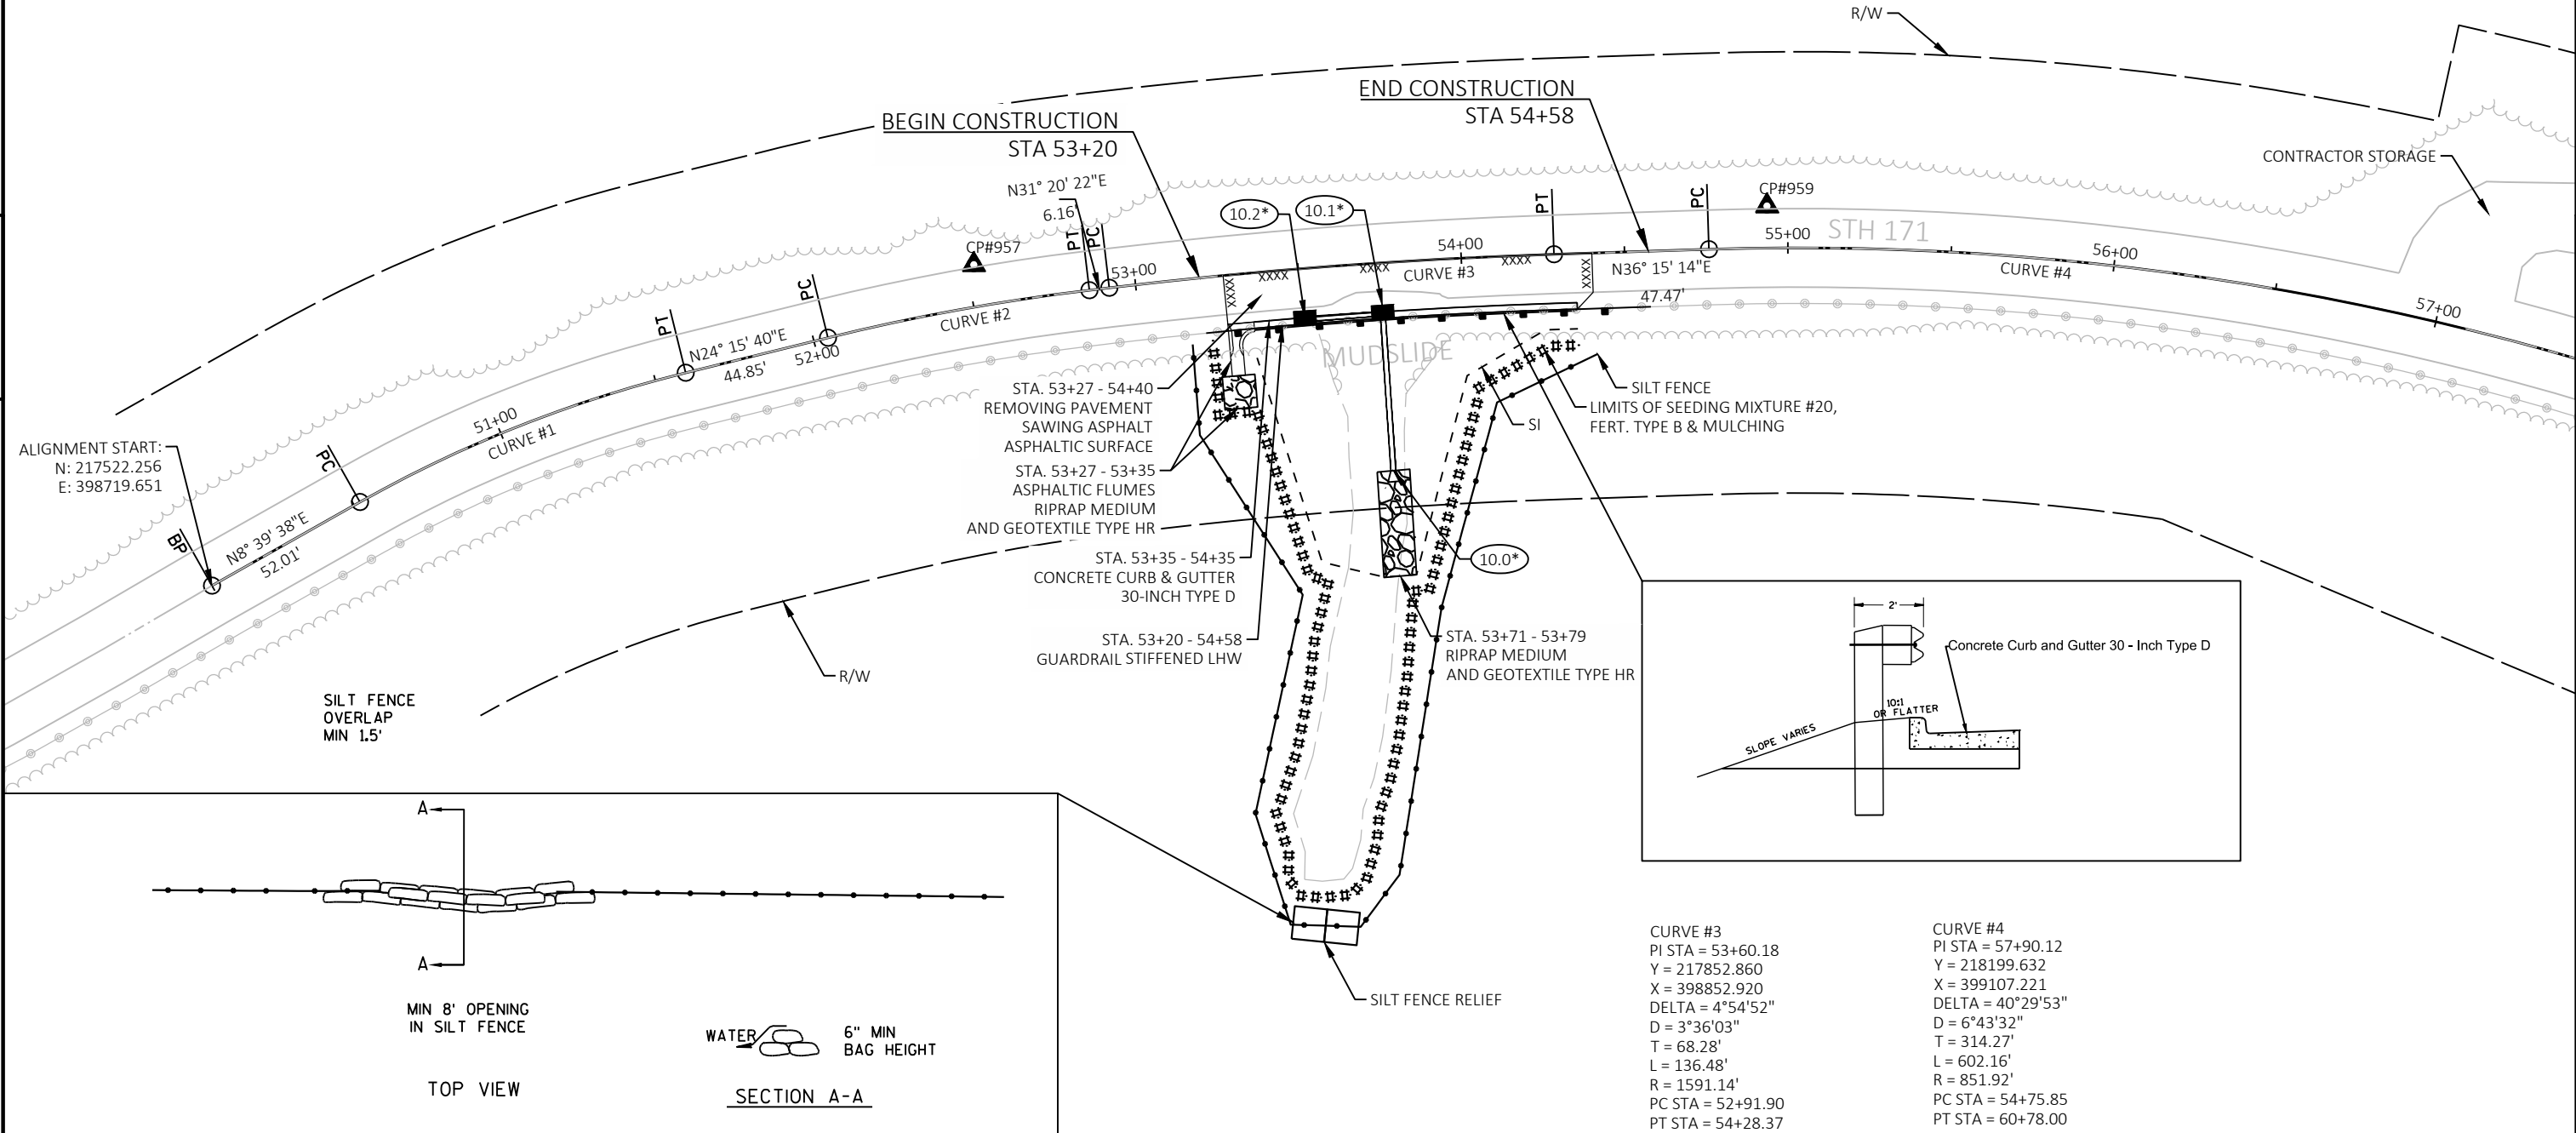

5

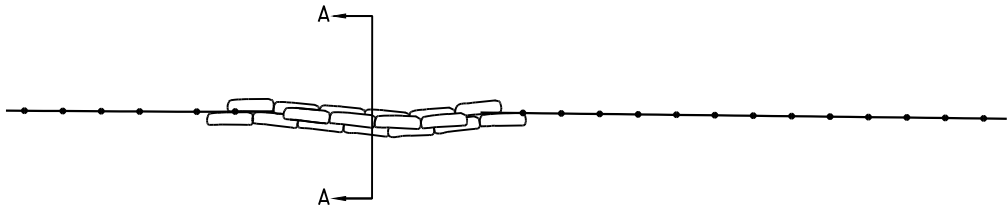

ROCK BAGS USED FOR SILT FENCE RELIEF




CURVE #3
PI STA = 53+60.18
Y = 217852.860
X = 398852.920
DELTA = 4°54'52"
D = 3°36'03"
T = 68.28'
L = 136.48'
R = 1591.14'
PC STA = 52+91.90
PT STA = 54+28.37


CURVE #4
PI STA = 57+90.12
Y = 218199.632
X = 399107.221
DELTA = 40°29'53"
D = 6°43'32"
T = 314.27'
L = 602.16'
R = 851.92'
PC STA = 54+75.85
PT STA = 60+78.00








SDD 8a5-a Inlet Covers Type A, H, A-S, H-S and Z

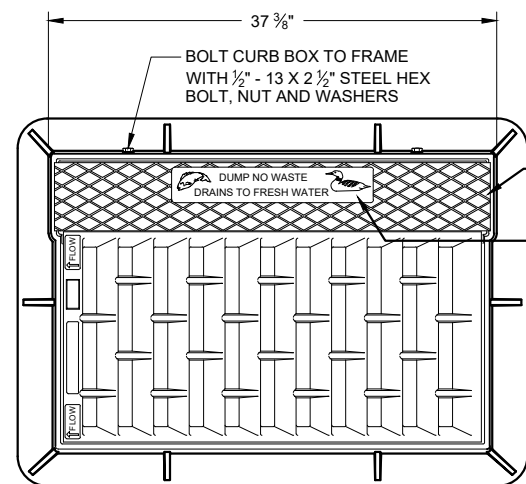

NOTE: EITHER CASTING IS ACCEPTABLE

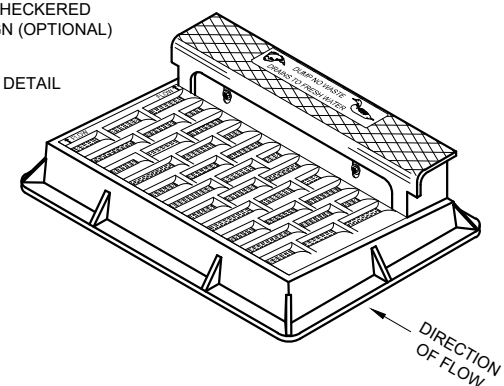


NOTE: CURB BOX HEIGHT ADJUSTABLE 6" - 9"

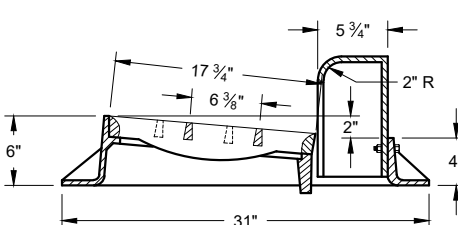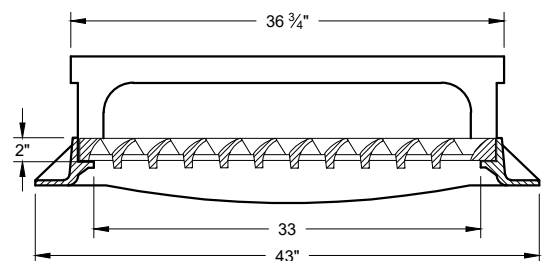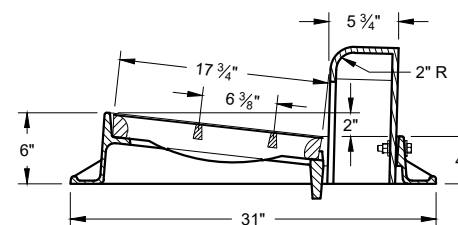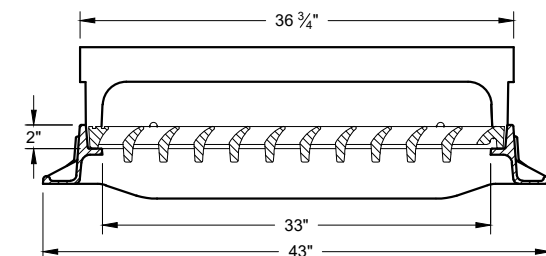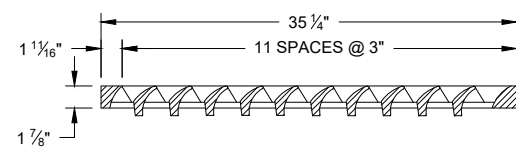


TYPE "H"

NOTE: EITHER CASTING IS ACCEPTABLE

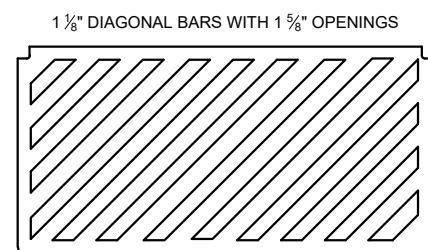


SPECIAL GRATE FOR TYPE "H" COVER

(MEASURES 35" X 17 3/4" X 2")
(NOTED AS TYPE H-S ON DRAINAGE TABLE)



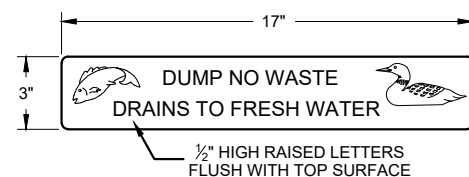


LOGO DETAIL


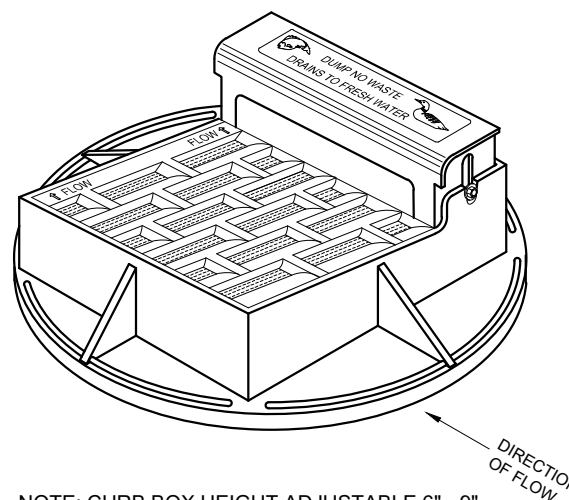


NOTE: CURB BOX HEIGHT ADJUSTABLE 6" - 9"

NOTE: EITHER CASTING IS ACCEPTABLE

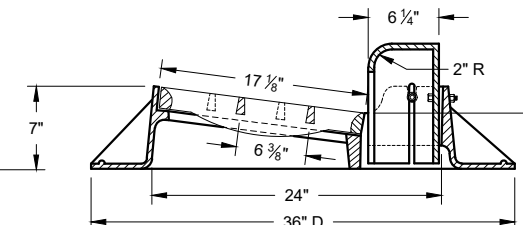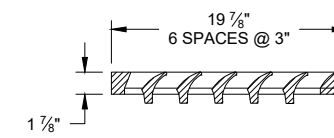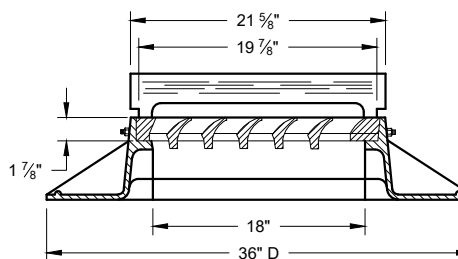

TYPE "A"

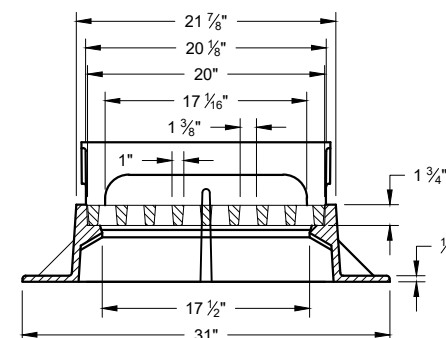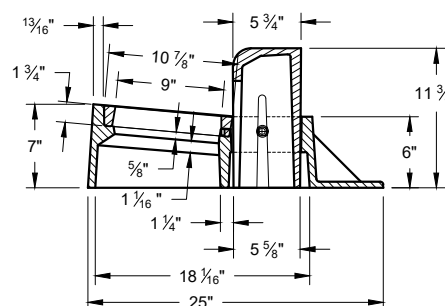

TYPE "Z"


GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

DETAIL DRAWINGS FOR PROPOSED ALTERNATE DESIGNS FOR CATCH BASIN, MANHOLE AND INLET COVERS SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PROVIDING THAT SUCH ALTERNATE DESIGNS MAKE PROVISION FOR EQUIVALENT CAPACITY AND STRENGTH.


ROUND FRAMES AND COVERS SHALL HAVE CONTINUOUSLY MACHINED BEARING SURFACES TO PREVENT ROCKING AND RATTLING.

1" DIAGONAL BARS
WITH 1 1/2" OPENINGS



SPECIAL GRATE FOR TYPE "A" COVER


(MEASURES 19 3/4" X 17" X 1 7/8")
(NOTED AS TYPE A-S ON DRAINAGE TABLE)

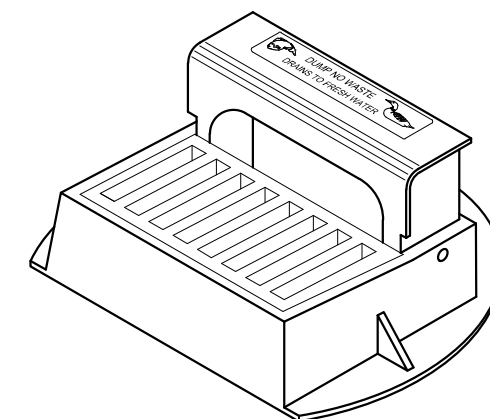


INLET COVERS TYPE A, H, A-S, H-S & Z

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


APPROVED
11-27-13
DATE
/S/ Jerry H. Zogg
APPROVING
ENGINEER
FHWA

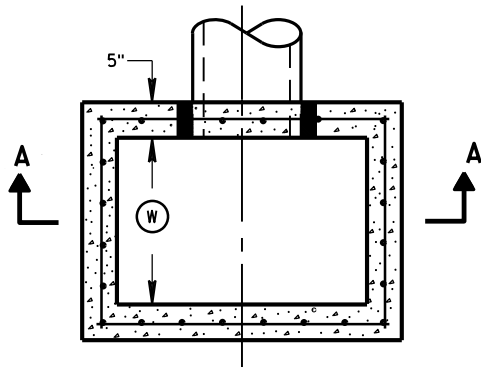


PLAN VIEW

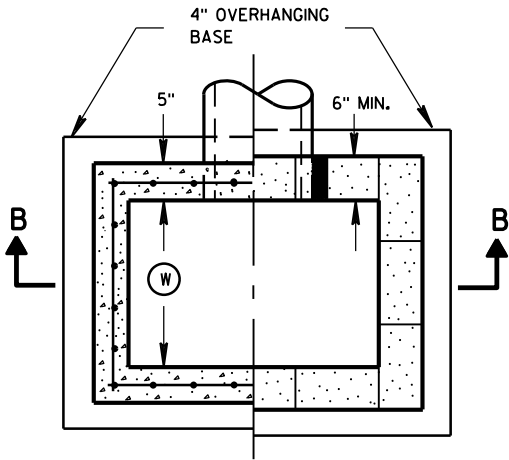


PLAN VIEW




RISER JOINTS TO BE SEALED WITH A BUTYL RUBBER SEAL PER SEALANT MANUFACTURERS RECOMMENDATIONS CONFORMING TO ASTM C 990 (TYP)

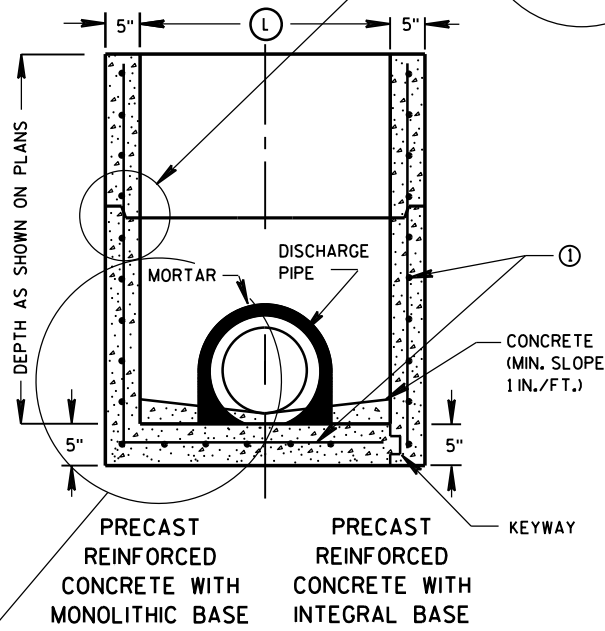

SECTION A-A

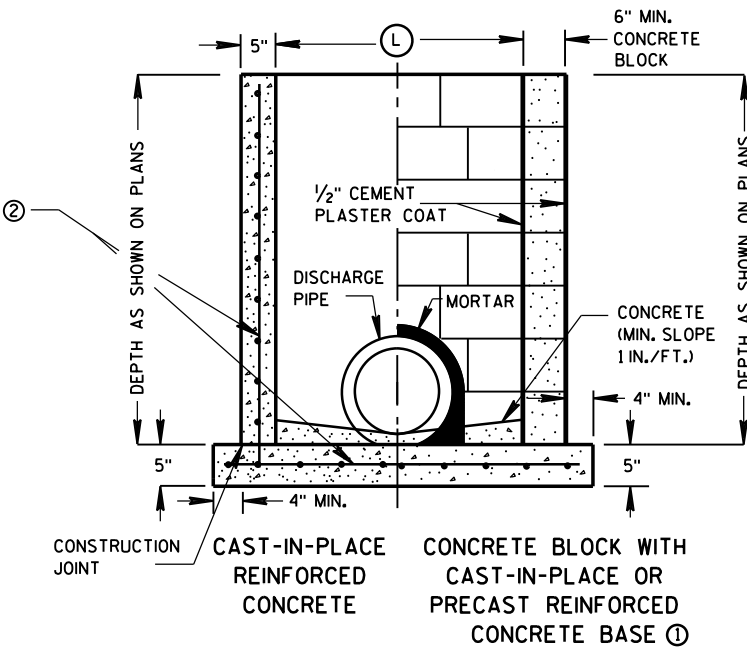

SECTION B-B

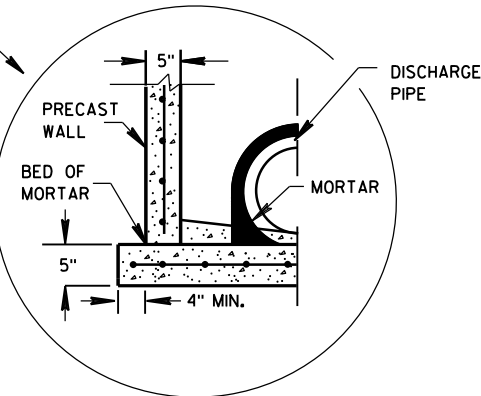

SEPARATE PRECAST REINFORCED CONCRETE BASE OPTION

INLETS 2X2-FT, 2X2.5-FT, 2X3-FT AND 2.5X3-FT

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

UNLESS OTHERWISE AUTHORIZED IN WRITING BY THE ENGINEER, THE CONTRACTOR SHALL NOT ORDER AND DELIVER PRECAST INLET UNITS REQUIRED FOR THE PROJECT UNTIL A LIST OF SIZES IS FURNISHED BY THE ENGINEER.

DETAILED DRAWINGS FOR PROPOSED ALTERNATE DESIGNS FOR UNDERGROUND DRAINAGE STRUCTURES SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PROVIDING THAT SUCH ALTERNATE DESIGNS MAKE PROVISION FOR EQUIVALENT CAPACITY AND STRENGTH.

ALL PRECAST INLET UNITS SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF ASTM C 913.

ALL DRAINAGE STRUCTURES ARE DESIGNATED ON THE PLANS AS "MANHOLES 3X3-L", "CATCH BASINS 4-B", "INLETS 2X3-H", ETC. THE FIRST NUMBERS DESIGNATES THE SIZE OF THE STRUCTURE, AND THE FOLLOWING LETTER DESIGNATES THE TYPE OF COVER TO BE USED TO COMPRISE THE COMPLETE UNIT.

BASES SHALL BE PLACED ON A BED OF MATERIAL AT LEAST 6 INCHES IN DEPTH, WHICH MEETS THE REQUIREMENTS OF FOUNDATION BACKFILL. THIS BEDDING SHALL BE COMPACTED AND PROVIDE UNIFORM SUPPORT FOR THE ENTIRE AREA OF THE BASE.

ALL BAR STEEL REINFORCEMENT SHALL BE EMBEDDED 2 INCHES CLEAR UNLESS OTHERWISE SHOWN OR NOTED.

PRECAST REINFORCED RISERS SHALL HAVE A TONGUE AND GROOVE JOINT WITH TONGUE UP OR DOWN.

4" OVERHANGING BASES ARE REQUIRED FOR CAST-IN-PLACE REINFORCED CONCRETE AND CONCRETE BLOCK INSTALLATIONS. 4" OVERHANG IS REQUIRED WHEN SEPARATE PRECAST BASE IS PROVIDED. OVERHANG IS NOT REQUIRED ON PRECAST STRUCTURES WITH AN INTEGRAL OR MONOLITHIC BASE.

MAXIMUM INSIDE PIPE DIAMETER DETERMINED BY 3 INCH CLEARANCE ON EACH SIDE OF THE OUTSIDE WALL OF THE PIPE. SEE DETAIL "A". ASSUMES PIPE ENTERS PERPENDICULAR TO THE STRUCTURE.


- FOR PRECAST INLETS PROVIDE REINFORCING STEEL IN ACCORDANCE TO ASTM C 913.
- CONTRACTOR TO PROVIDE DRAWING(S) STAMPED BY A PROFESSIONAL ENGINEER FOR STEEL REINFORCING DESIGN FOR CAST-IN-PLACE STRUCTURES.

INLET COVER MATRIX

INLET SIZE	WIDTH (FT)	LENGTH (FT)	ALL A'S	ALL B'S	BW	F	ALL H'S	S	T	V	WM
2X2-FT	2	2	X	X				X		X	
2X2.5-FT	2	2.5			X			X	X	X	X
2X3-FT	2	3					X				
2.5X3-FT	2.5	3				X					

PIPE MATRIX

INLET SIZE	MAXIMUM INSIDE PIPE DIAMETER	
	WIDTH (IN)	LENGTH (IN)
2X2-FT	12	12
2X2.5-FT	12	18
2X3-FT	12	24
2.5X3-FT	18	24

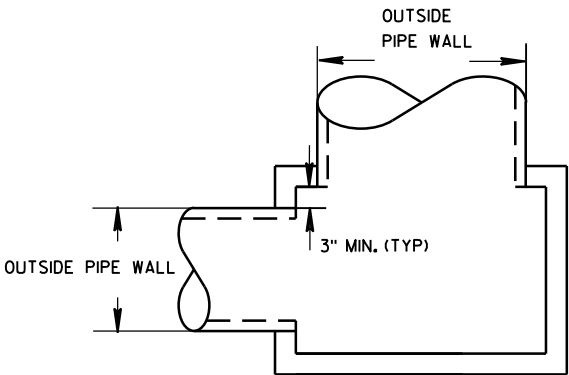


DETAIL "A"


INLETS 2X2-FT, 2X2.5-FT, 2X3-FT AND 2.5X3-FT

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


APPROVED
Sept., 2016 /S/ Rodney Taylor
DATE ROADWAY STANDARDS DEVELOPMENT
FHWA UNIT SUPERVISOR

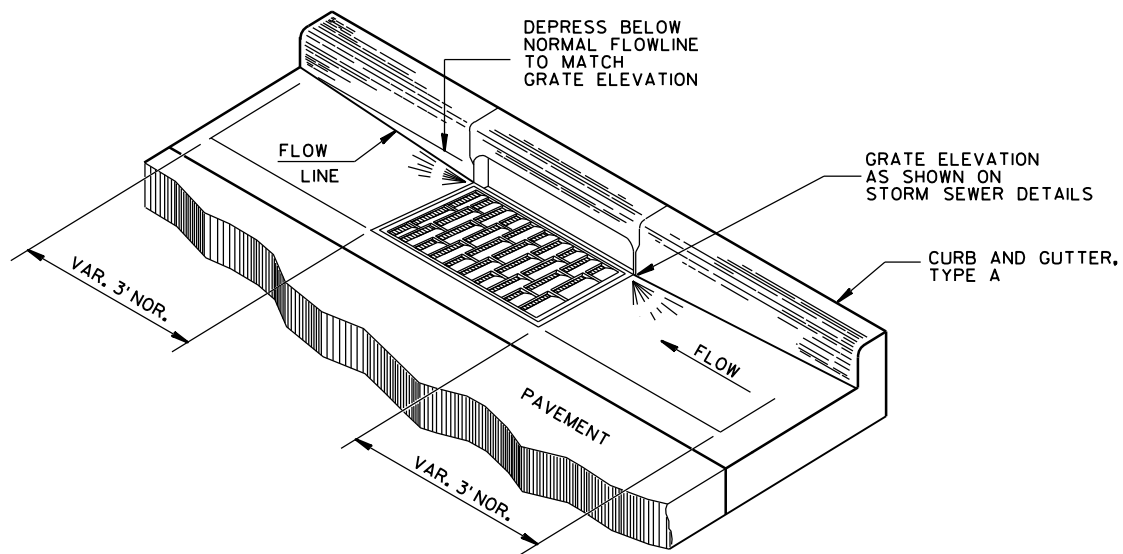

DETAIL OF CURB AND GUTTER AT INLETS
(TYPE H INLET COVER SHOWN)

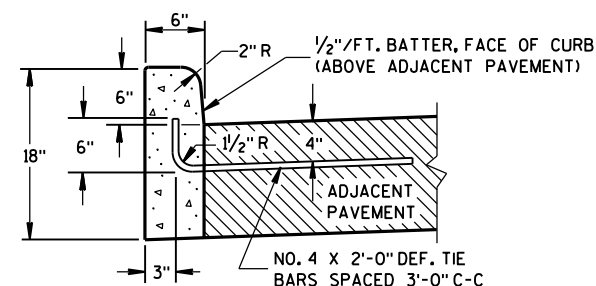


TYPES A^① & D

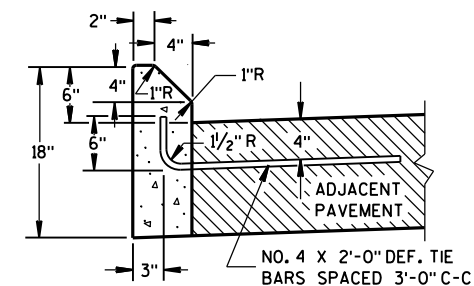


TYPES G^① & J


CONCRETE CURB

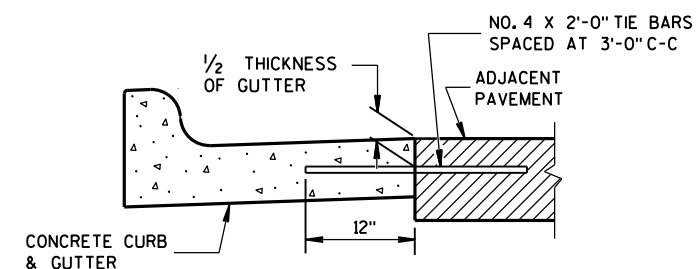


TYPICAL TIE BAR LOCATION^①

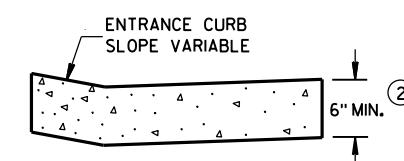

DRIVEWAY ENTRANCE CURB^⑨
(WHEN DIRECTED BY THE ENGINEER)

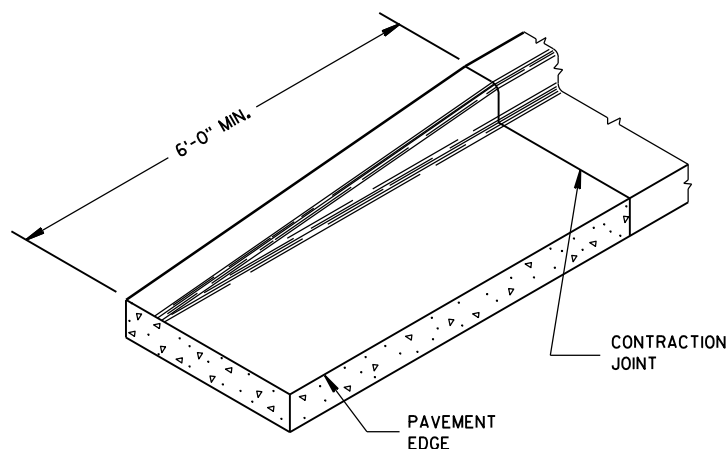


END SECTION CURB & GUTTER

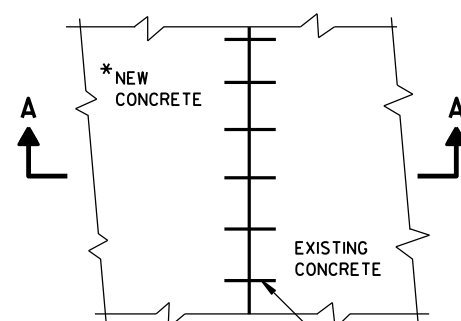

PLAN VIEW

*NEW CURB & GUTTER, SURFACE DRAINS, CONCRETE PAVEMENT OR OTHER NEW CONCRETE.

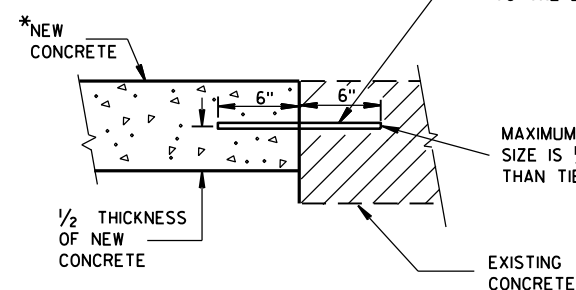

SECTION A-A
TIE BARS DRILLED INTO EXISTING PAVEMENT

NO. 6 TIE BARS SPACED 2'-6" C-C, INSTALLED PERPENDICULAR TO THE LONGITUDINAL JOINT.

MAXIMUM DRILL HOLE SIZE IS 1/8" GREATER THAN TIE BAR DIAMETER


CONCRETE CURB, TIES AND CURB AND GUTTER APPLICATIONS	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED June, 2017 DATE FHWA	/S/ Rodney Taylor ROADWAY STANDARDS DEVELOPMENT UNIT SUPERVISOR




ASPHALTIC FLUME

NOTE: TAPER CURB ENDS
TO GUTTER IN 1'-0"


INCREASE ϕ FROM RIGHT ANGLE
TO BEST FIT FIELD CONDITIONS

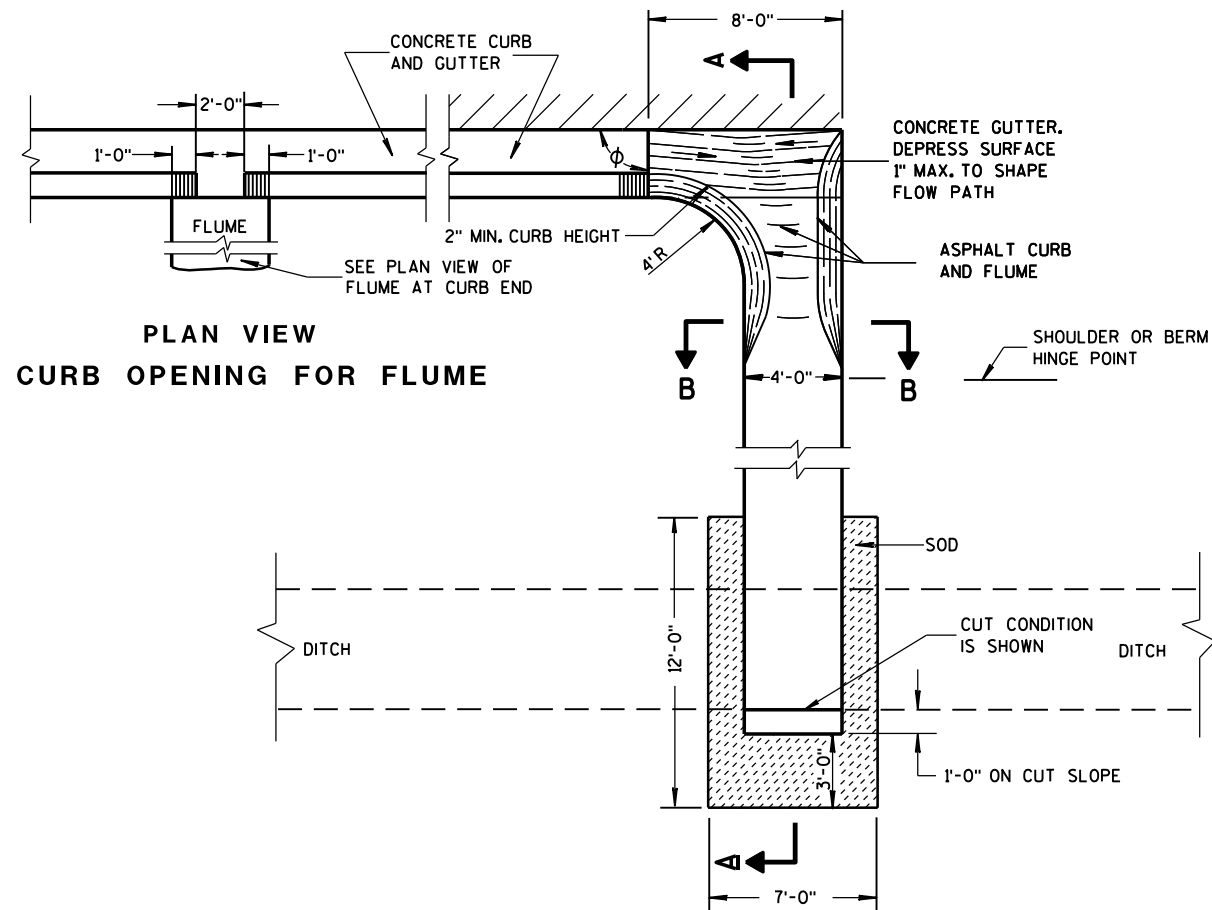

PLAN VIEW FLUME AT CURB END

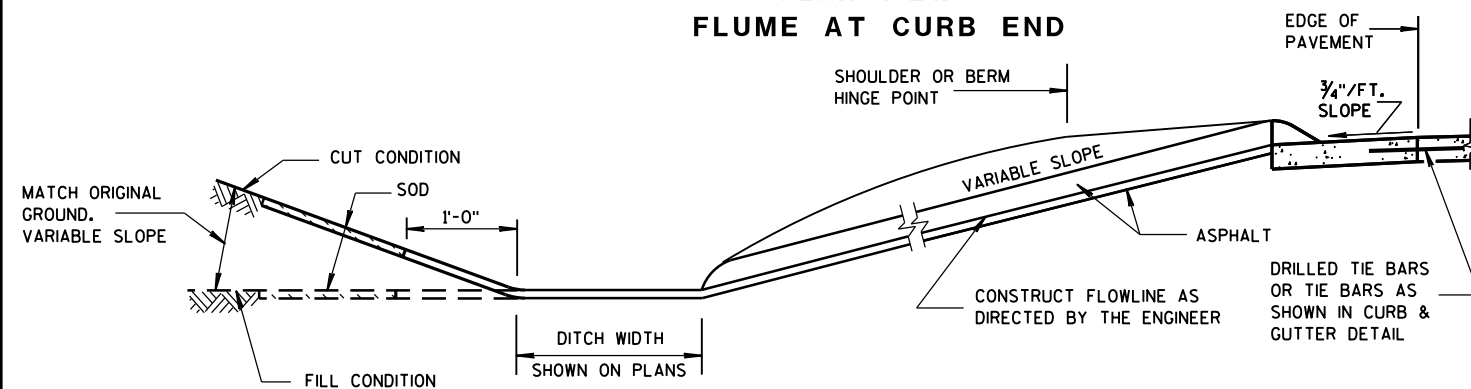

SECTION B-B

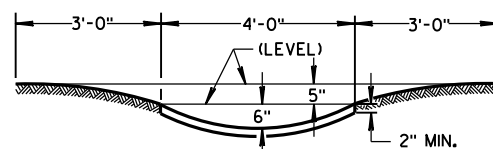




GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND APPLICABLE SPECIAL PROVISIONS.

WELDED STEEL WIRE FABRIC SHALL BE IN ACCORDANCE WITH AASHTO SPECIFICATION M55.

- JOINTS SHALL BE 1/8 TO 1/4 INCH WIDE BY 1 1/2 INCHES DEEP AND SPACED AT UNIFORM INTERVALS OF APPROXIMATELY 4 FEET.
- GEOTEXTILE FABRIC TYPE "R" SHALL UNDERLAY THE FULL LENGTH AND WIDTH OF THE CONCRETE SURFACE DRAIN AND RIPRAP.
- CONCRETE SURFACE DRAIN WITHOUT CURB AND GUTTER MAY BE USED ON BACKSLOPES WHEN SPECIFIED

③ CONCRETE SURFACE DRAIN

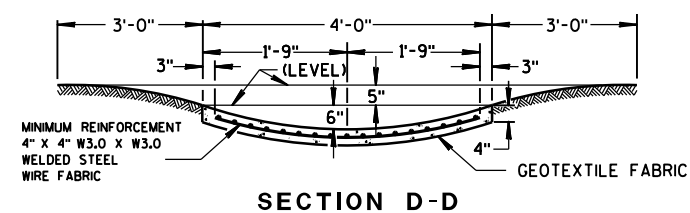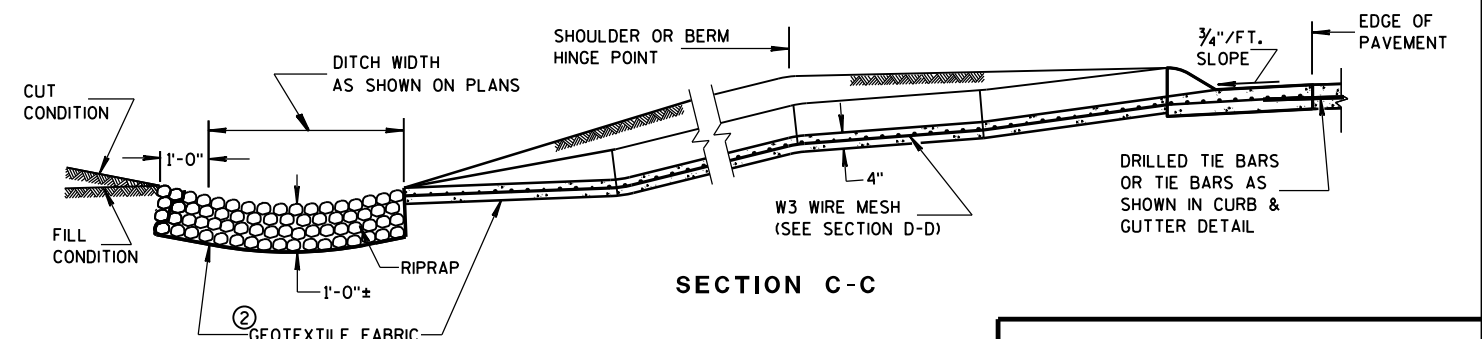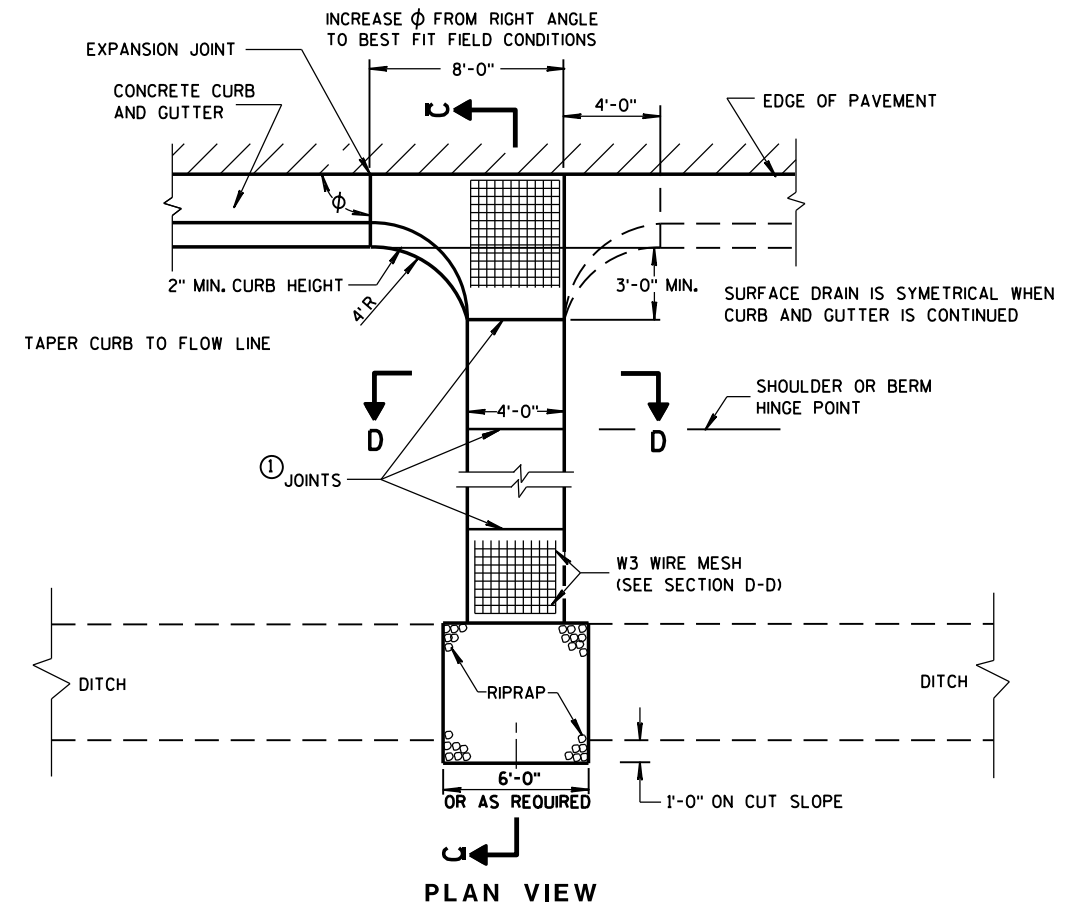

CONCRETE SURFACE DRAINS & ASPHALTIC FLUMES

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED

9/4/08
DATE

FHWA

/S/ Jerry H. Zogg
ROADWAY STANDARDS DEVELOPMENT
ENGINEER



SDD 8f1 Apron Endwalls for Culvert Pipe


METAL APRON ENDWALLS											
PIPE DIA. (IN.)	MIN. THICK. (Inches)		DIMENSIONS (Inches)							APPROX. SLOPE	BODY
	STEEL	ALUM.	A (±1")	B (MAX.)	H (±1/2")	L (±1/2")	L1 ①	L2 ①	W (±2")		
12	.064	.060	6	6	6	21	12	17 1/2	24	2 1/2 to 1	1 Pc.
15	.064	.060	7	8	6	26	14	21 3/4	30	2 1/2 to 1	1 Pc.
18	.064	.060	8	10	6	31	15	28 1/4	36	2 1/2 to 1	1 Pc.
21	.064	.060	9	12	6	36	18	29 5/8	42	2 1/2 to 1	1 Pc.
24	.064	.075	10	13	6	41	18	37 1/4	48	2 1/2 to 1	1 Pc.
30	.079	.075	12	16	8	51	18	52 1/4	60	2 1/2 to 1	1 Pc.
36	.079	.105	14	19	9	60	24	59 3/4	72	2 1/2 to 1	2 Pc.
42	.109	.105	16	22	11	69	24	75 5/8	84	2 1/2 to 1	2 Pc.
48	.109	.105	18	27	12	78	24	81	90	2 1/4 to 1	3 Pc.
54	.109	.105	18	30	12	84	30	85 1/2	102	2 1/4 to 1	3 Pc.
60	.109x	.105x	18	33	12	87	—	—	114	2 to 1	3 Pc.
66	.109x	.105x	18	36	12	87	—	—	120	2 to 1	3 Pc.
72	.109x	.105x	18	39	12	87	—	—	126	2 to 1	3 Pc.
78	.109x	.105x	18	42	12	87	—	—	132	1 1/2 to 1	3 Pc.
84	.109x	.105x	18	45	12	87	—	—	138	1 1/2 to 1	3 Pc.
90	.109x	.105x	18	37	12	87	—	—	144	1 1/2 to 1	3 Pc.
96	.109x	.105x	18	35	12	87	—	—	150	1 1/2 to 1	3 Pc.

* EXCEPT CENTER PANEL
SEE GENERAL NOTES

REINFORCED CONCRETE APRON ENDWALLS											
PIPE DIA. (IN.)	DIMENSIONS (Inches)							APPROX. SLOPE	BODY	APPROX. SLOPE	BODY
	T	A	B	C	D	E	G				
12	2	4	24	48 1/8	72 1/8	24	2	3 to 1	1 Pc.	3 to 1	1 Pc.
15	2 1/4	6	27	46	73	30	2 1/4	3 to 1	1 Pc.	3 to 1	1 Pc.
18	2 1/2	9	27	46	73	36	2 1/2	3 to 1	1 Pc.	3 to 1	1 Pc.
21	2 3/4	9	36	37 1/2	73 1/2	42	2 3/4	3 to 1	1 Pc.	3 to 1	1 Pc.
24	3	9 1/2	43 1/2	30	73 1/2	48	3	3 to 1	1 Pc.	3 to 1	1 Pc.
27	3 1/4	10 1/2	49 1/2	24	73 1/2	54	3 1/4	3 to 1	1 Pc.	3 to 1	1 Pc.
30	3 1/2	12	54	19 3/4	73 1/2	60	3 1/2	3 to 1	1 Pc.	3 to 1	1 Pc.
36	4	15	63	34 3/4	97 3/4	72	4	3 to 1	1 Pc.	3 to 1	1 Pc.
42	4 1/2	21	63	35	98	78	4 1/2	3 to 1	1 Pc.	3 to 1	1 Pc.
48	5	24	72	26	98	84	5	3 to 1	1 Pc.	3 to 1	1 Pc.
54	5 1/2	27	65	33 1/4-35	98 1/4-100	90	5 1/2	2 1/2 to 1	2 Pc.	2 1/2 to 1	2 Pc.
60	6	30-35	60	39	99	96	5	2 to 1	3 Pc.	2 to 1	3 Pc.
66	6 1/2	24-30	72-78	21-27	99	102	5 1/2	2 to 1	3 Pc.	2 to 1	3 Pc.
72	7	24-36	78	21	99	108	6	2 to 1	3 Pc.	2 to 1	3 Pc.
78	7 1/2	24-36	78	21	99	114	6 1/2	2 to 1	3 Pc.	2 to 1	3 Pc.
84	8	36	90 1/2	21	111 1/2	120	6 1/2	1 1/2 to 1	3 Pc.	1 1/2 to 1	3 Pc.
90	8 1/2	41	87 1/2	24	111 1/2	132	6 1/2	1 1/2 to 1	3 Pc.	1 1/2 to 1	3 Pc.


* MINIMUM
** MAXIMUM

1" WIDE, 12 GA. (0.109"
THICK) GALVANIZED STRAP
WITH STANDARD 6" X 1/2"
BAND BOLT AND NUT



ALTERNATE FOR TYPE 1 CONNECTION
END SECTION CONNECTOR STRAP

THREADED 1/8" DIA. ROD
AROUND CULVERT & THROUGH
TANK TYPE CONNECTOR LUG
OR ALTERNATE CONNECTOR
STRAP (SEE DETAIL)

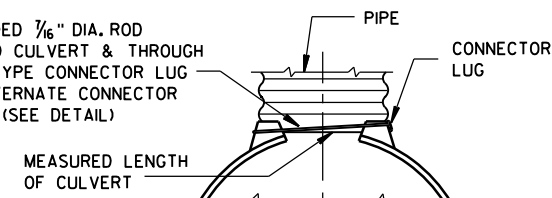

TYPE 1
FOR 12" THRU 24" CORR. PIPE

THREADED 1/8" DIA. ROD
OVER TOP OF APRON, SIDE
LUGS TO BE RIVETED TO
APRON



TYPE 2
FOR 30" THRU 96" CORR. PIPE

MEASURED LENGTH
OF CULVERT

MEASURED LENGTH
OF CULVERT

CONNECTOR SECTION

CONNECTOR SECTION
TO BE PAID FOR AS
PART OF END SECTION

COUPLING BAND
REQUIRED

12"

RIVETED OR
BOLTED

TYPE 3
FOR 42" THRU 96" CORR. PIPE

DIMPLED OR CORRUGATED
COUPLING BAND

2 - 1/2" X 6"
BAND BOLTS

RIVETED OR BOLTED AT
DIMPLES (6" C-C FOR
CORRUGATED BAND)

MEASURED
LENGTH
OF CULVERT

TYPE 5
ALTERNATE FOR:
ALL SIZES CORRUGATED CIRCULAR PIPE


NOTE: DIMPLED BAND FITS OVER OUTSIDE OF ENDWALL,
AND CORRUGATED BAND FITS INSIDE ENDWALL.
DIMPLED BAND MAY BE USED WITH HELICALLY
CORRUGATED PIPE.

FOR CIRCUMFERENTIALLY CORRUGATED PIPE USE
ENDWALL CONNECTION DETAILS 1, 2, 3 OR 5
AS APPLICABLE.

FOR HELICALLY CORRUGATED PIPE USE ENDWALL
CONNECTION DETAILS 1, 2 OR 5.

FOR HELICALLY CORRUGATED PIPES WITH TWO
CIRCUMFERENTIAL CORRUGATIONS AT EACH END
USE ENDWALL CONNECTION DETAILS 1, 2 OR 3.

CONNECTION DETAILS

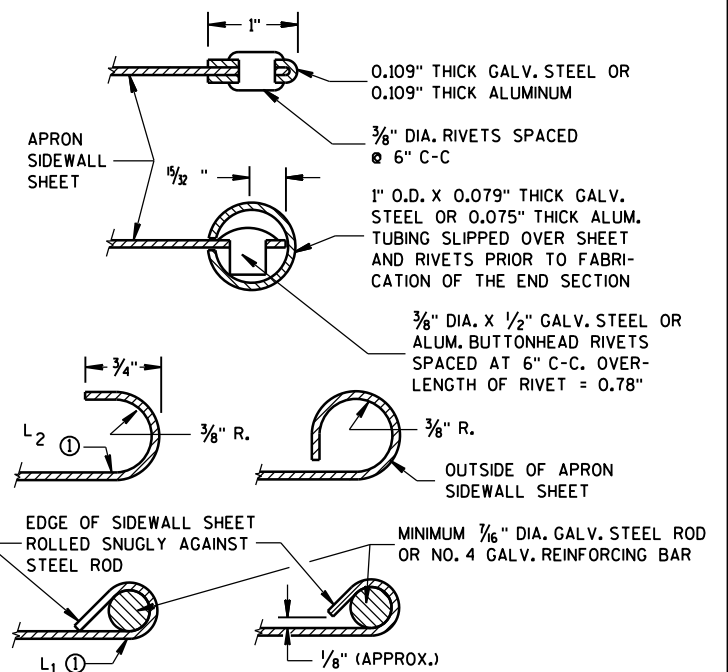

SECTION A-A

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON
THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE
STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

CONCRETE CULVERT ENDWALLS MAY NOT BE USED WITH GALVANIZED STEEL
OR ALUMINUM CULVERT PIPE OR VISE VERSA. GALVANIZED STEEL OR
ALUMINUM ENDWALLS SHALL NORMALLY BE INSTALLED ON CULVERT PIPE
OF THE SAME METAL.

ALL THREE PIECE STEEL APRON ENDWALLS FOR 60" DIAMETER PIPE AND
LARGER SHALL HAVE 0.109" SIDES AND 0.138" CENTER PANELS. ALL
THREE PIECE ALUMINUM APRON ENDWALLS FOR 60" DIAMETER PIPE AND
LARGER SHALL HAVE 0.105" SIDES AND 0.134" CENTER PANELS. THE WIDTH
OF CENTER PANELS SHALL BE GREATER THAN 20 PERCENT OF THE PIPE
PERIMETER.

LAP SEAMS SHALL BE TIGHTLY JOINED BY GALVANIZED RIVETS OR BOLTS
FOR STEEL UNITS AND ALUMINUM RIVETS AND BOLTS FOR ALUMINUM UNITS.
FOR THE 60" THROUGH 96" DIAMETER APRON ENDWALL SIZES, THE REINFORCED
EDGES AND CENTER PANEL SEAMS SHALL BE FURTHER REINFORCED WITH
GALVANIZED STEEL OR ALUMINUM STIFFENER ANGLES. THE ANGLES SHALL BE
ATTACHED BY GALVANIZED NUTS AND BOLTS FOR STEEL UNITS AND ALUMINUM
NUTS AND BOLTS FOR ALUMINUM UNITS.


WHERE TWO OR MORE PIPES WITH APRON ENDWALLS ARE LAID ADJACENT
TO EACH OTHER, THEY SHALL BE SEPARATED BY A DISTANCE SUFFICIENT
TO PROVIDE A MINIMUM CLEARANCE OF 6 INCHES BETWEEN APRON ENDWALLS.

① FOR PIPE SIZES UP TO 60" DIAMETER, A 180° ROLLED EDGE MAY BE USED
INSTEAD OF STEEL ROD REINFORCEMENT. SEE SECTION A-A.


APRON ENDWALLS FOR CULVERT PIPE

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


APPROVED
8-30-94
DATE
/S/ Rory L. Rhinesmith
CHIEF ROADWAY DEVELOPMENT ENGINEER
FHWA

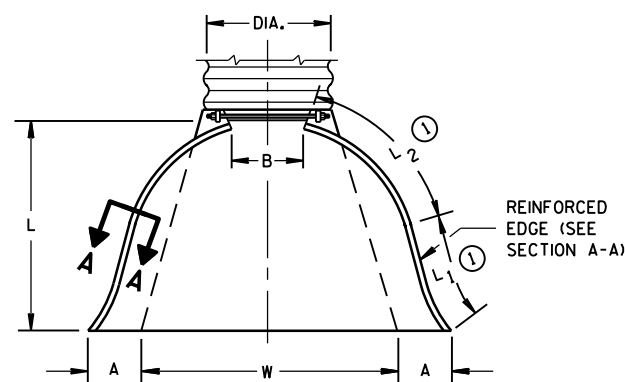


PLAN VIEW

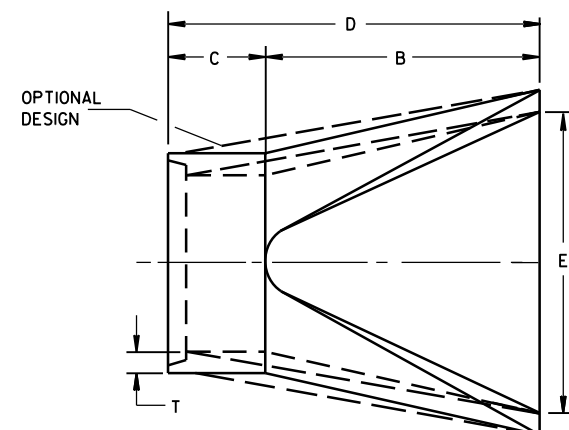


PLAN

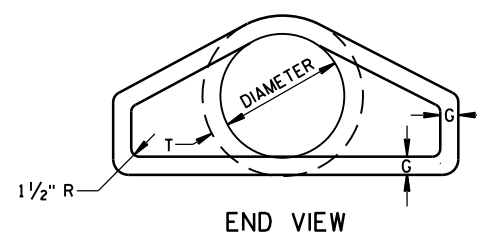


END VIEW

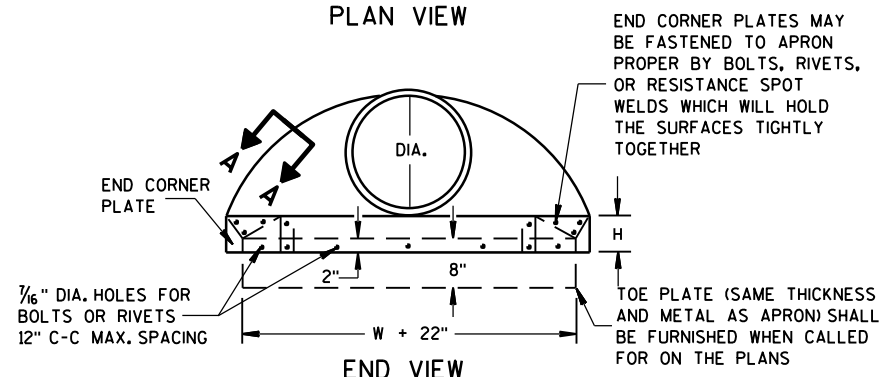

END VIEW

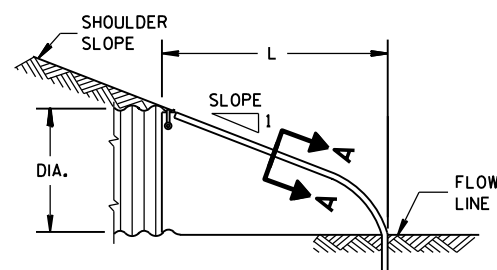

SIDE ELEVATION
METAL ENDWALLS



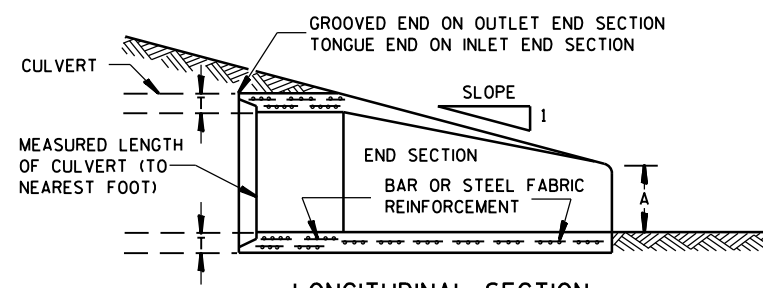


LONGITUDINAL SECTION
CONCRETE ENDWALLS

GENERAL NOTES


- ① W6 X 9 OR W6 X 8.5 STEEL POSTS AND NOTCHED PLASTIC BLOCKOUTS ARE ACCEPTABLE ALTERNATIVES FOR 6" X 8" WOOD POSTS WITH WOOD OR PLASTIC BLOCKOUTS. USE APPROVED NOTCHED PLASTIC BLOCKOUTS WITH STEEL POSTS. APPROVED PLASTIC BLOCKOUT DESIGNS MAY VARY FROM THIS TYPICAL DETAIL WHEN USED IN CONJUNCTION WITH STEEL POSTS.
DO NOT MIX STEEL POSTS AND WOOD POSTS IN A SINGLE INSTALLATION.
- ② USE STRUCTURAL STEEL POSTS CONFORMING TO ASTM A 36. GALVANIZED POSTS ACCORDING TO AASHTO M 111. EITHER SET THE POSTS IN DRILLED HOLES OR DRIVE TO GRADE. REMOVE MUSHROOMING CAUSED BY DRIVING AND REPAIR DAMAGED SPELTER COATING ON GALVANIZED POSTS.
- ③ INSTALL STEEL POSTS WITH HOLES ON APPROACHING TRAFFIC SIDE.
- ④ USE EITHER WOOD OR APPROVED PLASTIC BLOCKOUTS ON WOOD POSTS.
- ⑤ IF THE DISTANCE FROM BACK OF POST TO SHOULDER HINGE POINT IS LESS THAN 2 FEET INSTALL LONGER POST AT HALF POST SPACING, W BEAM (LHW).
- ⑥ IF ROCK IS ENCOUNTERED DURING EXCAVATION, THE ENGINEER MAY APPROVE USING A 12 INCH DIAMETER POST HOLE EXTENDING 20 INCHES DEEP INTO THE ROCK. PLACE GRANULAR MATERIAL IN THE BOTTOM OF THE HOLE APPROXIMATELY 2 1/2 INCHES DEEP. CUT THE POSTS TO LENGTH AND PLACE IN THE HOLE. BACKFILL WITH MATERIAL EXCAVATED FROM THE HOLE AND COMPACT ADEQUATELY.
- ⑦ WHEN USING STEEL POSTS AND WOOD BLOCKOUTS INSTALL FOUR 16D GALVANIZED NAILS. INSTALL NAILS AT THE BACK CORNERS OF THE BLOCK AND BEND THE NAILS OVER THE FLANGE OF THE STEEL POST.

INSTALL BEAM GUARD SECTIONS AND ALL NECESSARY HARDWARE ACCORDING TO THE APPLICABLE PLAN AND CURRENT STANDARD AND SUPPLEMENTAL SPECIFICATIONS. ALL DIMENSIONS ARE SUBJECT TO MANUFACTURER'S TOLERANCES EXCEPT WHERE ALLOWABLE TOLERANCES ARE SHOWN.

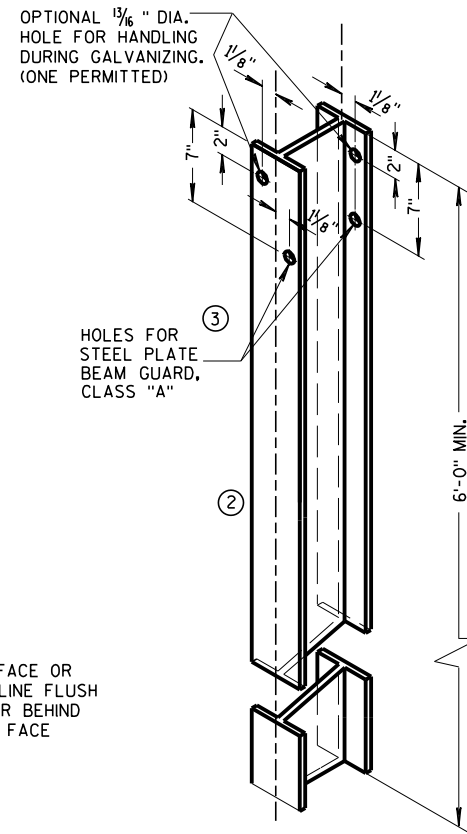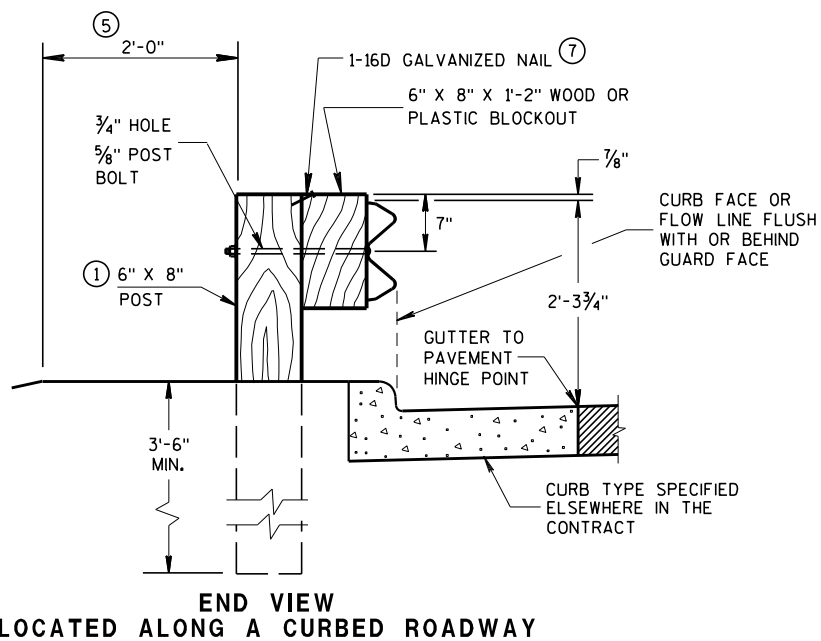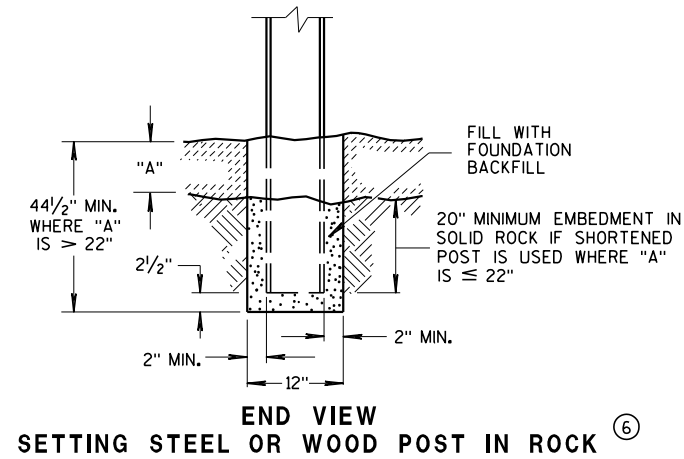


**STEEL POST &
HOLE PUNCHING DETAIL
(W6 X 9) ①**


ALL HOLES 1 3/8" DIAMETER EXCEPT AS NOTED

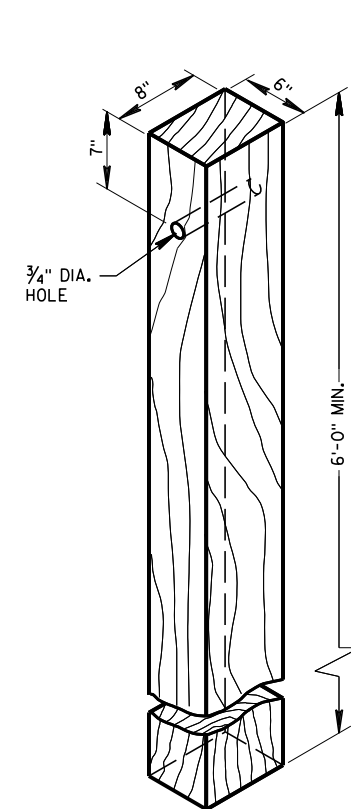


**WOOD POST
(6"X8") NOMINAL**

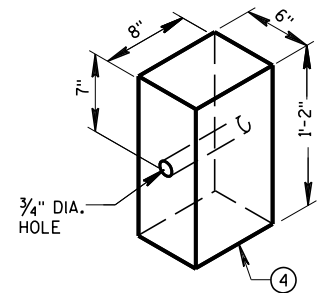


WOOD OR PLASTIC BLOCKOUT FOR WOOD POSTS

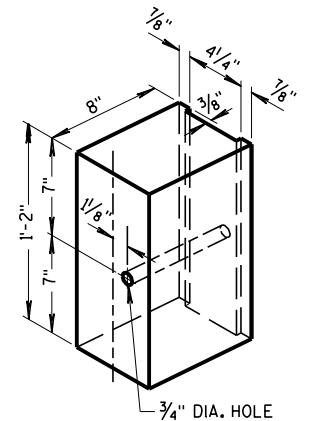

**TYPICAL NOTCHED
PLASTIC BLOCKOUT
FOR STEEL POSTS** ①

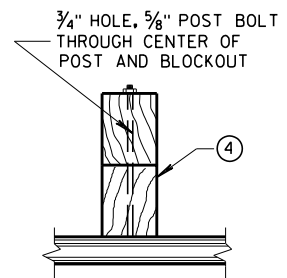


PLAN VIEW
WOOD POST, BLOCKOUT & BEAM

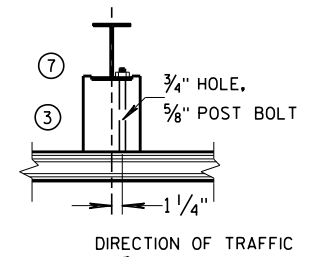


PLAN VIEW
STEEL POST, NOTCHED
PLASTIC BLOCKOUT & BEAM

STEEL PLATE BEAM GUARD, CLASS "A" INSTALLATION & ELEMENTS


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

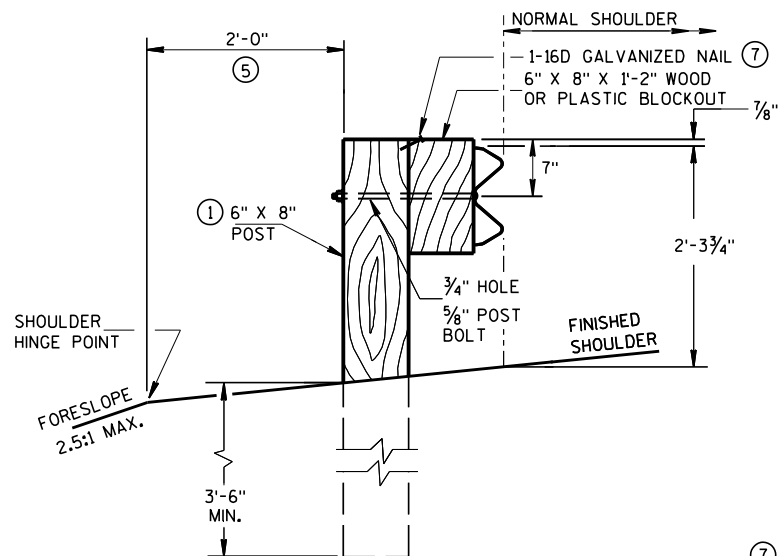

END VIEW
LOCATED ALONG A ROADWAY SHOULDER
STANDARD INSTALLATION

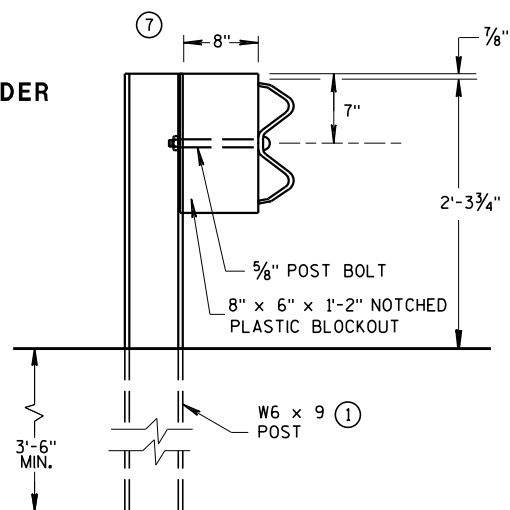


END VIEW
STEEL POST & NOTCHED
PLASTIC BLOCKOUT ALTERNATIVE
STANDARD INSTALLATION

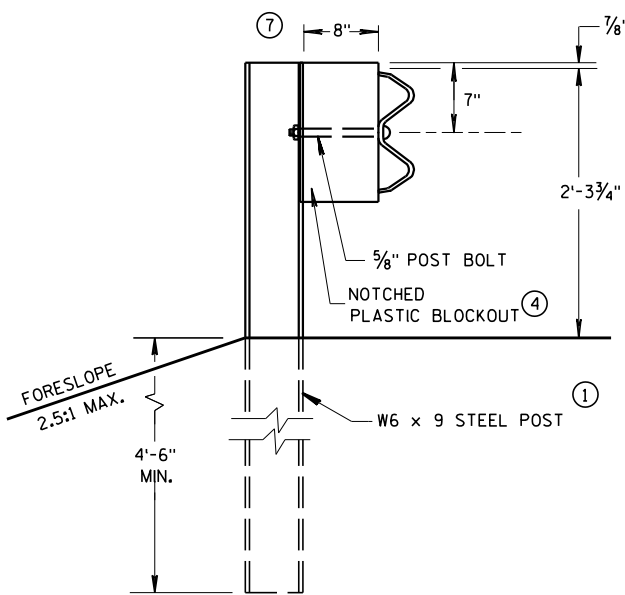

END VIEW
LONGER POST AT HALF
POST SPACING W BEAM
(LHW)


TYPICAL INSTALLATION OF STEEL PLATE BEAM GUARD

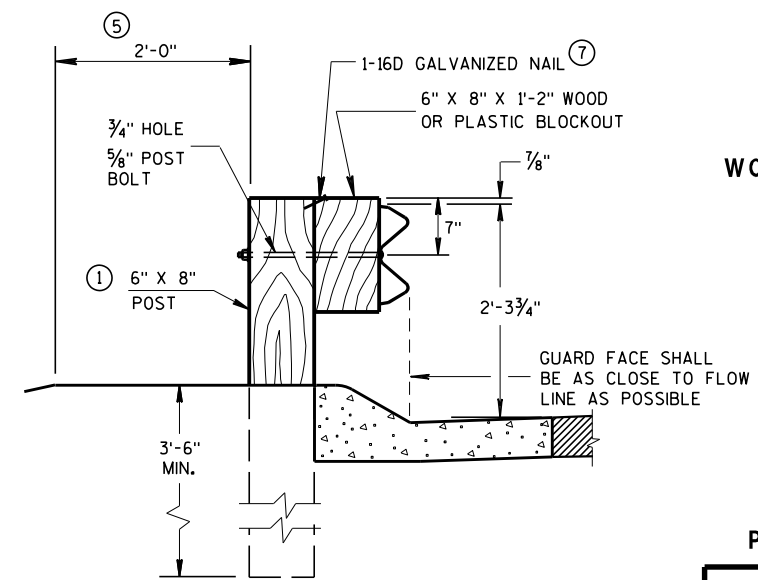

END VIEW
LOCATED ALONG A
MOUNTABLE CURBED ROADWAY




SDD 14b15-b Steel Plate Beam Guard, Class "A", Installation and Elements

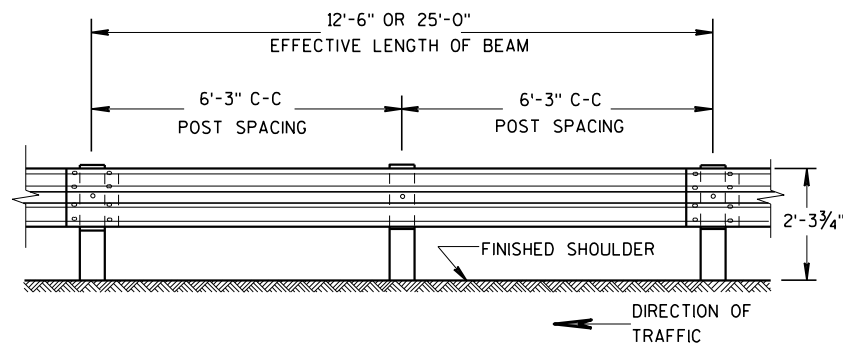


FRONT VIEW

POST SPACING STANDARD INSTALLATION

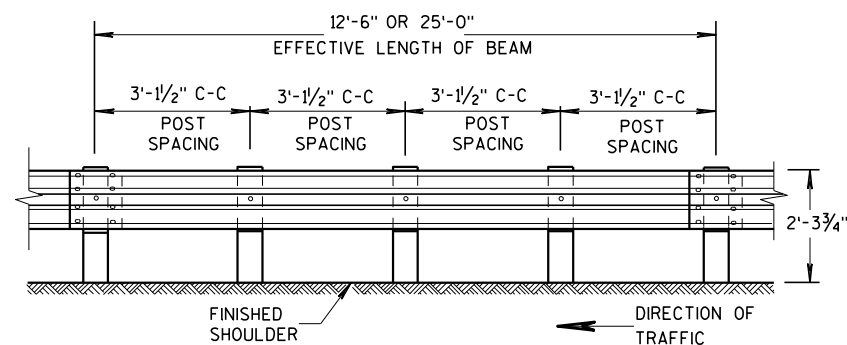


FRONT VIEW


POST SPACING FOR LONGER POST AT HALF POST SPACING W BEAM (LHW)

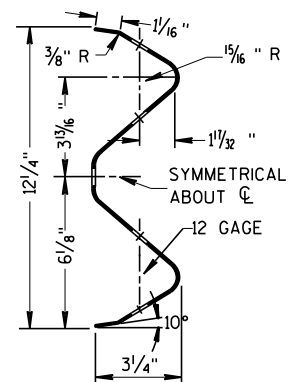

SECTION THRU W BEAM

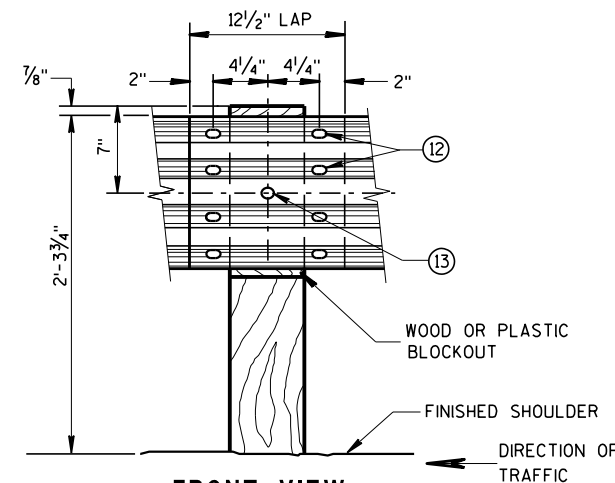

FRONT VIEW
BEAM SPLICE AT WOOD POST
AND POST MOUNTING DETAIL

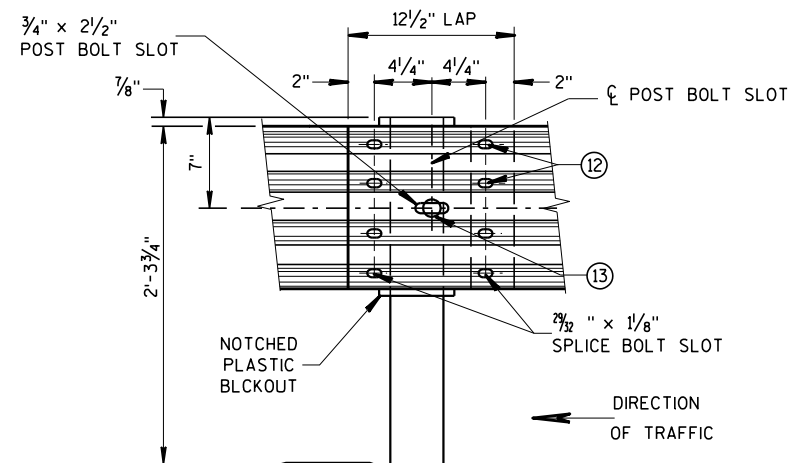


FRONT VIEW
BEAM SPLICE AT STEEL POST

TYPICAL SPlicing DETAILS OF STEEL PLATE BEAM GUARD

GENERAL NOTES

FURNISH GUARDRAIL DEFLECTORS FROM APPROVED PRODUCTS LIST.


- ⑨ DO NOT INSTALL REFLECTORS ON THE FIRST 50 FEET OF THE APPROACH END OF THE ENERGY ABSORBING TERMINA. START REFLECTORS AT POST #9 AND SPACE EVENLY EVERY 100 FEET (MAX.) TO THE END OF GUARDRAIL RUN, USING A MINIMUM OF 3 REFLECTORS.
- ⑫ 8 - 5/8" ϕ X 2" BUTTON HEAD BOLTS WITH OVAL SHOULDERS & RECESS NUTS.
- ⑬ 5/8" DIA. BUTTON HEAD BOLT AND RECESS NUT WITH 5/8" DIA. F844 FLAT WASHER UNDER NUT.

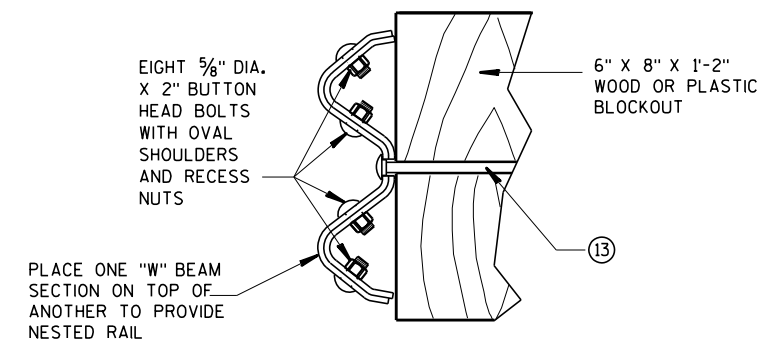


NESTED W BEAM (NW)

USE ALL OTHER STANDARD BEAM GUARD DETAILS FOR CONSTRUCTING NESTED W BEAM (NW)

* USE DOUBLE SIDED WHITE GUARDRAIL REFLECTORS ON ROADWAYS WITH BI-DIRECTIONAL TRAFFIC (NO MEDIAN). USE SINGLE SIDED WHITE (RIGHT SIDE) AND SINGLE SIDED YELLOW (LEFT SIDE) ON ROADWAYS WITH MEDIAN SEPARATION.

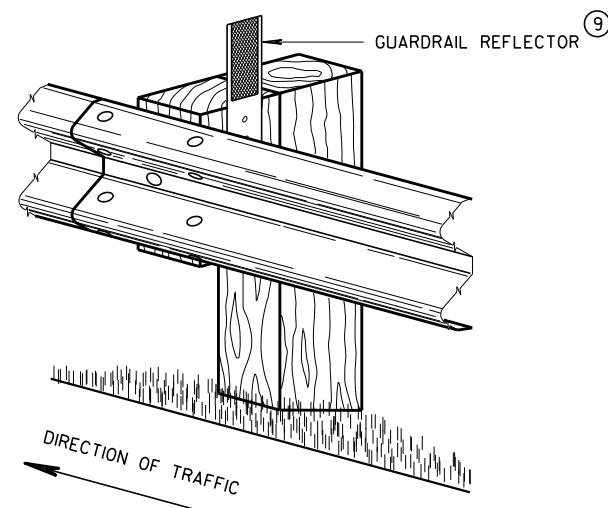

4" X 12" GUARDRAIL REFLECTOR DETAIL
AND TYPICAL INSTALLATION *

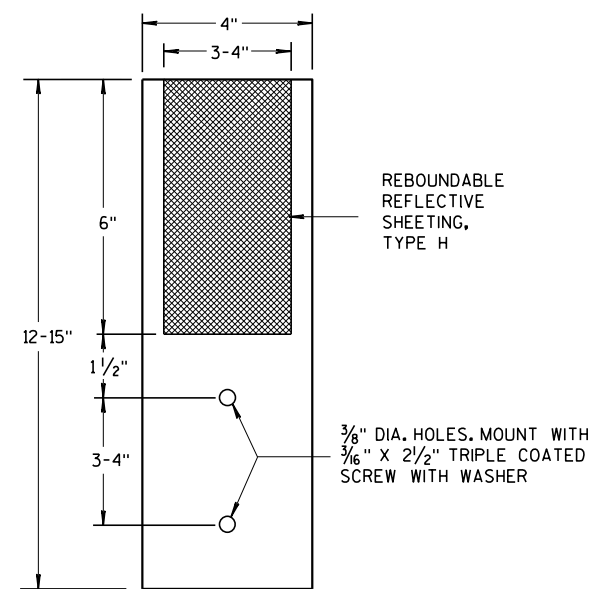


4"x 12" GUARDRAIL REFLECTOR

STEEL PLATE BEAM GUARD,
CLASS "A",
INSTALLATION & ELEMENTS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




SDD 14b15-c Steel Plate Beam Guard, Class "A", Installation and Elements

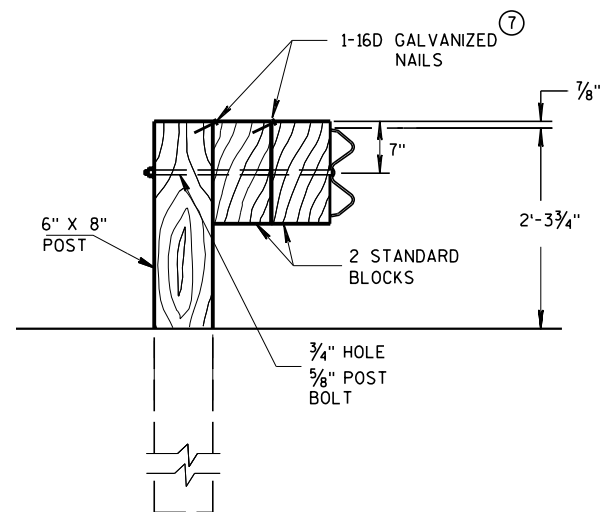

DETAIL FOR DOUBLE BLOCKS

THE NUMBER OF DOUBLE BLOCK POSTS
WITHIN A BARRIER RUN IS UNLIMITED

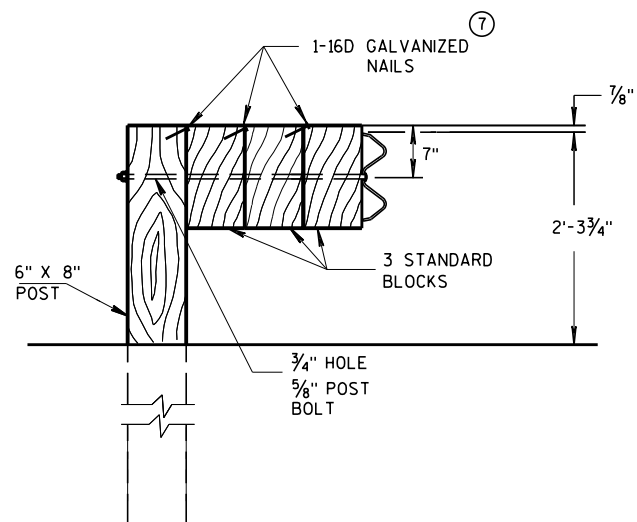


DETAIL FOR TRIPLE BLOCKS


TRIPLE BLOCK DETAIL IS LIMITED TO ONE
LOCATION WITHIN A BEAM GUARD RUN.

NOTES: USE DOUBLE OR TRIPLE BLOCKS WHEN UNDERGROUND OBSTACLES
PREVENT THE POST FROM BEING INSTALLED.

DO NOT USE EXTRA BLOCKOUTS IF IT CAUSES THE POST TO BE DRIVEN BEYOND
SHOULDER HINGE POINT OR CAUSES A FIXED OBJECT TO BE WITHIN THE DEFLECTION
DISTANCE OF THE BARRIER.

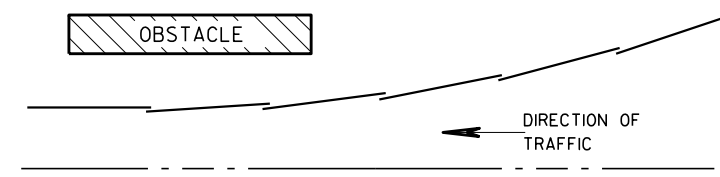

PLAN VIEW BEAM LAPPING DETAIL

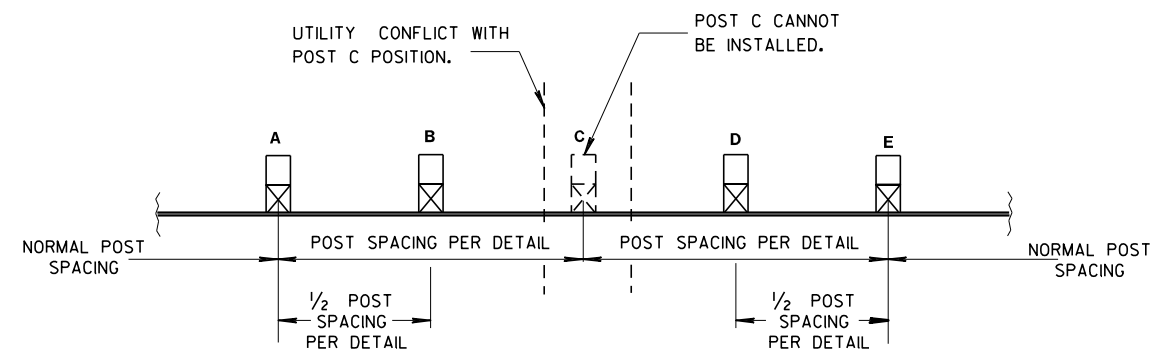



POST DRIVING FOR CONTINUOUS UNDERGROUND OBSTRUCTION


STEEL PLATE BEAM GUARD, CLASS "A", INSTALLATION & ELEMENTS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
June 2017 /S/ Rodney Taylor
DATE ROADWAY STANDARDS DEVELOPMENT
FHWA UNIT SUPERVISOR

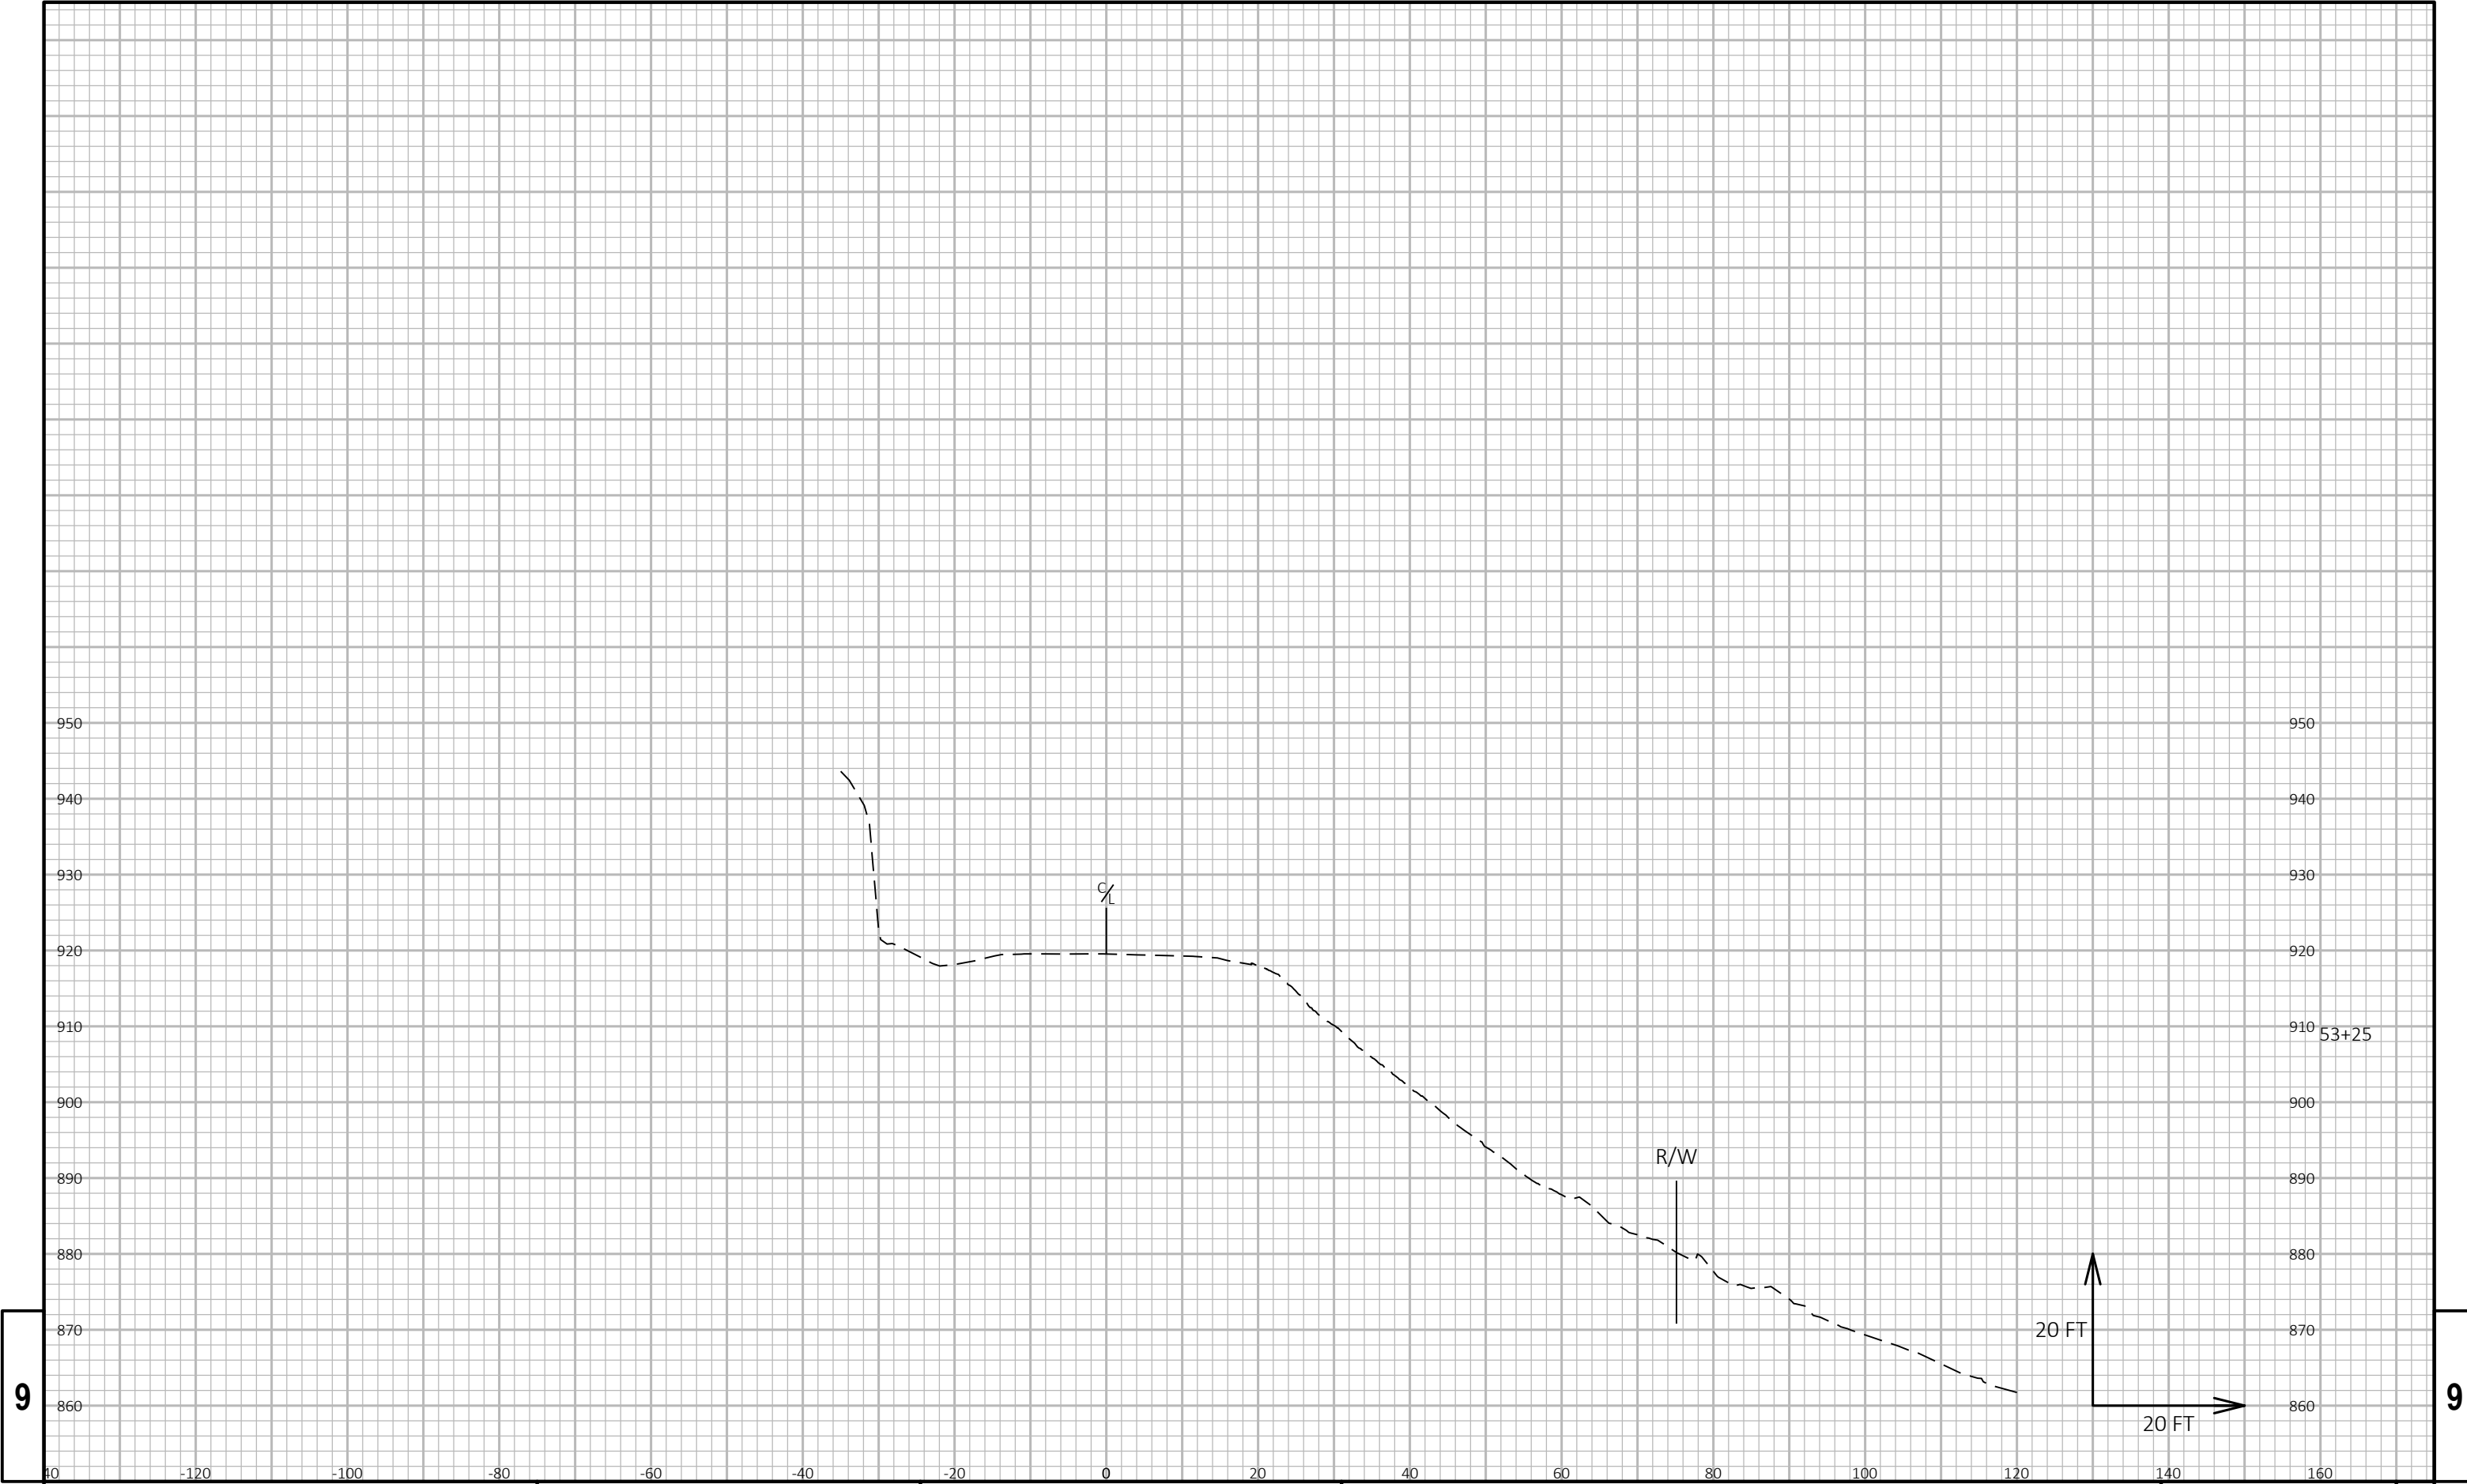

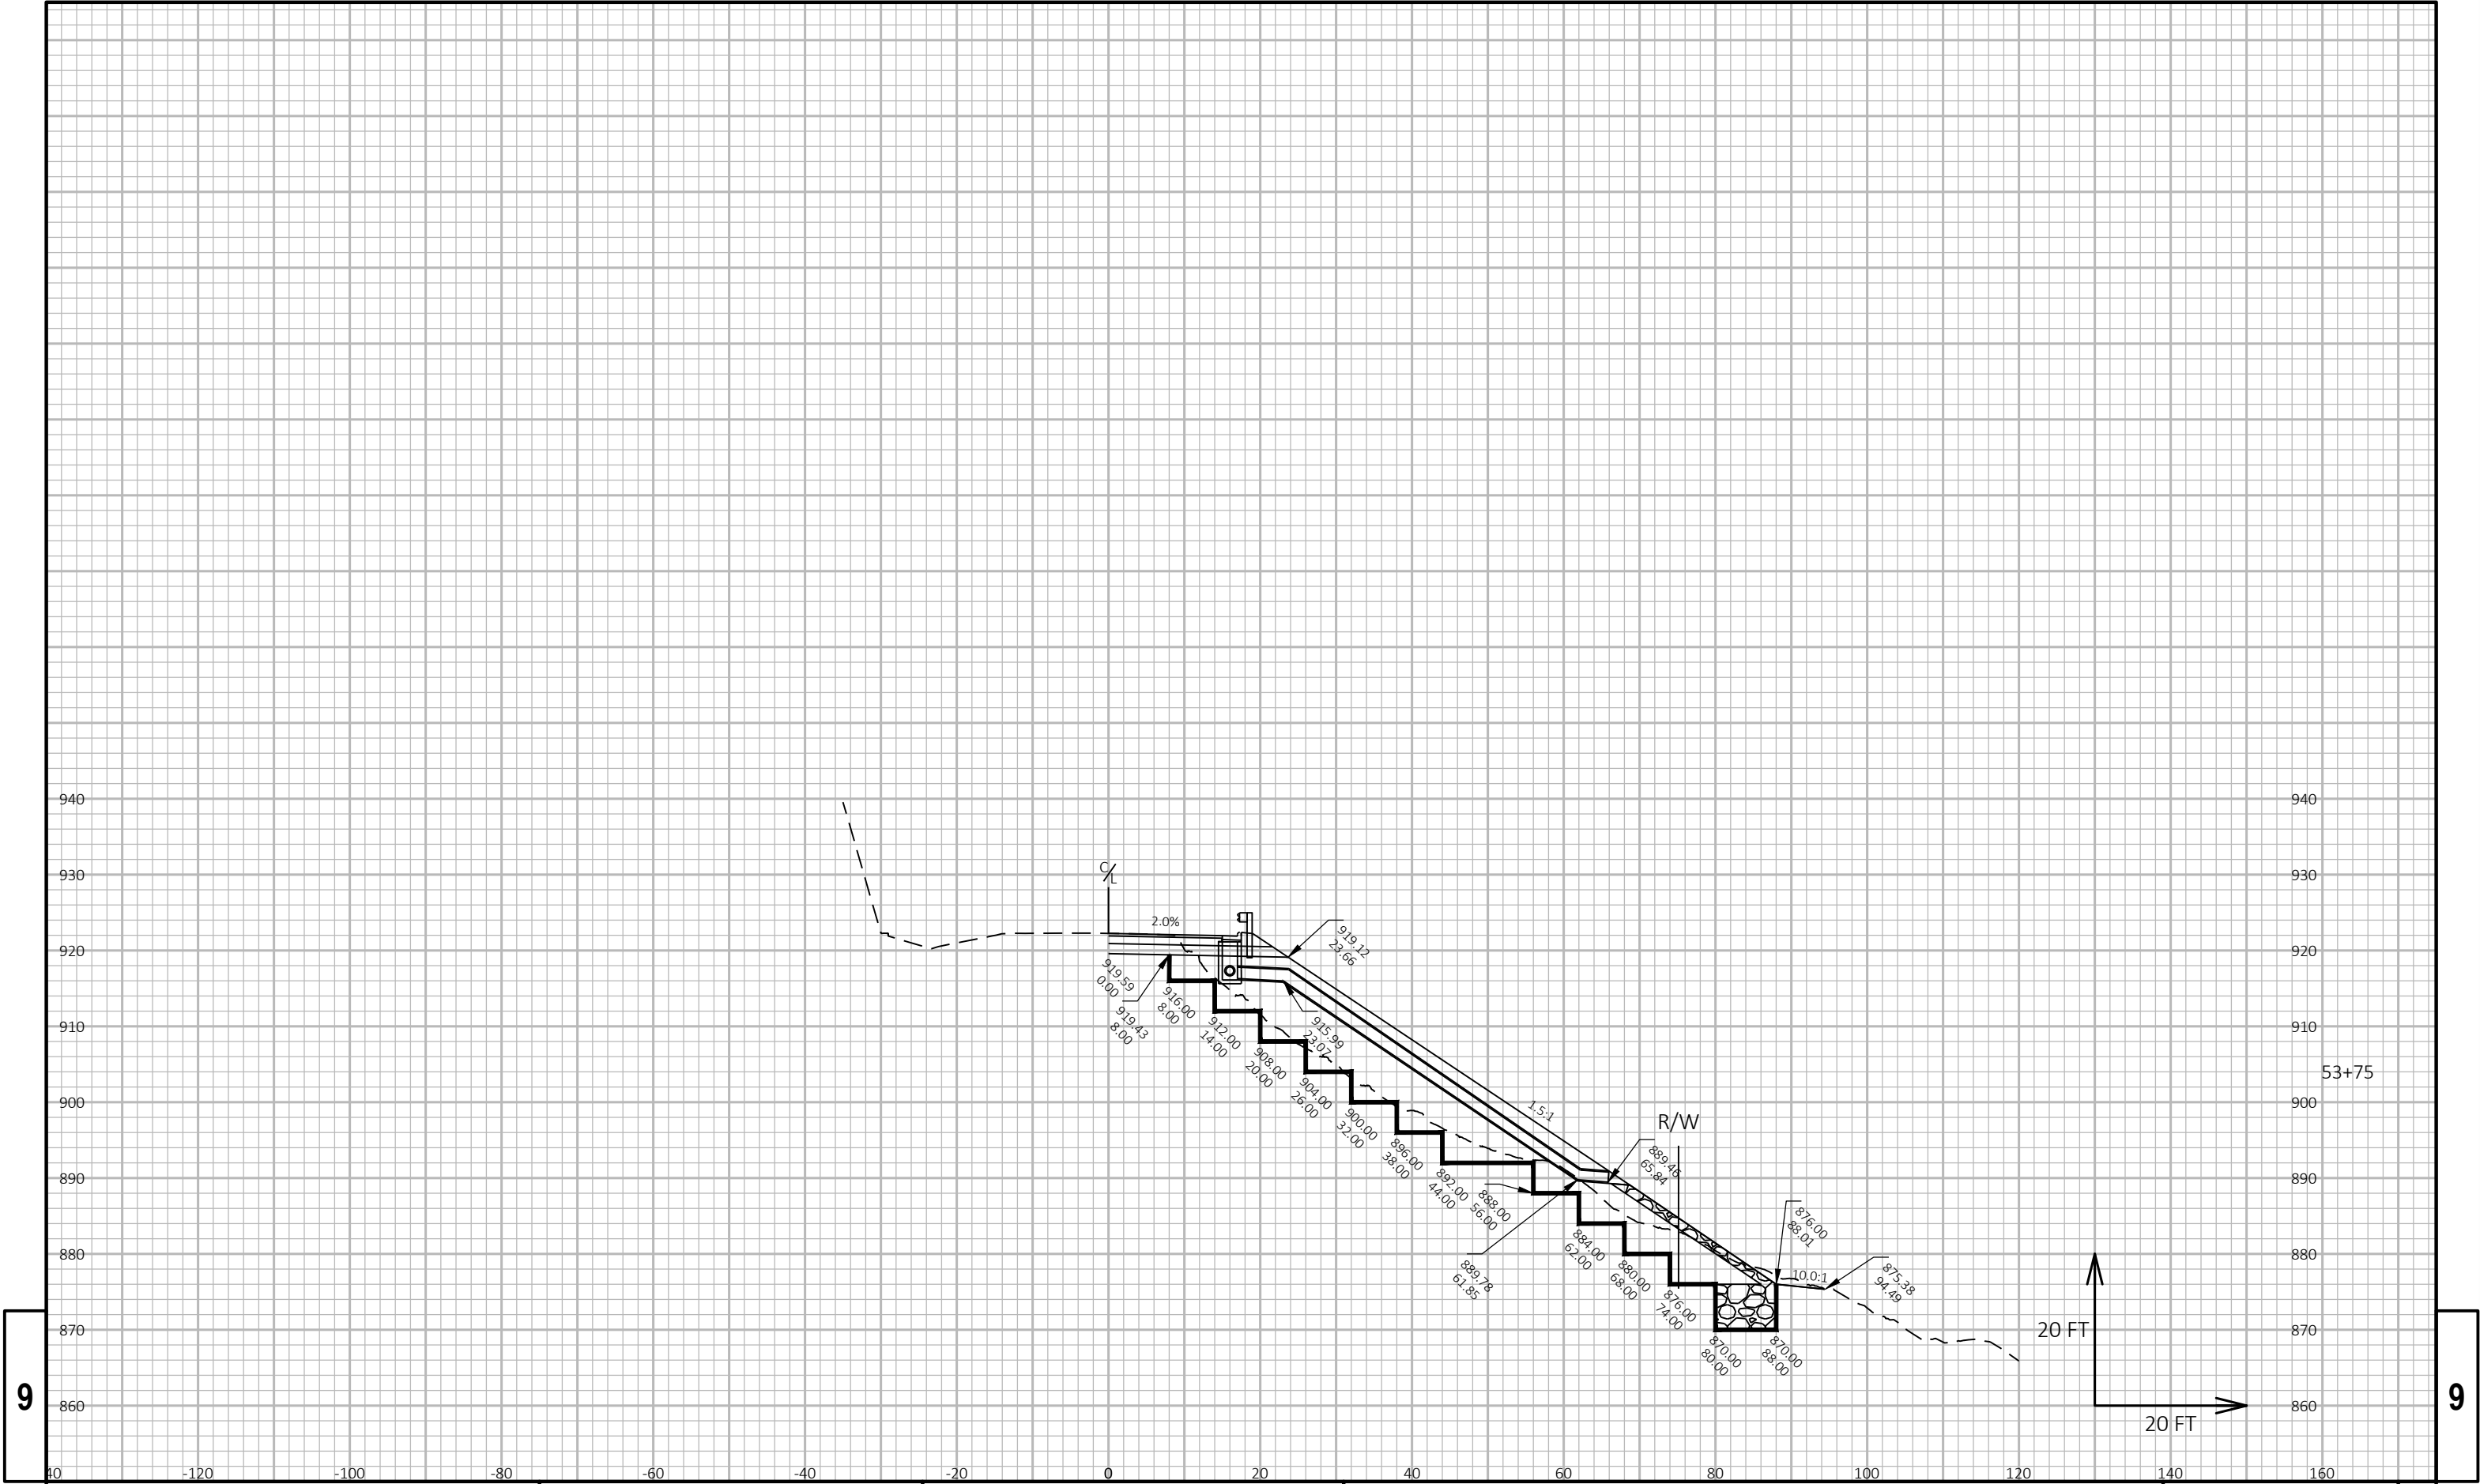


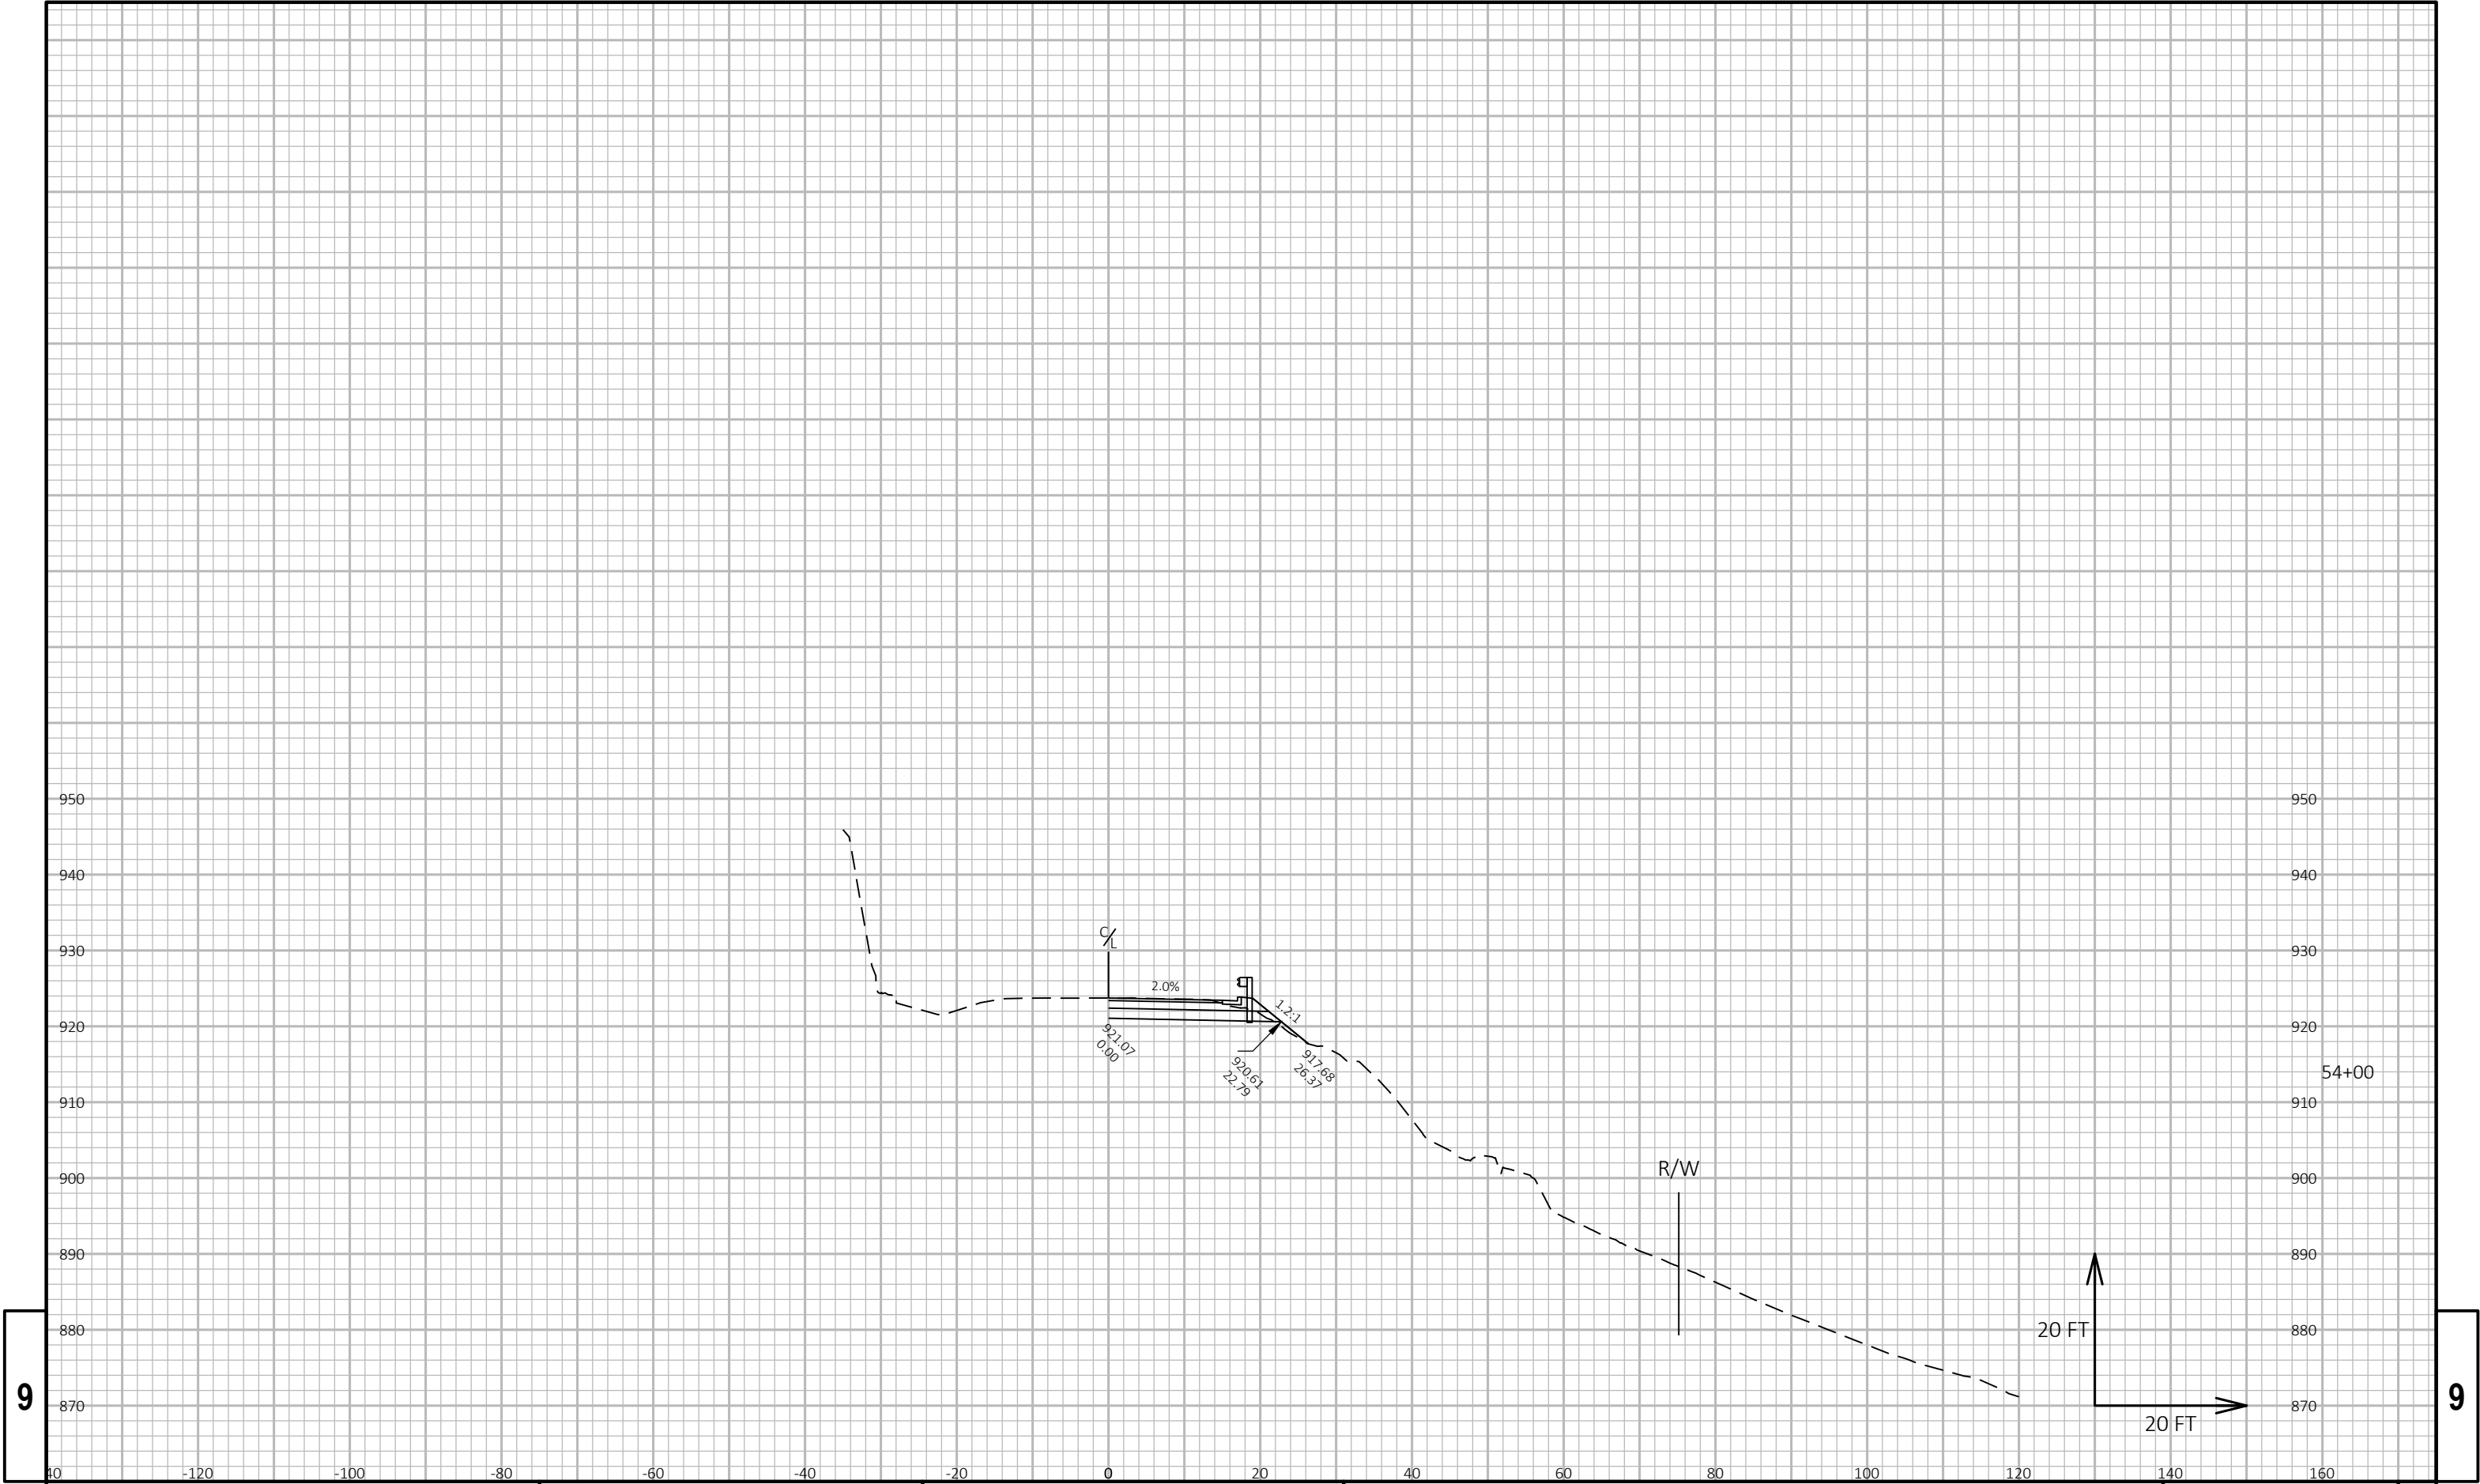

9

9


PROJECT NO: 5860-00-60	HWY: STH 171	COUNTY: CRAWFORD	CROSS SECTIONS: STH 171	SHEET	E
------------------------	--------------	------------------	-------------------------	-------	---

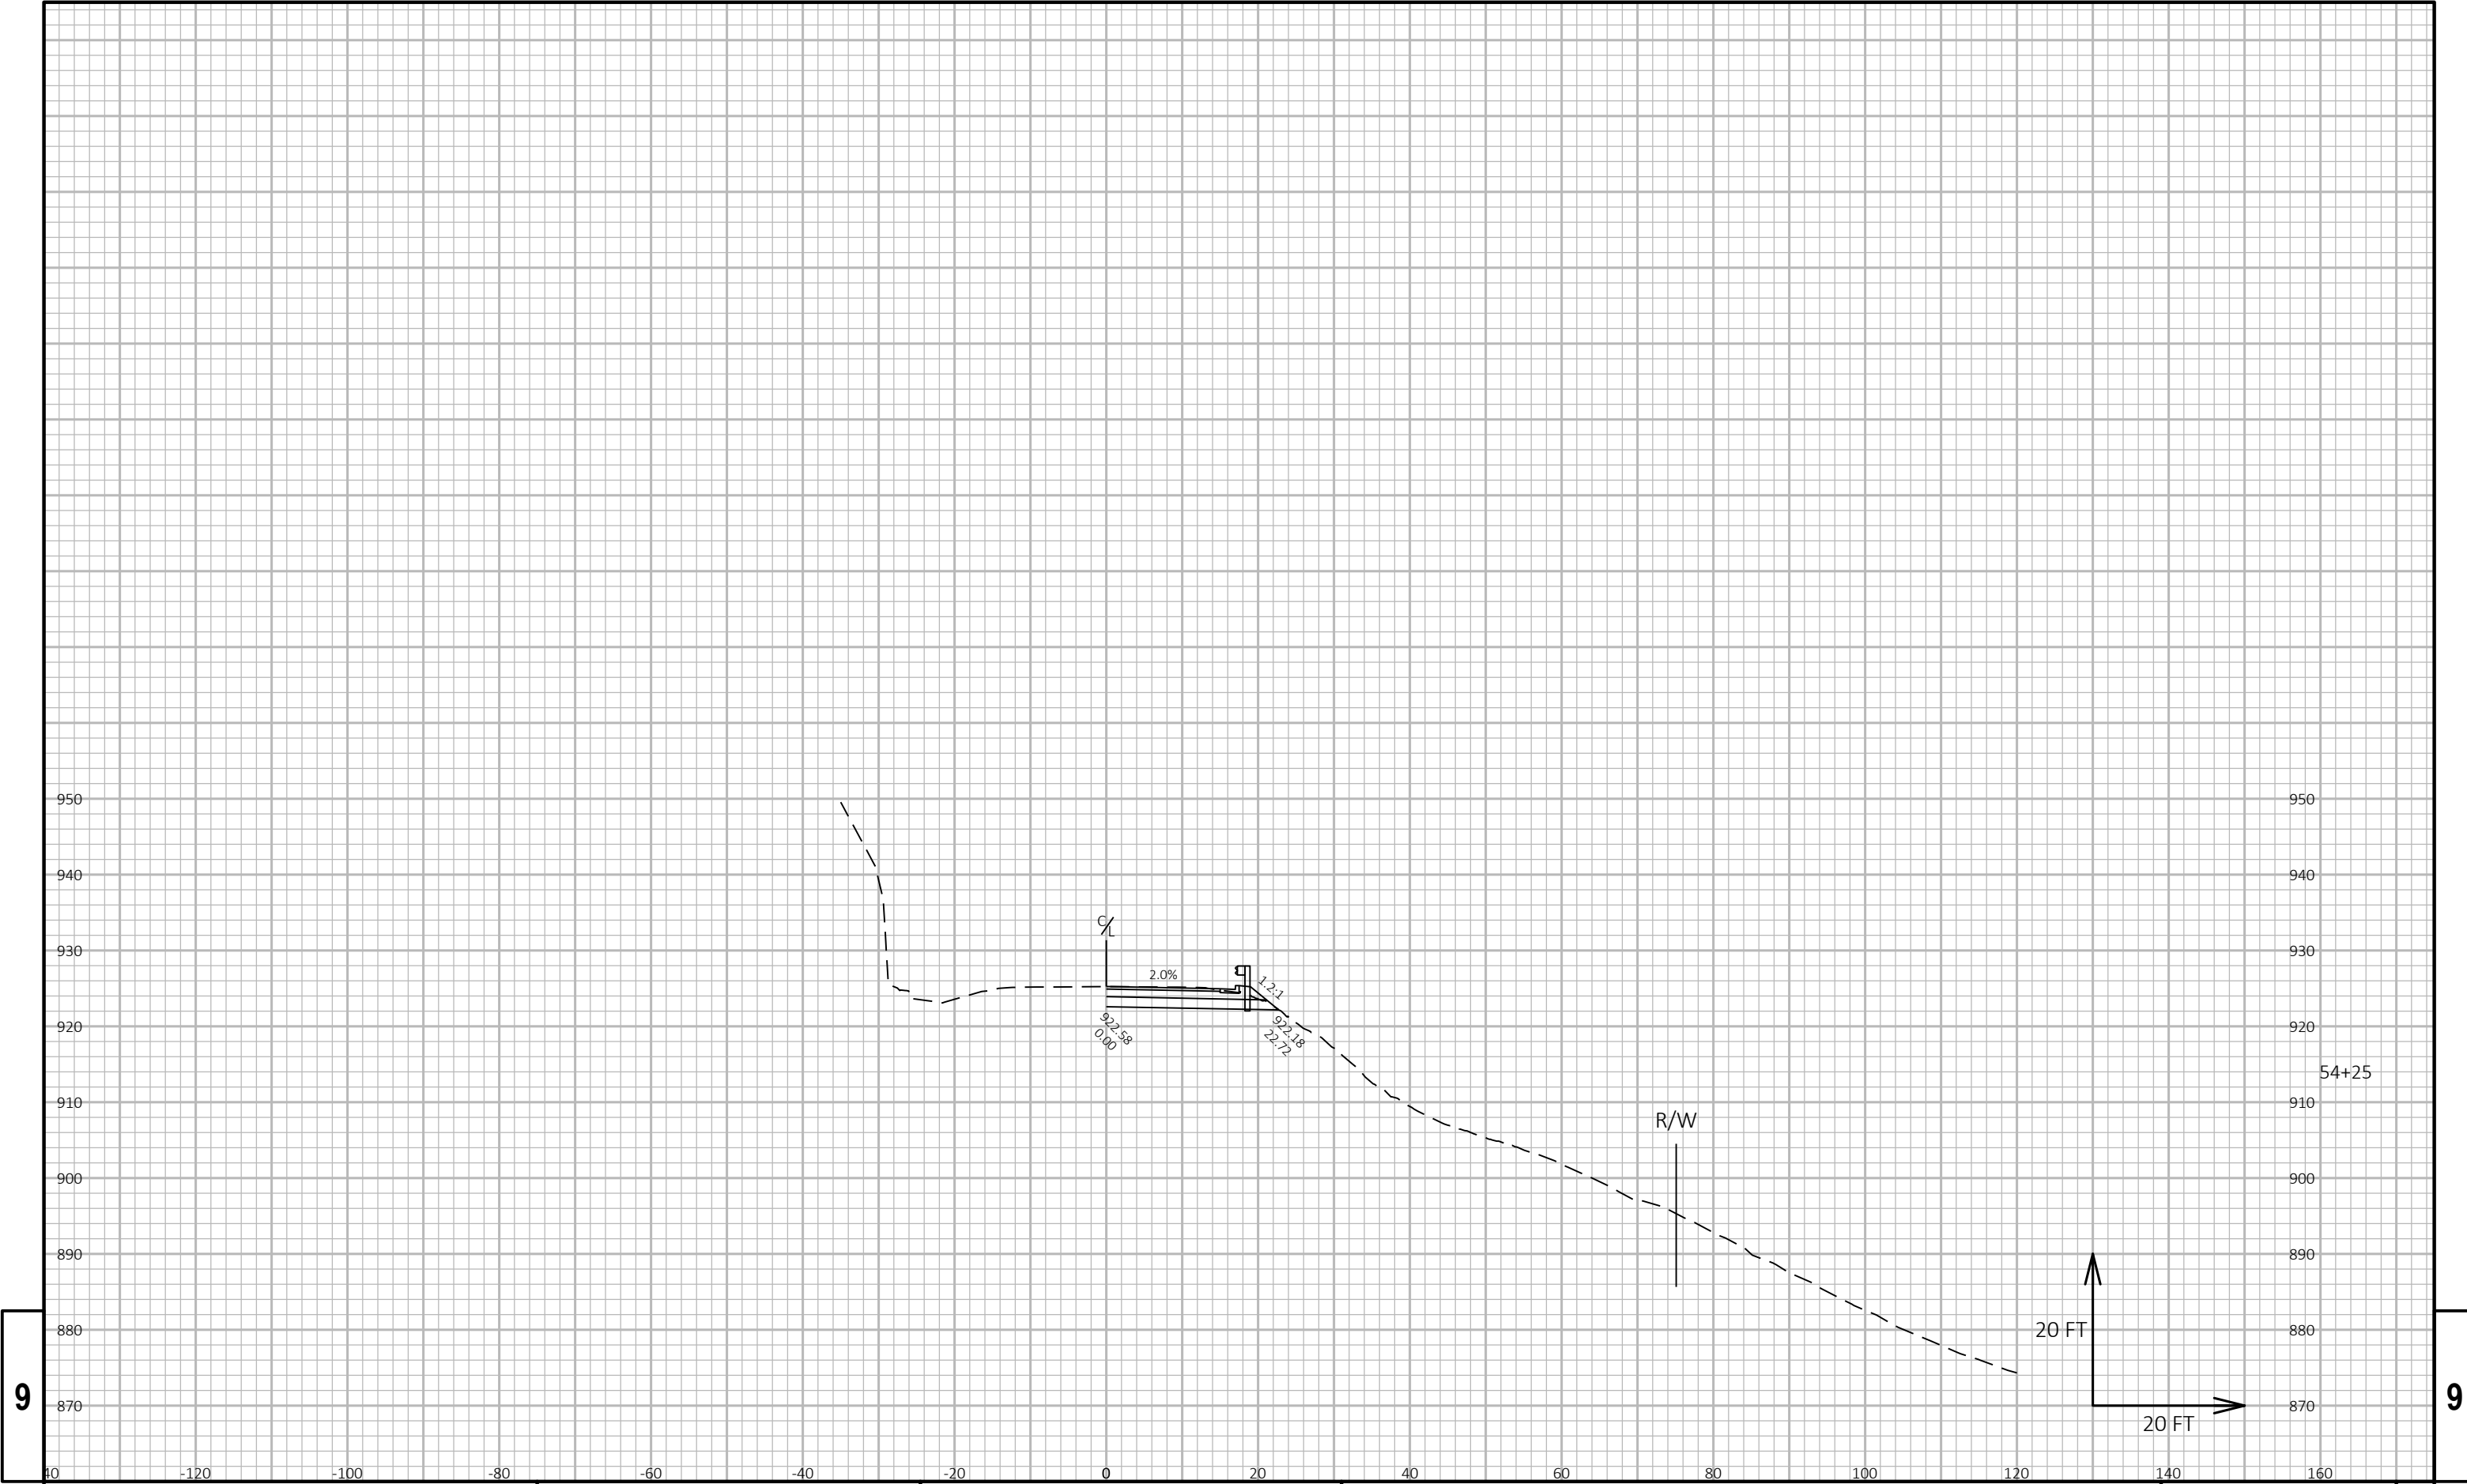

9

9

PROJECT NO: 5860-00-60	HWY: STH 171	COUNTY: CRAWFORD	CROSS SECTIONS: STH 171	SHEET	E
------------------------	--------------	------------------	-------------------------	-------	---

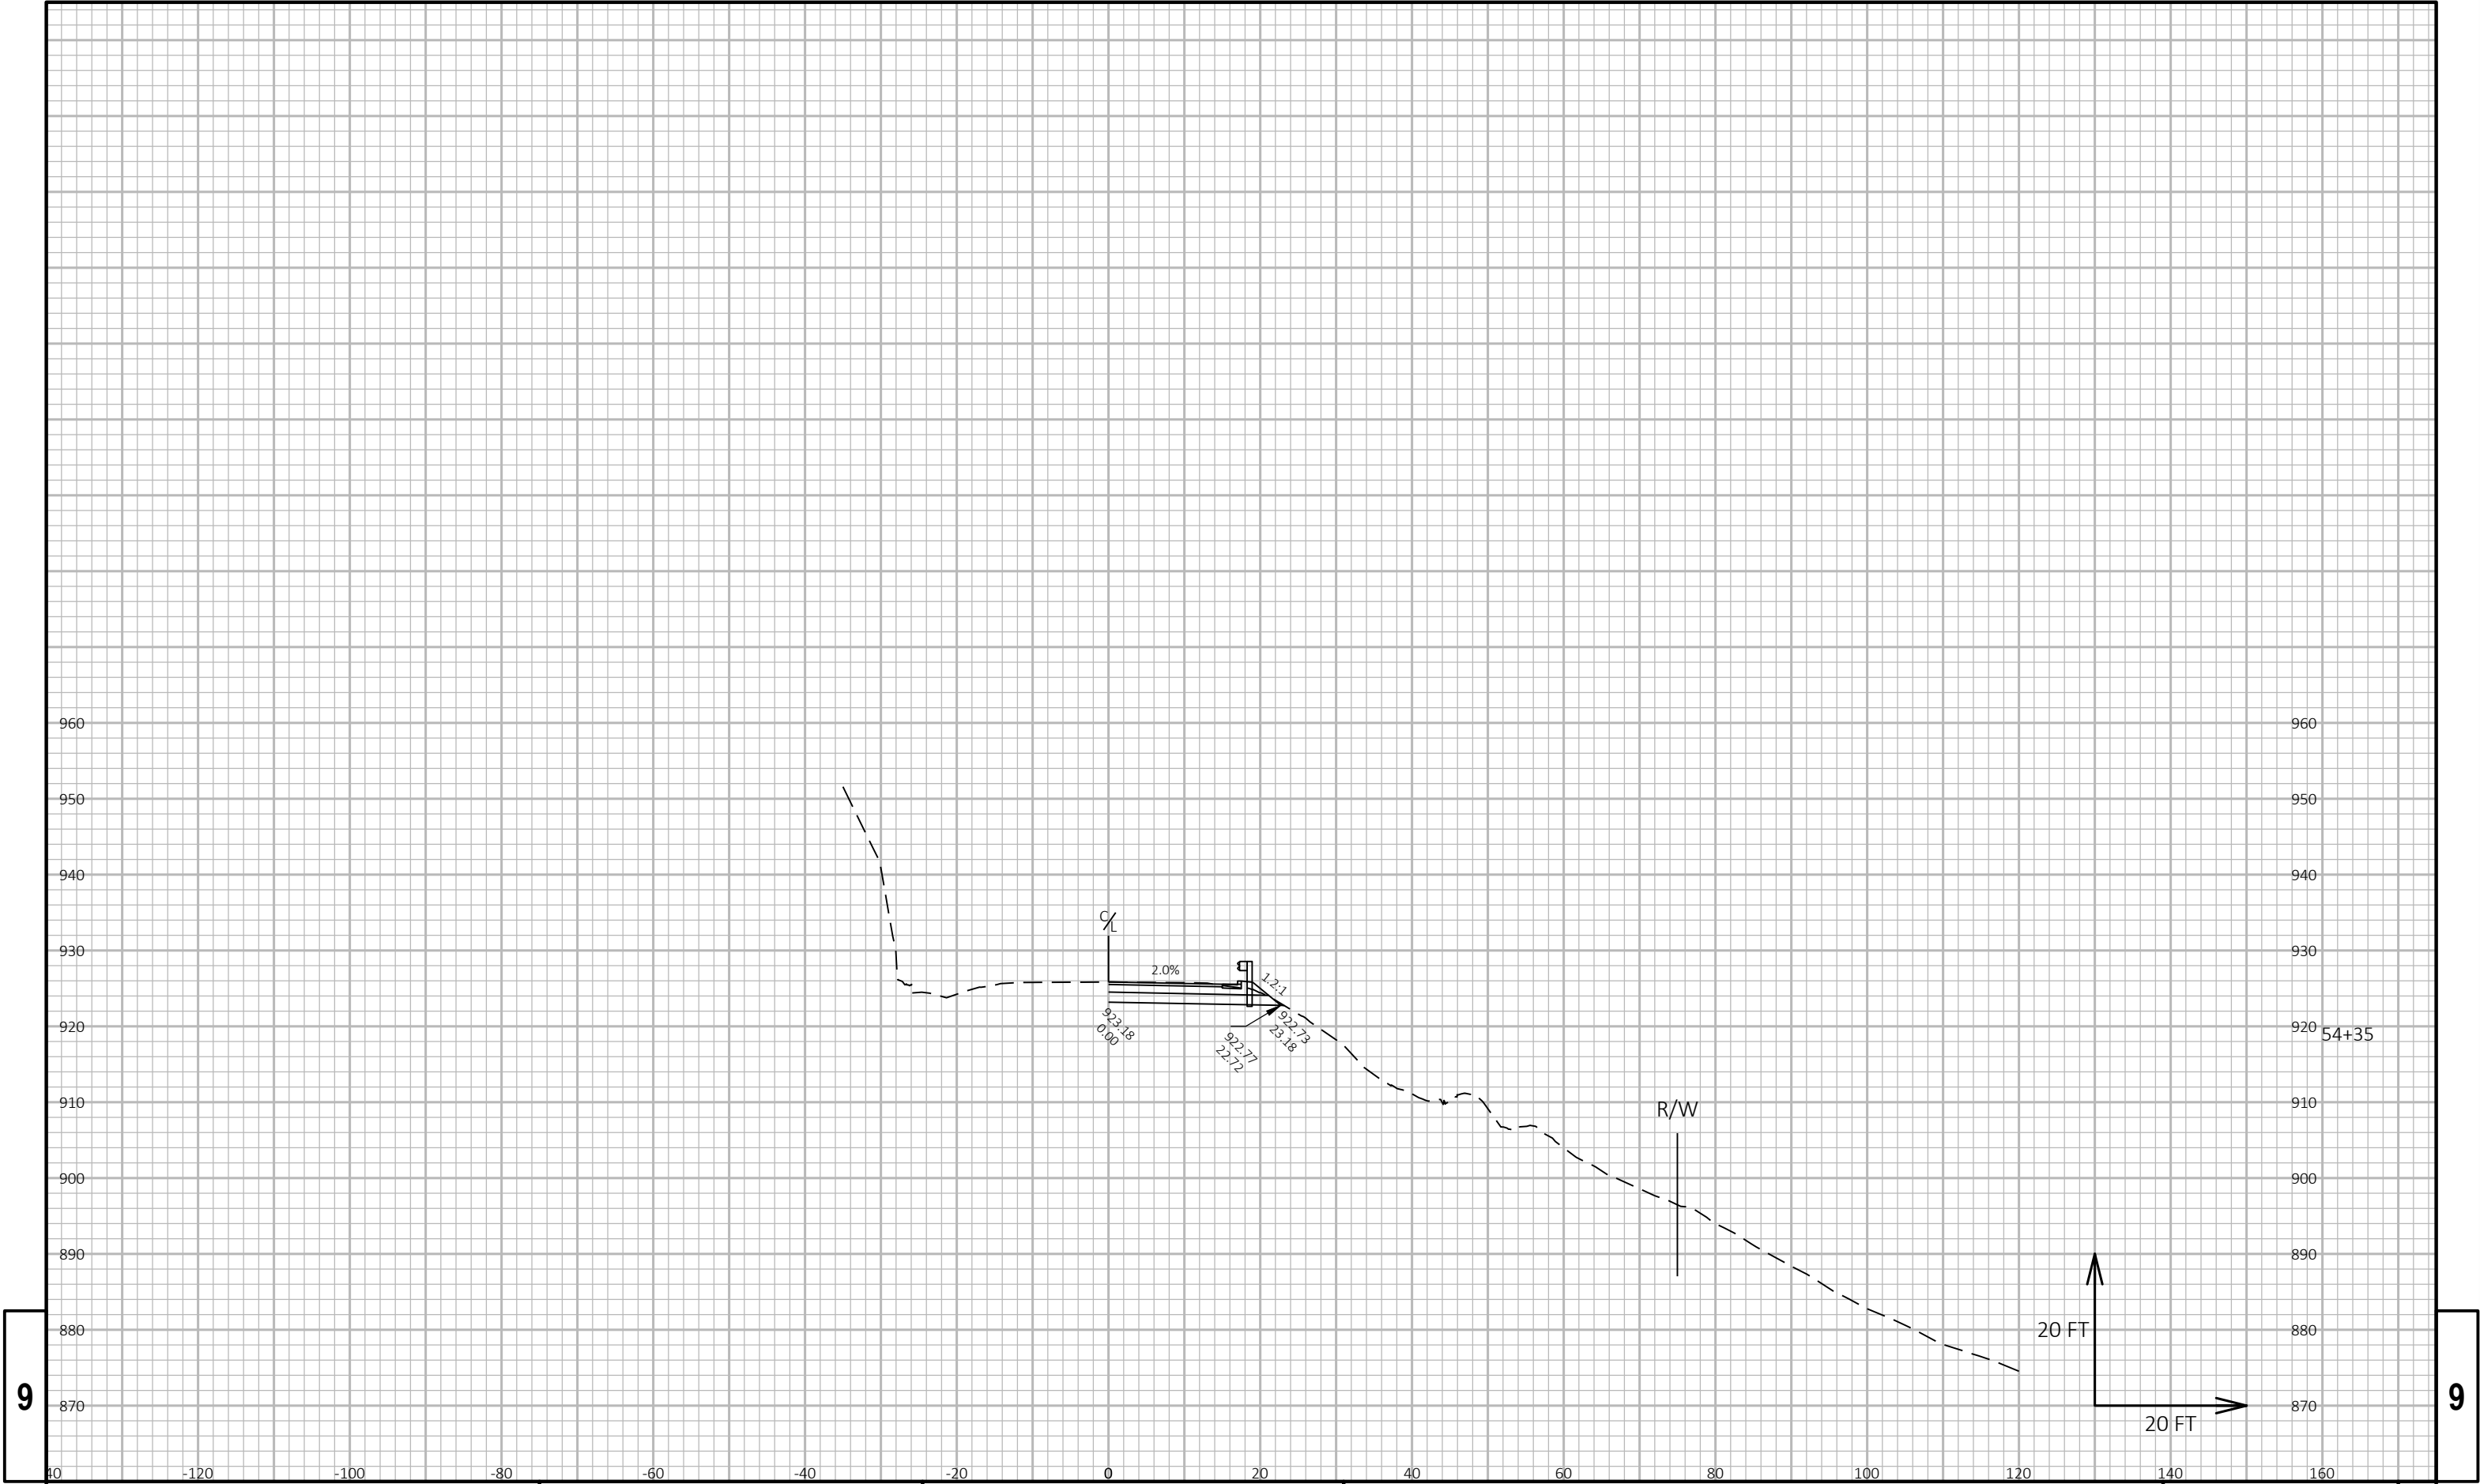

9

9

PROJECT NO: 5860-00-60	HWY: STH 171	COUNTY: CRAWFORD	CROSS SECTIONS: STH 171	SHEET	E
------------------------	--------------	------------------	-------------------------	-------	---



9

9