






9


9





9


9




9

9


PROJECT NO: 9090-01-61	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: CULVERT REPLACEMENTS	SHEET E
------------------------	-------------	----------------	--------------------------------------	---------






9

9




9


9





9

9











9


9



9


9





9


9



9


9


PROJECT NO: 9090-01-61	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: CULVERT REPLACEMENTS	SHEET E
------------------------	-------------	----------------	--------------------------------------	---------



9


9







9

9








9


9



9


9

PROJECT NO: 9090-01-61	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: CULVERT REPLACEMENTS	SHEET	E
------------------------	-------------	----------------	--------------------------------------	-------	---



9


9



9


9

PROJECT NO: 9090-01-61	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: CULVERT REPLACEMENTS	SHEET E
------------------------	-------------	----------------	--------------------------------------	---------




9

9




9

9




9

9




9

9




9

9




9

9




9

9



9


9




9

9

PROJECT NO: 9090-01-61	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: CULVERT REPLACEMENTS	SHEET E
------------------------	-------------	----------------	--------------------------------------	---------



PROJECT NO: 9090-01-61	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: CULVERT REPLACEMENTS	SHEET	E
------------------------	-------------	----------------	--------------------------------------	-------	---



Wisconsin Department of Transportation

Dedicated people creating transportation solutions
through innovation and exceptional service.

<http://www.dot.wisconsin.gov>

ORDER OF SHEETS

Section No.	1	Title
Section No.	2	Typical Sections and Details
Section No.	3	Estimate of Quantities
Section No.	3	Miscellaneous Quantities
Section No.	4	Right of Way Plat
Section No.	5	Plan and Profile
Section No.	6	Standard Detail Drawings
Section No.	7	Sign Plates
Section No.	8	Structure Plans
Section No.	9	Computer Earthwork Data
Section No.	9	Cross Sections

TOTAL SHEETS = 110



DESIGN DESIGNATION 9090-01-02

A.A.D.T.	2019	=	1000
A.A.D.T.	2039	=	1300
D.H.V.		=	14.7
D.D.		=	61/39
T.		=	15.6%
DESIGN SPEED		=	55
ESALS		=	452,600

CONVENTIONAL SYMBOLS

PLAN	
CORPORATE LIMITS	
PROPERTY LINE	
LOT LINE	
LIMITED HIGHWAY EASEMENT	
EXISTING RIGHT OF WAY	
PROPOSED OR NEW R/W LINE	
SLOPE INTERCEPT	
REFERENCE LINE	
EXISTING CULVERT	
PROPOSED CULVERT (Box or Pipe)	
COMBUSTIBLE FLUIDS	
MARSH AREA	
WOODED OR SHRUB AREA	

PROFILE	
GRADE LINE	
ORIGINAL GROUND	
MARSH OR ROCK PROFILE (To be noted as such)	
SPECIAL DITCH	
GRADE ELEVATION	
CULVERT (Profile View)	
UTILITIES	
ELECTRIC	
FIBER OPTIC	
GAS	
SANITARY SEWER	
STORM SEWER	
TELEPHONE	
WATER	
UTILITY PEDESTAL	
POWER POLE	
TELEPHONE POLE	

ROCK	
LABEL	
E	
FO	
G	
SAN	
SS	
T	
W	

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION
PLAN OF PROPOSED IMPROVEMENT

EAGLE RIVER - TIPLER

DIVIDE ROAD TO STH 55


STH 70

FOREST COUNTY

STATE PROJECT NUMBER
9090-01-72

BEGIN PROJECT
STA 289+40

END PROJECT
STA 685+23.4



LAYOUT
SCALE 0 2 MI
TOTAL NET LENGTH OF CENTERLINE = 7.50 MI

HORIZONTAL POSITIONS SHOWN ON THIS PLAN ARE WISCONSIN COORDINATE REFERENCE SYSTEM (WISCRS) FOREST COUNTY, NAD83 (2011), IN U.S. SURVEY FEET. POSITIONS SHOWN ARE GRID COORDINATES, GRID BEARINGS, AND GRID DISTANCES. GRID DISTANCES ARE THE SAME AS GROUND DISTANCES. ELEVATIONS ARE REFERENCED TO NAVD 88 (1929). GPS DERIVED ELEVATIONS ARE BASED ON GEOID 12A.

STATE PROJECT	FEDERAL PROJECT	
	PROJECT	CONTRACT
9090-01-72	WISC 2020157	1

ORIGINAL PLANS PREPARED BY

benesch

Alfred Benesch & Company
1300 West Capital Street, Suite 150
Milwaukee, Wisconsin 53233
Phone: 414.331.1229 Fax: 414.331.1229

AMANDA E. ZACHARIAS
E-35716
MILWAUKEE
WISCONSIN

PROFESSIONAL ENGINEER

DATE: 1/21/19 Amanda Zacharias
(Professional Engineer Signature)

STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
PREPARED BY	SIGMA
Surveyor	ALFRED BENESCH & CO
Designer	DAN ERVA, PE
Project Manager	CHERYL SIMON, PE
Regional Examiner	JED PETERS, PE
Regional Supervisor	

APPROVED FOR THE DEPARTMENT

DATE: 1/22/19
(Signature)

WISDNR
DNR NORTHERN REGION
107 SUTLIFF
RHINELANDER, WI 54501
JON SIMONSEN
(715) 367-1936
Jonathan.Simonsen@wisconsin.gov

ORDER OF SECTION 2 SHEETS

- PROJECT OVERVIEW
- TYPICAL SECTIONS
- CONSTRUCTION DETAILS
- MGS DETAILS
- PLAN DETAILS

GENERAL NOTES

- 1. THERE ARE NO KNOWN UTILITY FACILITIES WITHIN THE PROJECT AREA. THE CONTRACTOR SHALL COORDINATE HIS CONSTRUCTION ACTIVITIES WITH A CALL TO DIGGERS HOTLINE.

RUNOFF COEFFICIENT TABLE


	HYDROLOGIC SOIL GROUP											
	A			B			C			D		
	SLOPE RANCE (PERCENT)			SLOPE RANCE (PERCENT)			SLOPE RANCE (PERCENT)			SLOPE RANCE (PERCENT)		
LAND USE:	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER
ROW CROPS	0.08	0.16	0.22	0.12	0.20	0.27	0.15	0.24	0.33	0.19	0.28	0.38
	0.22	0.30	0.38	0.26	0.34	0.44	0.30	0.37	0.50	0.34	0.41	0.56
MEDIAN STRIP TURF	0.19	0.20	0.24	0.19	0.22	0.26	0.20	0.23	0.30	0.20	0.25	0.30
	0.24	0.26	0.30	0.25	0.28	0.33	0.26	0.30	0.37	0.27	0.32	0.40
SIDE SLOPE TURF			0.25			0.27			0.28			0.30
			0.32			0.34			0.36			0.38
PAVEMENT:												
ASPHALT						0.70 - 0.95						
CONCRETE						0.80 - 0.95						
BRICK						0.70 -0.80						
DRIVES, WALKS						0.75 - 0.85						
ROOFS						0.75 - 0.95						
GRAVEL ROADS, SHOULDERS						0.40 - 0.60						


TOTAL PROJECT AREA = 33.4 ACRES
TOTAL AREA EXPECTED TO BE DISTURBED BY CONSTRUCTION ACTIVITIES = 0.7 ACRES


DIGGERSHOTLINE

Dial 811 or (800) 242-8511

www.DiggersHotline.com







NOTES:
ALL CRACK FILLER REMAINING AFTER MILLING
SHOULD BE REMOVED AND THE CRACKS LARGER
THAN 0.5" SHOULD BE FILLED WITH HMA PRIOR
TO CONSTRUCTING THE HMA SURFACE AND IS
CONSIDERED INCIDENTAL TO PREPARE
FOUNDATION FOR ASPHALTIC PAVING.

PROJECT NO: 9090-01-72

HWY: STH 70



COUNTY: FOREST

PLAN: TYPICAL SECTIONS

SHEET

E

2

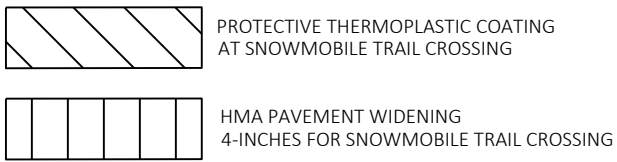


NOTE:A: PREPARATION FOR PAVEMENT WIDENING
FALLS UNDER PREPARE FOUNDATION
FOR ASPHALTIC SHOULDERS.

EXACT LOCATIONS TO BE MARKED
IN THE FIELD BY THE PROJECT PERSONAL.


SNOWMOBILE TRAIL CROSSING

STA 530+15
STA 668+25


TYPICAL MAINLINE DETAIL



SECTION A-A



TYPICAL SIDE ROAD DETAIL



PROJECT NO: 9090-01-72


HWY: STH 70

COUNTY: FOREST

PLAN: CONSTRUCTION DETAILS

SHEET

--	--

**NOTES:**


EXCAVATION COMMON , FILL, BORROW, SALVAGED TOPSOIL, FERTILIZER AND SEEDING ARE INCIDENTAL TO BARRIER SYSTEM GRADING SHAPING FINISHING.

BARRIER SYSTEM GRADING SHAPING FINISHING WILL BE MEASURED BY THE ENTIRE BARRIER SYSTEM INCLUDING GRADING REQUIRED FOR BOTH TERMINALS AND BEHIND THE GUARDRAIL IN BETWEEN.


SEE STANDARD DETAIL DRAWINGS FOR MORE INFORMATION.

MGS GUARDRAIL GRADING, SHAPING, AND FINISHING

STA 367+50 TO STA 376+15 RT
STA 392+65 TO STA 398+25 LT
STA 419+74 TO STA 425+75 RT
STA 419+74 TO STA 428+81 LT




2



	395+75.13
--	-----------

2



LEGEND

	DITCH CHECK
	SILT FENCE
	RIPRAP, MEDIUM ON GEOTEXTILE FABRIC TYPE HR
	SLOPE INTERCEPT

NOTES
ALL DISTURBED AREAS TO BE
PROTECTED WITH EROSION MAT
-URBAN CLASS I TYPE A UNLESS
OTHERWISE NOTED.

PROJECT NO:	9090-01-72
-------------	------------

HWY: STH 70

COUNTY: FOREST

MGS DETAILS	
-------------	--

SHEET

E

FILE NAME : Y:\MILWAUKEE\202005\20229.03\ENG_DOCS\90900102\SHEETSPLAN\021210-PD.DWG
LAYOUT NAME - 02


PLOT DATE : 12/5/2018 3:14 PM


PLOT BY : WEIGAND, BEN

PLOT NAME :


PLOT SCALE : 1 IN:40 FT

WISDOT/CADDS SHEET 44





PROJECT NO: 9090-01-72	HWY: STH 70	COUNTY: FOREST	PLAN DETAILS	SHEET	E
------------------------	-------------	----------------	--------------	-------	---



PROJECT NO: 9090-01-72


HWY: STH 70

COUNTY: FOREST



PLAN DETAILS

SHEET

E



PROJECT NO: 9090-01-72	HWY: STH 70	COUNTY: FOREST	PLAN DETAILS	SHEET	E
------------------------	-------------	----------------	--------------	-------	---



SECTION A-A

NOTES:

PROPOSED CURB TO BE PLACED TO THE SAME LOCATIONS AND ELEVATIONS AS THE EXISTING CURB AND GUTTER, CONTRACTOR TO OBTAIN CURB FLOW ELEVATIONS PRIOR TO REMOVAL. THIS WORK WILL BE INCIDENTAL TO "CONSTRUCTION STAKING CURB GUTTER AND CURB & GUTTER".

*PAYMENT FOR EXCAVATION, PAVEMENT REMOVAL, BACKFILL, TOPSOIL, FERTILIZER, AND SEEDING TO BE INCLUDED IN THE ITEM GRADING, SHAPING, AND FINISHING INTERSECTION.

LEGEND

DITCH CHECK

SILT FENCE

EROSION MAT URBAN CLASS I TYPE A

PROJECT NO: 9090-01-72

HWY: STH 70

COUNTY: FOREST

PLAN DETAILS

SHEET

E

Estimate Of Quantities By Plan Sets

9090-01-72					
Line	Item	Item Description	Unit	Total	Qty
0004	204.0110	Removing Asphaltic Surface	SY	4,100.000	4,100.000
0006	204.0115	Removing Asphaltic Surface Butt Joints	SY	295.000	295.000
0008	204.0120	Removing Asphaltic Surface Milling	SY	136,328.000	136,328.000
0010	204.0150	Removing Curb & Gutter	LF	333.000	333.000
0012	204.0165	Removing Guardrail	LF	2,250.000	2,250.000
0014	204.9060.S	Removing (item description) 01. Asphaltic Flume	EACH	2.000	2.000
0018	205.9015.S	Grading Shaping and Finishing Intersection (location) 01. STH 55	LS	1.000	1.000
0020	211.0100	Prepare Foundation for Asphaltic Paving (project) 01. 9090-01-72	LS	1.000	1.000
0022	211.0400	Prepare Foundation for Asphaltic Shoulders	STA	7.000	7.000
0026	213.0100	Finishing Roadway (project) 02. 9090-01-72	EACH	1.000	1.000
0028	305.0110	Base Aggregate Dense 3/4-Inch	TON	2,229.000	2,229.000
0030	305.0120	Base Aggregate Dense 1 1/4-Inch	TON	110.000	110.000
0032	416.1010	Concrete Surface Drains	CY	2.000	2.000
0034	455.0605	Tack Coat	GAL	9,635.000	9,635.000
0036	460.0105.S	HMA Percent Within Limits (PWL) Test Strip Volumetrics	EACH	1.000	1.000
0038	460.0110.S	HMA Percent Within Limits (PWL) Test Strip Density	EACH	1.000	1.000
0040	460.2005	Incentive Density PWL HMA Pavement	DOL	15,460.000	15,460.000
0042	460.2007	Incentive Density HMA Pavement Longitudinal Joints	DOL	15,834.000	15,834.000
0044	460.2010	Incentive Air Voids HMA Pavement	DOL	15,460.000	15,460.000
0046	460.5224	HMA Pavement 4 LT 58-28 S	TON	15,459.000	15,459.000
0050	465.0110	Asphaltic Surface Patching	TON	460.000	460.000
0052	465.0475	Asphalt Centerline Rumble Strips 2-Lane Rural	LF	39,584.000	39,584.000
0056	521.1012	Apron Endwalls for Culvert Pipe Steel 12-Inch	EACH	2.000	2.000
0062	601.0553	Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type D	LF	325.000	325.000
0064	606.0200	Riprap Medium	CY	6.000	6.000
0066	612.0212	Pipe Underdrain Unperforated 12-Inch	LF	57.000	57.000
0068	614.0010	Barrier System Grading Shaping Finishing	EACH	4.000	4.000
0070	614.2300	MGS Guardrail 3	LF	1,225.000	1,225.000
0072	614.2330	MGS Guardrail 3 K	LF	778.000	778.000
0074	614.2610	MGS Guardrail Terminal EAT	EACH	8.000	8.000
0078	618.0100	Maintenance And Repair of Haul Roads (project) 02. 9090-01-72	EACH	1.000	1.000
0080	619.1000	Mobilization	EACH	0.750	0.750
0082	621.0100	Landmark Reference Monuments	EACH	1.000	1.000
0084	624.0100	Water	MGAL	23.000	23.000
0086	628.1104	Erosion Bales	EACH	60.000	60.000
0088	628.1504	Silt Fence	LF	3,800.000	3,800.000
0090	628.1520	Silt Fence Maintenance	LF	3,800.000	3,800.000

Estimate Of Quantities By Plan Sets

9090-01-72

Line	Item	Item Description	Unit	Total	Qty
0092	628.1905	Mobilizations Erosion Control	EACH	3.000	3.000
0094	628.1910	Mobilizations Emergency Erosion Control	EACH	2.000	2.000
0096	628.2006	Erosion Mat Urban Class I Type A	SY	3,309.000	3,309.000
0100	628.7504	Temporary Ditch Checks	LF	160.000	160.000
0104	628.7570	Rock Bags	EACH	60.000	60.000
0108	634.0618	Posts Wood 4x6-Inch X 18-FT	EACH	4.000	4.000
0110	638.2102	Moving Signs Type II	EACH	10.000	10.000
0112	638.3000	Removing Small Sign Supports	EACH	10.000	10.000
0114	642.5001	Field Office Type B	EACH	0.750	0.750
0116	643.0300	Traffic Control Drums	DAY	1,080.000	1,080.000
0118	643.0900	Traffic Control Signs	DAY	1,140.000	1,140.000
0120	643.5000	Traffic Control	EACH	0.750	0.750
0122	645.0120	Geotextile Type HR	SY	10.000	10.000
0124	646.1020	Marking Line Epoxy 4-Inch	LF	128,919.000	128,919.000
0126	646.4505	Marking Line Same Day Paint 4-Inch	LF	49,893.000	49,893.000
0128	646.6120	Marking Stop Line Epoxy 18-Inch	LF	50.000	50.000
0130	648.0100	Locating No-Passing Zones	MI	7.500	7.500
0132	649.0105	Temporary Marking Line Paint 4-Inch	LF	46,606.000	46,606.000
0134	650.5500	Construction Staking Curb Gutter and Curb & Gutter	LF	325.000	325.000
0136	650.6000	Construction Staking Pipe Culverts	EACH	2.000	2.000
0138	650.8000	Construction Staking Resurfacing Reference	LF	39,584.000	39,584.000
0142	650.9910	Construction Staking Supplemental Control (project) 02. 9090-01-72	LS	1.000	1.000
0144	650.9920	Construction Staking Slope Stakes	LF	2,963.000	2,963.000
0146	690.0150	Sawing Asphalt	LF	341.000	341.000
0148	690.0250	Sawing Concrete	LF	6.000	6.000
0150	740.0440	Incentive IRI Ride	DOL	30,000.000	30,000.000
0152	ASP.1T0A	On-the-Job Training Apprentice at \$5.00/HR	HRS	1,200.000	1,200.000
0154	ASP.1T0G	On-the-Job Training Graduate at \$5.00/HR	HRS	600.000	600.000
0160	SPV.0060	Special 03. Reestablish Section Corner Monuments	EACH	1.000	1.000
0162	SPV.0180	Special 01. Protective Thermoplastic Coating at Snowmobile Trail Crossings	SY	120.000	120.000

REMOVALS									
LOCATION	204.0110	204.0115	204.0120	204.0150	204.0165	204.9060.S	211.0100	211.0400	
	REMOVING	REMOVING	REMOVING	REMOVING	REMOVING	REMOVING	PREPARE	PREPARE	
	ASPHALTIC	ASPHALTIC	ASPHALTIC	CURB & GUTTER	GUARDRAIL	ASPHALTIC	FOUNDATION	FOUNDATION	
	SURFACE	SURFACE	SURFACE			FLUME	FOR ASPHALTIC	FOR ASPHALTIC	
	*	BUTT JOINTS	MILLING				PAVING	SHOULDERS	
	(SY)	(SY)	(SY)	(LF)	(LF)	(EACH)	(LS)	(STA)	
289+40.00 to 685+23.40 WB	-	27	66679	-	-	-	-	-	
289+40.00 to 685+23.40 EB	-	27	65946	-	-	-	-	-	
Divide Road	-	53	628	-	-	-	-	-	
367+50.00 to 376+15.00 Rt	-	-	29	4	687.5	1	-	2	
392+65.00 to 398+25.00 Lt	-	-	177	-	400	-	-	2	
419+74.00 to 428+81.00 Lt	-	-	44	4	762.5	-	-	-	
419+44.00 to 425+75.00 Rt	-	-	169	-	400	1	-	2	
Perry Road	-	27	292	-	-	-	-	-	
Fisher Road	-	27	290	-	-	-	-	-	
530+15	-	-	-	-	-	-	-	-	
Windsor Dam Road	-	27	373	-	-	-	-	-	
Cary Dam Road	-	27	303	-	-	-	-	-	
Elliot Road	-	27	320	-	-	-	-	-	
668+25	-	-	-	-	-	-	-	-	
STH 55	-	53	1078	325	-	-	-	-	
Project	4100	-	-	-	-	-	1	1	
TOTALS	4100	295	136328	333	2250	2	1	7	

* ASPHALTIC SURFACE PATCHING USED TO REPAIR DISTRESSED PAVEMENT AREAS

SHOULDER ITEMS				
				305.0110
				BASE
				AGGREGATE
				DENSE
				3/4-INCH
LOCATION				(TON)
289+40.00 to 685+23.40	WB			1100
289+40.00 to 685+23.40	EB			1100
STH 55 Curb Replacement				29
TOTALS				2229

ALL ITEMS ON THIS PAGE ARE CATEGORY 0010

3

3

			455.0605	460.0105.S	460.0110.S	460.5224	465.0110	465.0475	
			TACK	HMA PERCENT	HMA PERCENT	HMA	ASPHALTIC	ASPHALTIC	
			COAT	WITHIN LIMITS	WITHIN LIMITS	PAVEMENT	SURFACE	CENTERLINE	
				(PWL) TEST STRIP	(PWL) TEST STRIP	4 LT 58-28 S	PATCHING	RUMBLE STRIPS	
				VOLUMETRICS	DENSITY			2-LANE RURAL	
LOCATION			(GAL)	(EACH)	(EACH)	(TON)	(TON)	(LF)	COMMENTS
289+40.00 to 685+23.40	WB		4696	-	-	7513	-	-	
289+40.00 to 685+23.40	EB		4657	-	-	7451	-	39584	
Divide Road			48	-	-	77	-	-	
367+50.00 to 376+15.00	Rt		2	-	-	16	-	-	Including Additional Pavement Area
392+65.00 to 398+25.00	Lt		13	-	-	27	-	-	Including Additional Pavement Area
419+74.00 to 428+81.00	Lt		4	-	-	5	-	-	
419+44.00 to 425+75.00	Rt		12	-	-	34	-	-	Including Additional Pavement Area
Perry Road			23	-	-	36	-	-	
Fisher Road			23	-	-	36	-	-	
530+15			-	-	-	-	-	-	
Windsor Dam Road			28	-	-	45	-	-	
Cary Dam Road			24	-	-	37	-	-	
Elliot Road			25	-	-	39	-	-	
668+25			-	-	-	-	-	-	
STH 55			80	-	-	143	-	-	Including Pavement for Curb Replacement
Project			-	1	1	-	460	-	
TOTALS			9635	1	1	15459	460	39584	

LOCATION		STATION	MIXTURE USE	UNDERLYING SURFACE	BID ITEM	TONS	THICKNESS	QUALITY MANAGEMENT PROGRAM TO BE USED FOR:	
								MIXTURE ACCEPTANCE	DENSITY ACCEPTANCE
STH 70 LANES AND SHOULDERS		289+40 to 685+23	UPPER LAYER	MILLED EXISTING HMA SURFACE	4 LT 58-28 S	15459	2.00	PWL INCENTIVE AIR VOIDS HMA PAVEMENT 460.2010	INCENTIVE PWL HMA PAVEMENT 460.2005

ALL ITEMS ON THIS PAGE ARE CATEGORY 0010

PROJECT NO: 9090-01-72	HWY: STH 70	COUNTY: FOREST	MISCELLANEOUS QUANTITIES	SHEET	E
------------------------	-------------	----------------	--------------------------	-------	---

CURB AND GUTTER									
LOCATION	205.9015.S	601.0553					628.2006		
	GRADING	CONCRETE					EROSION MAT		
	SHAPING	CURB & GUTTER					URBAN		
	AND FINISHING	4-INCH SLOPED					CLASS I		
	INTERSECTION	36-INCH					TYPE A	FERTILIZER	SEEDING
	STH 55	TYPED	EXCAVATION	FILL	BORROW	TOPSOIL	**	TYPE B	MIXTURE
	(LS)	(LF)	COMMON	(CY)	(CY)	(SY)	(SY)	(CWT)	NO. 30
			(CY)						(LB)
STH 55	1	325	6.1	-	-	109	109	0.07	2
	1	325					109		

* NON-BID ITEM, ITEMS AND QUANTITIES LISTED FOR BID INFORMATION ONLY , ITEMS INCIDENTAL TO GRADING, SHAPING, AND FINISHING INTERSECTION
** ADDITIONAL QUANTITY SHOWN ELSEWHERE

MGS GUARDRAIL												
LOCATION	305.0120	614.0010	614.2300	614.2330	614.2610					628.2006		
	BASE	BARRIER	MGS	MGS	MGS					EROSION MAT		
	AGGREGATE	SYSTEM	GUARDRAIL	GUARDRAIL	GUARDRAIL					CLASS I	FERTILIZER	SEEDING
	DENSE	GRADING	3	3K	TERMINAL					TYPEA	TYPE B	MIXTURE
	1 1/4-INCH	SHAPING			EAT					**	(CWT)	NO. 30
	(TON)	FINISHING	(LF)	(LF)	(EACH)	EXCAVATION	FILL	BORROW	TOPSOIL	(SY)		(LB)
		(EACH)				COMMON	(CY)	(CY)	(SY)			
						(CY)						
367+50.00 to 376+15.00 Rt	32	1	225	390	2	7.3	102.2	94.9	720	720	0.46	13
392+65.00 to 398+25.00 Lt	21	1	312.5	-	2	20.4	23.0	2.6	490	490	0.31	9
419+74.00 to 428+81.00 Lt	34	1	-	387.5	2	12.4	93.8	81.4	790	790	0.50	15
419+44.00 to 425+75.00 Rt	23	1	687.5	-	2	55.2	164.4	109.2	1200	1200	0.76	22
	110	4	1,225	778	8					3,200		

* NON-BID ITEM, ITEMS AND QUANTTIES LISTED FOR BID INFORMATION ONLY , ITEMS INCIDENTAL TO BARRIER SYSTEM GRADING SHAPING FINISHING.
** ADDITIONAL QUANTITY SHOWN ELSEWHERE

EROSION CONTROL AND RESTORATION									
LOCATION	624.0100	628.1104	628.1504	628.1520	628.1905	628.1910	628.7504	628.7570	
	WATER	EROSION	SILT	SILT	MOBILIZATIONS	MOBILIZATIONS	TEMPORARY	ROCK	
		BALES	FENCE	FENCE	EROSION	EROSION	DITCH	BAGS	
				MAINTENANCE	CONTROL	CONTROL	CHECKS		
	(MGAL)	(EA)	(LF)	(LF)	(EACH)	(EACH)	(LF)	(EA)	
367+50.00 to 376+15.00 Rt	-	-	885	885	1	-	16	-	
392+65.00 to 398+25.00 Lt	-	-	700	700	1	-	24	-	
419+74.00 to 428+81.00 Lt	-	-	770	770	1	-	32	-	
419+44.00 to 425+75.00 Rt	-	-	1025	1025	-	-	32	-	
STH 55	-	-	270	270	-	-	40	-	
Projectw ide	23	60	150	150	-	2	16	60	
TOTALS	23	60	3800	3800	3	2	160	60	

* ROCK BAGS TO BE USED AS SILT FENCE RELIEF AS DIRECTED BY THE ENGINEER

ALL ITEMS ON THIS PAGE ARE CATEGORY 0010

PERMANENT SIGNING

	634.0616 POSTS WOOD 4x6-INCH x 16-FT (EA)	638.2102 MOVING SIGNS TYPE II (EA)	638.3000 REMOVING SMALL SIGN SUPPORTS (EA)
LOCATION			
PASSING ZONE RELOCATIONS	4	10	10
TOTALS	4	10	10

SNOWMOBILE CROSSING

	SPV.0180.01 PORTECTIVE THERMOPLASTIC COATING AT SNOWMOBILE TRAIL CROSSINGS (SY)
LOCATION *	
530+15	60
668+25	60
PROJECT	-
TOTALS	120

TRAFFIC CONTROL

	643.0300 TRAFFIC CONTROL DRUMS	643.0900 TRAFFIC CONTROL SIGNS
STAGE	DURATION CALANDAR DAYS	#
	(DAYS)	#
	(DAYS)	(DAYS)
ADVANCED SIGNING	60	-
MAX WIDTH SIGNING	60	-
FLAGGING DETAIL	60	-
GUARDRAIL INSTALLATION	30	36
SIDE ROADS	20	-
UNDISTRIBUTED	4	-
TOTALS	1,080	1,140

PAVEMENT MARKING

	646.1020 MARKING LINE EPOXY 4-INCH (WHITE) (LF)	646.4505 MARKING LINE SAME DAY PAINT 4-INCH (YELLOW) (LF)	646.6120 MARKING STOP LINE EPOXY 18-INCH (WHITE) (LF)	648.0100 LOCATING NO-PASSING ZONES (MI)	649.0105 TEMPORARY MARKING LINE PAINT 4-INCH (YELLOW) (LF)
LOCATION *	x	x	x		x
289+40 to 328+65	2	7850	0.25	981	0.25
328+65 to 340+55	2	2380	1.25	1488	1.25
340+55 to 360+30	2	3950	2	3950	2
360+30 to 371+40	2	2220	1.25	1388	1.25
371+40 to 373+90	2	500	0.25	63	0.25
373+90 to 384+80	2	2180	1.25	1363	1.25
384+80 to 437+60	2	10560	2	10560	2
437+60 to 448+55	2	2190	1.25	1369	1.25
448+55 to 455+50	2	1390	0.25	174	0.25
455+50 to 465+65	2	2030	0.25	254	0.25
465+65 to 466+85	2	240	0.25	30	0.25
466+85 to 476+95	2	2020	1.25	1263	1.25
476+95 to 490+05	2	2620	0.25	328	0.25
490+05 to 501+35	2	2260	1.25	1413	1.25
501+35 to 524+35	2	4600	2	4600	2
524+35 to 533+40	2	1810	1.25	1131	1.25
533+40 to 535+25	2	370	2	370	2
535+25 to 544+80	2	1910	1.25	1194	1.25
544+80 to 582+65	2	7570	2	7570	2
582+65 to 605+40	2	4550	1.25	2844	1.25
605+40 to 610+80	2	1080	2	1080	2
610+80 to 621+95	2	2230	1.25	1394	1.25
621+95 to 640+55	2	3720	0.25	465	0.25
640+55 to 651+70	2	2230	1.25	1394	1.25
651+70 to 653+55	2	370	2	370	2
653+55 to 664+35	2	2160	1.25	1350	1.25
664+35 to 675+15	2	2160	0.25	270	0.25
675+15 to 683+75	2	1720	1.25	1075	1.25
684+50 to 685+23	2	146	2	146	2
STH 55 North	2	5	2	10	30
STH 55 South	2	5	2	10	20
PROJECT	-	-	-	-	-
TOTALS	128919	49893	50	7.50	46606

* LOCATIONS OF PASSING ZONES GIVEN FOR ESTIMATION ONLY. ACTUAL MARKINGS IN THE FIELD TO BE BASED ON LOCATING NO-PASSING ZONES.
IN AREAS OF CENTERLINE RUMBLE STRIPS, ONE APPLICATION OF EPOXY AND ONE APPLICATION OF EPOXY SAME DAY IS INCLUDED FOR THE CENTERLINE

ALL ITEMS ON THIS PAGE ARE CATEGORY 0010

PROJECT NO: 9090-01-72

HWY: STH 70

COUNTY: FOREST

MISCELLANEOUS QUANTITIES

SHEET



E

SURFACE DRAINS					
	416.1010	521.1012	612.0212	645.0120	606.0200
	CONCRETE	APRON	PIPE	GEOTEXTILE	RIPRAP
	SURFACE	ENDWALLS FOR	UNDERDRAIN	TYPE HR	MEDIUM
	DRAINS	CULVERT PIPE	UNPERFORATED		
		STEEL 12-INCH	12-INCH		
LOCATION	(CY)	(EA)	(LF)	(SY)	(CY)
374+90.00 Rt	1	1	25	5	3
419+74.00 Lt	1	1	32	5	3
TOTALS	2	2	57	10	6


CONSTRUCTION STAKING							
	621.0100	650.5500	650.6000	650.8000	650.9910	650.9920	SPV.0060.04
	LANDMARK	CURB	PIPE	RESURFACING	SUPPLEMENTAL	SLOPE	REESTABLISH
	REFERENCE	GUTTER AND	CULVERTS	REFERENCE	CONTROL	STAKES	SECTION
	MONUMENTS	CURB &			(9090-01-72)		CORNER
		GUTTER					MONUMENTS
LOCATION	(EA)	(LF)	(EA)	(LF)	(LS)	(EA)	(EA)
289+40.00 to 685+23.40	-	-	-	39584	-	-	-
367+50.00 to 376+15.00 Rt	-	-	1	-	-	865	-
392+65.00 to 398+25.00 Lt	-	-	-	-	-	560	-
419+74.00 to 428+81.00 Lt	-	-	1	-	-	907	-
419+44.00 to 425+75.00 Rt	-	-	-	-	-	631	-
STH 55	-	325	-	-	-	-	-
Project	1	-	-	-	1	-	1
TOTALS	1	325	2	39584	1	2963	1


SAWING		
	690.0150	690.0250
	SAWING	SAWING
	ASPHALT	CONCRETE
LOCATION	(LF)	(LF)
367+50.00 to 376+15.00 Rt	-	3
419+74.00 to 428+81.00 Lt	-	3
STH 55	341	-
	341	6

ALL ITEMS ON THIS PAGE ARE CATEGORY 0010






CONTROL POINTS						
I.D.	DESCRIPTION	STATION	OFFSET	ELEVATION	Y	X
5201	REBAR	392+65.07	36.68	1765.84	826690.75	714368.44
5200	REBAR	397+81.94	-31.79	1746.82	827207.00	714441.42







CONTROL POINTS						
I.D.	DESCRIPTION	STATION	OFFSET	ELEVATION	Y	X
6543	REBAR	501+15.53	25.79	1660.98	837127.97	715724.62
6287	REBAR	504+77.21	-26.21	1655.76	837479.11	715824.70









Standard Detail Drawing List


08D01-20A	CONCRETE CURB & GUTTER
08D01-20B	CONCRETE CURB, TIES AND CURB AND GUTTER APPLICATIONS
08D02-06	CONCRETE SURFACE DRAINS FLUME TYPE AT STRUCTURES
08E08-03	TYPICAL INSTALLATIONS OF EROSION BALES / TEMPORARY DITCH CHECKS
08E09-06	SILT FENCE
08F01-11	APRON ENDWALLS FOR CULVERT PIPE
13A11-03A	2-LANE RURAL CENTER LINE RUMBLE STRIP, MILLING
13A11-03B	2-LANE RURAL CENTER LINE RUMBLE STRIP, MILLING
13C19-01	HMA LONGITUDINAL JOINTS
14B29-01	SAFETY EDGE
14B42-06A	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B42-06B	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B42-06C	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B42-06D	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B44-04A	MIDWEST GUARDRAIL SYSTEM ENERGY ABSORBING TERMINAL (MGS)
14B44-04B	MIDWEST GUARDRAIL SYSTEM ENERGY ABSORBING TERMINAL (MGS)
14B44-04C	MIDWEST GUARDRAIL SYSTEM ENERGY ABSORBING TERMINAL (MGS)
15C02-07F	ADVANCED WIDTH RESTRICTION SIGNING
15C04-05	TRAFFIC CONTROL, ADVANCE WARNING SIGNS 45 M.P.H. OR GREATER TWO-WAY UNDIVIDED ROAD OPEN TO TRAFFIC
15C08-19A	LONGITUDINAL MARKING (MAINLINE)
15C11-07B	CHANNELIZING DEVICES DRUMS, CONES, BARRICADES AND VERTICAL PANELS
15C12-07	TRAFFIC CONTROL FOR LANE CLOSURE WITH FLAGGING OPERATION
15C19-05A	MOVING PAVEMENT MARKING OPERATION TWO-LANE TWO-WAY ROADWAY
15C33-03	STOP LINE AND CROSSWALK PAVEMENT MARKING
15C35-03A	PAVEMENT MARKING (INTERSECTIONS)
15D28-03	TRAFFIC CONTROL, WORK ON SHOULDER OR PARKING LANE, UNDIVIDED ROADWAY
15D38-02A	TEMPORARY TRAFFIC CONTROL SIGN MOUNTING
15D38-02B	ATTACHMENT OF SIGNS TO POSTS
15D39-02	TRAFFIC CONTROL, DROP-OFF SIGNING
16A01-07	LANDMARK REFERENCE MONUMENTS AND COVERS




TYPES A^① & D




6" SLOPED CURB TYPES G^① & J



4" SLOPED CURB TYPES G^① & J




TYPES K^① & L
(OPTIONAL CURB SHAPE)




TYPES K^① & L

CONCRETE CURB & GUTTER 30"




TYPES A^① & D


CONCRETE CURB & GUTTER 18"



6" SLOPED CURB TYPES A^① & D




4" SLOPED CURB TYPES A^① & D



4" SLOPED CURB TYPES R^① & T^⑤


CONCRETE CURB & GUTTER 36"




TYPES TBT & TBTT^①

CONCRETE CURB & GUTTER

TBT & TBTT	"X"
30"	22"
36"	28"



PARTIAL SECTION OF PAVEMENT
WITH INTEGRAL CURB & GUTTER



REVERSE SLOPE GUTTER^⑥
(TYPICAL FOR ALL CURB & GUTTER TYPES)

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

PAVEMENT TIES AND TIE BARS SHALL BE EPOXY COATED IN CONFORMANCE WITH SUBSECTION 505.2.6.2 OF THE STANDARD SPECIFICATIONS.

INTEGRAL CURB & GUTTER SHALL CONFORM TO THE DETAILS SHOWN FOR CONCRETE CURB & GUTTER INCLUDING THE TRANSVERSE GUTTER SLOPE.

WHERE THE TRANSVERSE JOINTS IN THE PAVEMENT ARE REQUIRED TO BE SEALED, THE JOINTS IN THE INTEGRAL CURB AND GUTTER SHALL BE SEALED TO THE FACE OF CURB WITH THE SAME TYPE OF SEALANT. THE COST OF FURNISHING AND INSTALLING THIS SEALANT SHALL BE INCIDENTAL TO THE ITEM CONCRETE CURB AND GUTTER.

UNLESS OTHERWISE SHOWN ON THE TYPICAL CROSS SECTIONS, THE BASE AGGREGATE AND COMMON EXCAVATION LIMITS ARE 2'-0" BEHIND THE BACK OF CURBS.

- ① TIE BARS ARE REQUIRED FOR CURB AND GUTTER TYPES A, G, K, R AND TBTT.
- ② THE BOTTOM OF CURB AND GUTTER MAY BE CONSTRUCTED EITHER LEVEL OR PARALLEL TO THE SLOPE OF THE SUBGRADE OR BASE AGGREGATE PROVIDED A 6" MINIMUM GUTTER THICKNESS IS MAINTAINED.
- ③ USE 8" MINIMUM GUTTER THICKNESS WHEN USED WITH AN ADJACENT CONCRETE TRUCK APRON PLACED BEHIND BACK OF CURB.
- ④ THE BOTTOM OF CURB AND GUTTER MAY BE CONSTRUCTED EITHER LEVEL OR PARALLEL TO THE SLOPE OF THE SUBGRADE OR BASE AGGREGATE PROVIDED A 8" MINIMUM GUTTER THICKNESS IS MAINTAINED.
- ⑤ THE FACE OF CURB IS 6" FROM THE BACK OF CURB.
- ⑥ WHEN REVERSE SLOPE GUTTER IS REQUIRED, THE LOCATION(S) WILL BE SHOWN ELSEWHERE IN THE PLAN.
- ⑦ USE 4% GUTTER CROSS SLOPE UNLESS OTHERWISE NOTED IN THE PLANS.
- ⑧ INCLUDE LONGITUDINAL JOINT AND TIE BARS ALONG LANE EDGE WHEN CONCRETE PANEL WIDTH EXCEEDS THE MAXIMUM WIDTH PER TABLE BELOW. LONGITUDINAL JOINT(S) ARE NOT ALLOWED WITHIN TRAFFIC LANES AND BIKE LANES. LONGITUDINAL JOINT MAY BE SAWED.


PAVEMENT THICKNESS AND MAXIMUM CONCRETE PANEL WIDTH TABLE

PAVEMENT THICKNESS	MAXIMUM PANEL WIDTH
LESS THAN 10"	12'
10" & ABOVE	15'

* BIKE LANE IS NOT SHOWN.


CONCRETE CURB & GUTTER

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




DETAIL OF CURB AND GUTTER AT INLETS

(TYPE H INLET COVER SHOWN)




END SECTION CURB & GUTTER



PLAN VIEW

*NEW CURB & GUTTER, SURFACE DRAINS, CONCRETE PAVEMENT OR OTHER NEW CONCRETE.




**SECTION A-A
TIE BARS DRILLED
INTO EXISTING PAVEMENT**


NO. 6 TIE BARS SPACED 2'-6" C-C, INSTALLED PERPENDICULAR TO THE LONGITUDINAL JOINT.

MAXIMUM DRILL HOLE SIZE IS 1/8" GREATER THAN TIE BAR DIAMETER

EXISTING CONCRETE



TYPES A^① & D



TYPES G^① & J

GENERAL NOTES


DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

PAVEMENT TIES AND TIE BARS SHALL BE EPOXY COATED IN CONFORMANCE WITH SUBSECTION 505.2.6.2 OF THE STANDARD SPECIFICATIONS.


UNLESS OTHERWISE SHOWN ON THE TYPICAL CROSS SECTIONS, THE BASE AGGREGATE AND COMMON EXCAVATION LIMITS ARE 2'-0" BEHIND THE BACK OF CURBS.

- ① TIE BARS ARE REQUIRED FOR CURB AND GUTTER TYPES A, G, K, R AND TBTT.
- ② THE BOTTOM OF CURB AND GUTTER MAY BE CONSTRUCTED EITHER LEVEL OR PARALLEL TO THE SLOPE OF THE SUBGRADE OR BASE AGGREGATE PROVIDED A 6" MINIMUM GUTTER THICKNESS IS MAINTAINED.
- ③ REFER TO SDD 8D18 AND SDD 8D19 FOR ADDITIONAL DRIVEWAY ENTRANCE CURB DETAILS.

CONCRETE CURB



TYPICAL TIE BAR LOCATION^①



DRIVEWAY ENTRANCE CURB^⑨

(WHEN DIRECTED BY THE ENGINEER)

CONCRETE CURB, TIES AND CURB AND GUTTER APPLICATIONS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED

June, 2017


DATE

FHWA


/S/ Rodney Taylor

ROADWAY STANDARDS DEVELOPMENT


UNIT SUPERVISOR




SECTION F-F




SECTION H-H



SECTION E-E



LOCATION OF TIE BARS IN WINGWALL



* PARTIAL PLAN VIEW
SURFACE DRAIN WITHOUT PIPE
TYPE "B"

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS, AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

ALL STEEL REINFORCEMENT SHALL BE EMBEDDED 2 INCHES CLEAR
UNLESS OTHERWISE SHOWN OR NOTED.


- ① NO. 4 X 2'-0" TIE BARS SPACED AT 3'-0" CENTERS TO BE USED ONLY WHEN ADJACENT TO P.C. CONCRETE.
- ② NO. 4 X 2'-0" TIE BARS SPACED AT 12" CENTERS TO BE PLACED BY BRIDGE CONTRACTOR, OR DRILLED TIE BARS PLACED AS DIRECTED BY THE ENGINEER.
- ③ PIPE UNDERDRAIN MAY BE ANY OF THE MATERIALS LISTED IN SECTION 612.2 OF THE STANDARD SPECIFICATIONS EXCEPT DRAIN TILE.
- ④ MINIMUM REINFORCEMENT SHALL BE 6" X 6" - W4.0 X W4.0 OR NO. 3 BARS LONGITUDINAL AND TRANSVERSE SPACING 12" C-C.
- ⑤ LIMITS OF ADDITIONAL RIPRAP WHEN SPECIAL DITCH IS REQUIRED.
- ⑥ GEOTEXTILE FABRIC, TYPE 'R'
- ⑦ HOT POURED SEALANT UNLESS OTHERWISE SPECIFIED.
- ⑧ THIS DIMENSION MAY VARY DEPENDING ON THE SPACING OF POSTS FOR THE STEEL PLATE BEAM GUARD, THE TYPICAL LOCATION FOR THE SURFACE DRAIN IS WHERE THE POST SPACING WIDENS TO 3'-1/2".

CONCRETE SURFACE DRAINS FLUME TYPE AT STRUCTURES

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
9/4/08
DATE
FHWA



/S/ Jerry H. Zogg
ROADWAY STANDARDS DEVELOPMENT
ENGINEER



GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

- ① TEMPORARY DITCH CHECKS EITHER EROSION BALES OR MANUFACTURED SHALL BE PAID FOR UNDER THE BID ITEM OF TEMPORARY DITCH CHECK. THE DEPARTMENT WILL NOT PAY FOR TEMPORARY DITCH CHECKS CONSTRUCTED OF A SINGLE ROW OF EROSION BALES.


TYPICAL INSTALLATIONS OF
EROSION BALES / TEMPORARY
DITCH CHECKS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


APPROVED

6/04/02
DATE/S/ Beth Canestra
CHIEF ROADWAY DEVELOPMENT ENGINEER


FHWA




PLAN VIEW
TYPICAL APPLICATION OF SILT FENCE



SILT FENCE



PLAN VIEW
SILT FENCE AT MEDIAN SURFACE DRAINS




JOINING TWO LENGTHS OF SILT FENCE ⑤


GENERAL NOTES

DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND APPLICABLE SPECIAL PROVISIONS.

- ① HORIZONTAL BRACE REQUIRED WITH 2" X 4" WOODEN FRAME OR EQUIVALENT AT TOP OF POSTS.
- ② FOR MANUAL INSTALLATIONS THE TRENCH SHALL BE A MINIMUM OF 4" WIDE & 6" DEEP TO BURY AND ANCHOR THE GEOTEXTILE FABRIC. FOLD MATERIAL TO FIT TRENCH AND BACKFILL & COMPACT TRENCH WITH EXCAVATED SOIL.
- ③ WOOD POSTS SHALL BE A MINIMUM SIZE OF 1 1/8" X 1 1/8" OF OAK OR HICKORY.
- ④ SILT FENCE TO EXTEND ACROSS THE TOP OF THE PIPE.
- ⑤ CONSTRUCT SILT FENCE FROM A CONTINUOUS ROLL IF POSSIBLE BY CUTTING LENGTHS TO AVOID JOINTS. IF A JOINT IS NECESSARY USE ONE OF THE FOLLOWING TWO METHODS; A) OVERLAP THE END POSTS AND TWIST, OR ROTATE, AT LEAST 180 DEGREES, B) HOOK THE END OF EACH SILT FENCE LENGTH.



TRENCH DETAIL




SILT FENCE TIE BACK
(WHEN REQUIRED BY THE ENGINEER)

SILT FENCE	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED 4-29-05 DATE	/S/ Beth Canestra CHIEF ROADWAY DEVELOPMENT ENGINEER
FHWA	



METAL APRON ENDWALLS												
PIPE DIA. (IN.)	MIN. THICK. (Inches)		DIMENSIONS (Inches)							APPROX. SLOPE	BODY	
	STEEL	ALUM.	A (±1")	B (MAX.)	H (±1")	L (±1 1/2")	L ₁ ①	L ₂ ①	W (±2")			
12	.064	.060	6	6	6	21	12	17 1/2	24	2 1/2 to 1	1 Pc.	
15	.064	.060	7	8	6	26	14	21 3/4	30	2 1/2 to 1	1 Pc.	
18	.064	.060	8	10	6	31	15	28 1/4	36	2 1/2 to 1	1 Pc.	
21	.064	.060	9	12	6	36	18	29 5/8	42	2 1/2 to 1	1 Pc.	
24	.064	.075	10	13	6	41	18	37 1/4	48	2 1/2 to 1	1 Pc.	
30	.079	.075	12	16	8	51	18	52 1/4	60	2 1/2 to 1	1 Pc.	
36	.079	.105	14	19	9	60	24	59 3/4	72	2 1/2 to 1	2 Pc.	
42	.109	.105	16	22	11	69	24	75 5/8	84	2 1/2 to 1	2 Pc.	
48	.109	.105	18	27	12	78	24	81	90	2 1/4 to 1	3 Pc.	
54	.109	.105	18	30	12	84	30	85 1/2	102	2 1/4 to 1	3 Pc.	
60	.109x	.105x	18	33	12	87	—	—	114	2 to 1	3 Pc.	
66	.109x	.105x	18	36	12	87	—	—	120	2 to 1	3 Pc.	
72	.109x	.105x	18	39	12	87	—	—	126	2 to 1	3 Pc.	
78	.109x	.105x	18	42	12	87	—	—	132	1 1/2 to 1	3 Pc.	
84	.109x	.105x	18	45	12	87	—	—	138	1 1/2 to 1	3 Pc.	
90	.109x	.105x	18	37	12	87	—	—	144	1 1/2 to 1	3 Pc.	
96	.109x	.105x	18	35	12	87	—	—	150	1 1/2 to 1	3 Pc.	

* EXCEPT CENTER PANEL
SEE GENERAL NOTES



END CORNER PLATES MAY BE FASTENED TO APRON PROPER BY BOLTS, RIVETS, OR RESISTANCE SPOT WELDS WHICH WILL HOLD THE SURFACES TIGHTLY TOGETHER



TOE PLATE (SAME THICKNESS AND METAL AS APRON) SHALL BE FURNISHED WHEN CALLED FOR ON THE PLANS




SIDE ELEVATION
METAL ENDWALLS

REINFORCED CONCRETE APRON ENDWALLS								
PIPE DIA. (IN.)	DIMENSIONS (Inches)							APPROX. SLOPE
	T	A	B	C	D	E	G	
12	2	4	24	48 ⁷ / ₈	72 ¹ / ₈	24	2	3 to 1
15	2 ¹ / ₄	6	27	46	73	30	2 ¹ / ₄	3 to 1
18	2 ¹ / ₂	9	27	46	73	36	2 ¹ / ₂	3 to 1
21	2 ³ / ₄	9	36	37 ¹ / ₂	73 ¹ / ₂	42	2 ³ / ₄	3 to 1
24	3	9 ¹ / ₂	43 ¹ / ₂	30	73 ¹ / ₂	48	3	3 to 1
27	3 ¹ / ₄	10 ¹ / ₂	49 ¹ / ₂	24	73 ¹ / ₂	54	3 ¹ / ₄	3 to 1
30	3 ¹ / ₂	12	54	19 ³ / ₄	73 ¹ / ₂	60	3 ¹ / ₂	3 to 1
36	4	15	63	34 ³ / ₄	97 ³ / ₄	72	4	3 to 1
42	4 ¹ / ₂	21	63	35	98	78	4 ¹ / ₂	3 to 1
48	5	24	72	26	98	84	5	3 to 1
54	5 ¹ / ₂	27	65	33 ¹ / ₄ -35 ^{**}	98 ¹ / ₄ -100 ^{**}	90	5 ¹ / ₂	2 ¹ / ₂ to 1
60	6	30-35 ^{**}	60	39	99	96	5	2 to 1
66	6 ¹ / ₂	24-30 ^{**}	72-78 ^{**}	21-27 ^{**}	99	102	5 ¹ / ₂	2 to 1
72	7	24-36 ^{**}	78	21	99	108	6	2 to 1
78	7 ¹ / ₂	24-36 ^{**}	78	21	99	114	6 ¹ / ₂	2 to 1
84	8	36	90 ¹ / ₂	21	111 ¹ / ₂	120	6 ¹ / ₂	1 ¹ / ₂ to 1
90	8 ¹ / ₂	41	87 ¹ / ₂	24	111 ¹ / ₂	132	6 ¹ / ₂	1 ¹ / ₂ to 1


* MINIMUM
** MAXIMUM







LONGITUDINAL SECTION
CONCRETE ENDWALLS



1" WIDE, 12 GA. (0.109" THICK) GALVANIZED STRAP WITH STANDARD 6" X 1/2" BAND BOLT AND NUT



ALTERNATE FOR TYPE 1 CONNECTION
END SECTION CONNECTOR STRAP




NOTE: DIMPLED BAND FITS OVER OUTSIDE OF ENDWALL, AND CORRUGATED BAND FITS INSIDE ENDWALL. DIMPLED BAND MAY BE USED WITH HELICALLY CORRUGATED PIPE.

FOR CIRCUMFERENTIALLY CORRUGATED PIPE USE ENDWALL CONNECTION DETAILS 1, 2, 3 OR 5 AS APPLICABLE.

FOR HELICALLY CORRUGATED PIPE USE ENDWALL CONNECTION DETAILS 1, 2 OR 5.

FOR HELICALLY CORRUGATED PIPES WITH TWO CIRCUMFERENTIAL CORRUGATIONS AT EACH END USE ENDWALL CONNECTION DETAILS 1, 2 OR 3.

CONNECTION DETAILS



SECTION A-A

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

CONCRETE CULVERT ENDWALLS MAY NOT BE USED WITH GALVANIZED STEEL OR ALUMINUM CULVERT PIPE OR VISE VERSA. GALVANIZED STEEL OR ALUMINUM ENDWALLS SHALL NORMALLY BE INSTALLED ON CULVERT PIPE OF THE SAME METAL.

ALL THREE PIECE STEEL APRON ENDWALLS FOR 60" DIAMETER PIPE AND LARGER SHALL HAVE 0.109" SIDES AND 0.138" CENTER PANELS. ALL THREE PIECE ALUMINUM APRON ENDWALLS FOR 60" DIAMETER PIPE AND LARGER SHALL HAVE 0.105" SIDES AND 0.134" CENTER PANELS. THE WIDTH OF CENTER PANELS SHALL BE GREATER THAN 20 PERCENT OF THE PIPE PERIMETER.

LAP SEAMS SHALL BE TIGHTLY JOINED BY GALVANIZED RIVETS OR BOLTS FOR STEEL UNITS AND ALUMINUM RIVETS AND BOLTS FOR ALUMINUM UNITS. FOR THE 60" THROUGH 96" DIAMETER APRON ENDWALL SIZES, THE REINFORCED EDGES AND CENTER PANEL SEAMS SHALL BE FURTHER REINFORCED WITH GALVANIZED STEEL OR ALUMINUM STIFFENER ANGLES. THE ANGLES SHALL BE ATTACHED BY GALVANIZED NUTS AND BOLTS FOR STEEL UNITS AND ALUMINUM NUTS AND BOLTS FOR ALUMINUM UNITS.


WHERE TWO OR MORE PIPES WITH APRON ENDWALLS ARE LAID ADJACENT TO EACH OTHER, THEY SHALL BE SEPARATED BY A DISTANCE SUFFICIENT TO PROVIDE A MINIMUM CLEARANCE OF 6 INCHES BETWEEN APRON ENDWALLS.

① FOR PIPE SIZES UP TO 60" DIAMETER, A 180° ROLLED EDGE MAY BE USED INSTEAD OF STEEL ROD REINFORCEMENT. SEE SECTION A-A.

APRON ENDWALLS FOR
CULVERT PIPE


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
11/30/94
DATE
/S/ Rory L. Rhinesmith
CHIEF ROADWAY DEVELOPMENT ENGINEER
FHWA



PLAN VIEW
SHOULDER WITH GROOVES

PLACEMENT DETAIL FOR TYPE 1 MILLED RUMBLE STRIP



PLAN VIEW
(SINGLE GROOVE)

GENERAL NOTES


DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND APPLICABLE SPECIAL PROVISIONS.

DO NOT MILL CENTERLINE GROOVES THROUGH ANY INTERSECTION, MARKED CROSSWALK, NON-MOTORIZED PATH CROSSING, OR SNOWMOBILE CROSSING.


INSTALL PAVEMENT MARKING AFTER THE GROOVES ARE INSTALLED.

SEE SIGNING PLAN FOR SIGN REQUIREMENTS THAT MAY BE NEEDED.


- ① CENTERLINE GROOVES MAY BE OMITTED IN AREAS WITH HIGH CONCENTRATIONS OF DRIVEWAYS. WHEN DIRECTED BY THE ENGINEER.




ISOMETRIC




CENTERLINE GROOVES ON TWO-WAY ROADWAYS



SECTION B - B
SUPERELEVATED ROADWAY




SECTION B - B
CROWNED ROADWAY




SECTION A - A

2-LANE RURAL
CENTER LINE RUMBLE STRIP,
MILLING


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION



CENTERLINE GROOVES AT INTERSECTIONS




CENTERLINE GROOVES AT INTERSECTIONS
(WITH LEFT TURN LANES)




CENTERLINE GROOVES AT DRIVEWAYS^①

GENERAL NOTES

- ① CENTERLINE GROOVES MAY BE OMITTED IN AREAS WITH HIGH CONCENTRATIONS OF DRIVEWAYS. WHEN DIRECTED BY THE ENGINEER.



CENTERLINE GROOVES AT BRIDGES



CENTERLINE GROOVES AT RAILROADS

2-LANE RURAL
CENTERLINE RUMBLE STRIP,
MILLING


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
7/2018
DATE
/S/ Rodney Taylor
ROADWAY STANDARDS DEVELOPMENT
ENGINEER

FHWA

GENERAL NOTES

CONFORM TO STANDARD SPECIFICATION 450.3.2.8




TYPICAL PAVEMENT CROSS SECTION
OF NOTCHED WEDGE LONGITUDINAL JOINTS

HMA LONGITUDINAL JOINTS


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2019 /S/ Steven Hefel
DATE HMA PAVEMENT ENGINEER


FHWA




CONSTRUCTED WITH FINAL TWO LAYERS
FOR H 5" OR LESS



CONSTRUCTED WITH FINAL LAYER
FOR H 5" OR LESS




CONSTRUCTED WITH FINAL TWO LAYERS
FOR H GREATER THAN 5"



CONSTRUCTED WITH FINAL LAYER
FOR H GREATER THAN 5"

HMA PAVEMENT AND HMA OVERLAYS



FINISHED SHOULDER AGGREGATE PLACEMENT

SAFETY EDGE_{SM}

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION






APPROVED

11/30/2012
DATE




FHWA

/s/ Jerry H. Zogg
ROADWAY STANDARDS DEVELOPMENT
ENGINEER


- ① WOOD OR STEEL POSTS (w6X9 OR w6X8.5) MAY BE USED. DO NOT INTERMIX WOOD AND STEEL POSTS. INSTALL STEEL POSTS WITH HOLES ON APPROACHING TRAFFIC SIDE.
- ② USE WOOD OR APPROVED PLASTIC BLOCKOUTS. WOOD BLOCKOUTS MAY BE CONSTRUCTED OUT OF TWO OR MORE WOOD BLOCKOUTS. SEE ALTERNATE WOOD BLOCKOUT DETAIL. DIMENSIONS OF APPROVED PLASTIC BLOCKOUTS MAY VARY.
- ③ IF ROCK IS ENCOUNTERED DURING EXCAVATION, PROVIDE A HOLE 12 INCHES IN DIAMETER EXTENDING 30 INCHES DEEP INTO THE ROCK. PLACE APPROXIMATELY 2 1/2" INCHES OF GRANULAR MATERIAL IN THE BOTTOM OF THE HOLE. CUT THE POSTS TO LENGTH AND INSTALL. BACKFILL WITH EXCAVATED MATERIAL AND COMPACT. BACKFILL IS TO BE FREE OF LARGE ROCKS.
- ④ WHEN THE DISTANCE FROM BACK OF POST TO SHOULDER HINGE POINT IS LESS THAN 2 FEET INSTALL LONGER POST AT HALF POST SPACING (K).
- ⑤ FOR NEW MGS INSTALLATION TOP OF W-BEAM RAIL TOLERANCE IS +1". FOR EXISTING MGS INSTALLATION TOP OF W-BEAM IS BETWEEN 27 3/4" TO 32".
- ⑥ WHEN USING STEEL POST AND WOOD BLOCKOUTS INSTALL FOUR 16D GALVANIZED NAILS. INSTALL NAILS AT THE BACK CORNERS OF THE BLOCK AND BEND THE NAILS OVER THE FLANGE OF THE STEEL POST.
- ⑦ TOTAL POST LENGTH FOR TYPE K IS 7' - 0".
TOTAL POST LENGTH FOR OTHER MGS TYPES IS 6' - 0".




**STEEL POST & HOLE
PUNCHING DETAIL
(W 6 X 9) ①**




WOOD POST (6" X 8") NOMINAL ⁽¹⁾







**FRONT VIEW
POST SPACING STANDARD INSTALLATION**




**FRONT VIEW
HALF POST SPACING (HS) AND
HALF POST SPACING WITH LONGER POSTS (K)**




**FRONT VIEW
QUARTER POST SPACING (QS)**




**FRONT VIEW
MID-SPAN BEAM SPLICE**




FRONT VIEW AT STEEL POST



FRONT VIEW AT WOOD POST




SECTION THRU W-BEAM RAIL



**ONE SIDED REFLECTOR DETAIL
AND TYPICAL INSTALLATION**


GENERAL NOTES

- ⑧ DO NOT INSTALL REFLECTORS ON THE FIRST 50 FEET OF THE APPROACH END OF THE ENERGY ABSORBING TERMINAL. RAIL SPLICE LOCATIONS ARE THE ONLY ACCEPTABLE LOCATIONS FOR REFLECTORS.
 - ⑨ 25 FEET OF HALF POST SPACING IS REQUIRED ON APPROACH AND DEPARTURE ENDS OF QUARTER POST SPACING.
- POST BOLTS ARE A 3/8" DIAMETER ASTM A307 GUARDRAIL BOLT. A POST BOLT REQUIRES 3/4" DIAMETER A563A DOUBLE RECESSED (DR) HEAVY HEX NUT AND 3/4" DIAMETER F844 FLAT WASHER. POST BOLTS MAY BE LONGER IF MULTIPLE BLOCKOUTS ARE BEING USED.
- GUARD RAIL SPLICE BOLTS ARE A 3/8" DIAMETER ASTM A307 GUARDRAIL HEAD BOLT. A GUARDRAIL SPLICE BOLT REQUIRES 3/4" DIAMETER A563A DOUBLE RECESSED (DR) HEAVY HEX NUT.



DETAIL FOR 16" BLOCKOUT DEPTH

IT IS ACCEPTABLE TO USE BLOCKOUTS UP TO 16" DEEP TO INCREASE THE POST OFFSET TO AVOID UNDERGROUND OBSTACLES. THERE IS NO LIMIT TO THE NUMBER OF POSTS THAT CAN HAVE ADDITIONAL BLOCKOUTS UP TO 16" DEEP.




DETAIL FOR 36" BLOCKOUT DEPTH

NOTES: UNDER SPECIAL CIRCUMSTANCES, SUCH AS AVOIDING OBSTACLES THAT ARE NOT RELOCATED, IT IS ACCEPTABLE TO INSTALL ADDITIONAL BLOCKOUTS TO OBTAIN UP TO 36" DEPTH FOR ONE OR TWO POSTS IN A SECTION OF GUARDRAIL.

DO NOT USE 16" OR 36" BLOCKOUTS IF IT CAUSES THE POST TO BE DRIVEN BEYOND SHOULDER HINGE POINT OR CAUSES A FIXED OBJECT TO BE WITHIN THE DEFLECTION DISTANCE OF THE BARRIER.


NOTE:

1. ALL FILLETS SHALL HAVE A MINIMUM RADIUS OF $\frac{3}{16}$ ".
2. IF THE BOLT EXTENDS MORE THAN $\frac{1}{4}$ " FROM THE NUT THE BOLT SHOULD BE TRIMMED BACK.




POST BOLT TABLE

L	T (MIN.)
1 ¼"	1 ½"
2"	1 ¾"
10"	4"
14"	4 ⅙"
18"	4"
21"	4 ⅙"
25"	4"




ALTERNATE BOLT HEAD




POST BOLT, SPLICE BOLT AND RECESS NUT


⑥ WHEN USING STEEL POST AD WOOD BLOCKOUTS, INSTALL FOUR 16D GALVANIZED NAILS. INSTALL NAILS AT THE BACK CORNERS OF THE BLOCK AND BEND THE NAILS OVER THE FLANGE OF THE STEEL POST.




**PLAN VIEW
BEAM LAPPING DETAIL**



POST DRIVING FOR CONTINUOUS UNDERGROUND OBSTRUCTION



SIDE VIEW




PLAN VIEW


ALTERNATE WOOD BLOCKOUT DETAIL

**MIDWEST GUARDRAIL SYSTEM
(MGS) GUARDRAIL**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




MISSING POST IN NORMAL BEAM GUARD RUN




MISSING POST NEAR APPROACH THRIE BEAM TRANSITION




MISSING POST IN NORMAL BEAM GUARD RUN
NEAR TYPE 2 TERMINAL



MISSING POST IN NORMAL BEAM GUARD RUN NEAR EAT



MISSING POST IN NORMAL BEAM GUARD RUN
NEAR FLARED BEAM GUARD



CROSS SECTION VIEW

- ① MINIMUM OF 2 FEET OF GRADING BEHIND POST.
- ② SEE SDD 14B45 FOR MORE DETAILS.
- ③ SEE SDD 14B47 FOR MORE DETAILS.
- ④ SEE SDD 14B44 FOR MORE DETAILS.
- ⑤ SEE MISSING POST IN NORMAL BEAM GUARD RUN FOR DISTANCE TO NEXT MISSING POST AND AREA FOR WELL DRAINED, COMPACTED SOILS.
- ⑥ SEE PLAN FOR SHOULDER DESIGN.

**MIDWEST GUARDRAIL SYSTEM
(MGS) GUARDRAIL**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
7/2018
DATE
/S/ Rodney Taylor
ROADWAY STANDARDS DEVELOPMENT
UNIT SUPERVISOR
FHWA


- (A) THE SLOPE IN THE AREA BOUNDED BY THE GRADELINE, THE HINGE POINT LINE (HPL) AND THE CLEAR ZONE LIMITS (CZL) SHALL BE 4:1 OR FLATTER.
- (B) AFTER FINAL ASSEMBLY, RECHECK CABLE TO BE SURE IT IS TAUT AND HAS NOT RELAXED
- (C) DIFFERENT MANUFACTURERS REQUIRE DIFFERENT PERFORATED W - BEAM RAIL END PANELS. SEE MANUFACTURER'S INFORMATION.
- (D) ATTACH ALUMINUM SHEET TO E.A.T. HEAD USING 4 STAINLESS STEEL SELF - TAPPING SCREWS, ONE SCREW PER CORNER.
- (E) HARDWARE MAY VARY BETWEEN MANUFACTURER. SEE MANUFACTURER'S DRAWING FOR INFORMATION.

DIMENSIONS MAY VARY, MANUFACTURER'S INFORMATION.

THE CENTER OF THE UPPER 3 1/2" DIAMETER HOLE ON POST NUMBER 3 THROUGH POST 9 IS TO BE FLUSH WITH THE GROUND LINE UP TO A MAXIMUM OF 2" ABOVE GROUND LINE. WOOD BLOCKS ON POSTS NUMBERED 3 THROUGH 9 MAY BE ADJUSTED UP TO 3" ABOVE THE TOP OF POST.




STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




GENERIC GROUND STRUT⁹ ^E

BILL OF MATERIALS	
PART NO.	DESCRIPTION MATERIALS PROVIDED BY MGS EAT MANUFACTURER. SEE MANUFACTURER'S DETAILS FOR MORE INFORMATION.
①	UPPER POST NO. 1 6" X 6" TUBE
②	LOWER POST NO. 1
③	WOOD CRT
④	WOOD BLOCKOUT
⑤	PIPE SLEEVE
⑥	BEARING PLATE
⑦	BCT CABLE ASSEMBLY
⑧	ANCHOR CABLE BOX
⑨	GROUND STRUT
⑩	PERFORATED W-BEAM RAIL END PANEL, 12'-6" LONG.
⑪	STANDARD W-BEAM RAIL. MULTIPLE SECTIONS REQUIRED. SECTIONS VARY IN LENGTH.
⑫	IMPACT HEAD
⑬	EAT MARKER POST - YELLOW (SEE APPROVED PRODUCTS LIST)
⑭	SOIL PLATE
⑮	UPPER POST NO. 2
⑯	LOWER POST NO. 2




GENERIC ANCHOR CABLE BOX⁹ ^E




BEARING PLATE⁶ ^E

MIDWEST GUARDRAIL SYSTEM
ENERGY ABSORBING TERMINAL
(MGS)


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




UPPER POST NO. 1 ⁽¹⁾ (E)




LOWER POST NO. 1 ⁽²⁾ (E)




WOOD CRT POST ⁽³⁾ (E)
POSTS NUMBER 3-9




UPPER POST NO. 2 ⁽¹⁵⁾ (E)




LOWER POST NO. 2 ⁽¹⁶⁾ (E)



WOOD BLOCKOUT ⁽⁴⁾
REQ'D. AT ALL POSTS EXCEPT POST NO'S 1 & 2




REFLECTIVE SHEETING DETAIL ^(E)




FRONT VIEW

SIDE VIEW

E.A.T. MARKER POST ⁽¹³⁾



SIDE VIEW




TOP VIEW

ALTERNATE WOOD
BLOCKOUT DETAIL

**MIDWEST GUARDRAIL SYSTEM
ENERGY ABSORBING TERMINAL
(MGS)**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
7/2018 DATE /S/ Rodney Taylor
ROADWAY STANDARDS DEVELOPMENT
UNIT SUPERVISOR
FHWA



GENERAL NOTES

THE EXACT NUMBER, LOCATION, AND SPACING OF ALL SIGNS AND DEVICES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS.

THE SPACING BETWEEN TRAFFIC CONTROL SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND SHOULD PROVIDE A MINIMUM OF 200 FEET (500 FEET DESIRABLE) CLEARANCE TO EXISTING SIGNS THAT WILL REMAIN IN PLACE.

ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE NOTED.


SIGNS THAT WILL BE IN PLACE LESS THAN SEVEN CONTINUOUS DAYS AND NIGHTS MAY BE MOUNTED ON PORTABLE SUPPORTS.

IF A "STOP" SIGN MUST BE REMOVED FOR A WORK OPERATION, A TEMPORARY "STOP" SIGN SHALL BE PLACED PRIOR TO THE SIGN REMOVAL, OR A FLAGGER SHALL BE PROVIDED UNTIL THE SIGN IS REESTABLISHED.


- * OMIT G20-1 SIGNS IF LENGTH OF WORK AREA IS 2 MILES OR LESS
- ** PLACE AN ADDITIONAL W20-1A "ROAD WORK AHEAD" SIGN IF WORK AREA WITHIN THE PROJECT IS SEPARATED BY MORE THAN 2 MILES FROM PREVIOUS WORK AREA.

LEGEND

-  SIGN ON PERMANENT SUPPORT
-  DIRECTION OF TRAFFIC
-  WORK AREA



TYPICAL SIDE ROAD APPROACH
WARNING SIGN DETAIL




TRAFFIC CONTROL, ADVANCE WARNING SIGNS 45MPH OR GREATER


TRAFFIC CONTROL, ADVANCE WARNING
SIGNS 45 MPH OR GREATER TWO-WAY
UNDIVIDED ROAD OPEN TO TRAFFICE

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
July 2018 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER
FHWA




TWO WAY TRAFFIC




ONE WAY TRAFFIC

PERMANENT PAVEMENT MARKING



TWO WAY TRAFFIC



ONE WAY TRAFFIC

TEMPORARY PAVEMENT MARKING

GENERAL NOTES

DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO STANDARD SPECIFICATIONS AND SPECIAL PROVISIONS.

① LOCATE THE NO PASSING ZONE W14-3 SIGN WITHIN 50 FEET OF THE "T" MARKING.

NOTE

ARROW SYMBOL (➡) SHOWS DIRECTION OF TRAVEL


LEGEND

- "T" MARKING
- POST MOUNTED SIGN


LONGITUDINAL MARKING (MAINLINE)

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
7/2018 /S/ Matthew R. Rauch
DATE STATE SIGNING AND MARKING ENGINEER
FHWA




DRUM




42" CONE

DO NOT USE IN TAPERS
½ SPACING OF DRUMS




VERTICAL PANEL

THE STRIPES SHALL SLOPE DOWNWARD TO
THE TRAFFIC SIDE FOR CHANNELIZATION.



TYPE II BARRICADE

FOR RAILS LESS THAN 36" LONG, 4" WIDE STRIPES
MAY BE USED. ALL STRIPES SHALL SLOPE DOWNWARD
TO THE TRAFFIC SIDE FOR CHANNELIZATION.



TYPE III BARRICADE

IF SIGN MOUNTED, DO NOT COVER MORE THAN 50% OF THE TOP
TWO RAILS OR 33% OF THE TOTAL AREA OF THE THREE RAILS.

* IF USED FOR A PERMANENT APPLICATION USE RED SHEETING.

GENERAL NOTES

- ① REFLECTIVE SHEETING SHALL FOLLOW THE REQUIREMENTS IN THE APPROVED PRODUCTS LISTING FOR SIGN SHEETING.
- ② LOCATION OF WARNING LIGHTS WHEN SHOWN ON THE PLAN.

CHANNELIZING DEVICES
DRUMS, CONES, BARRICADES
AND VERTICAL PANELS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
June 2017 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER

FHWA

LEGEND

-  SIGN ON PORTABLE OR PERMANENT SUPPORT
-  TEMPORARY PORTABLE RUMBLE STRIP ARRAY
-  DIRECTION OF TRAFFIC
-  WORK AREA
-  FLAGGER, EQUIPPED WITH STOP/SLOW PADDLE FASTENED ON SUPPORT STAFF

GENERAL NOTES

DETAILS OF TRAFFIC CONTROL DEVICES AND INSTALLATION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS, THE SPECIAL PROVISIONS, AND THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.

ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE NOTED.

"WO" SIGNS ARE THE SAME AS "W" SIGNS EXCEPT THE BACKGROUND IS ORANGE.

THE EXACT NUMBER, LOCATION AND SPACING OF ALL SIGNS, DEVICES, AND LOCATION OF ALL FLAGGERS SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

THE FIRST ADVANCE WARNING SIGN SHOULD TYPICALLY BE LOCATED IN ADVANCE OF THE ANTICIPATED TRAFFIC BACKUP OR QUEUE.

WHEN A SIDE ROAD OR RAMP INTERSECTS THE FACILITY ON WHICH THE WORK IS BEING PERFORMED, ADDITIONAL TRAFFIC CONTROLS SHALL BE PROVIDED AS SPECIFIED IN THE PLANS AND/OR THE SPECIAL PROVISIONS OR AS APPROVED BY THE ENGINEER.

FLAGGING

FLAGGERS SHALL BE IN SIGHT OF EACH OTHER OR IN DIRECT COMMUNICATION AT ALL TIMES. THEY SHALL BE EQUIPPED WITH STOP/SLOW PADDLES FASTENED ON SUPPORT STAFFS. WHEN THE FLAGGING OPERATION IS NOT IN EFFECT REMOVE TEMPORARY PORTABLE RUMBLE STRIPS PRIOR TO COVERING OR REMOVING ALL ADVANCE SIGNING.

① FOR MOVING WORK OPERATIONS, POST ADDITIONAL W20-7A FLAGGER SIGNS AT APPROXIMATELY 3,500' INTERVALS IN THE MOVING WORK OPERATION OR AS APPROVED BY THE ENGINEER.

② SIGN NOT REQUIRED IF FLAGGING OPERATION OCCURS WITHIN A SIGNED ROAD WORK ZONE AREA.

WHEN THE DISTANCE BETWEEN FLAGGERS EXCEEDS 2 MILES, A PILOT CAR IS REQUIRED. WHEN CURVES REDUCE SIGHT DISTANCE BELOW 400', A PILOT CAR IS REQUIRED.

TEMPORARY PORTABLE RUMBLE STRIPS

UTILIZE TEMPORARY PORTABLE RUMBLE STRIPS ON ALL FLAGGING OPERATIONS.


③ EACH TEMPORARY PORTABLE RUMBLE STRIP ARRAY CONSISTS OF THREE RUMBLE STRIPS SPACED ACCORDING TO MANUFACTURER'S RECOMMENDATION, PLACED TRANSVERSE ACROSS THE LANE AT LOCATIONS SHOWN.

ONLY USE TEMPORARY PORTABLE RUMBLE STRIPS FOR THE APPROVED PRODUCTS LIST.

INSTALL TEMPORARY RUMBLE STRIPS PER MANUFACTURER'S RECOMMENDATIONS.

PLACE ADVANCE SIGNING PRIOR TO INSTALLING TEMPORARY RUMBLE STRIPS.

DO NOT INSTALL TEMPORARY PORTABLE RUMBLE STRIPS ON GRAVEL, MILLED SURFACES, OR ASPHALT THAT HAS BEEN PAVED LESS THAN 12 HOURS.




SIGN AND TEMPORARY RUMBLE STRIP ARRAY SPACING TABLE

SPEED LIMIT	SPACING "A"
25-30 MPH	200'
35-40 MPH	350'
45-55 MPH	500'



USE OF W03-4 SIGN IS OPTIONAL. WHEN USED, THIS SIGN SHALL BE LOCATED BETWEEN THE W20-7A AND W20-4A SIGNS, USING SPACING "A".



TRAFFIC CONTROL FOR LANE CLOSURE WITH FLAGGING OPERATION

**TRAFFIC CONTROL FOR
LANE CLOSURE WITH
FLAGGING OPERATION**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2019 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER

FHWA

ALL VEHICLES SHALL BE EQUIPPED WITH TWO 360 DEGREE HIGH INTENSITY YELLOW FLASHING LIGHTS OR STROBE LIGHTS AND OPERATED WITH HEADLIGHTS TURNED ON.

VEHICLES SHALL BE EQUIPPED WITH REAR FACING TYPE B OR C FLASHING ARROW PANEL OPERATING IN CAUTION MODE. SIGNS PLACED ON VEHICLES MUST NOT OBSCURE THE ARROW PANEL.

ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE SPECIFIED.

IF SPEED LIMIT IS 40 MPH OR LESS STATIONARY SIGNS MAY BE OMITTED IF CONES ARE USED.

ALTERNATE SIGN MESSAGES, SUCH AS "PAINT CREW AHEAD" OR "ROAD PAINTING AHEAD" MAY BE USED.

DISTANCE BETWEEN VEHICLES MAY VARY ACCORDING TO TERRAIN, SIGHT DISTANCE, PAINT DRYING TIME, AND OTHER FACTORS. WHENEVER ADEQUATE STOPPING SIGHT DISTANCE EXISTS TO THE REAR, SHADOW VEHICLES SHOULD MAINTAIN THE MINIMUM DISTANCE FROM THE WORK VEHICLE AND PROCEED AT THE SAME SPEED AS THE WORK VEHICLE. SHADOW VEHICLES SHOULD SLOW DOWN IN ADVANCE OF VERTICAL OR HORIZONTAL CURVES THAT RESTRICT SIGHT DISTANCE.

THE WORK AND SHADOW VEHICLES SHOULD PULL OVER PERIODICALLY TO ALLOW TRAFFIC TO PASS.

THIS DRAWING SHALL BE USED FOR CENTERLINE OR EDGELINE MARKING.

WHEN NO WORK ACTIVITY IS TAKING PLACE, REMOVE OR TURN THE STATIONARY WARNING SIGNS AWAY FROM TRAFFIC.

- ① CONES MAY BE OMITTED ON PAINTED LINE IF APPROVED BY THE ENGINEER. CONSIDER PAVEMENT MARKING DRY OR CURE TIMES AND TRAFFIC VOLUME.
- ② USE STANDARD SIGN W21-64 WITH APPROPRIATE ARROW.


W21-64

OR


W21-64
- ③ OPTIONAL TRUCK-MOUNTED ATTENUATOR.
- ④ SIGNS SHALL BE REPEATED APPROXIMATELY EVERY THREE MILES.
- ⑤ IF CONSTRUCTION WORK ZONE SIGNS ARE IN PLACE, W20-1 OR W21-63 ARE NOT REQUIRED.

V1 LEAD VEHICLE

V2 SHADOW VEHICLE

V3 TRAIL VEHICLE WITH TMA

 **TMA** TRUCK-MOUNTED ATTENUATOR

 SIGN ON TEMPORARY SUPPORT

 DIRECTION OF TRAFFIC


○ CONES


 FLASHING ARROW PANEL (CAUTION)

MOVING PAVEMENT MARKING OPERATION TWO-LANE TWO-WAY ROADWAY


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED	
Sept.. 2017	/S/ Andrew Heidtke
DATE	WORK ZONE ENGINEER
FHWA	







**TYPICAL STOP LINE PAVEMENT MARKING
WITH CURB AND GUTTER**



**TYPICAL STOP LINE PAVEMENT MARKING
FOR SIDEROADS WITH RIGHT TURN LANE**



**TYPICAL STOP LINE PAVEMENT MARKING
FOR SIDEROADS WITH CROSSWALK MARKING**



**TYPICAL STOP LINE PAVEMENT MARKING
WITHOUT CURB AND GUTTER**

GENERAL NOTES

STOP SIGN SHALL BE PLACED A MINIMUM OF 6 FEET TO A MAXIMUM OF 50 FEET FROM THE EDGE LINE LOCATION.

- ① 18-INCH STOP LINES MAY BE DELETED OR ADDED BY THE PROJECT ENGINEER BASED ON VISIBILITY AND SIGHT LINES.
- ② IF STOP SIGN IS LESS THAN OR EQUAL TO 40 FEET FROM THE EDGE LINE THAN NO STOP LINE IS REQUIRED.
- ③ IF STOP SIGN IS LESS THAN OR EQUAL TO 30 FEET FROM THE FLANGELINE EXTENSION THAN NO STOP LINE IS REQUIRED.
- ④ MOVE CLOSER TO EDGE OF TRAVEL LANE AS NEEDED FOR VISIBILITY AND SIGHT LINES. (NO CLOSER THAN 4 FEET).

**STOP LINE AND CROSSWALK
PAVEMENT MARKING**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED


Sept., 2017
DATE

FHWA

/S/ Matthew R. Rauch
STATE SIGNING AND MARKING ENGINEER



MINOR INTERSECTION




MAJOR INTERSECTIONS
(INTERSECTION WITH FULL RIGHT TURN LANE OR BYPASS LANE)

GENERAL NOTES

OMIT EDGE LINES THROUGH INTERSECTIONS. CONTINUE EDGE LINES THROUGH DRIVEWAYS.

- ① WHEN DISTANCE "A" IS LESS THAN 250 FEET, OMIT LANE LINE.
- ② WHEN DISTANCE "B" IS LESS THAN 100 FEET, OMIT CHANNELIZING LANE LINE.
- ③ BARRIER LINE ENDS AT SIDE ROAD PAVEMENT / SURFACE EDGE EXTENSION.
- ④ BARRIER LINE STARTS 500 FEET PRIOR TO THE BYPASS TAPER

ARROW SYMBOL (➡) SHOWS DIRECTION OF TRAVEL



INTERSECTION ON OUTSIDE OF CURVE

PAVEMENT MARKING
(INTERSECTIONS)

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

LEGEND

-  SIGN ON PERMANENT SUPPORT
-  TRAFFIC CONTROL DRUM
-  DIRECTION OF TRAFFIC
-  WORK ZONE

TABLE A

SHOULDER TAPER LENGTH (FEET)					BUFFER SPACE (FEET)
S \ W	4	6	8	10	
30	20	30	40	50	200
35	30	45	55	70	250
40	40	55	75	90	305
45	60	90	120	150	360
50	70	100	135	170	425
55	75	110	150	185	495

W = SHOULDER WIDTH (FEET
S = NON-CONSTRUCTION SPEED LIMIT (MPH)

TAPER LENGTH

L = WS AT 45 MPH OR GREATER
L = WS² / 60 AT 40 MPH OR LESS

SHOULDER TAPER LENGTH = 1/3L

GENERAL NOTES

ALL SIGNS ARE 48"X48" UNLESS OTHERWISE NOTED. IF NECESSARY DUE TO SPACE CONSTRAINTS IN URBAN AREAS, 36" X 36" SIGNS MAY BE USED IF APPROVED BY THE REGIONAL TRAFFIC UNIT.

"WO" IS THE SAME AS "W" EXCEPT THE BACKGROUND IS ORANGE.

ANY SIGNS TEMPORARY OR EXISTING, WHICH CONFLICT WITH THE TRAFFIC CONTROL "IN USE" SHALL BE REMOVED OR COVERED AS NEEDED AND AS APPROVED BY THE ENGINEER.

THE EXACT NUMBER, LOCATION, AND SPACING OF ALL SIGNS AND DEVICES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.


CHANNELIZING DEVICES PLACED ADJACENT TO WORK AREA SHALL BE PULLED BACK FROM THE TRAVEL LANE WHEN WORK IS NOT IN PROGRESS.

SIGNS THAT WILL BE IN PLACE LESS THAN 7 CONTINUOUS DAYS AND NIGHTS MAY BE MOUNTED ON PORTABLE SUPPORTS.

W20-1A AND G20-2A SIGNS ARE NOT REQUIRED IF THE WORK AREA IS WITHIN A LARGER WORK ZONE WHERE THESE SIGNS ARE ALREADY RESENT. G20-2A SIGNS MAY ALSO BE OMITTED IF DURATION OF WORK IS LESS THAN 7 CONTINUOUS DAYS AND NIGHTS.

6

SDD 15D28 - 03




6

SDD 15D28 - 03

TRAFFIC CONTROL, WORK ON
SHOULDER OR PARKING LANE,
UNDIVIDED ROADWAY

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
August 2019
DATE /S/ Andrew Heidtke
STATEWIDE WORK ZONE TRAFFIC
SAFETY ENGINEER
FHWA





DETAIL OF TUBULAR
STEEL SIGN POST

TUBULAR STEEL POSTS

AREA OF SIGN INSTALLATION (SQ. FT.)	NUMBER OF REQUIRED TUBULAR STEEL POSTS
9 OR LESS	1
GREATER THAN 9 LESS THAN OR EQUAL TO 18	2
GREATER THAN 18 LESS THAN OR EQUAL TO 27	3


SIGNS WIDER THAN 3 FEET OR LARGER THAN 9 SQ. FT. SHALL
BE MOUNTED ON MULTIPLE POSTS (SEE ABOVE TABLE).
SIGNS LARGER THAN 27 SQ. FT. SHALL NOT BE MOUNTED
ON TUBULAR STEEL POSTS.




URBAN AREA

POST MOUNTING DETAIL FOR TEMPORARY TRAFFIC CONTROL FIXED MESSAGE SIGNS

WOOD POST EMBEDMENT DEPTH	
AREA OF SIGN INSTALLATION (SQ. FT.)	D (MIN)
20 OR LESS	4'
GREATER THAN 20	5'



4 "x6 " WOOD POST
MODIFICATION



RURAL AREA

POST SPACING REQUIREMENTS		NUMBER OF WOOD POSTS REQUIRED
L	E	
48" OR LESS AND LESS THAN 20 SQ. FT.	-	1
LESS THAN 60"	12"	2
60" TO 120"	L/5	2
GREATER THAN 120" LESS THAN 168"	12"	3
168" AND GREATER	12"	4


SEE NOTE ③

GENERAL NOTES

- ① 6 FEET FROM THE EDGE OF PAVEMENT (EDGE LINE LOCATION) UNLESS OTHERWISE DIRECTED BY THE PROJECT ENGINEER. LATERAL OFFSET SHOULD BE ADJUSTED TO AVOID THE DITCH FLOWLINE.
- ② THE EXISTENCE OF CURB AND GUTTER DOES NOT IN ITSELF MANDATE THE VERTICAL CLEARANCE ILLUSTRATED. THAT HEIGHT IS TYPICALLY MEASURED WHERE THERE IS SIDEWALK ADJACENT TO THE ROADWAY OR PARKING IS PERMITTED. IN THE ABSENCE OF SIDEWALK, VERTICAL CLEARANCE IS MEASURED FROM THE TOP OF THE CURB. IF NO SIDEWALK AND NO PARKING, VERTICAL CLEARANCE MAY BE REDUCED TO 5 FOOT MINIMUM. OFFSET OF SIGNS IS MEASURED FROM THE CURB FLOWLINE.
- ③ FOR SIGNS REQUIRING 4 POSTS, SPACE INTERMEDIATE POSTS EVENLY.

TEMPORARY TRAFFIC CONTROL
SIGN MOUNTING

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION



NUTS, BOLTS AND LAGS USED FOR MOUNTING SIGNS SHALL HAVE HEXAGONAL HEADS AND SHALL BE EITHER:

- A. HOT DIP GALVANIZED IN ACCORDANCE WITH ASTM DESIGNATION: A 153, CLASS D, OR SC 3
- B. ELECTRO-GALVANIZED IN ACCORDANCE WITH ASTM DESIGNATION: B 633, TYPE III, SC 3

THREADS ON BOLTS AND NUTS SHALL BE MANUFACTURED WITH SUFFICIENT ALLOWANCE FOR THE CADMIUM PLATE OR GALVANIZED COATING TO PERMIT THE NUTS TO RUN FREELY ON THE BOLTS.


- WOOD POSTS (4" x 4" or 4" x 6")
- LAG SCREWS - 3/8" X 3"
 - MACHINE BOLTS - 5/16" X 6-1/2" OR 7" LENGTH W/ NUTS

- SQUARE STEEL POSTS (2" x 2")
- MACHINE BOLTS - 3/8" X 3-1/4" LENGTH W/ NUTS
 - RIVETS - 9/32" (6605-9-6) BULB-TITE, TRI-FOLD, ALUMINUM BODY/MANDREL O.D. FLANGE .720-.765 INCH, GRIP RANGE .042-.375 INCH

- WASHERS (ALL POSTS) -
- 1-1/4" O.D. X 3/8" I.D. X 1/16" STEEL
 - 1-1/4" O.D. X 3/8" I.D. X .080 NYLON FOR ALL TYPE H SIGNS

* TWO DIFFERENT FASTENING SYSTEMS ARE SHOWN FOR ILLUSTRATION PURPOSES. ON ANY INDIVIDUAL SIGN, EITHER ONE OR THE OTHER SYSTEM SHALL BE USED. ACTUAL NUMBER OF FASTENERS PER SIGN VARIES WITH THE SIGN AREA. FOR A SINGLE POST INSTALLATION, ALL SIGNS GREATER THAN 9 SQ. FT. REQUIRE THE USE OF 3 FASTENERS.

ATTACHMENT OF SIGNS TO POSTS	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED June 2017 DATE	/S/ Andrew Heldtke WORK ZONE ENGINEER
FHWA	




ADJACENT LANE DROP-OFFS

GENERAL NOTES

- FOR SPOT LOCATIONS USE ENGINEERING JUDGEMENT WHEN PLACING ADDITIONAL SIGNS.
- ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE NOTED.
- "WO" SIGNS ARE THE SAME AS "W" SIGNS EXCEPT THE BACKGROUND IS ORANGE.
- WARNING LIGHTS ARE NOT REQUIRED IF THE LANE CLOSURE IS A DAYTIME ONLY OPERATION.
- * IF THE DROP-OFF IS CONTINUOUS ALONG THE PROJECT, PLACE ADDITIONAL SIGNS EVERY 1 MILE AND AFTER EVERY ENTRANCE RAMP.
- ① USE CLOSER SPACING WHEN DELINEATING DROP-OFF.

LEGEND

- SIGN ON TEMPORARY SUPPORT
- TRAFFIC CONTROL DRUM
- TYPE III BARRICADE WITH ATTACHED SIGN
- TYPE "A" WARNING LIGHT (FLASHING)
- DIRECTION OF TRAFFIC
- WORK AREA WITH DROP-OFF
- MILLED SURFACE



SHOULDER DROP-OFFS

SECTION B - B

D	SIGN (C)
< 2" WITH A SLOPE STEEPER THAN 3:1	LOW SHOULDER WO8-9
2" < 6" WITH A SLOPE STEEPER THAN 3:1	SHOULDER DROP - OFF W8-9A PROVIDE A 3:1 OR FLATTER SLOPE OF MATERIAL ADJACENT TO THE PAVEMENT



TRAFFIC CONTROL,
DROP-OFF SIGNING

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
March 2018
DATE



/S/ Andrew Heidtke
WORK ZONE ENGINEER

FHWA



ALUMINUM MONUMENTS

(INCLUDES MARKER)




ALUMINUM MONUMENT COVER

(APPROXIMATE WEIGHT 2 LBS)
(FOR CONCRETE PAVEMENT ONLY)


LANDMARK REFERENCE MONUMENTS AND COVERS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
March 2018 /S/ Raymond A. Kumapayi
DATE CHIEF SURVEYING AND MAPPING ENGINEER
FHWA





② WIS DOT MONUMENT MARKER LOGO
FOR TYPES "A", "C", & "D"



CAST IRON MONUMENT COVER


(APPROXIMATE WEIGHT 95 LBS)

URBAN AREA




White Edgeline
Location

RURAL AREA (See Note 2)



White Edgeline
Location



Outside Edge
of Gravel

POST EMBEDMENT DEPTH

Area of Sign Installation (Sq. Ft.)	D (Min)
20 or Less	4'
Greater than 20	5'

GENERAL NOTES

1. Signs wider than 4 feet or 20 sq.ft or larger, shall be mounted on multiple posts. Refer to plate A4-4.
2. If signs are mounted on barrier wall, see A4-10 sign plate.
3. For expressways and freeways, mounting height is 7'-3" (±) or 6'-3" (±) depending upon existence of a sub-sign.
4. J-Assemblies are considered to be one sign for mounting height.
5. Minimum mounting height for signs mounted on traffic signal poles is 5'-3" (±).
6. Offset distance shall be consistent with existing signs or consistent throughout length of project.
7. The (±) tolerance for mounting height is 3 inches.
8. Folding signs shall be mounted at a height of 5'-3" (±) or as directed by the Engineer.
9. The Double Arrow sign (W12-1) shall be mounted at a height of 2'-3" (±). The Chevron sign (W1-8), Roundabout Chevron panel (R6-4B), Enhanced Reference Markers, Clearance Markers (W5-52), Mile Markers (D10 series), In Road Object Markers (W5-54) & End of Road Markers (W5-56) shall be mounted at a height of 4'-3" (±).

✖✖ The existence of curb and gutter does not in itself mandate the vertical clearance illustrated. That height is typically measured where there is sidewalk adjacent to the roadway or parking is permitted. In the absence of sidewalk vertical clearance is measured from the top of the curb. Offset of signs is measured from the flow line.

* 6 feet from edge of a paved shoulder or 12 feet from the edge of pavement (edge line location) or 2 feet from outside edge of gravel, whichever is greater unless directed by project engineer.

TYPICAL INSTALLATION
OF PERMANENT TYPE II
SIGNS ON SINGLE POSTS

WISCONSIN DEPT OF TRANSPORTATION

APPROVED

Matthew R. Rauch
for State Traffic Engineer

DATE 8/21/17

PLATE NO. A4-3.21


PROJECT NO:

HWY:

COUNTY:

SHEET NO:


E



ELEVATION VIEW


DETAIL OF WOOD 4 X 6 SIGN POST IN BOX-OUT

- NOTES: 1. ALL MATERIAL TO BE APPROVED BY ENGINEER PRIOR TO INSTALLATION
2. SEE SIGN PLATE A4-8 FOR SIGN HARDWARE REQUIREMENTS
3. 18 INCH X 18 INCH SQUARE BOX-OUTS MAY BE USED FOR INSTALLATIONS IN EXISTING CONCRETE OR ASPHALT LOCATIONS.



ELEVATION VIEW

DETAIL OF STEEL 2 X 2 SIGN POST IN BOX-OUT



PLAN VIEW

FOR NEW CONCRETE/ASPHALT INSTALLATIONS

SIGN POST
BOX-OUTS
A4-3B

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 1/27/14 PLATE NO. A4-3B.1






PROJECT NO:

HWY:

COUNTY:

SHEET NO:

E



SIGN SHAPE OTHER THAN DIAMOND (TWO POSTS REQUIRED)	
L	E
Greater than 48" Less than 60"	12"
60" to 108"	L/5


SIGN SHAPE OTHER THAN DIAMOND (THREE POSTS REQUIRED)	
L	E
Greater than 108" to 144"	12"

POST EMBEDMENT DEPTH	
Area of Sign Installation (Sq. Ft.)	D (Min)
20 or Less	4'
Greater than 20	5'

TYPICAL INSTALLATION OF TYPE II SIGNS ON MULTIPLE POSTS	
WISCONSIN DEPT OF TRANSPORTATION	
APPROVED	<i>Matthew R. Rauch</i> for State Traffic Engineer
DATE 8/21/17	PLATE NO. A4-4.15

- GENERAL NOTES
1. For 3 or 4 post installations, individual post spacing shall be greater than 3'-6".
 2. See tables below for required number of posts.
 3. For expressways and freeways, mounting height is 7'-3" (±) or 6'-3" (±) depending upon existence of sub-sign.
 4. The (±) tolerance for mounting height is 3 inches.
 5. J-Assemblies are considered to be one sign for mounting height.
 6. Offset distance shall be consistent with existing signs or consistent throughout length of project.
 7. Folding signs shall be mounted at a height of 5'-3" (±) or as directed by the engineer.
 8. The Double Arrow sign (W12-1) shall be mounted at a height of 2'-3" (±). The Chevron sign (W1-8), Roundabout Chevron panel (R6-4B), Clearance Markers (W5-52), Mile Markers (D10 series), In Road Object Markers (W5-54) & End of Road Markers (W5-56) shall be mounted at a height of 4'-3" (±).

- * 6 feet from edge of a paved shoulder or 12 feet from the edge of pavement (edge line location) or 2 feet from outside edge of gravel, whichever is greater unless directed by project engineer.
- ** The existence of curb and gutter does not in itself mandate the vertical clearance illustrated. That height is typically measured where there is sidewalk adjacent to the roadway or parking is permitted. In the absence of sidewalk vertical clearance is measured from the top of the curb. Offset of signs is measured from the flow line.
- *** See A4-3 sign plate for signs 4' or less in width and less than 20 S.F. in area.



Nuts, bolts and lags used for mounting signs shall have hexagonal heads and shall be either :

- a. Hot dip galvanized in accordance with ASTM Designation: A 153, Class D, or SC 3
- b. Electro-galvanized in accordance with ASTM Designation : B 633, TYPE III, SC 3.


Threads on bolts and nuts shall be manufactured with sufficient allowance for the cadmium plate or galvanized coating to permit the nuts to run freely on the bolts.

- STRINGER BOLTING TO ALUMINUM SIGNS (SEE SIGN PLATE A4-18)
- MACHINE BOLTS - 5/16" X 1-3/4" Length w/ lock nuts
- WOOD POSTS (4" x 4" or 4" x 6")
- LAG SCREWS - 3/8" X 3" (NO STRINGERS ON BACK OF SIGN)
 - 3/8" X 4" (STRINGERS ON BACK OF SIGN)
- SQUARE STEEL POSTS (2" x 2")
- MACHINE BOLTS - 3/8" X 3-1/4" Length w/ nuts (NO STRINGER ON BACK OF SIGN)
 - 3/8" X 5" Length w/ nuts (STRINGERS ON BACK OF SIGN)
- RIVETS - 9/32 " (6605-9-6) BULB-TITE, TRI-FOLD, ALUMINUM BODY/MANDREL
- O.D. FLANGE .720-.765 INCH, GRIP RANGE .042-.375 INCH
- WASHERS (ALL POSTS) -
- 1-1/4" O.D. X 3/8" I.D. X 1/16" STEEL
 - 1-1/4" O.D. X 3/8" I.D. X .080 NYLON

* Two different fastening systems are shown for illustration purposes. On any individual sign, either one or the other system shall be used. Actual number of fasteners per sign varies with the sign area, but normally there are two. For a single post installation, all signs greater than 9 sq. ft. require the use of 3 fasteners.

ATTACHMENT OF SIGNS TO POSTS	
WISCONSIN DEPT OF TRANSPORTATION	
APPROVED	<i>Matthew R. Rauch</i> For State Traffic Engineer
DATE 8/11/16	PLATE NO. A4-8.8

**2 1/4 " SQUARE
12 GAUGE
PERFORATED
GALVANIZED FINISH**



LENGTH SHOWN ON MISC. QTY'S

18" DIA SCHEDULE 40 PVC BOX-OUT

TELESCOPE PIECES FLUSH AT TOP

2" STEEL TUBULAR SQUARE UPPER SECTION

ALL HOLES $\frac{7}{16}$ " SPACED 1" C-C ALL FOUR SIDES

$\frac{3}{8}$ " ZINC PLATED CORNER ANCHOR BOLT AND NUT

2 1/2" GRAVEL OR DIRT

$\frac{3}{8}$ " ZINC PLATED ANCHOR BOLT AND NUT

2 1/2" SQUARE X 18" (SOIL STABILIZING SLEEVE)

2 1/4" SQUARE X 36"

SIGN

SEE SIGN PLATE A4-8 FOR BOLT WASHER, & NUT MATERIAL

36"

18"

13"

LENGTH SHOWN ON MISC. QTY'S

TELESCOPE PIECES FLUSH AT TOP

2" STEEL TUBULAR SQUARE UPPER SECTION

ALL HOLES $\frac{7}{16}$ " SPACED 1" C-C ALL FOUR SIDES

$\frac{3}{8}$ " ZINC PLATED CORNER ANCHOR BOLT AND NUT

1"

$\frac{3}{8}$ " ZINC PLATED ANCHOR BOLT AND NUT

2 1/2" SQUARE X 18" (SOIL STABILIZING SLEEVE)

2 1/4" SQUARE X 36"

SEE SIGN PLATE A4-8 FOR BOLT WASHER, & NUT MATERIAL

SIGN

DIRECTION
OF TRAFFIC

SECTION A-A

Area of Sign Installation (Sq. Ft.)	Number of Required Posts
9 or less	1
Greater than 9 less than or equal to 18	2
Greater than 18 less than or equal to 27	3

TUBULAR STEEL
SIGN POST
A4-9

WISCONSIN DEPT OF TRANSPORTATION

APPROVED Matthew R Rauch

for State Traffic Engineer

DATE 2/05/15 PLATE NO. A4-9.9

PROJECT NO:


HWY:

COUNTY:

SHEET NO:

11

7



GENERAL NOTES

1. All 4 x 6 Wood Posts shall be modified by having two 1½" diameter holes drilled perpendicular to the roadway centerline.

7

4 X 6 WOOD POST MODIFICATIONS

WISCONSIN DEPT OF TRANSPORTATION

APPROVED

Chester J. Spang
for State Traffic Engineer

DATE 3/27/97

PLATE NO. A4-11.2

PROJECT NO:

HWY:




COUNTY:

SHEET NO:


E

BANDING

SINGLE SIGN



WASHER PLACEMENT




WASHERS (ALL POSTS) -
1-1/4" O.D. X 3/8" I.D. X 1/16" STEEL
1-1/4" O.D. X 3/8" I.D. X .080 NYLON
FOR ALL TYPE H SIGNS


GENERAL NOTES

1. Any sign over 3 feet in width shall use the V-Block banding method. See A5-10 standard plate.
2. Signs 3 feet or greater in height shall have three bracket bands installed. Signs less than 3 feet in height shall have two bracket bands installed.
3. Banding and assembly bracket shall be stainless steel. All bands shall be 3/4" in width and 0.025" thickness.
4. ALL SIGN MOUNTING BOLTS AND WASHERS SHALL BE EITHER:
 - a. Hot dip or mechanically galvanized in accordance with ASTM Designation: A 153, Class D
 - b. Electro-galvanized in accordance with ASTM designation: B 633, Type III, SC 3

"J" ASSEMBLY



CHANNEL
SEE TYPICAL PANEL
INSTALLATION SHEET





STANDARD SIGN
SIGN BANDING DETAILS

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer
DATE 6/10/19 PLATE NO. A5-9.4

VIEW FROM
BACK



GENERAL NOTES

1. WOOD 4"X6" POST MATERIAL SHALL CONFORM TO 507.2.2 OF THE WisDOT STANDARD SPECIFICATIONS
2. BLOCK BANDING AND CLIPS SHALL BE STAINLESS STEEL, $\frac{3}{4}$ " WIDTH AND 0.025" THICKNESS
3. SIGNS 3' OR GREATER IN HEIGHT SHALL UTILIZE 3 BLOCK BANDS. SIGNS UNDER 3' IN HEIGHT SHALL UTILIZE 2 BLOCK BANDS
4. ACTUAL NUMBER OF FASTENERS PER SIGN VARIES WITH THE SIGN AREA, BUT NORMALLY THERE ARE TWO. FOR SIGNS GREATER THAN 9 S.F. 3 FASTENERS SHALL BE USED.
5. ALL SIGN MOUNTING BOLTS AND WASHERS SHALL BE EITHER:
 - a. Hot dip or mechanically galvanized in accordance with ASTM Designation: A 153, Class D
 - b. Electro-galvanized in accordance with ASTM Designation : B 633, TYPE III, SC 3
6. ALL BOLTS SHALL HAVE HEXAGONAL HEADS.
7. STEEL WASHERS SHALL BE $1\frac{1}{4}$ " O.D. X $\frac{3}{8}$ " I.D. X $\frac{1}{16}$ "
8. NYLON WASHERS SHALL BE $1\frac{1}{4}$ " O.D. X $\frac{3}{8}$ " I.D. X .080 FOR TYPE H OR TYPE F FACE SIGN

✱ LAG BOLTS SHALL BE $\frac{3}{8}$ " X $2\frac{1}{2}$ "

BLOCK BANDING DETAIL
(V-BLOCK OPTION)

WISCONSIN DEPT OF TRANSPORTATION

APPROVED Matthew R. Rauch
for State Traffic Engineer


DATE 6/10/19 PLATE NO. A5-10.2

PROJECT NO:

SHEET NO:

E

7



G20-2A

Metric equivalent
for this sign is:


SIZE	
1	900 mm X 450 mm
2	1200 mm X 600 mm
3	1200 mm X 600 mm
4	1200 mm X 600 mm
5	1200 mm X 600 mm

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.	Area sq. m.
1	36	18	1 1/8	3/8	1/2	4	3 3/4	2 1/2	4 1/8	4 1/8	11 1/8	2	1	12 1/8													4.5	0.41
2	48	24	1 1/2	1/2	5/8	6	4 1/2	3 3/4	5 7/8	6 3/4	16 3/4	2 1/2	1 3/4	18 1/2													8.0	0.72
3	48	24	1 1/2	1/2	5/8	6	4 1/2	3 3/4	5 7/8	6 3/4	16 3/4	2 1/2	1 3/4	18 1/2													8.0	0.72
4	48	24	1 1/2	1/2	5/8	6	4 1/2	3 3/4	5 7/8	6 3/4	16 3/4	2 1/2	1 3/4	18 1/2													8.0	0.72
5	48	24	1 1/2	1/2	5/8	6	4 1/2	3 3/4	5 7/8	6 3/4	16 3/4	2 1/2	1 3/4	18 1/2													8.0	0.72

NOTES



- Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
- Color:
Background - Orange
Message - Black
- Message Series - C
- Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

7



NOTES

1. Sign is Type II - Type H Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - White
Message - Black
3. Message Series - D
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
5. Modify the message as required.



SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	48	30	1 3⁄8	1⁄2	5⁄8	8	5	4	13 1⁄4	13 1⁄2	19	14	15	13													10.0
2M	48	30	1 3⁄8	1⁄2	5⁄8	8	5	4	13 1⁄4	13 1⁄2	19	14	15	13													10.0
3	48	30	1 3⁄8	1⁄2	5⁄8	8	5	4	13 1⁄4	13 1⁄2	19	14	15	13													10.0
4	48	30	1 3⁄8	1⁄2	5⁄8	8	5	4	13 1⁄4	13 1⁄2	19	14	15	13													10.0
5	48	30	1 3⁄8	1⁄2	5⁄8	8	5	4	13 1⁄4	13 1⁄2	19	14	15	13													10.0



STANDARD SIGN
R11-2

WISCONSIN DEPT OF TRANSPORTATION
APPROVED *Matthew R. Rauch*
for State Traffic Engineer
DATE 4/1/11 PLATE NO. R11-2.10

PROJECT NO: HWY: COUNTY: SHEET NO: E

NOTES

1. Sign is Type II - Type H Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
 2. Color:
Background - White
Message - Black
 3. Message Series - E except as noted
 4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- ** Substitute appropriate message, optically center message




R12-70C																												R12-70	R12-70C
SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.	Area sq. ft.	
1																													
2S	90	36	2 1/4	1/2	5/8	6	4	5	20 7/8	28 3/8	24 5/8	8 1/8	12	12	6	3		66									22.5	5.5	
2M	90	36	2 1/4	1/2	5/8	6	4	5	20 7/8	28 3/8	24 5/8	8 1/8	12	12	6	3		66									22.5	5.5	
3																													
4	114	42	2 1/4	3/4	1	8	5	4	34	42	39	13	14	18	7	3 1/2		96									36.75	12.0	
5	114	42	2 1/4	3/4	1	8	5	4	34	42	39	13	14	18	7	3 1/2		96									36.75	12.0	

TYPICAL SIGN
R12-70B

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 11/10/15 PLATE NO. R12-70B.3



NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Yellow
Message - Black
3. Message Series - C
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	24		1 1/8	3/8	1/2	4	2 1/2	1/2	4 1/8	4 1/2	11																4.0
2S	36		1 5/8	5/8	3/4	6	3 1/2	1	6 1/4	6 3/4	16 1/2																9.0
2M	36		1 5/8	5/8	3/4	6	3 1/2	1	6 1/4	6 3/4	16 1/2																9.0
3	36		1 5/8	5/8	3/4	6	3 1/2	1	6 1/4	6 3/4	16 1/2																9.0
4	36		1 5/8	5/8	3/4	6	3 1/2	1	6 1/4	6 3/4	16 1/2																9.0
5	48		2 1/4	3/4	1	8	5	1 1/4	8 1/4	9	21 7/8																16.0


STANDARD SIGN W8-9

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 03/14/13 PLATE NO. W8-9.9

PROJECT NO: HWY: COUNTY: SHEET NO: E



NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Message Series - D
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	36		1 5/8	5/8	3/4	5	4	1 1/2	13 7/8	10 1/2	11 1/2																9.0
2M	36		1 5/8	5/8	3/4	5	4	1 1/2	13 7/8	10 1/2	11 1/2																9.0
3																											
4	36		1 5/8	5/8	3/4	5	4	1 1/2	13 7/8	10 1/2	11 1/2																9.0
5	48		2 1/4	3/4	1	7	5	2	18 1/2	14	15 3/8																16.0

STANDARD SIGN

W8-11

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 3/22/11 PLATE NO. W8-11.4


PROJECT NO:

HWY:

COUNTY:

SHEET NO:

E




NOTES

1. Sign is Type II - Type F Reflective
2. Color:
Background - Orange
Message - Black
3. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

W8-17


SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	48		2 1/4	3/4	1	17	11	24 7/8	19 7/8																		16.0
2M	48		2 1/4	3/4	1	17	11	24 7/8	19 7/8																		16.0
3	48		2 1/4	3/4	1	17	11	24 7/8	19 7/8																		16.0
4	48		2 1/4	3/4	1	17	11	24 7/8	19 7/8																		16.0
5	48		2 1/4	3/4	1	17	11	24 7/8	19 7/8																		16.0

STANDARD SIGN W8-17	
WISCONSIN DEPT OF TRANSPORTATION	
APPROVED	<i>Matthew R. Rauch</i> for State Traffic Engineer
DATE 10/10/17	PLATE NO. W8-17.1



NOTES

- Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
- Color:
Background - Orange
Message - Black
- Message Series - See note 5
- Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- The top line is series E, the numerals are series C, and the bottom line is series D.
- Substitute appropriate numerals and adjust spacing as required.



ARROW DETAIL

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	48		2 1/4	3/4	1	6	12	11 3/8	9 5/8	11 1/2	16	13	12	15 5/8	8	9 1/4	1 1/4	10 5/8									16.0
2M	48		2 1/4	3/4	1	6	12	11 3/8	9 5/8	11 1/2	16	13	12	15 5/8	8	9 1/4	1 1/4	10 5/8									16.0
3																											
4																											
5																											

STANDARD SIGN W12-52

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
For State Traffic Engineer

DATE 3/16/11 PLATE NO. W12-52.7






PROJECT NO:

HWY:


COUNTY:

SHEET NO:

E



- NOTES
1. Sign is Type II - Type F Reflective
 2. Color:
Background - Orange
Message - Black
 3. Message Series - C
 4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.




SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	v	W	X	Y	Z	Area sq. ft.
1	36		1 3/8	1/2	5/8	5	2 5/8	3 1/4	10 1/8	7	7 5/8	8 7/8	1 1/8	4 1/2	3 1/2	9		2 1/2	2 1/4	5 5/8	9	1 3/8	8	1 3/4	10 3/4	6	9.0
2S	48		2 1/4	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0
2M	48		2 1/4	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0
3	48		2 1/4	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0
4	48		2 1/4	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0
5	48		2 1/4	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0

STANDARD SIGN
W20-1A, B, C, D, F & G


WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer


DATE 9/25/19 PLATE NO. W20-1.11




W20-4A




W20-4D




W20-4C



W20-4B



W20-4G



W20-4F

NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Message Series - C
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.


SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36		1 5/8	5/8	3/4	5	2 3/8	6	3 3/4	10 3/8	2 3/8	8	13 1/2	7	8 7/8	9	1 3/8	1 7/8	5 5/8	10 1/8	2 1/2	1 1/8	4 1/2	3 1/2	10 3/4	1 3/4	9.0
2S	48		2 1/4	3/4	1	7	3 1/8	8	5 1/4	14 5/8	3 1/4	10 5/8	17 3/4	9 3/4	12 5/8	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	14 3/8	2 3/8	16.0
2M	48		2 1/4	3/4	1	7	3 1/8	8	5 1/4	14 5/8	3 1/4	10 5/8	17 3/4	9 3/4	12 5/8	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	14 3/8	2 3/8	16.0
3	48		2 1/4	3/4	1	7	3 1/8	8	5 1/4	14 5/8	3 1/4	10 5/8	17 3/4	9 3/4	12 5/8	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	14 3/8	2 3/8	16.0
4	48		2 1/4	3/4	1	7	3 1/8	8	5 1/4	14 5/8	3 1/4	10 5/8	17 3/4	9 3/4	12 5/8	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	14 3/8	2 3/8	16.0
5	48		2 1/4	3/4	1	7	3 1/8	8	5 1/4	14 5/8	3 1/4	10 5/8	17 3/4	9 3/4	12 5/8	12	1 7/8	2 5/8	7 1/2	13 1/2	3 3/8	1 1/2	6	4 5/8	14 3/8	2 3/8	16.0

STANDARD SIGN
W20-4A, B, C, D, F & G

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 3/18/11 PLATE NO. W20-4.9



W20-7A

NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36		1 5/8	5/8	3/4		2 3/4	13 1/2	14 5/8																		9.00
2S	48		2 1/4	3/4	1		3 3/4	18	19 1/2																		16.00
2M	48		2 1/4	3/4	1		3 3/4	18	19 1/2																		16.00
3	48		2 1/4	3/4	1		3 3/4	18	19 1/2																		16.00
4	48		2 1/4	3/4	1		3 3/4	18	19 1/2																		16.00
5	48		2 1/4	3/4	1		3 3/4	18	19 1/2																		16.00


STANDARD SIGN
W20-7A

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 3/18/11 PLATE NO. W20-7A.5

PROJECT NO:	HWY:	COUNTY:	SHEET NO:	E
-------------	------	---------	-----------	---



NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Message Series - C
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	24		1 1/8	3/8	1/2	4	2 1/2	10 3/4	6																		4.0
2S	30		1 3/8	1/2	5/8	5	3	13 3/8	7 1/2																		6.25
2M	30		1 3/8	1/2	5/8	5	3	13 3/8	7 1/2																		6.25
3	36		1 5/8	5/8	3/4	6	3 1/2	16	9																		9.0
4	48		2 1/4	3/4	1	8	5	21 3/8	11 1/4																		16.0
5	48		2 1/4	3/4	1	8	5	21 3/8	11 1/4																		16.0

STANDARD SIGN W21-5

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer
DATE 3/21/11 PLATE NO. W21-5.5


PROJECT NO:

HWY:

COUNTY:

SHEET NO:

E



W21-65

NOTES

- 1. Sign is Type II - Type F Reflective
- 2. Color:
Background - Orange
Message - Black
- 3. Message Series - see note 5
- 4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- 5. Line 1 is Series C
Lines 2 and 3 are Series D

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36		1 5/8	5/8	3/4	5	3 1/4	10 7/8	11 5/8	11	11 5/8																9.0
2S	48		2 1/4	3/4	1	7	4	15 1/4	16 3/8	14 5/8	15 1/4																16.0
2M	48		2 1/4	3/4	1	7	4	15 1/4	16 3/8	14 5/8	15 1/4																16.0
3	48		2 1/4	3/4	1	7	4	15 1/4	16 3/8	14 5/8	15 1/4																16.0
4	48		2 1/4	3/4	1	7	4	15 1/4	16 3/8	14 5/8	15 1/4																16.0
5	48		2 1/4	3/4	1	7	4	15 1/4	16 3/8	14 5/8	15 1/4																16.0


STANDARD SIGN

W21-65

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 5/28/14 PLATE NO. W21-65.1



NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Message Series - C
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36		1 3⁄8	1⁄2	5⁄8	6	2 1⁄2	3 3⁄4	15 7⁄8	16 7⁄8	7 3⁄8	4	2 3⁄8	13 3⁄4													9.0
2S	48		2 1⁄4	3⁄4	1	8	4	5	21 1⁄2	22 1⁄2	9 7⁄8	5	3 3⁄8	18 1⁄4													16.0
2M	48		2 1⁄4	3⁄4	1	8	4	5	21 1⁄2	22 1⁄2	9 7⁄8	5	3 3⁄8	18 1⁄4													16.0
3	48		2 1⁄4	3⁄4	1	8	4	5	21 1⁄2	22 1⁄2	9 7⁄8	5	3 3⁄8	18 1⁄4													16.0
4	48		2 1⁄4	3⁄4	1	8	4	5	21 1⁄2	22 1⁄2	9 7⁄8	5	3 3⁄8	18 1⁄4													16.0
5	48		2 1⁄4	3⁄4	1	8	4	5	21 1⁄2	22 1⁄2	9 7⁄8	5	3 3⁄8	18 1⁄4													16.0


STANDARD SIGN
W03-4

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer


DATE 12/02/13 PLATE NO. W03-4.1

PROJECT NO: HWY: COUNTY: SHEET NO: E



NOTES

- 1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
- 2. Color:
Background - Orange
Message - Black
- 3. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- 4. W06-2 same as W06-1 but is rotated 180° when mounted.



ARROW DETAIL


SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36		1 5/8	5/8	3/4		4	8 3/4	10	4 3/4	9 1/2	30	2	14	5	4 5/8	7 3/8	7/8	8	12	24 1/2	2 1/2					9.0
2S	48		2 1/4	3/4	1		5 3/8	11 5/8	13 3/8	6 3/8	12 5/8	40	2 5/8	18 5/8	6 5/8	6 1/4	9 7/8	1 1/4	10 5/8	16	32 5/8	3 3/8					16.0
2M	48		2 1/4	3/4	1		5 3/8	11 5/8	13 3/8	6 3/8	12 5/8	40	2 5/8	18 5/8	6 5/8	6 1/4	9 7/8	1 1/4	10 5/8	16	32 5/8	3 3/8					16.0
3	48		2 1/4	3/4	1		5 3/8	11 5/8	13 3/8	6 3/8	12 5/8	40	2 5/8	18 5/8	6 5/8	6 1/4	9 7/8	1 1/4	10 5/8	16	32 5/8	3 3/8					16.0
4	48		2 1/4	3/4	1		5 3/8	11 5/8	13 3/8	6 3/8	12 5/8	40	2 5/8	18 5/8	6 5/8	6 1/4	9 7/8	1 1/4	10 5/8	16	32 5/8	3 3/8					16.0
5	48		2 1/4	3/4	1		5 3/8	11 5/8	13 3/8	6 3/8	12 5/8	40	2 5/8	18 5/8	6 5/8	6 1/4	9 7/8	1 1/4	10 5/8	16	32 5/8	3 3/8					16.0

STANDARD SIGN
W06-1 & W06-2

WISCONSIN DEPT OF TRANSPORTATION


APPROVED
Matthew R. Rauch
for State Traffic Engineer

DATE 11/20/13 PLATE NO. W06-1.1



NOTES

- 1. Sign is Type II - Type F Reflective
- 2. Color:
Background - Orange
Message - Black
- 3. Message Series - C
- 4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- 5. Substitute appropriate numerals to the nearest quarter mile and optically adjust spacing to achieve proper balance.



* See note 5

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36	24	1 1/8	3/8	1/2	6	4 1/2	3	4 3/4	14 5/8	10 5/8	11 3/8	2	12													6.0
2S	48	36	1 3/8	1/2	5/8	8	7	6	6 3/8	19 1/2	14	15	2 3/4	16 3/8													12.0
2M	48	36	1 3/8	1/2	5/8	8	7	6	6 3/8	19 1/2	14	15	2 3/4	16 3/8													12.0
3	48	36	1 3/8	1/2	5/8	8	7	6	6 3/8	19 1/2	14	15	2 3/4	16 3/8													12.0
4	48	36	1 3/8	1/2	5/8	8	7	6	6 3/8	19 1/2	14	15	2 3/4	16 3/8													12.0
5	48	36	1 3/8	1/2	5/8	8	7	6	6 3/8	19 1/2	14	15	2 3/4	16 3/8													12.0

PROJECT NO:

HWY:

COUNTY:

DATE 3/21/17

PLATE NO. W057-52.2

SHEET NO:

E


STANDARD SIGN
W057-52

WISCONSIN DEPT OF TRANSPORTATION

APPROVED
Matthew R. Rauch
for State Traffic Engineer


DATE 3/21/17

PLATE NO. W057-52.2



9


9



9


9

PROJECT NO: 9090-01-72	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: MGS GUARDRAIL	SHEET	E
------------------------	-------------	----------------	-------------------------------	-------	---



9


9



9

9


PROJECT NO: 9090-01-72	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: MGS GUARDRAIL	SHEET	E
------------------------	-------------	----------------	-------------------------------	-------	---



9

9


PROJECT NO: 9090-01-72	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: MGS GUARDRAIL	SHEET	E
------------------------	-------------	----------------	-------------------------------	-------	---



9

9


PROJECT NO: 9090-01-72	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: MGS GUARDRAIL	SHEET E
------------------------	-------------	----------------	-------------------------------	---------



9

9


PROJECT NO: 9090-01-72	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: MGS GUARDRAIL	SHEET	E
------------------------	-------------	----------------	-------------------------------	-------	---



9


9

PROJECT NO: 9090-01-72				HWY: STH 70				COUNTY: FOREST				CROSS SECTIONS: MGS GUARDRAIL				SHEET				E
------------------------	--	--	--	-------------	--	--	--	----------------	--	--	--	-------------------------------	--	--	--	-------	--	--	--	---



9


9



9

9


PROJECT NO: 9090-01-72	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: MGS GUARDRAIL	SHEET	E
------------------------	-------------	----------------	-------------------------------	-------	---



9

9


PROJECT NO: 9090-01-72				HWY: STH 70				COUNTY: FOREST				CROSS SECTIONS: MGS GUARDRAIL				SHEET				E
------------------------	--	--	--	-------------	--	--	--	----------------	--	--	--	-------------------------------	--	--	--	-------	--	--	--	---



9

9


PROJECT NO: 9090-01-72	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: MGS GUARDRAIL	SHEET	E
------------------------	-------------	----------------	-------------------------------	-------	---



9

9


PROJECT NO: 9090-01-72	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: MGS GUARDRAIL	SHEET	E
------------------------	-------------	----------------	-------------------------------	-------	---



9

9


PROJECT NO: 9090-01-72	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: MGS GUARDRAIL	SHEET	E
------------------------	-------------	----------------	-------------------------------	-------	---



9

9


PROJECT NO: 9090-01-72	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: MGS GUARDRAIL	SHEET	E
------------------------	-------------	----------------	-------------------------------	-------	---



9

9


PROJECT NO: 9090-01-72	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: MGS GUARDRAIL	SHEET	E
------------------------	-------------	----------------	-------------------------------	-------	---



9

9


PROJECT NO: 9090-01-72	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: MGS GUARDRAIL	SHEET	E
------------------------	-------------	----------------	-------------------------------	-------	---




9

9

PROJECT NO: 9090-01-72	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: MGS GUARDRAIL	SHEET	E
------------------------	-------------	----------------	-------------------------------	-------	---






9


9

PROJECT NO: 9090-01-72	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: MGS GUARDRAIL	SHEET	E
------------------------	-------------	----------------	-------------------------------	-------	---



9


9



9


9

PROJECT NO: 9090-01-72				HWY: STH 70				COUNTY: FOREST				CROSS SECTIONS: MGS GUARDRAIL				SHEET				E
------------------------	--	--	--	-------------	--	--	--	----------------	--	--	--	-------------------------------	--	--	--	-------	--	--	--	---



9


9




9

9

PROJECT NO: 9090-01-72	HWY: STH 70	COUNTY: FOREST	CROSS SECTIONS: MGS GUARDRAIL	SHEET	E
------------------------	-------------	----------------	-------------------------------	-------	---



Notes



Wisconsin Department of Transportation

Dedicated people creating transportation solutions
through innovation and exceptional service.

<http://www.dot.wisconsin.gov>