

RHI

PROJECT ID: 1176-22-60

WITH: N/A


COUNTY: LINCOLN

MAY 2021

ORDER OF SHEETS

Section No.	1	Title
Section No.	2	Typical Sections and Details
Section No.	3	Estimate of Quantities
Section No.	3	Miscellaneous Quantities
Section No.	4	Right of Way Plat
Section No.	5	Plan and Profile
Section No.	6	Standard Detail Drawings
Section No.	7	Sign Plates
Section No.	8	Structure Plans
Section No.	9	Computer Earthwork Data
Section No.	9	Cross Sections

TOTAL SHEETS = 110



DESIGN DESIGNATION	1176-22-30
A.A.D.T.	2018 = 2,100 (CTH Q)
A.A.D.T.	= N/A
D.H.V.	= N/A
D.D.	= N/A
T.	= N/A
DESIGN SPEED	= N/A
ESALS	= N/A


CONVENTIONAL SYMBOLS

PLAN		PROFILE	
CORPORATE LIMITS		GRADE LINE	
PROPERTY LINE		ORIGINAL GROUND	
LOT LINE		MARSH OR ROCK PROFILE (To be noted as such)	
LIMITED HIGHWAY EASEMENT		SPECIAL DITCH	
EXISTING RIGHT OF WAY		GRADE ELEVATION	
PROPOSED OR NEW R/W LINE		CULVERT (Profile View)	
SLOPE INTERCEPT		UTILITIES	
REFERENCE LINE		ELECTRIC	
EXISTING CULVERT		FIBER OPTIC	
PROPOSED CULVERT (Box or Pipe)		GAS	
COMBUSTIBLE FLUIDS		SANITARY SEWER	
MARSH AREA		STORM SEWER	
WOODED OR SHRUB AREA		TELEPHONE	
		WATER	
		UTILITY PEDESTAL	
		POWER POLE	
		TELEPHONE POLE	

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION
PLAN OF PROPOSED IMPROVEMENT
WAUSAU - MERRILL
STRUCTURE B-35-0021
USH 51
LINCOLN COUNTY


STATE PROJECT NUMBER
1176-22-60

BEGIN PROJECT
STA 195+50
X: 404762.67
Y: 105091.48



STRUCTURE B-35+0021
STA 197+84 - STA 200+98

END PROJECT
STA 203+75



HORIZONTAL POSITIONS SHOWN ON THIS PLAN ARE WISCONSIN COORDINATE REFERENCE SYSTEM (WISCRS), LINCOLN COUNTY, NAD83 (2011), IN U.S. SURVEY FEET. POSITIONS SHOWN ARE GRID COORDINATES, GRID BEARINGS, AND GRID DISTANCES. GRID DISTANCES ARE THE SAME AS GROUND DISTANCES. ELEVATIONS ARE REFERENCED TO NAVD 88 (2012). GPS DERIVED ELEVATIONS ARE BASED ON GEOID 12A.

STATE PROJECT	FEDERAL PROJECT	
	PROJECT	CONTRACT
1176-22-60		

ORIGINAL PLANS PREPARED BY

Alfred Benesch & Company
1300 West Canal Street, Suite 150
Milwaukee, Wisconsin 53233
414-308-1310 Job No. 20260.00

DATE: 7/22/2020

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

PREPARED BY

Surveyor	CBS2
Designer	ALFRED BENESCH & CO
Project Manager	JESSE JEFFERSON, PE
Regional Examiner	CHERYL SIMON, PE
Regional Supervisor	DAN ERVA, PE

APPROVED FOR THE DEPARTMENT

DATE: 7/22/2020

(Signature)

E

GENERAL NOTES

- 1. THERE ARE NO KNOWN UTILITY FACILITIES WITHIN THE PROJECT AREA. HOWEVER, IT IS THE CONTRACTOR'S RESPONSIBILITY TO CONFIRM THIS.

ORDER OF SECTION 2 SHEETS

PROJECT OVERVIEW
TYPICAL SECTIONS
CONSTRUCTION DETAILS
PAVEMENT MARKING
TRAFFIC CONTROL PLAN
TEMPORARY TRAFFIC SIGNALS

RUNOFF COEFFICIENT TABLE

	HYDROLOGIC SOIL GROUP											
	A			B			C			D		
	SLOPE RANCE (PERCENT)			SLOPE RANCE (PERCENT)			SLOPE RANCE (PERCENT)			SLOPE RANCE (PERCENT)		
LAND USE:	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER	0-2	2-6	6 & OVER
ROW CROPS	0.08	0.16	0.22	0.12	0.20	0.27	0.15	0.24	0.33	0.19	0.28	0.38
	0.22	0.30	0.38	0.26	0.34	0.44	0.30	0.37	0.50	0.34	0.41	0.56
MEDIAN STRIP TURF	0.19	0.20	0.24	0.19	0.22	0.26	0.20	0.23	0.30	0.20	0.25	0.30
	0.24	0.26	0.30	0.25	0.28	0.33	0.26	0.30	0.37	0.27	0.32	0.40
SIDE SLOPE TURF	0.25	0.27	0.25	0.30		0.27			0.28			0.30
	0.34	0.36	0.32			0.34			0.36			0.38
PAVEMENT:												
ASPHALT	0.70 - 0.95											
CONCRETE	0.80 - 0.95											
BRICK	0.70 - 0.80											
DRIVES, WALKS	0.75 - 0.85											
ROOFS	0.75 - 0.95											
GRAVEL ROADS, SHOULDERS	0.40 - 0.60											

TOTAL PROJECT AREA = 0.70 ACRES
TOTAL AREA EXPECTED TO BE DISTURBED BY CONSTRUCTION ACTIVITIES = 0.11 ACRES

OTHER AGENCIES


WISDNR
NORTHERN REGION
WENDY HENNIGES
107 SUTLIFF AVE
RHINELANDER, WI 54501-3349
(715) 365-8916
Wendy.henniges@wisconsin.gov




Dial 811 or (800)242-8511



www.DiggersHotline.com




PROJECT NO: 1176-22-60	HWY: CTH Q	COUNTY: LINCOLN	PROJECT OVERVIEW - CTH Q	SHEET	E
------------------------	------------	-----------------	--------------------------	-------	---




TYPICAL EXISTING SECTION
CTH Q
STA 195+50.00 TO 197+60.52
STA 201+20.37 TO 203+75.00

* APPROX. 2% AT MATCH POINTS
† CLEAR ZONE WHERE NOT PROTECTED BY BEAM GUARD




NOTE: STATIONS FOR CONCRETE PAVEMENT APPROACH SLAB VARY ACROSS ROADWAY DUE TO SKEWED APPROACH SLAB

TYPICAL EXISTING SECTION
CTH Q
STA 197+60.52 TO 197+95.62
STA 200+86.61 TO 201+20.37





TYPICAL FINISHED SECTION
CTH Q
STA 195+70.50 TO 197+60.52
STA 201+20.37 TO 202+88.32

- * MILL APPROX. 0.5" AT CENTERLINE AND 1.75" AT EDGES AS NECESSARY TO ACHIEVE 2.0 % CROSS SLOPE
- ** UPPER LAYER 1.75" 4 MT 58-34 S
- † CLEAR ZONE WHERE NOT PROTECTED BY MGS GUARDRAIL




NOTE: STATIONS FOR CONCRETE PAVEMENT APPROACH SLAB VARY ACROSS ROADWAY DUE TO SKEWED APPROACH SLAB

TYPICAL FINISHED SECTION
CTH Q
STA 197+60.52 TO 197+95.62
STA 200+86.61 TO 201+20.37



- REMOVING ASPHALTIC SURFACE MILLING
 REMOVING ASPHALTIC SURFACE BUTT JOINT

BUTT JOINT DETAIL





NOTES
VERIFY PROPOSED GUARDRAIL POST LOCATIONS
PRIOR TO INSTALLING CONCRETE SURFACE DRAIN.


STA 201+50, LT
STA 201+76, RT

NOTES:


SEE CONCRETE SURFACE DRAINS DROP INLET TYPE AT
STRUCTURES STANDARD DETAIL DRAWINGS FOR MORE
INFORMATION.









PROJECT NO: 1176-22-60	HWY: CTH Q	COUNTY: LINCOLN	PAVEMENT MARKING	SHEET	E
------------------------	------------	-----------------	------------------	-------	---




CTH Q - STAGE 1
APPROACHES



CTH Q - STAGE 1
ON STRUCTURE



CTH Q - STAGE 2
APPROACHES



CTH Q - STAGE 2
ON STRUCTURE

CONTROLLER LOGIC

[illegible]RING 2

CHART 1

PHASE ON	NONCONFLICTING PHASE ALLOWED TO TIME CONCURRENTLY	PHASES IN CONFLICT WITH PHASE ON
1	NONE	2, 3, 4
2	NONE	1, 3, 4
3	NONE	1, 2, 4
4	NONE	1, 2, 3
5		
6		
7		
8		

PHASE NUMBER	PHASE LOCKING	DUAL ENTRY W / Ø	PHASE RECALL	PHASE ACTIVE
1	X		MIN	X
2	X		MIN	X
3	X		MIN	X
4	X		MIN	X
5				
6				
7				
8				

```
O.L. "A" = 1,2
O.L. "B" = 3,4
O.L. "C" = NONE
O.L. "D" = NONE
```

TYPE OF PRE-EMPT	
NONE	x
RAILROAD	
EMERGENCY VEHICLE	
3M	
TOMAR	
HARDWIRE	
OTHER	
LIFT BRIDGE	
QUEUE DETECTOR	

TYPE OF LIGHTING	
BY OTHER AGENCY	
IN TRAFFIC SIGNAL CABINET	x
IN SEPARATE DOT LIGHTING CABINET	


1. ANY ACTUATED PHASE FOR WHICH THERE IS NO CALL SHALL BE SKIPPED.
2. TEMPORARY CABINET SHALL BE SET UP TO ACCOMMODATE THE TEMPORARY DETECTION ZONES AS PLANNED FOR DURING THE VARIOUS STAGES. ADJUST THE ACTIVE DETECTORS ACCORDINGLY BASED ON THE PARTICULAR STAGE AND OPEN/CLOSED LANES.
3. WHEN OPPOSING THRU PHASES ARE TIMING CONCURRENTLY, THEY SHALL TERMINATE TOGETHER DUE TO PERMISSIVE LEFT TURN CONFLICT.

PAGE NO. OF

ACTUATED TIMING USH 51 / CTH Q TEMPORARY TRAFFIC SIGNALS

	PHASE	01	02	03	04	05	06	07	08
MIN GREEN		12	12	12	12				
PASSAGE		3	3	3	3				
MAX 1		20	15	25	12				
YELLOW		5	5	5	5				
RED		5	26	5	26				

NOTES: PHASES SHALL NOT BE SKIPPED
 PHASES SHALL FOLLOW IN ORDER (01, 02, 03, 04)



LEGEND


- | | | | |
|--|--|--|--|
| | CONTROL CABINET | | TYPE III BARRICADE WITH ATTACHED SIGN |
| | TEMPORARY SIGNAL WITH BACKPLATE AND 12-INCH LENSES ON SPAN WIRE MOUNTED OVERHEAD | | TRAFFIC CONTROL DRUM |
| | LUMINAIRE ON WOOD POLE | | TRAFFIC CONTROL DRUM WITH TYPE C STEADY BURN LIGHT |
| | APPROXIMATE DETECTION AREA | | SIGN ON PERMANENT SUPPORT |
| | SIGNAL HEAD NUMBER | | CONCRETE BARRIER TEMPORARY PRECAST |
| | RED CIRCULAR INDICATOR | | WORK AREA |
| | YELLOW CIRCULAR INDICATOR | | DIRECTION OF TRAFFIC |
| | GREEN CIRCULAR INDICATOR | | OVERHEAD UTILITY |
| | | | ELECTRIC / CONDUIT |

NOTES

- CONTRACTOR SHALL BE RESPONSIBLE FOR POWER INSTALLATION AND COORDINATION WITH WISCONSIN PUBLIC SERVICE (WPS) THREE WEEKS PRIOR TO CONSTRUCTION. ELECTRIC LINE CONTINUES TO METER BREAKER PEDESTAL. FINAL LOCATION OF METER DETERMINED BY WPS.
- TRAFFIC SIGNAL CONTROLLER AND CABINET TO BE SUPPLIED BY CONTRACTOR.
- SIGNALS SHALL BE INTERCONNECTED BY OVERHEAD LINES OR ELECTRICAL CONDUIT.
- ADVANCE SIGNING, SIGN SPACING, AND ADDITIONAL TRAFFIC CONTROL SHALL FOLLOW STANDARD DETAIL DRAWING, TRAFFIC CONTROL, ONE LANE ROAD WITH TEMPORARY SIGNALS.
- AN AREA OF MILLING AND OVERLAY BEYOND THE PROTECTION OF TEMPORARY CONCRETE BARRIER WILL NEED TO BE DONE USING FLAGGER PROTECTION.
- ALL SIGNS ARE 48"X48" UNLESS OTHERWISE NOTED.

LEGEND

	CONTROL CABINET		TYPE III BARRICADE WITH ATTACHED SIGN
	TEMPORARY SIGNAL WITH BACKPLATE AND 12-INCH LENSES ON SPAN WIRE MOUNTED OVERHEAD		TRAFFIC CONTROL DRUM
	LUMINAIRE ON WOOD POLE		TRAFFIC CONTROL DRUM WITH TYPE C STEADY BURN LIGHT
	APPROXIMATE DETECTION AREA		SIGN ON PERMANENT SUPPORT
	SIGNAL HEAD NUMBER		CONCRETE BARRIER TEMPORARY PRECAST
	RED CIRCULAR INDICATOR		WORK AREA
	YELLOW CIRCULAR INDICATOR		DIRECTION OF TRAFFIC
	GREEN CIRCULAR INDICATOR		OVERHEAD UTILITY
			ELECTRIC / CONDUIT



NOTES

1. SIGNALS SHALL BE INTERCONNECTED BY OVERHEAD LINES OR ELECTRICAL CONDUIT.
2. ADVANCE SIGNING, SIGN SPACING, AND ADDITIONAL TRAFFIC CONTROL SHALL FOLLOW STANDARD DETAIL DRAWING, TRAFFIC CONTROL, ONE LANE ROAD WITH TEMPORARY SIGNALS.
3. AN AREA OF MILLING AND OVERLAY BEYOND THE PROTECTION OF TEMPORARY CONCRETE BARRIER WILL NEED TO BE DONE USING FLAGGER PROTECTION.
4. ALL SIGNS ARE 48"X48" UNLESS OTHERWISE NOTED.

PROJECT NO: 1176-22-60


HWY: CTH Q

COUNTY: LINCOLN

TRAFFIC CONTROL - STAGE 1


SHEET

E



LEGEND

	CONTROL CABINET		TYPE III BARRICADE WITH ATTACHED SIGN
	TEMPORARY SIGNAL WITH BACKPLATE AND 12-INCH LENSES ON SPAN WIRE MOUNTED OVERHEAD		TRAFFIC CONTROL DRUM
	LUMINAIRE ON WOOD POLE		TRAFFIC CONTROL DRUM WITH TYPE C STEADY BURN LIGHT
	APPROXIMATE DETECTION AREA		SIGN ON PERMANENT SUPPORT
	SIGNAL HEAD NUMBER		CONCRETE BARRIER TEMPORARY PRECAST
	RED CIRCULAR INDICATOR		WORK AREA
	YELLOW CIRCULAR INDICATOR		DIRECTION OF TRAFFIC
	GREEN CIRCULAR INDICATOR		OVERHEAD UTILITY
			ELECTRIC / CONDUIT



NOTES

1. SIGNALS SHALL BE INTERCONNECTED BY OVERHEAD LINES OR ELECTRICAL CONDUIT.
2. ADVANCE SIGNING, SIGN SPACING, AND ADDITIONAL TRAFFIC CONTROL SHALL FOLLOW STANDARD DETAIL DRAWING, TRAFFIC CONTROL, ONE LANE ROAD WITH TEMPORARY SIGNALS.
3. AN AREA OF MILLING AND OVERLAY BEYOND THE PROTECTION OF TEMPORARY CONCRETE BARRIER WILL NEED TO BE DONE USING FLAGGER PROTECTION.
4. ALL SIGNS ARE 48\"X48\" UNLESS OTHERWISE NOTED.

PROJECT NO: 1176-22-60

HWY: CTH Q

COUNTY: LINCOLN

TRAFFIC CONTROL - STAGE 2

SHEET

E

Estimate Of Quantities

1176-22-60

Line	Item	Item Description	Unit	Total	Qty
0002	203.0100	Removing Small Pipe Culverts	EACH	2.000	2.000
0004	204.0100	Removing Concrete Pavement	SY	222.000	222.000
0006	204.0115	Removing Asphaltic Surface Butt Joints	SY	98.000	98.000
0008	204.0120	Removing Asphaltic Surface Milling	SY	1,650.000	1,650.000
0010	204.0150	Removing Curb & Gutter	LF	14.000	14.000
0012	204.0165	Removing Guardrail	LF	432.000	432.000
0014	204.0190	Removing Surface Drains	EACH	2.000	2.000
0016	213.0100	Finishing Roadway (project) 01. 1176-22-60	EACH	1.000	1.000
0018	305.0110	Base Aggregate Dense 3/4-Inch	TON	50.000	50.000
0020	305.0120	Base Aggregate Dense 1 1/4-Inch	TON	82.000	82.000
0022	415.0070	Concrete Pavement 7-Inch	SY	101.000	101.000
0024	415.0410	Concrete Pavement Approach Slab	SY	121.000	121.000
0026	450.4000	HMA Cold Weather Paving	TON	25.000	25.000
0028	455.0605	Tack Coat	GAL	123.000	123.000
0030	465.0105	Asphaltic Surface	TON	173.000	173.000
0032	502.3101	Expansion Device	LF	106.000	106.000
0034	502.3200	Protective Surface Treatment	SY	1,535.000	1,535.000
0036	502.3210	Pigmented Surface Sealer	SY	215.000	215.000
0038	502.4205	Adhesive Anchors No. 5 Bar	EACH	108.000	108.000
0040	505.0600	Bar Steel Reinforcement HS Coated Structures	LB	7,816.000	7,816.000
0042	505.0906	Bar Couplers No. 6	EACH	20.000	20.000
0044	509.0301	Preparation Decks Type 1	SY	154.000	154.000
0046	509.0302	Preparation Decks Type 2	SY	77.000	77.000
0048	509.0505.S	Cleaning Decks to Reapply Concrete Masonry Overlay	SY	1,535.000	1,535.000
0050	509.1000	Joint Repair	SY	49.000	49.000
0052	509.1500	Concrete Surface Repair	SF	27.000	27.000
0054	509.2000	Full-Depth Deck Repair	SY	4.000	4.000
0056	509.2500	Concrete Masonry Overlay Decks	CY	139.000	139.000
0058	509.9005.S	Removing Concrete Masonry Deck Overlay (structure) 01. B-35-0021	SY	1,535.000	1,535.000
0060	509.9020.S	Epoxy Crack Sealing	LF	100.000	100.000
0062	509.9050.S	Cleaning Parapets	LF	723.000	723.000
0064	521.1012	Apron Endwalls for Culvert Pipe Steel 12-Inch	EACH	2.000	2.000
0066	601.0588	Concrete Curb & Gutter 4-Inch Sloped 36-Inch Type TBT	LF	120.000	120.000
0068	603.8000	Concrete Barrier Temporary Precast Delivered	LF	825.000	825.000
0070	603.8125	Concrete Barrier Temporary Precast Installed	LF	1,650.000	1,650.000
0072	606.0200	Riprap Medium	CY	6.000	6.000
0074	611.0654	Inlet Covers Type V	EACH	2.000	2.000
0076	611.3220	Inlets 2x2-FT	EACH	2.000	2.000

Estimate Of Quantities

1176-22-60

Line	Item	Item Description	Unit	Total	Qty
0078	612.0212	Pipe Underdrain Unperforated 12-Inch	LF	120.000	120.000
0080	614.0010	Barrier System Grading Shaping Finishing	EACH	4.000	4.000
0082	614.2300	MGS Guardrail 3	LF	100.000	100.000
0084	614.2500	MGS Thrie Beam Transition	LF	158.000	158.000
0086	614.2610	MGS Guardrail Terminal EAT	EACH	4.000	4.000
0088	618.0100	Maintenance And Repair of Haul Roads (project) 01. 1176-22-60	EACH	1.000	1.000
0090	619.1000	Mobilization	EACH	1.000	1.000
0092	624.0100	Water	MGAL	3.000	3.000
0094	628.1504	Silt Fence	LF	850.000	850.000
0096	628.1520	Silt Fence Maintenance	LF	850.000	850.000
0098	628.1905	Mobilizations Erosion Control	EACH	3.000	3.000
0100	628.1910	Mobilizations Emergency Erosion Control	EACH	2.000	2.000
0102	628.2006	Erosion Mat Urban Class I Type A	SY	319.000	319.000
0104	628.7020	Inlet Protection Type D	EACH	2.000	2.000
0106	642.5001	Field Office Type B	EACH	1.000	1.000
0108	643.0300	Traffic Control Drums	DAY	2,930.000	2,930.000
0110	643.0420	Traffic Control Barricades Type III	DAY	320.000	320.000
0112	643.0705	Traffic Control Warning Lights Type A	DAY	640.000	640.000
0114	643.0715	Traffic Control Warning Lights Type C	DAY	800.000	800.000
0116	643.0900	Traffic Control Signs	DAY	2,720.000	2,720.000
0118	643.0920	Traffic Control Covering Signs Type II	EACH	8.000	8.000
0120	643.5000	Traffic Control	EACH	1.000	1.000
0122	645.0120	Geotextile Type HR	SY	10.000	10.000
0124	646.1020	Marking Line Epoxy 4-Inch	LF	3,202.000	3,202.000
0126	646.6120	Marking Stop Line Epoxy 18-Inch	LF	128.000	128.000
0128	646.6464	Cold Weather Marking Epoxy 4-Inch	LF	3,202.000	3,202.000
0130	646.9000	Marking Removal Line 4-Inch	LF	1,150.000	1,150.000
0132	646.9200	Marking Removal Line Wide	LF	128.000	128.000
0134	649.0105	Temporary Marking Line Paint 4-Inch	LF	1,400.000	1,400.000
0136	649.0150	Temporary Marking Line Removable Tape 4-Inch	LF	1,400.000	1,400.000
0138	649.0850	Temporary Marking Stop Line Removable Tape 18-Inch	LF	155.000	155.000
0140	650.5500	Construction Staking Curb Gutter and Curb & Gutter	LF	102.000	102.000
0142	650.6000	Construction Staking Pipe Culverts	EACH	2.000	2.000
0144	650.9910	Construction Staking Supplemental Control (project) 01. 1176-22-60	LS	1.000	1.000
0146	690.0150	Sawing Asphalt	LF	108.000	108.000
0148	715.0415	Incentive Strength Concrete Pavement	DOL	500.000	500.000
0150	SPV.0105	Special 01. Temporary Traffic Signals for Interchange Bridges (B-35-0021)	LS	1.000	1.000

Estimate Of Quantities

1176-22-60					
0152	SPV.0105	Special 02. Temporary Vehicle Detection (B-35-0021)	LS	1.000	1.000

REMOVALS						
	203.0100 REMOVING SMALL PIPE CULVERTS 12" DIA CMP	204.0100 REMOVING CONCRETE PAVEMENT	204.0115 REMOVING ASPHALTIC SURFACE BUTT JOINTS	204.0120 REMOVING ASPHALTIC SURFACE MILLING	204.0150 REMOVING CURB & GUTTER	204.0190 REMOVING SURFACE DRAINS
LOCATION	(EA)	(SY)	(SY)	(SY)	(LF)	(EA)
195+71 to 197+61	-	-	49	890	-	-
197+61 to 197+96	-	108	-	-	-	-
200+87 to 201+20	-	113	-	-	-	-
201+20 to 202+88	-	-	49	760	-	-
201+08 to 201+20	Lt 1	-	-	-	12	1
201+35 to 201+37	Rt 1	-	-	-	2	1
TOTALS	2	222	98	1650	14	2

BASE AGGREGATE DENSE					
	305.0110 BASE AGGREGATE DENSE 3/4-INCH	305.0120 BASE AGGREGATE DENSE 1 1/4-INCH	624.0100 WATER		
LOCATION	(TON)	(TON)	(MGAL)		
195+50.00 to 197+46.77	Lt 15	50	1.3		
196+25.00 to 197+73.25	Rt 11	-	0.3		
201+08.49 to 202+55.00	Lt 10	-	0.2		
201+34.83 to 203+75.00	Rt 14	32	1.0		
Undistributed	-	-	-		
TOTALS	50	82	3		

PAVEMENT					
	415.0410 CONCRETE PAVEMENT APPROACH SLAB	415.0070 CONCRETE PAVEMENT 7-INCH	455.0605 TACK COAT	450.4000 HMA COLD WEATHER PAVING	465.0105 ASPHALTIC SURFACE
LOCATION	(SY)	(SY)	(GAL)	(TON)	(TON)
195+71 to 197+61	-	-	66	-	93
197+61 to 197+96	59	49	-	-	-
200+87 to 201+20	62	51	-	-	-
201+20 to 202+88	-	-	57	-	80
Undistributed	-	-	-	25	-
TOTALS	121	101	123	25	173

ALL ITEMS ON THIS PAGE ARE CATEGORY 0010

SURFACE DRAINS							
	521.1012 APRON ENDWALLS FOR CULVERT PIPE STEEL 12-INCH	601.0588 CONCRETE CURB & GUTTER 4-INCH SLOPED 36-INCH TYP TBT	611.0654 INLET COVERS TYPE V	611.3220 INLETS 2X2-FT	612.0212 PIPE UNDERDRAIN UNPERFORATED 12-INCH	645.0120 GEOTEXTILE TYPE HR	606.0200 RIPRAP MEDIUM
LOCATION	(EA)	(LF)	(EACH)	(EACH)	(LF)	(SY)	(CY)
201+49.80 Lt	1	45	1	1	60	5	3
201+69.64 Rt	1	57	1	1	60	5	3
TOTALS	2	102	2	2	120	10	6

MGS GUARDRAIL											
	614.0010 BARRIER SYSTEM GRADING SHAPING FINISHING	204.0165 REMOVING GUARDRAIL	614.2300 MGS GUARDRAIL 3	614.2500 MGS THRIE BEAM TRANSITION	614.2610 MGS GUARDRAIL TERMINAL EAT	*	*	*	*	628.2006 EROSION MAT URBAN CLASS I TYPE A **	* SEEDING MIXTURE NO. 30
LOCATION	(EACH)	(LF)	(LF)	(LF)	(EACH)	EXCAVATION COMMON (CY)	FILL (CY)	BORROW (CY)	TOPSOIL (SY)	(SY)	FERTILIZER TYPE B (CWT)
196+33.88 to 197+46.77 Lt	1	108	25	39.5	1	0.1	2.2	2.1	67	67	0.05
196+58.06 to 197+73.25 Rt	1	108	25	39.5	1	0.5	2.3	1.8	28	28	0.02
201+08.49 to 202+21.43 Lt	1	108	25	39.5	1	0.3	2.0	1.7	112	112	0.08
201+34.83 to 202+47.77 Rt	1	108	25	39.5	1	0.6	2.5	1.9	112	112	0.08
TOTALS	4	432	100	158	4					319	

* NON-BID ITEM, ITEMS AND QUANTITIES LISTED FOR BID INFORMATION ONLY, ITEMS INCIDENTAL TO BARRIER SYSTEM GRADING SHAPING FINISHING.

TEMPORARY BARRIER		
	603.8000 CONCRETE BARRIER TEMPORARY PRECAST DELIVERED	603.8125 CONCRETE BARRIER TEMPORARY PRECAST INSTALLED
LOCATION	(LF)	(LF)
Stage 1	825	825
Stage 2		825
TOTALS	825	1650

EROSION CONTROL					
	628.1504 SILT FENCE	628.1520 SILT FENCE MAINTENANCE	628.1905 MOBILIZATIONS EROSION CONTROL	628.1910 MOBILIZATIONS EMERGENCY EROSION CONTROL	628.7020 INLET PROTECTION TYPE D
LOCATION	(LF)	(LF)	(EACH)	(EACH)	(EACH)
195+50.00 to 197+46.77 Lt	220	220	-	-	-
196+25.00 to 197+73.25 Rt	160	160	-	-	-
201+08.49 to 202+55.00 Lt	200	200	-	-	-
201+34.83 to 203+75.00 Rt	270	270	-	-	-
Project Wide	-	-	3	2	2
TOTALS	850	850	3	2	2

ALL ITEMS ON THIS PAGE ARE CATEGORY 0010

TRAFFIC CONTROL																
		643.0300		643.0420		643.0705		643.0715		643.0900		643.0920		SPV.0105.01		SPV.0105.02
		TC		TC		TC		TC		TC		TC		TEMPORARY		TEMPORARY
		DRUMS		BARRICADES		WARNING		WARNING		SIGNS		COVERING		TRAFFIC SIGNALS FOR		VEHICLE
				TYPE III		LIGHTS		LIGHTS				SIGNS		INTERCHANGE BRIDGES		DETECTION
						TYPE A		TYPE C				TYPE II		(B-35-0021)		(B-35-0021)
STAGE		DURATION														
		CALANDAR	#	(DAY)	#	(DAY)	#	(DAY)	#	(DAY)	#	(DAY)	Cycles	(EACH)	(LS)	(LS)
STAGE 1		40	36	1440	4	160	8	320	10	400	34	1360	1	4	-	-
STAGE 2		40	36	1440	4	160	8	320	10	400	34	1360	-	-	-	-
UNDISTRIBUTED			-	50	-	-	-	-	-	-	-	-	1	4	1	1
TOTALS				2,930		320		640		800		2,720		8	1	1


TEMPORARY PAVEMENT MARKING							
	646.9000	646.9200	649.0105		649.0150		649.0850
	MARKING	MARKING	TEMPORARY		TEMPORARY		TEMPORARY
	REMOVAL	REMOVAL	MARKING LINE		MARKING LINE		MARKING STOP
	LINE	LINE	PAINT		REMOVABLE		LINE REMOVABLE
	4-INCH	WIDE	4-INCH		TAPE 4-INCH		TAPE 18-INCH
			YELLOW	WHITE	YELLOW	WHITE	
LOCATION	(LF)	(LF)	(LF)	(LF)	(LF)	(LF)	(LF)
Stage 1	1150	128	-	1400	-	-	155
Stage 2	-	-	-	-	-	1400	-
TOTALS	1150	128	1400		1400		155

PAVEMENT MARKING				
		646.1020	646.6120	646.6464
		MARKING LINE	MARKING	COLD
		EPOXY	STOP LINE	WEATHER
		4-INCH	EPOXY	MARKING
			18-INCH	EPOXY
		YELLOW	WHITE	4-INCH
LOCATION		(LF)	(LF)	(LF)
195+71 to 202+88		1582	1620	128
UNDISTRIBUTED		-	-	3202
TOTALS		3202	128	3202

CONSTRUCTION STAKING			
	650.5500	650.6000	650.9910
	CURB GUTTER	PIPE	SUPPLEMENTAL
	AND	CULVERTS	CONTROL
	CURB & GUTTER		(1176-22-30)
LOCATION	(LF)	(EACH)	(LS)
BRIDGE B-35-21	-	-	-
PROJECT	102	2	1
TOTALS	102	2	1



SAWING		
		690.015
		SAWING
		ASPHALT
LOCATION		(LF)
201+49.80	Lt	48
201+69.64	Rt	60
TOTALS		108

ALL ITEMS ON THIS PAGE ARE CATEGORY 0010





Standard Detail Drawing List

08A05-19C	INLET COVERS TYPE F, HM, HM-S, S, T, V, HM-GJ, & HM-GJ-S
08C07-02	INLETS 2X2-FT, 2X2.5-FT, 2X3-FT AND 2.5X3-FT
08D01-21A	CONCRETE CURB & GUTTER
08D01-21B	CONCRETE CURB, TIES AND CURB AND GUTTER APPLICATIONS
08D03-08A	CONCRETE SURFACE DRAINS DROP INLET TYPE AT STRUCTURES
08D03-08B	CONCRETE SURFACE DRAINS DROP INLET TYPE AT STRUCTURES
08E09-06	SILT FENCE
08E10-02	INLET PROTECTION TYPE A, B, C AND D
08F01-11	APRON ENDWALLS FOR CULVERT PIPE
09G01-04A	SPAN WIRE TEMPORARY TRAFFIC SIGNAL
09G01-04D	SPAN WIRE TEMPORARY TRAFFIC SIGNAL
09G01-04E	SPAN WIRE TEMPORARY TRAFFIC SIGNAL
09G01-04F	SPAN WIRE TEMPORARY TRAFFIC SIGNAL
09G01-04G	SPAN WIRE TEMPORARY TRAFFIC SIGNAL
09G02-05A	BRIDGE TEMPORARY TRAFFIC SIGNAL INSTALLATION
09G02-05B	BRIDGE TEMPORARY TRAFFIC SIGNAL INSTALLATION
13A03-06	CONCRETE PAVEMENT SHOULDERS
13B02-09A	CONCRETE PAVEMENT APPROACH SLAB
13C01-19	CONCRETE PAVEMENT LONGITUDINAL JOINTS AND TIES
13C11-12A	RURAL DOWELED CONCRETE PAVEMENT
13C11-12B	RURAL DOWELED CONCRETE PAVEMENT
14B07-15A	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-15B	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-15C	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-15D	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-15E	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-15F	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-15G	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-15H	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B07-15I	CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"
14B42-06A	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B42-06B	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B42-06C	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B42-06D	MIDWEST GUARDRAIL SYSTEM (MGS) GUARDRAIL
14B44-04A	MIDWEST GUARDRAIL SYSTEM ENERGY ABSORBING TERMINAL (MGS)
14B44-04B	MIDWEST GUARDRAIL SYSTEM ENERGY ABSORBING TERMINAL (MGS)
14B44-04C	MIDWEST GUARDRAIL SYSTEM ENERGY ABSORBING TERMINAL (MGS)
14B45-05A	MIDWEST GUARDRAIL SYSTEM THRIE BEAM TRANSITION (MGS)
14B45-05B	MIDWEST GUARDRAIL SYSTEM THRIE BEAM TRANSITION (MGS)
14B45-05C	MIDWEST GUARDRAIL SYSTEM THRIE BEAM TRANSITION (MGS)
14B45-05F	MIDWEST GUARDRAIL SYSTEM THRIE BEAM TRANSITION (MGS)
15C08-20A	LONGITUDINAL MARKING (MAINLINE)
15C11-08B	CHANNELIZING DEVICES DRUMS, CONES, BARRICADES AND VERTICAL PANELS
15C12-07	TRAFFIC CONTROL FOR LANE CLOSURE WITH FLAGGING OPERATION
15C33-04	STOP LINE AND CROSSWALK PAVEMENT MARKING
15D33-06	TRAFFIC CONTROL, ONE LANE ROAD WITH TEMPORARY SIGNALS
15D38-02A	TEMPORARY TRAFFIC CONTROL SIGN MOUNTING
15D38-02B	ATTACHMENT OF SIGNS TO POSTS





TYPE "F"


USE WITH TYPES A & D CONCRETE CURB & GUTTER, 36 INCH.




TYPE "S"




TYPE "V"

ALTERNATIVE CURB BOX
FOR TYPE "HM" COVERUSE WITH TYPES G & J CONCRETE CURB & GUTTER, 30 INCH
NOTED AS TYPE HM-GJ ON DRAINAGE TABLENOTE:
SPECIAL GRATE FOR THE
TYPE "H" COVER MAY ALSO BE
USED FOR THE TYPE "HM-GJ" COVER
NOTED AS TYPE HM-GJ-S ON DRAINAGE TABLE

GENERAL NOTES


DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING
SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND
THE APPLICABLE SPECIAL PROVISIONS.DETAIL DRAWINGS FOR PROPOSED ALTERNATE DESIGNS FOR INLET COVERS SHALL BE SUBMITTED
TO THE ENGINEER FOR APPROVAL PROVIDING THAT SUCH ALTERNATE DESIGNS MAKE PROVISION
FOR EQUIVALENT CAPACITY AND STRENGTH.


TYPE "HM"

USE WITH TYPES A & D CONCRETE
CURB & GUTTER, 36 INCH.NOTE:
SPECIAL GRATE FOR THE
TYPE "H" COVER MAY ALSO BE
USED FOR THE TYPE "HM" COVER
NOTED AS TYPE HM-S ON DRAINAGE TABLE


TYPE "T"

USE WITH TYPES R & T CONCRETE CURB & GUTTER, 36 INCH.


INLET COVERS
TYPE F, HM, HM-S, S, T, V,
HM-GJ, & HM-GJ-SSTATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATIONAPPROVED
11/27/2013
DATE /S/ Jerry H. Zogg
ROADWAY STANDARDS DEVELOPMENT
ENGINEER
FHWA




PLAN VIEW




PLAN VIEW




RISER JOINTS TO BE SEALED WITH A BUTYL RUBBER SEAL PER SEALANT MANUFACTURERS RECOMMENDATIONS CONFORMING TO ASTM C 990 (TYP)



SECTION A-A



SECTION B-B



SEPARATE PRECAST REINFORCED CONCRETE BASE OPTION

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

UNLESS OTHERWISE AUTHORIZED IN WRITING BY THE ENGINEER, THE CONTRACTOR SHALL NOT ORDER AND DELIVER PRECAST INLET UNITS REQUIRED FOR THE PROJECT UNTIL A LIST OF SIZES IS FURNISHED BY THE ENGINEER.

DETAILED DRAWINGS FOR PROPOSED ALTERNATE DESIGNS FOR UNDERGROUND DRAINAGE STRUCTURES SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PROVIDING THAT SUCH ALTERNATE DESIGNS MAKE PROVISION FOR EQUIVALENT CAPACITY AND STRENGTH.

ALL PRECAST INLET UNITS SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF ASTM C 913.

ALL DRAINAGE STRUCTURES ARE DESIGNATED ON THE PLANS AS "MANHOLES 3X3-L", "CATCH BASINS 4-B", "INLETS 2X3-H", ETC. THE FIRST NUMBERS DESIGNATES THE SIZE OF THE STRUCTURE, AND THE FOLLOWING LETTER DESIGNATES THE TYPE OF COVER TO BE USED TO COMPRISE THE COMPLETE UNIT.

BASES SHALL BE PLACED ON A BED OF MATERIAL AT LEAST 6 INCHES IN DEPTH, WHICH MEETS THE REQUIREMENTS OF FOUNDATION BACKFILL. THIS BEDDING SHALL BE COMPACTED AND PROVIDE UNIFORM SUPPORT FOR THE ENTIRE AREA OF THE BASE.

ALL BAR STEEL REINFORCEMENT SHALL BE EMBEDDED 2 INCHES CLEAR UNLESS OTHERWISE SHOWN OR NOTED.

PRECAST REINFORCED RISERS SHALL HAVE A TONGUE AND GROOVE JOINT WITH TONGUE UP OR DOWN.

4" OVERHANGING BASES ARE REQUIRED FOR CAST-IN-PLACE REINFORCED CONCRETE AND CONCRETE BLOCK INSTALLATIONS. 4" OVERHANG IS REQUIRED WHEN SEPARATE PRECAST BASE IS PROVIDED. OVERHANG IS NOT REQUIRED ON PRECAST STRUCTURES WITH AN INTEGRAL OR MONOLITHIC BASE.

MAXIMUM INSIDE PIPE DIAMETER DETERMINED BY 3 INCH CLEARANCE ON EACH SIDE OF THE OUTSIDE WALL OF THE PIPE. SEE DETAIL "A". ASSUMES PIPE ENTERS PERPENDICULAR TO THE STRUCTURE.

① FOR PRECAST INLETS PROVIDE REINFORCING STEEL IN ACCORDANCE TO ASTM C 913.


② CONTRACTOR TO PROVIDE DRAWING(S) STAMPED BY A PROFESSIONAL ENGINEER FOR STEEL REINFORCING DESIGN FOR CAST-IN-PLACE STRUCTURES.

INLET COVER MATRIX

INLET SIZE		INLET COVER TYPE	ALL A'S	ALL B'S	BW	F	ALL H'S	S	T	V	WM
	WIDTH ① (FT)	LENGTH ② (FT)									
2X2-FT	2	2	X	X				X		X	
2X2.5-FT	2	2.5			X			X	X	X	X
2X3-FT	2	3					X				
2.5X3-FT	2.5	3				X					

PIPE MATRIX

INLET SIZE	MAXIMUM INSIDE PIPE DIAMETER	
	WIDTH (IN)	LENGTH (IN)
2X2-FT	12	12
2X2.5-FT	12	18
2X3-FT	12	24
2.5X3-FT	18	24



DETAIL "A"


INLETS 2X2-FT, 2X2.5-FT,
2X3-FT AND 2.5X3-FT

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


APPROVED
Sept., 2016
DATE
FHWA

/S/ Rodney Taylor
ROADWAY STANDARDS DEVELOPMENT
UNIT SUPERVISOR


INLETS 2X2-FT, 2X2.5-FT, 2X3-FT AND 2.5X3-FT




TYPES A^① & D




6" SLOPED CURB TYPES G^① & J



4" SLOPED CURB TYPES G^① & J




TYPES K^① & L
(OPTIONAL CURB SHAPE)




TYPES K^① & L

CONCRETE CURB AND GUTTER 30"




TYPES A^① & D


CONCRETE CURB AND GUTTER 18"



6" SLOPED CURB TYPES A^① & D




4" SLOPED CURB TYPES A^① & D



4" SLOPED CURB TYPES R^① & T^⑤

CONCRETE CURB AND GUTTER 36"

TBT & TBTT	X
30"	22"
36"	28"




TYPES TBT & TBTT^①

CONCRETE CURB AND GUTTER


PAVEMENT THICKNESS
AND MAXIMUM CONCRETE
PANEL WIDTH TABLE

PAVEMENT THICKNESS	MAXIMUM PANEL WIDTH
LESS THAN 10"	12'
10" & ABOVE	15'



PARTIAL SECTION OF PAVEMENT *
WITH INTEGRAL CURB AND GUTTER

* BIKE LANE IS NOT SHOWN



REVERSE SLOPE GUTTER^⑥
(TYPICAL FOR ALL CURB & GUTTER TYPES)

GENERAL NOTES

DETAILS OF CONSTRUCTION AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

PAVEMENT TIES AND TIE BARS SHALL BE EPOXY COATED IN CONFORMANCE WITH SUBSECTION 505.2.6.2 OF THE STANDARD SPECIFICATIONS.


INTEGRAL CURB AND GUTTER SHALL CONFORM TO THE DETAILS SHOWN FOR CONCRETE CURB AND GUTTER INCLUDING THE TRANSVERSE GUTTER SLOPE.

UNLESS OTHERWISE SHOWN ON THE TYPICAL CROSS SECTIONS, THE BASE AGGREGATE AND COMMON EXCAVATION LIMITS ARE 2' - 0" BEHIND THE BACK OF CURBS.


- ① TIE BARS ARE REQUIRED FOR CURB AND GUTTERS TYPES A, G, K, R, AND TBTT.
- ② THE BOTTOM OF CURB AND GUTTER MAY BE CONSTRUCTED EITHER LEVEL OR PARALLEL TO THE SLOPE OF THE SUBGRADE OR BASE AGGREGATE PROVIDED A 6" MINIMUM GUTTER THICKNESS IS MAINTAINED.
- ③ USE 8" MINIMUM GUTTER THICKNESS WHEN USED WITH AN ADJACENT CONCRETE TRUCK APRON PLACED BEHIND BACK OF CURB.
- ④ THE BOTTOM OF CURB AND GUTTER MAY BE CONSTRUCTED EITHER LEVEL OR PARALLEL TO THE SLOPE OF THE SUBGRADE OR BASE AGGREGATE PROVIDED A 8" MINIMUM GUTTER THICKNESS IS MAINTAINED.
- ⑤ THE FACE OF CURB IS 6" FROM THE BACK OF CURB.
- ⑥ WHEN REVERSE SLOPE GUTTER IS REQUIRED, THE LOCATION(S) WILL BE SHOWN ELSEWHERE IN THE PLAN.
- ⑦ USE 4% GUTTER CROSS SLOPE UNLESS OTHERWISE NOTED IN THE PLANS.
- ⑧ INCLUDE LONGITUDINAL JOINT AND TIE BARS ALONG LANE EDGE WHEN CONCRETE PANEL WIDTH EXCEEDS THE MAXIMUM WIDTH PER TABLE BELOW. LONGITUDINAL JOINT(S) ARE NOT ALLOWED WITHIN TRAFFIC LANES AND BIKE LANES. LONGITUDINAL JOINT MAY BE SAWED.

CONCRETE CURB AND GUTTER


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




END SECTION CURB AND GUTTER



DETAIL OF CURB AND GUTTER AT INLETS
(TYPICAL H INLET COVER SHOWN)




TYPES A^① & D




TYPES G^① & J

CONCRETE CURB



PLAN VIEW



SECTION A - A

TIE BARS DRILLED
INTO EXISTING PAVEMENT


GENERAL NOTES

DETAILS OF CONSTRUCTION AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.


PAVEMENT TIES AND TIE BARS SHALL BE EPOXY COATED IN CONFORMANCE WITH SUBSECTION 505.2.6.2 OF THE STANDARD SPECIFICATIONS.

UNLESS OTHERWISE SHOWN ON THE TYPICAL CROSS SECTIONS, THE BASE AGGREGATE AND COMMON EXCAVATION LIMITS ARE 2' - 0" BEHIND THE BACK OF CURBS.

- ① TIE BARS ARE REQUIRED FOR CURB AND GUTTERS TYPES A, G, K, R, AND TBTT.
- ② THE BOTTOM OF CURB AND GUTTER MAY BE CONSTRUCTED EITHER LEVEL OR PARALLEL TO THE SLOPE OF THE SUBGRADE OR BASE AGGREGATE PROVIDED A 6" MINIMUM GUTTER THICKNESS IS MAINTAINED.
- ⑨ REFER TO SDD 08D18 AND 08D19 FOR ADDITIONAL DRIVEWAY ENTRANCE CURB DETAILS.



TYPICAL TIE BAR LOCATION^①




DRIVEWAY ENTRANCE CURB^⑨
(WHEN DIRECTED BY THE ENGINEER)

CONCRETE CURB, TIES
AND CURB AND GUTTER
APPLICATIONS


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
February 2020
DATE /S/ Rodney Taylor
ROADWAY STANDARDS DEVELOPMENT
ENGINEER


FHWA




INLET PLAN VIEW
(NOTE: RAIL NOT SHOWN FOR CLARITY)



PLAN VIEW



ELEVATION VIEW



GENERAL NOTES


DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

ALL STEEL REINFORCEMENT SHALL BE EMBEDDED 2 INCHES CLEAR UNLESS OTHERWISE SHOWN OR NOTED.


- 1 USE A JOINT SEALANT CONFORMING TO STANDARD SPECIFICATION 415.2.6.
- 2 NO. 4 X 2' - 0" TIE BARS SPACED AT 12" C-C TO BE PLACED BY BRIDGE CONTRACTOR OR DRILLED TIE BARS PLACED AS DIRECTED BY THE ENGINEER.
- 3 PAVED CONCRETE SHOULDER (SDD 13A03) OR CONCRETE DRAINAGE SLAB.
- 4 CONCRETE PAVEMENT APPROACH SLAB (SHOWN) OR STRUCTURE APPROACH SLAB AND CONCRETE PAVEMENT APPROACH SLAB. SEE SDD 13B02.
- 5 PAVED CONCRETE SHOULDER (SDD 13A03) OR ASPHALT SHOULDER.
- 6 CONCRETE CURB AND GUTTER 4-INCH SLOPED 36-INCH TYPE TBT OR TBT. USE TYPE TBT CURB WITH NO. 4 X 2' - 0" TIE BARS SPACED AT 3' - 0" C-C ONLY WHEN ADJACENT TO CONCRETE PAVEMENTS.
- 7 PLACE DRAINAGE STRUCTURE BEFORE MSG THRIE BEAM TRANSITION POST 1 (SEE SDD 14B45)
- 8 CENTER DRAINAGE STRUCTURE BETWEEN POSTS. 6-INCH MINIMUM SEPARATION FROM OUTSIDE WALL OF DRAINAGE STRUCTURE TO POSTS.
- 9 SEE SDD 08A05 AND 08C07 FOR DETAILS. SEE ROADWAY PLANS FOR LOCATION.
- 10 START CURB AND GUTTER TRANSITION OR END SECTION.
- 11 DEPRESS FLOW LINE (SEE DETAIL)
- 12 MEDIUM RIPRAP UNLESS OTHERWISE SPECIFIED.
- 13 LIMITS OF ADDITIONAL RIPRAP WHEN SPECIAL DITCH IS REQUIRED.

**CONCRETE SURFACE
DRAINS DROP INLET TYPE
AT STRUCTURES**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




**CURB AND GUTTER TRANSITION SECTION
CONCRETE CURB AND GUTTER 4-INCH SLOPED
36 INCH TYPE TBT OR TBTT**




**CURB AND GUTTER END SECTION
CONCRETE CURB AND GUTTER 4-INCH SLOPED
36 INCH TYPE TBT OR TBTT**




**CURB AND GUTTER FLOW LINE DEPRESSION
AT INLETS CONCRETE CURB AND GUTTER
4-INCH SLOPED 36 INCH TYPE TBT OR TBTT**




SECTION A - A




**SECTION C - C
JOINT DETAIL FOR BRIDGE APPROACH
WITH CONCRETE SHOULDERS**




SECTION B-B




SECTION D - D



**SECTION C - C
JOINT DETAIL FOR BRIDGE WITH STRUCTURAL
APPROACH SLAB AND CONCRETE APPROACH SLAB**



SECTION E - E



SECTION F - F

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.


ALL STEEL REINFORCEMENT SHALL BE EMBEDDED 2 INCHES CLEAR UNLESS OTHERWISE SHOWN OR NOTED.

- ① USE A JOINT SEALANT CONFORMING TO STANDARD SPECIFICATION 415.2.6.
- ② NO. 4 X 2' - 0" TIE BARS SPACED AT 12" C-C TO BE PLACED BY BRIDGE CONTRACTOR OR DRILLED TIE BARS PLACED AS DIRECTED BY THE ENGINEER.
- ③ PAVED CONCRETE SHOULDER (SDD 13A03) OR CONCRETE DRAINAGE SLAB.
- ④ CONCRETE PAVEMENT APPROACH SLAB (SHOWN) OR STRUCTURE APPROACH SLAB AND CONCRETE PAVEMENT APPROACH SLAB. SEE SDD 13B02 AND STRUCTURE PLANS.
- ⑤ PAVED CONCRETE SHOULDER (SDD 13A03) OR ASPHALT SHOULDER.
- ⑥ CONCRETE CURB AND GUTTER 4-INCH SLOPED 36-INCH TYPE TBT OR TBTT. USE TYPE TBTT CURB WITH NO. 4 X 2' - 0" TIE BARS SPACED AT 3' - 0" C-C ONLY WHEN ADJACENT TO CONCRETE PAVEMENTS.
- ⑦ PLACE DRAINAGE STRUCTURE BEFORE MSG THRIE BEAM TRANSITION POST 1 (SEE SDD 14B45)
- ⑧ CENTER DRAINAGE STRUCTURE BETWEEN POSTS. 6-INCH MINIMUM SEPARATION FROM OUTSIDE WALL OF DRAINAGE STRUCTURE TO POSTS.
- ⑨ SEE SDD 08A05 AND 08C07 FOR DETAILS. SEE ROADWAY PLANS FOR LOCATION.
- ⑩ START CURB AND GUTTER TRANSITION OR END SECTION.
- ⑪ DEPRESS FLOW LINE (SEE DETAIL)
- ⑫ MEDIUM RIPRAP UNLESS OTHERWISE SPECIFIED.
- ⑬ LIMITS OF ADDITIONAL RIPRAP WHEN SPECIAL DITCH IS REQUIRED.
- ⑭ GEOTEXTILE FABRIC TYPE HR.
- ⑮ MSG THRIE BEAM TRANSITION POST 1. SEE SDD 14B45 FOR ADDITIONAL CONSTRUCTION DETAILS AND ACCEPTABLE MATERIALS.
- ⑯ MAINTAIN WIDTH, THICKNESS AND CROSS SLOPE OF ADJACENT TYPE TBT OR TBTT CURB. SEE NOTE 6 FOR TIE BAR SPACING.
- ⑰ ALIGN FACE OF POST BLOCK WITH FLOW LINE.
- ⑱ MAINTAIN FLOW LINE AT EDGE OF PAVEMENT/FACE OF BEAM GUARD AS APPLICABLE.
- ⑲ MANUFACTURER SUPPLIED BEND.
- ⑳ MANUFACTURER SUPPLIED EXTERNAL MECHANICAL COUPLING OR A MANUFACTURER RECOMMENDED COUPLING WITH A MASTIC IMPREGNATED GEOTEXTILE WRAP AND MECHANICAL FASTENING BANDS.
- ㉑ MINIMUM REINFORCEMENT SHALL BE 6" X 6" - W4.0 X W4.0 OR NO. 3 BARS LONGITUDINAL AND TRANSVERSE SPACING 12" C - C.
- ㉒ DO NOT CONSTRUCT AN EXPANSION JOINT OR INSTALL DOWEL BARS WHEN ABUTTING HMA PAVEMENTS.


CONCRETE SURFACE DRAINS DROP INLET TYPE AT STRUCTURES

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


APPROVED
February 2020
DATE /S/ Rodney Taylor
ROADWAY STANDARDS DEVELOPMENT
ENGINEER
FHWA




PLAN VIEW
TYPICAL APPLICATION OF SILT FENCE



SILT FENCE



PLAN VIEW
SILT FENCE AT MEDIAN SURFACE DRAINS




JOINING TWO LENGTHS OF SILT FENCE (5)


GENERAL NOTES

DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND APPLICABLE SPECIAL PROVISIONS.

- ① HORIZONTAL BRACE REQUIRED WITH 2" X 4" WOODEN FRAME OR EQUIVALENT AT TOP OF POSTS.
- ② FOR MANUAL INSTALLATIONS THE TRENCH SHALL BE A MINIMUM OF 4" WIDE & 6" DEEP TO BURY AND ANCHOR THE GEOTEXTILE FABRIC. FOLD MATERIAL TO FIT TRENCH AND BACKFILL & COMPACT TRENCH WITH EXCAVATED SOIL.
- ③ WOOD POSTS SHALL BE A MINIMUM SIZE OF 1 1/8" X 1 1/8" OF OAK OR HICKORY.
- ④ SILT FENCE TO EXTEND ACROSS THE TOP OF THE PIPE.
- ⑤ CONSTRUCT SILT FENCE FROM A CONTINUOUS ROLL IF POSSIBLE BY CUTTING LENGTHS TO AVOID JOINTS. IF A JOINT IS NECESSARY USE ONE OF THE FOLLOWING TWO METHODS; A) OVERLAP THE END POSTS AND TWIST, OR ROTATE, AT LEAST 180 DEGREES, B) HOOK THE END OF EACH SILT FENCE LENGTH.



TRENCH DETAIL





SILT FENCE TIE BACK
(WHEN REQUIRED BY THE ENGINEER)

SILT FENCE

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
4-29-05 /S/ Beth Cannestra
DATE CHIEF ROADWAY DEVELOPMENT ENGINEER
FHWA



INLET PROTECTION, TYPE A


GENERAL NOTES

INLET PROTECTION DEVICES SHALL BE MAINTAINED OR REPLACED AT THE DIRECTION OF THE ENGINEER.

MANUFACTURED ALTERNATIVES APPROVED AND LISTED ON THE DEPARTMENT'S EROSION CONTROL PRODUCT ACCEPTABILITY LIST MAY BE SUBSTITUTED.


WHEN REMOVING OR MAINTAINING INLET PROTECTION, CARE SHALL BE TAKEN SO THAT THE SEDIMENT TRAPPED ON THE GEOTEXTILE FABRIC DOES NOT FALL INTO THE INLET. ANY MATERIAL FALLING INTO THE INLET SHALL BE REMOVED IMMEDIATELY.

- ① FINISHED SIZE, INCLUDING FLAP POCKETS WHERE REQUIRED, SHALL EXTEND A MINIMUM OF 10" AROUND THE PERIMETER TO FACILITATE MAINTENANCE OR REMOVAL.
- ② FOR INLET PROTECTION, TYPE C (WITH CURB BOX), AN ADDITIONAL 18" OF FABRIC IS WRAPPED AROUND THE WOOD AND SECURED WITH STAPLES. THE WOOD SHALL NOT BLOCK THE ENTIRE HEIGHT OF THE CURB BOX OPENING.
- ③ FLAP POCKETS SHALL BE LARGE ENOUGH TO ACCEPT WOOD 2X4.



**INLET PROTECTION, TYPE B
(WITHOUT CURB BOX)**

(CAN BE INSTALLED IN ANY INLET WITHOUT A CURB BOX)



INLET PROTECTION, TYPE C (WITH CURB BOX)

INSTALLATION NOTES

TYPE B & C

TRIM EXCESS FABRIC IN THE FLOW LINE TO WITHIN 3" OF THE GRATE.


THE CONTRACTOR SHALL DEMONSTRATE A METHOD OF MAINTENANCE, USING A SEWN FLAP, HAND HOLDS OR OTHER METHOD TO PREVENT ACCUMULATED SEDIMENT FROM ENTERING THE INLET.

TYPE D

DO NOT INSTALL INLET PROTECTION TYPE D IN INLETS SHALLOWER THAN 30", MEASURED FROM THE BOTTOM OF THE INLET TO THE TOP OF THE GRATE.

TRIM EXCESS FABRIC IN THE FLOW LINE TO WITHIN 3" OF THE GRATE.

THE INSTALLED BAG SHALL HAVE A MINIMUM SIDE CLEARANCE, BETWEEN THE INLET WALLS AND THE BAG, MEASURED AT THE BOTTOM OF THE OVERFLOW HOLES, OF 3". WHERE NECESSARY THE CONTRACTOR SHALL CINCH THE BAG, USING PLASTIC ZIP TIES, TO ACHIEVE THE 3" CLEARANCE. THE TIES SHALL BE PLACED AT A MAXIMUM OF 4" FROM THE BOTTOM OF THE BAG.



INLET PROTECTION, TYPE D

(CAN BE INSTALLED IN ANY INLET TYPE WITH OR WITHOUT A CURB BOX AS PER NOTE ②)




**INLET PROTECTION
TYPE A, B, C, AND D**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
10/16/02 /S/ Beth Cannestra
DATE
FHWA CHIEF ROADWAY DEVELOPMENT ENGINEER

METAL APRON ENDWALLS												
PIPE DIA. (IN.)	MIN. THICK. (Inches)		DIMENSIONS (Inches)							APPROX. SLOPE		BODY
	STEEL	ALUM.	A (±1")	B (MAX.)	H (±1")	L (±1 1/2")	L1 ①	L2 ①	W (±2")			
12	.064	.060	6	6	6	21	12	17 1/2	24	2 1/2 to 1		1 Pc.
15	.064	.060	7	8	6	26	14	21 3/4	30	2 1/2 to 1		1 Pc.
18	.064	.060	8	10	6	31	15	28 1/4	36	2 1/2 to 1		1 Pc.
21	.064	.060	9	12	6	36	18	29 5/8	42	2 1/2 to 1		1 Pc.
24	.064	.075	10	13	6	41	18	37 1/4	48	2 1/2 to 1		1 Pc.
30	.079	.075	12	16	8	51	18	52 1/4	60	2 1/2 to 1		1 Pc.
36	.079	.105	14	19	9	60	24	59 3/4	72	2 1/2 to 1		2 Pc.
42	.109	.105	16	22	11	69	24	75 5/8	84	2 1/2 to 1		2 Pc.
48	.109	.105	18	27	12	78	24	81	90	2 1/4 to 1		3 Pc.
54	.109	.105	18	30	12	84	30	85 1/2	102	2 1/4 to 1		3 Pc.
60	.109x	.105x	18	33	12	87	—	—	114	2 to 1		3 Pc.
66	.109x	.105x	18	36	12	87	—	—	120	2 to 1		3 Pc.
72	.109x	.105x	18	39	12	87	—	—	126	2 to 1		3 Pc.
78	.109x	.105x	18	42	12	87	—	—	132	1 1/2 to 1		3 Pc.
84	.109x	.105x	18	45	12	87	—	—	138	1 1/2 to 1		3 Pc.
90	.109x	.105x	18	37	12	87	—	—	144	1 1/2 to 1		3 Pc.
96	.109x	.105x	18	35	12	87	—	—	150	1 1/2 to 1		3 Pc.




* EXCEPT CENTER PANEL
SEE GENERAL NOTES




METAL ENDWALLS

REINFORCED CONCRETE APRON ENDWALLS												
PIPE DIA. (IN.)	DIMENSIONS (Inches)							APPROX. SLOPE				
	T	A	B	C	D	E	G					
12	2	4	24	48 1/8	72 1/8	24	2	3 to 1				
15	2 1/4	6	27	46	73	30	2 1/4	3 to 1				
18	2 1/2	9	27	46	73	36	2 1/2	3 to 1				
21	2 3/4	9	36	37 1/2	73 1/2	42	2 3/4	3 to 1				
24	3	9 1/2	43 1/2	30	73 1/2	48	3	3 to 1				
27	3 1/4	10 1/2	49 1/2	24	73 1/2	54	3 1/4	3 to 1				
30	3 1/2	12	54	19 3/4	73 1/2	60	3 1/2	3 to 1				
36	4	15	63	34 3/4	97 3/4	72	4	3 to 1				
42	4 1/2	21	63	35	98	78	4 1/2	3 to 1				
48	5	24	72	26	98	84	5	3 to 1				
54	5 1/2	27	65	33 1/4-35	98 1/4-100	90	5 1/2	2 1/2 to 1				
60	6	30-35	60	39	99	96	5	2 to 1				
66	6 1/2	24-30	72-78	21-27	99	102	5 1/2	2 to 1				
72	7	24-36	78	21	99	108	6	2 to 1				
78	7 1/2	24-36	78	21	99	114	6 1/2	2 to 1				
84	8	36	90 1/2	21	111 1/2	120	6 1/2	1 1/2 to 1				
90	8 1/2	41	87 1/2	24	111 1/2	132	6 1/2	1 1/2 to 1				





* MINIMUM
** MAXIMUM



1" WIDE, 12 GA. (0.109" THICK) GALVANIZED STRAP WITH STANDARD 6" X 1/2" BAND BOLT AND NUT



ALTERNATE FOR TYPE 1 CONNECTION
END SECTION CONNECTOR STRAP




NOTE: DIMPLED BAND FITS OVER OUTSIDE OF ENDWALL, AND CORRUGATED BAND FITS INSIDE ENDWALL. DIMPLED BAND MAY BE USED WITH HELICALLY CORRUGATED PIPE.

FOR CIRCUMFERENTIALLY CORRUGATED PIPE USE ENDWALL CONNECTION DETAILS 1, 2, 3 OR 5 AS APPLICABLE.

FOR HELICALLY CORRUGATED PIPE USE ENDWALL CONNECTION DETAILS 1, 2 OR 5.

FOR HELICALLY CORRUGATED PIPES WITH TWO CIRCUMFERENTIAL CORRUGATIONS AT EACH END USE ENDWALL CONNECTION DETAILS 1, 2 OR 3.

CONNECTION DETAILS



SECTION A-A

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

CONCRETE CULVERT ENDWALLS MAY NOT BE USED WITH GALVANIZED STEEL OR ALUMINUM CULVERT PIPE OR VISE VERSA. GALVANIZED STEEL OR ALUMINUM ENDWALLS SHALL NORMALLY BE INSTALLED ON CULVERT PIPE OF THE SAME METAL.

ALL THREE PIECE STEEL APRON ENDWALLS FOR 60" DIAMETER PIPE AND LARGER SHALL HAVE 0.109" SIDES AND 0.138" CENTER PANELS. ALL THREE PIECE ALUMINUM APRON ENDWALLS FOR 60" DIAMETER PIPE AND LARGER SHALL HAVE 0.105" SIDES AND 0.134" CENTER PANELS. THE WIDTH OF CENTER PANELS SHALL BE GREATER THAN 20 PERCENT OF THE PIPE PERIMETER.


LAP SEAMS SHALL BE TIGHTLY JOINED BY GALVANIZED RIVETS OR BOLTS FOR STEEL UNITS AND ALUMINUM RIVETS AND BOLTS FOR ALUMINUM UNITS. FOR THE 60" THROUGH 96" DIAMETER APRON ENDWALL SIZES, THE REINFORCED EDGES AND CENTER PANEL SEAMS SHALL BE FURTHER REINFORCED WITH GALVANIZED STEEL OR ALUMINUM STIFFENER ANGLES. THE ANGLES SHALL BE ATTACHED BY GALVANIZED NUTS AND BOLTS FOR STEEL UNITS AND ALUMINUM NUTS AND BOLTS FOR ALUMINUM UNITS.

WHERE TWO OR MORE PIPES WITH APRON ENDWALLS ARE LAID ADJACENT TO EACH OTHER, THEY SHALL BE SEPARATED BY A DISTANCE SUFFICIENT TO PROVIDE A MINIMUM CLEARANCE OF 6 INCHES BETWEEN APRON ENDWALLS.

① FOR PIPE SIZES UP TO 60" DIAMETER, A 180° ROLLED EDGE MAY BE USED INSTEAD OF STEEL ROD REINFORCEMENT. SEE SECTION A-A.

APRON ENDWALLS FOR CULVERT PIPE	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED 11/30/94 DATE	/S/ Rory L. Rhinesmith CHIEF ROADWAY DEVELOPMENT ENGINEER
FHWA	


MINIMUM POLE LENGTHS	POLE BURIAL DEPTHS
25'	5'
30'	6'
35'	7'
40'	8'
45'	9'



DETAIL "A"

GENERAL NOTES

- DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.
- WOOD POLES SHALL BE CLASS 4. LENGTH DETERMINED BY SIGNAL PLAN.
 - SIGNAL FACES:
 - ALL SECTIONS SHALL BE 12" AND POLYCARBONATE.
 - EACH SHALL CONTAIN A 5" WIDE DULL BLACK POLYCARBONATE BACKPLATE.
 - EACH SHALL BE WIRED FROM THE TOP SIGNAL MOUNTING BRACKET.
 - NEAR RIGHT SIGNAL FACE SUSPENDED ON THE TETHER (NO BACKPLATE) SHALL NOT BE OVER THE TRAVELED WAY. IF THE POLE IS WITHIN 5 FEET OF THE TRAVELED WAY MOUNT THE SIGNAL FACE ON THE WOOD POLE WITH BACKPLATE.
 - SPAN WIRE:
 - EACH SPAN WIRE SHALL BE INDIVIDUALLY DOWN GUYED
 - SIGNAL AND LIGHTING CABLES SHALL ONLY BE ATTACHED TO THE UPPER SPAN WIRE.
 - THE SIGNAL ASSEMBLY SHALL HAVE A 17' MIN. HEIGHT ABOVE THE ROADWAY. THIS SHALL BE MEASURED AFTER THE SPAN WIRE INSTALLATION IS COMPLETED WITH ALL CABLES AND SIGNAL FACES IN PLACE. MAINTAIN MINIMUM AND MAXIMUM HEIGHTS AS ROADWAY WORK PROGRESSES.





SPAN WIRE
TEMPORARY SIGNALS

SPAN WIRE TEMPORARY
TRAFFIC SIGNAL


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
June 2015 /S/ Ahmet Demerbilek
DATE STATE ELECTRICAL ENGINEER

FHWA



SPAN WIRE TEMPORARY TRAFFIC SIGNAL	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED June 2015 DATE	/S/ Ahmet Demerbilek ROADWAY STANDARDS DEVELOPMENT ENGINEER
FHWA	




GENERAL NOTES


- 1. USE 3/4" DRILL IN WOOD POLE TO PROVIDE FOR 5/8" BOLTS.
- 2. SAFETY LOOP REQUIRED ON EACH END OF ALL SPAN WIRES.

TYPICAL DEAD-ENDINGS OR GUYING


SPAN WIRE TEMPORARY TRAFFIC SIGNAL	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED June 2015 DATE	/S/ Ahmet Demerbilek ROADWAY STANDARDS DEVELOPMENT ENGINEER
FHWA	




TYPICAL DROP TO TEMPORARY MOVEABLE SIGNAL



TYPICAL SPAN WIRE MOUNTING HARDWARE



TETHER CLAMP ASSEMBLY OPTION







5 SECTION VERTICAL WITH 3 SECTION VERTICAL ON ONE SPAN WIRE



SPAN WIRE TEMPORARY TRAFFIC SIGNAL

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
June 2015
DATE /S/ Ahmet Demerbilek
ROADWAY STANDARDS DEVELOPMENT
ENGINEER
FHWA

**SPLICE BOX****TYPICAL SKID TYPE TEMPORARY**

ALL DOWN OR SIDEWALK GUYS SHALL BE INSTALLED IN THE OPPOSITE DIRECTION OF THE STRAIN OF THE SPAN WIRE

CORNER POLES**ISLAND POLES****MEDIAN POLES**


SPAN WIRE TEMPORARY TRAFFIC SIGNAL

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
June 2015
DATE

/S/ Ahmet Demerbilek
ROADWAY STANDARDS DEVELOPMENT
ENGINEER

FHWA



TYPICAL BRIDGE TEMPORARY TRAFFIC SIGNAL LOCATION

LEGEND

- WOOD POLE (NON-BREAKAWAY)
- WOOD POST (BREAKAWAY)
- SIGNAL CABLE
- SIGNAL CABLE W/MESSENGER
- DIRECTION OF TRAFFIC
- LED TRAFFIC SIGNAL WITH BACKPLATE

GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE CONTRACT.

POLE MOUNTED TRAFFIC SIGNAL CONTROL CABINET MAY BE MOUNTED ON THE SERVICE POLE IF THE ELECTRICAL UTILITY ALLOWS THE INSTALLATION.

WHEN UTILITY POLES ARE USED TO SPAN THE TEMPORARY OVERHEAD CABLE, WRITTEN PERMISSION MUST BE OBTAINED FROM THE OWNER OF THE POLES AND GIVEN TO THE PROJECT MANAGER. ALL PERTINENT UTILITY AND CODE CLEARANCES SHALL BE MAINTAINED.

WOOD POLES (NON-BREAKAWAY) SHALL BE NO CLOSER TO EDGE OF PAVEMENT THAN OFFSET DISTANCE CHART ALLOWS OR 4 FEET BEHIND PROTECTIVE BARRIER (BEAM GUARD, ETC.).


WOOD POSTS (BREAKAWAY) SHALL BE NO CLOSER THAN 2 FEET OUTSIDE OF SHOULDER.

VERTICAL CLEARANCE ETC. PER NEC.


TRAFFIC SIGNAL FACES SHALL BE TYPICALLY PLACED 12 FEET FROM EDGE OF PAVEMENT.

EACH TRAFFIC SIGNAL SHALL HAVE A BACKPLATE.


SIGNING, PAVEMENT MARKING AND LANE CONTROL REQUIREMENTS SHALL CONFORM TO STANDARD DETAIL DRAWING 15D33.



TYPICAL DROP TO TRAFFIC SIGNAL FACE



POLE MOUNT CABINET INSTALLATION



GROUND MOUNT CABINET INSTALLATION

MINIMUM POLE LENGTHS	CLASS	POLE BURIAL DEPTHS
25'	V	5'
30'	V	6'
35'	IV	7'
40'	IV	8'
45'	IV	9'


OFFSET DISTANCES FOR TEMPORARY NON-BREAKAWAY POLES	
SPEED LIMIT	OFFSET DISTANCE*
GREATER THAN 45 MPH	18 FT
45 MPH OR LESS	12 FT
45 MPH OR LESS W/CURBS	2 FT

* NOTE: OFFSET MEASURED FROM OUTER EDGE OF OUTSIDE THRU LANE.

BRIDGE TEMPORARY TRAFFIC SIGNAL INSTALLATION

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


APPROVED
March 2018
DATE /S/ Ahmet Demirbilek
ROADWAY STANDARDS DEVELOPMENT
ENGINEER
FHWA



GENERAL NOTES
USE 3/4\"/>

TYPICAL DEAD-ENDINGS OR GUYING

BRIDGE TEMPORARY TRAFFIC SIGNAL INSTALLATION	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED June 2015 DATE	/S/ Ahmet Demerbilek ROADWAY STANDARDS DEVELOPMENT ENGINEER
FHWA	



PLAN VIEW
CONCRETE PAVEMENT SHOULDER

TIE BAR TABLE

PAVEMENT DEPTH (D)	TIE BAR SIZE	TIE BAR LENGTH (L)	MAX. TIE BAR SPACING
< 10 1/2"	NO. 4	30"	36"
≥ 10 1/2"	NO. 5	36"	36"
	NO. 4 *	30"	24" **

* SUBSTITUTE BENT BARS AT LONGITUDINAL JOINTS WHEN EQUIPMENT LIMITATIONS DURING CONSTRUCTION WARRANT (e.g. AUXILIARY LANES OR TURN LANES)

** CONFORM TO 15" MINIMUM SPACING FROM TRANSVERSE JOINTS; SPACING BETWEEN TIE BARS WILL BE 30" AT TRANSVERSE JOINTS.


GENERAL NOTES

DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

TRANSVERSE JOINT DETAILS ARE SHOWN ELSEWHERE IN THE PLAN.

FINISH THE SHOULDER PAVEMENT CONFORMING TO SUBSECTION 415.3.8 OF THE STANDARD SPECIFICATIONS.

TIE BARS SHALL CONFORM TO SUBSECTION 505.2.4 OF THE STANDARD SPECIFICATIONS.



SECTION A-A
LONGITUDINAL CONSTRUCTION JOINT

PAVEMENT DEPTH, DOWEL BAR SIZE
AND JOINT SPACING TABLE

PAVEMENT DEPTH (D)	DOWEL BAR DIAMETER***	CONTRACTION JOINT SPACING
5 1/2", 6", 6 1/2"	NONE	12'
7", 7 1/2"	1"	14'
8", 8 1/2"	1 1/4"	15'
9", 9 1/2"	1 1/4"	15'
10" & ABOVE	1 1/2"	15'

*** FOR DOWELED CONCRETE SHOULDERS WITH TRAPEZOIDAL CROSS SECTIONS, CHOSE THE APPROPRIATE DOWEL BAR DIAMETER BASED ON THE SMALLER PAVEMENT DEPTH (LIKELY THE OUTSIDE EDGE OF THE SHOULDER). IF USING BASKETS, USE BASKETS FOR THE AVERAGE THICKNESS OF THE CROSS SECTION.

CONCRETE PAVEMENT SHOULDERS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED


June, 2015

DATE


FHWA

/S/ Peter Kemp, P.E.


PAVEMENT SUPERVISOR



**SKewed Approach
(Pavement more than two lanes)**




**SKews > 20°
(Pavement width ≤ 30')**




**SKews ≤ 20°
(Pavement width ≤ 30')**

APPROACH SLAB AND ADJACENT PAVEMENT


- * (RS) = REINFORCED CONCRETE SLAB
- * (PS) = PAVED CONCRETE SHOULDER OR CONCRETE DRAINAGE SLAB
- * (NRS) = NON - REINFORCED CONCRETE SLAB
- *** STANDARD DOWEL BAR DIAMETER (SEE SDD 13C11 AND SDD 13C13)



**SECTION A - A
REINFORCEMENT POSITIONING DETAIL**



**SECTION B - B
BEND DETAIL
BOTTOM REINFORCEMENT**




**SECTION C - C
TRANSITION DETAIL
APPROACH SLAB TO ADJACENT PAVEMENT**

GENERAL NOTES


THE CONTRACTOR MAY SPLICE NO. 6 BARS IN THE APPROACH SLAB FOR SKEWED STRUCTURES ONLY. STAGGER SPLICES WITH A MAXIMUM OF ONE SPLICE PER BAR. THE LENGTH OF LAP IS 20 INCHES.

TACK WELD DOWEL BARS TO THE BASKETS ON ALTERNATE ENDS.

- ① THE CONTRACTOR MAY USE NO. 4 BARS SPACED AT 2' - 0" C - C IN BOTH THE LONGITUDINAL AND TRANSVERSE DIRECTIONS FOR TOP REINFORCEMENT AS AN ALTERNATIVE TO THE WELDED WIRE FABRIC.
- ② THE CONTRACTOR MAY OMIT THE BARS BETWEEN REINFORCED SLABS WHERE SLAB REINFORCEMENT BARS EXTEND ACROSS THE CENTERLINE OR REFERENCE LINE.
- ③ DO NOT CONSTRUCT AN EXPANSION JOINT OR INSTALL DOWEL BARS WHEN ABUTTING AN HMA PAVEMENT.
- ④ USE A JOINT SEALANT CONFORMING TO STANDARD SPECIFICATION 415.2.6.
- ⑤ PLACE EXPANSION CAP ON THE END OF THE DOWEL THAT IS NOT TACK WELDED TO THE BASKET. DO NOT FORCE DOWEL BAR PAST THE DOWEL STOP.
- ⑥ EXTEND EXPANSION JOINT THROUGH ANY ADJACENT TIED CONCRETE.
- (A) STANDARD CONTRACTION JOINT NORMAL TO $\mathcal{C}$ OR $\mathcal{R}$.
- (B) STANDARD LONGITUDINAL JOINT WITH TIE BARS.
- (C) 1 1/2" EXPANSION JOINT WITH DOWEL BARS NORMAL TO $\mathcal{C}$ OR $\mathcal{R}$.



**SECTION D - D
CONTRACTION JOINT**




EXPANSION JOINT DETAIL

CONCRETE PAVEMENT APPROACH SLAB


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
November 2018 /S/ Peter Kemp, P.E.
DATE PAVEMENT SUPERVISOR

FHWA



CONSTRUCTION JOINT




SAWED JOINT

GENERAL NOTES


CREATE A LONGITUDINAL JOINT FOR PAVEMENT WIDTHS GREATER THAN 15 FEET.

CORRELATE LONGITUDINAL JOINTS WITH LANE LINES WHEN POSSIBLE.

- ① ANCHOR TIE BARS INTO DRILLED HOLES WITH AN EPOXY.
- ② PAVEMENT THAT WAS IN PLACE PRIOR TO THE CONTRACT.




PLAN VIEW




SECTION A-A
LONGITUDINAL CONSTRUCTION JOINT
TIE BARS ANCHORED
INTO EXISTING PAVEMENT


NO. 6 TIE BARS SPACED 30" C-C,
INSTALLED PERPENDICULAR
TO THE LONGITUDINAL JOINT. ①



DETAIL "A"



DETAIL "B"




DETAIL "C"

TIE BAR TABLE

PAVEMENT DEPTH (D)	TIE BAR SIZE	TIE BAR LENGTH (L)	MAX. TIE BAR SPACING
< 10 1/2"	NO. 4	30"	36"
≥ 10 1/2"	NO. 5	36"	36"
	NO. 4 *	30"	24" **

* SUBSTITUTE BENT BARS AT LONGITUDINAL JOINTS WHEN EQUIPMENT LIMITATIONS DURING CONSTRUCTION WARRANT (e.g. AUXILIARY LANES OR TURN LANES)

** CONFORM TO 15" MINIMUM SPACING FROM TRANSVERSE JOINTS; SPACING BETWEEN TIE BARS WILL BE 30" AT TRANSVERSE JOINTS.






PLAN VIEW
SHOWING LOCATION OF TIE BARS

CONCRETE PAVEMENT
LONGITUDINAL JOINTS AND TIES

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
March 2018 /S/ Peter Kemp, P.E.
DATE PAVEMENT SUPERVISOR
FHWA



GENERAL NOTES

CONTRACTION JOINTS

CONSTRUCT TRANSVERSE CONTRACTION JOINTS NORMAL TO THE CENTERLINE. SHOW THE LOCATION OF CONTRACTION JOINTS THROUGH INTERSECTIONS ON THE PLANS OR AS DIRECTED BY THE ENGINEER.

INSTALL DOWEL BARS PARALLEL TO THE PAVEMENT CENTERLINE AND PAVEMENT SURFACE.

FOR PAVEMENT SLABS OF VARYING WIDTHS, LOCATE THE OUTER MOST DOWEL BAR SO THAT THE CENTER OF THE BAR IS A MINIMUM OF 6 INCHES AND A MAXIMUM OF 18 INCHES FROM THE FREE EDGE OF PAVEMENT.



CONSTRUCTION JOINTS


LOCATE CONSTRUCTION JOINTS A MINIMUM OF 6 FEET FROM THE NEAREST CONTRACTION JOINT AND ALIGN PARALLEL TO CONTRACTION JOINTS.

- ① REFER TO TYPICAL CROSS SECTIONS FOR ADDITIONAL DETAILS.
- ② MEASURE THE ENTIRE PAVED WIDTH INCLUDING THE PORTION(S) LABELED PAVED SHOULDER AS CONCRETE PAVEMENT.


PAVEMENT DEPTH, DOWEL BAR SIZE AND JOINT SPACING TABLE

PAVEMENT DEPTH (D)	DOWEL BAR DIAMETER	CONTRACTION JOINT SPACING
5 1/2", 6", 6 1/2"	NONE	12'
7", 7 1/2"	1"	14'
8", 8 1/2"	1 1/4"	15'
9", 9 1/2"	1 1/4"	15'
10" & ABOVE	1 1/2"	15'





PLAN VIEW




②


SIDE VIEW

(NORMAL TO CENTERLINE)


CONTRACTION JOINT DOWEL ASSEMBLY ①




JOINT DETAIL



DOWELED CONTRACTION JOINT



TRANSVERSE CONSTRUCTION JOINT




DRILLED DOWEL BAR CONSTRUCTION JOINT ⑦


GENERAL NOTES

- ① OBTAIN THE ENGINEER'S APPROVAL FOR THE USE OF ALTERNATIVE DESIGNS OF THE DOWEL ASSEMBLY. USE MECHANICAL DOWEL BAR INSERTERS OR DOWEL ASSEMBLIES WHEN CONSTRUCTING CONTRACTION JOINTS.
- ② SECURE BASKETS WITH ANCHORS TO HOLD DOWEL BARS IN THE CORRECT POSITION AND ALIGNMENT. TYPE, LOCATION, NUMBER AND LENGTH OF ANCHORS ARE DEPENDENT UPON FIELD CONDITIONS.
- ③ FORM OR SAW CONSTRUCTION JOINTS. PROVIDE A 1/4-INCH RADIUS AT FORMED JOINTS.
- ④ PROVIDE A SMOOTH VERTICAL FACE FOR THE ENTIRE DEPTH OF THE PAVEMENT WHEN FORMING CONSTRUCTION JOINTS.
- ⑤ INSTALL DOWEL BARS AT CONSTRUCTION JOINTS BY FORMING OR DRILLING. INSTALL FORMED DOWEL BARS 12 INCHES C-C AND 12 INCHES FROM PAVEMENT EDGE. REMOVE EXCESS CONCRETE FROM THE FREE END OF THE DOWEL BAR IF DOWEL BARS ARE FORMED THROUGH A HEADER BOARD. INSTALL DRILLED DOWEL BARS ACCORDING TO *DRILLED DOWEL BAR CONSTRUCTION JOINT* DETAIL.
- ⑥ APPLY A THIN UNIFORM COATING OF SURFACE TREATMENT TO THE FREE END OF DOWEL BARS TO PREVENT BONDING.
- ⑦ ANCHOR DOWEL BARS INTO DRILLED HOLES WITH AN EPOXY. MAXIMUM DRILLED HOLE SIZE IS 1/8-INCH GREATER THAN DOWEL BAR DIAMETER, 9 INCHES IN LENGTH.


RURAL DOWELED CONCRETE PAVEMENT	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED March 2018 DATE	/S/ Peter Kemp, P.E. PAVEMENT SUPERVISOR
FHWA	




ANCHOR ON TRAFFIC SIDE
ONLY WHEN REQUIRED
(SEE SHEET D FOR ADDITIONAL
ANCHOR DETAIL)




END VIEW




ELEVATION VIEW




DETAIL "B"
LIFTING SLOT DETAIL



SECTION A-A
(STIRRUP PLACEMENT)




SECTION B-B
(STIRRUP PLACEMENT)




PLAN VIEW


DETAILS OF BARRIER SECTION



DETAILS OF BARRIER CONNECTION



DETAIL "A"
CONNECTION PIN
(A36 STEEL (10.9 LB EACH))



GENERAL NOTES

THESE GENERAL NOTES APPLY TO SHEETS 14B7-15(a) THRU 14B7-15(i).

DO NOT INTERMIX CONCRETE BARRIER TEMPORARY PRECAST, 12'-6" (CBTP12.5) WITH OTHER TEMPORARY CONCRETE BARRIERS.

USE ASTM A-615, GRADE 60, DEFORMED STEEL BARS FOR BARS 4A1, 6A2, 5B1 AND 4C1 IN THE BARRIER SECTION AND FOR 4V1, 4V2, 4V3, 4V4, 4V5, 4V6, 4F1, 4F2 AND 5F3 IN THE BARRIER TAPER SECTION.

LOOP BARS 6D1, 6D2 AND 6D3 SHALL BE 3/4" SMOOTH STEEL BARS WITH A MINIMUM YIELD STRENGTH OF 60 KSI, A TENSILE STRENGTH OF NOT LESS THAN 1.25 TIMES THE YIELD STRENGTH BUT A MINIMUM OF 80 KSI, A MINIMUM 14% ELONGATION IN 8 INCHES AND PASSING A 180 DEGREE BEND TEST USING A 3-1/2" PIN BEND DIAMETER FOR BEND TESTS. THE LOOPS SHALL BE INSTALLED WITHIN 1/8" OF THE PLAN DIMENSION.

CONSTRUCT LIFTING SLOTS AS SPECIFIED ON THE PLANS TO FACILITATE THE DRAINAGE OF WATER AFTER INSTALLATION.

PLACE BARRIER ON A PAVED SURFACE. REMOVE ALL LOOSE DIRT AND SAND FROM THE ROADWAY SURFACE PRIOR TO PLACEMENT OF THE BARRIER.

INSTALL MECHANICAL OR ADHESIVE ANCHORS PER MANUFACTURER'S RECOMMENDATIONS. PROVIDE MANUFACTURER'S INFORMATION TO PROJECT ENGINEER.

- MARK ONE END OF EACH BARRIER PERMANENTLY BY FORMING INTO THE BARRIER THE FOLLOWING INFORMATION:
 - TYPE: WICBTP
 - MANUFACTURER
 - DATE MANUFACTURED (MONTH AND YEAR)
- 1" CHAMFER TO PREVENT SPALLING.
- A 3/8" HOLE IN THE CONNECTION PIN, AT THE LOCATION SHOWN, IS ACCEPTABLE, BUT NOT REQUIRED..
- "V" NOTCH IS OPTIONAL.
- THE 4" DIAMETER, 11 GAUGE STEEL, ROUND MECHANICAL TUBING SLEEVE FOR LIFTING (OPTIONAL).
- NEVER USE LOOP BARS (6D1, 6D2 OR 6D3) TO LIFT, MOVE OR REPOSITION THE BARRIER.
- USE DELINEATORS CONFORMING TO SECTION 633 OF THE STANDARD SPECIFICATIONS. CONTRACTOR MAY USE ALTERNATE SHAPES AND HOUSING. INSTALL DELINEATORS ACCORDING TO MANUFACTURES INSTRUCTION. INSTALL YELLOW REFLECTORS WHEN BARRIER IS LOCATED TO THE LEFT OF TRAFFIC AND WHITE REFLECTORS WHEN BARRIER IS LOCATED TO THE RIGHT OF TRAFFIC. SPACE DELINEATORS A MAXIMUM OF 25 FEET APART. PROVIDE TOP MOUNTED DELINEATORS IN ADDITION TO THE SIDE MOUNTED DELINEATORS ON ALL BARRIER INSTALLATIONS LOCATED ON A CURVED ALIGNMENT LONGER THAN 200 FEET AND ON BARRIERS USED TO SEPARATE OPPOSING TRAFFIC.
- SEE SHEET D FOR HOW TO ANCHOR BARRIER. SEE SHEET E FOR WHEN TO ANCHOR BARRIER.
- 1" CHAMFER OPTIONAL.

f'c = 4,000 psi


CONCRETE BARRIER
TEMPORARY PRECAST, 12'-6"

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION


BARRIER TAPER SECTION
BILL OF MATERIALS

(PER 12'-6" BARRIER TAPER SECTION)


BAR	BAR SIZE	NO. OF BARS	LENGTH FT.
4V1	4	2	1'-11"
4V2	4	2	2'-2"
4V3	4	2	2'-6"
4V4	4	2	2'-9"
4V5	4	2	3'-2"
4V6	4	2	3'-4"
4F1	4	2	12'-0"
4F2	4	2	7'-6"
5F3	5	1	11'-9"
LOOP ASSEMBLY			
6D1	6	1	8'-5"
6D2	6	1	7'-7"
6D3	6	1	8'-6"



DETAIL "C"
BENT BAR DETAIL



ELEVATION
LOOP BAR ASSEMBLY



BAR	a	b
V1	10"	1"
V2	1'-1"	1 1/4"
V3	1'-5"	1 5/8"
V4	1'-8"	1 7/8"
V5	2'-0 1/2"	2 3/8"
V6	2'-3"	2 3/4"

4V BARS
2 AT EACH SIZE REQUIRED
FOR STIRRUP ASSEMBLY

TAPER BARRIER SECTION


GENERAL NOTES

① NEVER USE LOOP BARS (6D1, 6D2 OR 6D3) TO LIFT, MOVE OR REPOSITION THE BARRIER.

BARRIER SECTION
BILL OF MATERIALS


(PER 12'-6" BARRIER SECTION)

BAR	BAR SIZE	NO. OF BARS	LENGTH FT.
4A1	4	12	6'-0"
6A2	6	6	2'-11"
5B1	5	3	12'-2"
4C1	4	2	12'-2"
LOOP ASSEMBLY			
6D1	6	2	8'-5"
6D2	6	2	7'-7"
6D3	6	2	8'-6"




PLAN VIEW
LOOP BAR ASSEMBLY


(MARKED END SHOWN, INVERT FOR OTHER END)



ELEVATION VIEW



6A2





4A1

BARRIER SECTION


CONCRETE BARRIER
TEMPORARY PRECAST, 12'-6"

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




TREATMENT AT BRIDGE DECK EXPANSION JOINTS

(NO SINGLE CONCRETE BARRIER SECTION SHALL BE ANCHORED TO BOTH THE BRIDGE DECK AND THE APPROACH SLAB. ALL ANCHOR BOLT LOCATIONS SHALL BE ANCHORED TO THE DECK IN ACCORDANCE WITH THE DETAIL. NO MORE THAN ONE ANCHOR BOLT SHALL BE ELIMINATED FROM A BARRIER SECTION WHEN SPANNING AN EXPANSION JOINT.)




THROUGH BOLTED ANCHOR INSTALLATION ON BRIDGE DECK

(DO NOT USE ON CONCRETE BRIDGE DECK WITH ASPHALT OVERLAY)



REMOVABLE ADHESIVE ANCHOR INSTALLATION ON CONCRETE BRIDGE DECK, CONCRETE APPROACH SLAB, OR CONCRETE PAVEMENT

(DO NOT USE ON CONCRETE WITH AN ASPHALTIC OVERLAY)



PLAN VIEW

FREE STANDING TRANSITION TO TIED-DOWN SYSTEM


(PLACE TRANSITION IN A TANGENT SECTION OF BARRIER PARALLEL TO THE ROADWAY. IF TRANSITION OCCURS ON STRUCTURAL SLAB, ANCHOR AS SHOWN.)

GENERAL NOTES


SEE SHEET E FOR WHEN TO ANCHOR. OTHER PARTS OF THE PLAN MAY SHOW ADDITIONAL LOCATIONS REQUIRING ANCHORING.

REMOVE ALL ANCHORS WHEN NO LONGER NEEDED. FILL CONCRETE PAVEMENTS, DECKS AND APPROACH SLABS WITH NON-SHRINK COMMERCIAL GROUT FROM THE APPROVED PRODUCT LIST. FILL ASPHALT PAVEMENTS WITH ASTM D6690 TYPE II RUBBERIZED CRACK FILLER.

- ① 1/8" DIAMETER A307 THREADED ROD, 1/2" X 3" X 3" SQUARE PLATE WASHER WITH ASTM A36 STEEL, ASTM A563A HEAVY HEX NUT.
- ② ADHESIVE ANCHORS WITH A MINIMUM BOND STRENGTH OF 1,800 PSI AND 5/4" EMBEDMENT. SEE 603.2 AND 603.3.12 OF THE WISCONSIN STANDARD SPECIFICATIONS FOR MORE INFORMATION ON ADHESIVE ANCHORS.
- ③ ASPHALT SURFACE SHOWN. CONTRACTOR MAY DRILL THROUGH CONCRETE PAVEMENT AND THEN DRIVE ASPHALT ANCHOR PIN.



STAKE DOWN INSTALLATION FOR ASPHALTIC SURFACE




ASPHALT ANCHOR PIN


(ASTM A36 STEEL)

CONCRETE BARRIER
TEMPORARY PRECAST, 12'-6"

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




**ANCHORED BARRIER SPACE REQUIREMENTS
FOR HAZARDS EXTENDED
ABOVE THE GRADE LINE**




**ANCHORED BARRIER SPACE REQUIREMENTS
ON VERTICAL DROP OFFS**

POSTED SPEED MPH	X
45 OR GREATER	4'
40 OR LESS	2'



FREE STANDING BARRIER SPACE REQUIREMENTS




**ANCHORED BARRIER SPACE REQUIREMENTS
ON SLOPES**

GENERAL NOTES

- 1 WHEN OBJECTS EXTEND ABOVE THE GRADE, A MINIMUM OF 1 FOOT IS REQUIRED FROM BACK OF BARRIER TO OBJECT. SEE OTHER DETAILS FOR FOR THE MINIMUM OFFSET FROM BACK OF BARRIER TO SLOPES OR VERTICAL DROPS.
- 2 OBJECTS ARE NOT TO BE PLACED ON, MOUNTED TO, OR LEANED AGAINST THE BARRIER WITHOUT PERMISSION OF THE PROJECT ENGINEER.
- 3 SEE OTHER DETAIL ON SHEET "D" FOR SPACE REQUIREMENTS.
- 4 SEE BOLT THROUGH DECK, REMOVABLE ADHESIVE ANCHOR, OR A STAKE DOWN FOR ASPHALTIC SURFACE TREATMENT DETAILS. ASPHALTIC ANCHOR SHOWN.
- 5 DEPTH OF 3 FEET OR MORE.
- 6 Y = 6'-6".

**CONCRETE BARRIER
TEMPORARY PRECAST, 12'-6"**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION



FRONT VIEW

NOTES


NESTED THRIE BEAM IS REQUIRED ON BOTH SIDES OF THE TEMPORARY BARRIER FOR ALL INSTALLATIONS REGARDLESS OF TRAFFIC.

1. CAP END PLATE PLACED FLUSH WITH UPSTREAM END OF PERMANENT BARRIER OR PARAPET.
2. THRIE BEAM PIECES ARE OFFSET 15 1/4" TO PREVENT INTERFERENCE FROM THE ANCHORS ON OPPOSING SIDES.
3. MINIMUM MECHANICAL OR ADHESIVE ANCHOR STRENGTH REQUIREMENTS: ULTIMATE TENSILE LOAD 9.48 KIPS AND ULTIMATE SHEAR LOAD 10.48 KIPS.

4. MINIMUM MECHANICAL OR ADHESIVE ANCHOR STRENGTH REQUIREMENTS: ULTIMATE TENSILE LOAD 17.9 KIPS AND ULTIMATE SHEAR LOAD 21.96 KIPS.


5. MAY BE USED ON CONCRETE OR ASPHALT PAVEMENTS. ASPHALT OPTION SHOWN. FOR CONCRETE OPTION SEE OTHER DETAILS.

6. MINIMUM MECHANICAL OR ADHESIVE ANCHOR STRENGTH REQUIREMENTS: ULTIMATE TENSILE LOAD 12.14 KIPS AND ULTIMATE SHEAR LOAD 17.5 KIPS.




FRONT VIEW


BI-DIRECTIONAL TRANSITION TO TIED-DOWN SYSTEM



TEMPORARY BARRIER PLACEMENT FOR BI-DIRECTIONAL TRANSITION TO TIED-DOWN SYSTEM




BACK VIEW




PLAN VIEW

CONCRETE BARRIER
TEMPORARY PRECAST, 12'-6"


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




GUSSET 1



GUSSET 2




GUSSET 3




GUSSET 4


GUSSETS




END PLATE



SIDE PLATE




TOP PLATE




**SIDE, TOP AND END PLATES FOR CAP
FROM TEMPORARY CONCRETE BARRIER
TO 42" PERMANENT CONCRETE BARRIER**

SIDE PLATES, TOP PLATE, END PLATE AND GUSSETS ARE 12 GAUGE ASTM A36 GALVANIZED STEEL.



SECTION C-C





NOTES

1. FOUR GUSSETS AND END PLATE ARE STITCH WELDED ON THREE SIDES.
2. TWO TRIANGULAR SIDE PLATES ARE STITCH WELDED TO TOP PLATE, END PLATE, AND GUSSETS.


**CAP DETAILS FOR TEMPORARY CONCRETE
BARRIER TO 42" PERMANENT CONCRETE BARRIER**

**CONCRETE BARRIER
TEMPORARY PRECAST, 12'-6"**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION



1/8" STEEL PLATE




ALL GUSSETS 1/8" STEEL PLATE

GUSSET DIMENSIONS				
GUSSET NO.	A	B	C	D
1	2 7/8"	7 3/4"	1/4"	8
2	4 1/16 "	7 9/16 "	1/2"	8
3	6 1/2"	7 3/8"	1 1/16 "	8 1/16 "
4	8 5/16 "	7 3/16 "	7/8"	8 1/16 "
5	10 1/8 "	7"	1 1/16 "	8 1/16 "
6	11 5/16 "	6 13/16 "	1 1/4"	8 1/16 "
7	13 3/4"	6 5/8"	1 7/16 "	8 1/16 "
8	15 9/16 "	6 7/16 "	1 9/16 "	8 1/16 "
9	17 3/8"	6 1/4"	1 13/16 "	8 1/16 "
10	19 3/16 "	6 1/16 "	1 15/16 "	8 1/16 "
11	21"	5 7/8"	2 3/16 "	8 1/16 "
12	22 13/16 "	5 11/16 "	2 5/16 "	8 1/16 "

SIDE PLATES, TOP PLATE, END PLATE AND GUSSETS ARE 12 GAUGE ASTM A36 STEEL AND GALVANIZED.







GUSSETS AND END PLATE ARE STITCH WELDED ON 3 SIDES. TWO TRIANGULAR SIDE PLATES ARE STITCH WELDED TO TOP PLATE, END PLATE AND GUSSETS.



CAP DETAILS FOR TEMPORARY CONCRETE BARRIER TO 56" PERMANENT CONCRETE BARRIER

CONCRETE BARRIER
TEMPORARY PRECAST, 12'-6"






STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION






CAP DETAILS FOR TEMPORARY CONCRETE
BARRIER TO 56" PERMANENT CONCRETE BARRIER

CONCRETE BARRIER TEMPORARY PRECAST, 12'-6"	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED June 2017 DATE	/S/ Rodney Taylor ROADWAY STANDARD DEVELOPMENT UNIT SUPERVISOR
FHWA	


- ① WOOD OR STEEL POSTS (w6X9 OR w6X8.5) MAY BE USED. DO NOT INTERMIX WOOD AND STEEL POSTS. INSTALL STEEL POSTS WITH HOLES ON APPROACHING TRAFFIC SIDE.
- ② USE WOOD OR APPROVED PLASTIC BLOCKOUTS. WOOD BLOCKOUTS MAY BE CONSTRUCTED OUT OF TWO OR MORE WOOD BLOCKOUTS. SEE ALTERNATE WOOD BLOCKOUT DETAIL. DIMENSIONS OF APPROVED PLASTIC BLOCKOUTS MAY VARY.
- ③ IF ROCK IS ENCOUNTERED DURING EXCAVATION, PROVIDE A HOLE 12 INCHES IN DIAMETER EXTENDING 30 INCHES DEEP INTO THE ROCK. PLACE APPROXIMATELY 2 1/2" INCHES OF GRANULAR MATERIAL IN THE BOTTOM OF THE HOLE. CUT THE POSTS TO LENGTH AND INSTALL. BACKFILL WITH EXCAVATED MATERIAL AND COMPACT. BACKFILL IS TO BE FREE OF LARGE ROCKS.
- ④ WHEN THE DISTANCE FROM BACK OF POST TO SHOULDER HINGE POINT IS LESS THAN 2 FEET INSTALL LONGER POST AT HALF POST SPACING (K).
- ⑤ FOR NEW MGS INSTALLATION TOP OF W-BEAM RAIL TOLERANCE IS +1". FOR EXISTING MGS INSTALLATION TOP OF W-BEAM IS BETWEEN 27 3/4" TO 32".
- ⑥ WHEN USING STEEL POST AND WOOD BLOCKOUTS INSTALL FOUR 16D GALVANIZED NAILS. INSTALL NAILS AT THE BACK CORNERS OF THE BLOCK AND BEND THE NAILS OVER THE FLANGE OF THE STEEL POST.
- ⑦ TOTAL POST LENGTH FOR TYPE K IS 7' - 0".
TOTAL POST LENGTH FOR OTHER MGS TYPES IS 6' - 0".




**STEEL POST & HOLE
PUNCHING DETAIL
(W 6 X 9) ①**




WOOD POST (6" X 8") NOMINAL ⁽¹⁾







**FRONT VIEW
POST SPACING STANDARD INSTALLATION**




**FRONT VIEW
HALF POST SPACING (HS) AND
HALF POST SPACING WITH LONGER POSTS (K)**




**FRONT VIEW
QUARTER POST SPACING (QS)**




**FRONT VIEW
MID-SPAN BEAM SPLICE**



FRONT VIEW AT STEEL POST



FRONT VIEW AT WOOD POST




**ONE SIDED REFLECTOR DETAIL
AND TYPICAL INSTALLATION**

GENERAL NOTES

- 8 DO NOT INSTALL REFLECTORS ON THE FIRST 50 FEET OF THE APPROACH END OF THE ENERGY ABSORBING TERMINAL.
- 9 25 FEET OF HALF POST SPACING IS REQUIRED ON APPROACH AND DEPARTURE ENDS OF QUARTER POST SPACING.

POST BOLTS ARE A 3/8" DIAMETER ASTM A307 GUARDRAIL BOLT. A POST BOLT REQUIRES 3/8" DIAMETER A563A DOUBLE RECESSED (DR) HEAVY HEX NUT AND 3/8" DIAMETER F844 FLAT WASHER. POST BOLTS MAY BE LONGER IF MULTIPLE BLOCKOUTS ARE BEING USED.


GUARD RAIL SPLICE BOLTS ARE A 3/8" DIAMETER ASTM A307 GUARDRAIL HEAD BOLT. A GUARDRAIL SPLICE BOLT REQUIRES 3/8" DIAMETER A563A DOUBLE RECESSED (DR) HEAVY HEX NUT.



SECTION THRU W-BEAM RAIL


**MIDWEST GUARDRAIL SYSTEM
(MGS) GUARDRAIL**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION



DETAIL FOR 16" BLOCKOUT DEPTH


IT IS ACCEPTABLE TO USE BLOCKOUTS UP TO 16" DEEP TO INCREASE THE POST OFFSET TO AVOID UNDERGROUND OBSTACLES. THERE IS NO LIMIT TO THE NUMBER OF POSTS THAT CAN HAVE ADDITIONAL BLOCKOUTS UP TO 16" DEEP.



DETAIL FOR 36" BLOCKOUT DEPTH


NOTES: UNDER SPECIAL CIRCUMSTANCES, SUCH AS AVOIDING OBSTACLES THAT ARE NOT RELOCATED, IT IS ACCEPTABLE TO INSTALL ADDITIONAL BLOCKOUTS TO OBTAIN UP TO 36" DEPTH FOR ONE OR TWO POSTS IN A SECTION OF GUARDRAIL.
DO NOT USE 16" OR 36" BLOCKOUTS IF IT CAUSES THE POST TO BE DRIVEN BEYOND SHOULDER HINGE POINT OR CAUSES A FIXED OBJECT TO BE WITHIN THE DEFLECTION DISTANCE OF THE BARRIER.

- NOTE:
- 1. ALL FILLETS SHALL HAVE A MINIMUM RADIUS OF 3/16".
 - 2. IF THE BOLT EXTENDS MORE THAN 1/4" FROM THE NUT THE BOLT SHOULD BE TRIMMED BACK.




POST BOLT TABLE

L	T (MIN.)
1 1/4"	1 1/8"
2"	1 3/4"
10"	4"
14"	4 1/16"
18"	4"
21"	4 1/16"
25"	4"




ALTERNATE BOLT HEAD




POST BOLT, SPLICE BOLT
AND RECESS NUT


- 6 WHEN USING STEEL POST AD WOOD BLOCKOUTS, INSTALL FOUR 16D GALVANIZED NAILS. INSTALL NAILS AT THE BACK CORNERS OF THE BLOCK AND BEND THE NAILS OVER THE FLANGE OF THE STEEL POST.




PLAN VIEW
BEAM LAPPING DETAIL



POST DRIVING FOR CONTINUOUS
UNDERGROUND OBSTRUCTION



SIDE VIEW




PLAN VIEW


ALTERNATE WOOD
BLOCKOUT DETAIL

MIDWEST GUARDRAIL SYSTEM
(MGS) GUARDRAIL


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




MISSING POST IN NORMAL BEAM GUARD RUN




MISSING POST NEAR APPROACH THRIE BEAM TRANSITION




MISSING POST IN NORMAL BEAM GUARD RUN NEAR EAT



MISSING POST IN NORMAL BEAM GUARD RUN
NEAR FLARED BEAM GUARD



MISSING POST IN NORMAL BEAM GUARD RUN
NEAR TYPE 2 TERMINAL



CROSS SECTION VIEW

- ① MINIMUM OF 2 FEET OF GRADING BEHIND POST.
- ② SEE SDD 14B45 FOR MORE DETAILS.
- ③ SEE SDD 14B47 FOR MORE DETAILS.
- ④ SEE SDD 14B44 FOR MORE DETAILS.
- ⑤ SEE MISSING POST IN NORMAL BEAM GUARD RUN FOR DISTANCE TO NEXT MISSING POST AND AREA FOR WELL DRAINED, COMPACTED SOILS.
- ⑥ SEE PLAN FOR SHOULDER DESIGN.

**MIDWEST GUARDRAIL SYSTEM
(MGS) GUARDRAIL**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
7/2018
DATE
/S/ Rodney Taylor
ROADWAY STANDARDS DEVELOPMENT
UNIT SUPERVISOR
FHWA


- (A) THE SLOPE IN THE AREA BOUNDED BY THE GRADELINE, THE HINGE POINT LINE (HPL) AND THE CLEAR ZONE LIMITS (CZL) SHALL BE 4:1 OR FLATTER.
- (B) AFTER FINAL ASSEMBLY, RECHECK CABLE TO BE SURE IT IS TAUT AND HAS NOT RELAXED
- (C) DIFFERENT MANUFACTURERS REQUIRE DIFFERENT PERFORATED W - BEAM RAIL END PANELS. SEE MANUFACTURER'S INFORMATION.
- (D) ATTACH ALUMINUM SHEET TO E.A.T. HEAD USING 4 STAINLESS STEEL SELF - TAPPING SCREWS, ONE SCREW PER CORNER.
- (E) HARDWARE MAY VARY BETWEEN MANUFACTURER. SEE MANUFACTURER'S DRAWING FOR INFORMATION.

DIMENSIONS MAY VARY, MANUFACTURER'S INFORMATION.

THE CENTER OF THE UPPER 3 1/2" DIAMETER HOLE ON POST NUMBER 3 THROUGH POST 9 IS TO BE FLUSH WITH THE GROUND LINE UP TO A MAXIMUM OF 2" ABOVE GROUND LINE. WOOD BLOCKS ON POSTS NUMBERED 3 THROUGH 9 MAY BE ADJUSTED UP TO 3" ABOVE THE TOP OF POST.




STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




GENERIC GROUND STRUT⁹ ^E

BILL OF MATERIALS	
PART NO.	DESCRIPTION MATERIALS PROVIDED BY MGS EAT MANUFACTURER. SEE MANUFACTURER'S DETAILS FOR MORE INFORMATION.
①	UPPER POST NO. 1 6" X 6" TUBE
②	LOWER POST NO. 1
③	WOOD CRT
④	WOOD BLOCKOUT
⑤	PIPE SLEEVE
⑥	BEARING PLATE
⑦	BCT CABLE ASSEMBLY
⑧	ANCHOR CABLE BOX
⑨	GROUND STRUT
⑩	PERFORATED W-BEAM RAIL END PANEL, 12'-6" LONG.
⑪	STANDARD W-BEAM RAIL. MULTIPLE SECTIONS REQUIRED. SECTIONS VARY IN LENGTH.
⑫	IMPACT HEAD
⑬	EAT MARKER POST - YELLOW (SEE APPROVED PRODUCTS LIST)
⑭	SOIL PLATE
⑮	UPPER POST NO. 2
⑯	LOWER POST NO. 2




GENERIC ANCHOR CABLE BOX⁹ ^E




BEARING PLATE⁶ ^E

MIDWEST GUARDRAIL SYSTEM
ENERGY ABSORBING TERMINAL
(MGS)


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




UPPER POST NO. 1 ⁽¹⁾ (E)




LOWER POST NO. 1 ⁽²⁾ (E)




WOOD CRT POST ⁽³⁾ (E)
POSTS NUMBER 3-9




UPPER POST NO. 2 ⁽¹⁵⁾ (E)




LOWER POST NO. 2 ⁽¹⁶⁾ (E)




WOOD BLOCKOUT ⁽⁴⁾
REQ'D. AT ALL POSTS EXCEPT POST NO'S 1 & 2




REFLECTIVE SHEETING DETAIL ^(E)



E.A.T. MARKER POST ⁽¹³⁾



SIDE VIEW




TOP VIEW

ALTERNATE WOOD
BLOCKOUT DETAIL


**MIDWEST GUARDRAIL SYSTEM
ENERGY ABSORBING TERMINAL
(MGS)**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
7/2018 DATE /S/ Rodney Taylor
ROADWAY STANDARDS DEVELOPMENT
UNIT SUPERVISOR
FHWA



TWO WAY TRAFFIC



ONE WAY TRAFFIC

(T) THRIE BEAM CONNECTION

(W) W-BEAM CONNECTION WHEN REQUIRED

TYPICAL LOCATIONS OF THRIE BEAM AND W-BEAM CONNECTIONS TO BRIDGE

GENERAL NOTES

IF ROCK IS ENCOUNTERED, REMOVE ROCK TO FULL DEPTH OF POST PLUS 2 1/2", AND 12" DIAMETER AROUND POST. SEE 14B42 FOR MORE DETAILS.

TRANSITION USES STEEL POSTS ONLY.


SEE STANDARD DETAIL DRAWING 14 B 42 FOR MORE INFORMATION.

POST 2 THROUGH 17 USES STEEL POST ONLY


① BRIDGE RAILING TYPE "W" DOES NOT REQUIRE A TERMINAL CONNECTOR.

② OPTIONAL CURB AND GUTTER OR DRAINAGE FEATURE SEE PLAN FOR INFORMATION.

⑬ STEEL OR WOOD POST IS ACCEPTABLE AT POST 1. SEE SDD14B42



PLAN VIEW



ELEVATION VIEW

MIDWEST GUARDRAIL SYSTEM THRIE BEAM TRANSITION

**MIDWEST GUARDRAIL SYSTEM
THRIE BEAM TRANSITION (MGS)**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

6

- S.D.D. 14 B 45-5b**




S.D.D. 14 B 45-5b




S.D.D. 14 B 45-5b







W-BEAM TO THRIE BEAM TRANSITION SECTION




6'-3" THRIE BEAM SECTION



12'-6" THRIE BEAM SECTION




SIDE VIEW



TOP VIEW


ALTERNATE WOOD BLOCKOUT DETAIL




FRONT VIEW

SIDE VIEW

STEEL POSTS 1-5




TOP VIEW



FRONT VIEW


BLOCKOUT POSTS 1-5




FRONT VIEW

SIDE VIEW

STEEL POSTS 6-17



TOP VIEW



FRONT VIEW

BLOCKOUT POSTS 6-17

GENERAL NOTES

STEEL POSTS ARE W6X9 OR W6X8.5.

BOLT HOLES FOR POST ARE ON FRONT AND OF SIDE OF POST.


③ WHEN USING STEEL POSTS AND WOOD BLOCKOUTS INSTALL FOUR 16D GALVANIZED NAILS. INSTALL NAILS AT THE BACK CORNERS OF THE BLOCK AND BEND THE NAILS OVER THE FLANGE OF THE STEEL POST.

⑤ WOOD BLOCKS MAY BE CONSTRUCTED OUT OF 2 WOOD BLOCKS. SEE ALTERNATE WOOD BLOCK DETAIL.

⑬ STEEL OR WOOD POST IS ACCEPTABLE AT POST 1. SEE SDD 14B42.

**MIDWEST GUARDRAIL SYSTEM
THRIE BEAM TRANSITION (MGS)**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION




**W BEAM CONNECTION TO
PARAPETS WITH SLOPED ENDS**
(USE ONLY AT TRAFFIC EXIT END OF ONE WAY BRIDGE)

GENERAL NOTES


- ② OPTIONAL CURB AND GUTTER OR DRAINAGE FEATURE SEE PLAN FOR INFORMATION.
- ④ TOLERANCE FOR TOP OF BEAM IS $\pm 1"$.
- ⑥ DRILLING BOLT HOLES THROUGH THE PARAPET, BOLTS, NUTS, WASHERS AND REPAIRING DAMAGED CONCRETE ARE INCIDENTAL TO THE CONTRACT.
- ⑦ BOLTS MAY BE A325 BOLTS OR A449 BOLTS. BOLT LENGTH AND THREADING LENGTH ARE TO ALLOW FOR A TIGHT CONNECTION BETWEEN RIGID BARRIER AND THRIE BEAM CONNECTION PLATE. CONTRACTOR IS TO FIELD VERIFY BOLT LENGTH AND THREAD LENGTH. ONE ROUND WASHER REQUIRED BETWEEN BOLT HEAD AND THRIE BEAM CONNECTOR PLATE. BOLTS THAT EXTEND THROUGH THE PARAPET AND OUT THE BACK FACE REQUIRE A HARDENED ROUND STEEL WASHER THAT IS 2" O.D. X 5/32" THICK AND ONE PLATE WASHER. REPAIR ANY DAMAGED CONCRETE FROM BOLT INSTALLATION.



**DRILL HOLE LOCATION AND PATTERN
FOR THRIE BEAM CONNECTION**




**THRIE BEAM CONNECTION TO BRIDGE
PARAPETS WITH SLOPED ENDS**




**MIDWEST GUARDRAIL SYSTEM
THRIE BEAM TRANSITION (MGS)**

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
07/2018
DATE
/S/ Rodney Taylor
ROADWAY STANDARDS DEVELOPMENT
UNIT SUPERVISOR
FHWA




TWO WAY TRAFFIC




ONE WAY TRAFFIC

PERMANENT PAVEMENT MARKING



TWO WAY TRAFFIC



ONE WAY TRAFFIC

TEMPORARY PAVEMENT MARKING


GENERAL NOTES

DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM
TO STANDARD SPECIFICATIONS AND SPECIAL PROVISIONS.

- ① LOCATE THE NO PASSING ZONE W14-3 SIGN WITH 50 FEET OF THE "T" MARKING
- ② MEASURE FROM EDGE OF MARKING TO JOINT LINE. THIS DOES NOT INCLUDE SPACE NEEDED FOR GROOVING OPERATIONS.

LEGEND

-  "T" MARKING
 SIGN ON PERMANENT SUPPORT
 DIRECTION OF TRAFFIC




LONGITUDINAL MARKING (MAINLINE)


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
February 2020
DATE

/S/ Matthew Rauch
STATEWIDE SIGNING AND MARKING
ENGINEER




DRUM




42" CONE

DO NOT USE IN TAPERS
½ SPACING OF DRUMS




VERTICAL PANEL

THE STRIPES SHALL SLOPE DOWNWARD TO
THE TRAFFIC SIDE FOR CHANNELIZATION.



TYPE II BARRICADE

FOR RAILS LESS THAN 36" LONG, 4" WIDE STRIPES
MAY BE USED. ALL STRIPES SHALL SLOPE DOWNWARD
TO THE TRAFFIC SIDE FOR CHANNELIZATION.



TYPE III BARRICADE

IF SIGN MOUNTED, DO NOT COVER MORE THAN 50% OF THE TOP
TWO RAILS OR 33% OF THE TOTAL AREA OF THE THREE RAILS.

* IF USED FOR A PERMANENT APPLICATION USE RED SHEETING.

GENERAL NOTES

- ① REFLECTIVE SHEETING SHALL FOLLOW THE REQUIREMENTS IN THE APPROVED PRODUCTS LISTING FOR SIGN SHEETING.
- ② LOCATION OF WARNING LIGHTS WHEN SHOWN ON THE PLAN.

CHANNELIZING DEVICES
DRUMS, CONES, BARRICADES
AND VERTICAL PANELS

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
November 2020 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER
FHWA

LEGEND

-  SIGN ON PORTABLE OR PERMANENT SUPPORT
-  TEMPORARY PORTABLE RUMBLE STRIP ARRAY
-  DIRECTION OF TRAFFIC
-  WORK AREA
-  FLAGGER, EQUIPPED WITH STOP/SLOW PADDLE FASTENED ON SUPPORT STAFF

GENERAL NOTES

DETAILS OF TRAFFIC CONTROL DEVICES AND INSTALLATION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS, THE SPECIAL PROVISIONS, AND THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.

ALL SIGNS ARE 48" X 48" UNLESS OTHERWISE NOTED.

"WO" SIGNS ARE THE SAME AS "W" SIGNS EXCEPT THE BACKGROUND IS ORANGE.

THE EXACT NUMBER, LOCATION AND SPACING OF ALL SIGNS, DEVICES, AND LOCATION OF ALL FLAGGERS SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.

THE FIRST ADVANCE WARNING SIGN SHOULD TYPICALLY BE LOCATED IN ADVANCE OF THE ANTICIPATED TRAFFIC BACKUP OR QUEUE.

WHEN A SIDE ROAD OR RAMP INTERSECTS THE FACILITY ON WHICH THE WORK IS BEING PERFORMED, ADDITIONAL TRAFFIC CONTROLS SHALL BE PROVIDED AS SPECIFIED IN THE PLANS AND/OR THE SPECIAL PROVISIONS OR AS APPROVED BY THE ENGINEER.

FLAGGING

FLAGGERS SHALL BE IN SIGHT OF EACH OTHER OR IN DIRECT COMMUNICATION AT ALL TIMES. THEY SHALL BE EQUIPPED WITH STOP/SLOW PADDLES FASTENED ON SUPPORT STAFFS. WHEN THE FLAGGING OPERATION IS NOT IN EFFECT REMOVE TEMPORARY PORTABLE RUMBLE STRIPS PRIOR TO COVERING OR REMOVING ALL ADVANCE SIGNING.

① FOR MOVING WORK OPERATIONS, POST ADDITIONAL W20-7A FLAGGER SIGNS AT APPROXIMATELY 3,500' INTERVALS IN THE MOVING WORK OPERATION OR AS APPROVED BY THE ENGINEER.

② SIGN NOT REQUIRED IF FLAGGING OPERATION OCCURS WITHIN A SIGNED ROAD WORK ZONE AREA.

WHEN THE DISTANCE BETWEEN FLAGGERS EXCEEDS 2 MILES, A PILOT CAR IS REQUIRED. WHEN CURVES REDUCE SIGHT DISTANCE BELOW 400', A PILOT CAR IS REQUIRED.

TEMPORARY PORTABLE RUMBLE STRIPS

UTILIZE TEMPORARY PORTABLE RUMBLE STRIPS ON ALL FLAGGING OPERATIONS.


③ EACH TEMPORARY PORTABLE RUMBLE STRIP ARRAY CONSISTS OF THREE RUMBLE STRIPS SPACED ACCORDING TO MANUFACTURER'S RECOMMENDATION, PLACED TRANSVERSE ACROSS THE LANE AT LOCATIONS SHOWN.

ONLY USE TEMPORARY PORTABLE RUMBLE STRIPS FOR THE APPROVED PRODUCTS LIST.

INSTALL TEMPORARY RUMBLE STRIPS PER MANUFACTURER'S RECOMMENDATIONS.

PLACE ADVANCE SIGNING PRIOR TO INSTALLING TEMPORARY RUMBLE STRIPS.

DO NOT INSTALL TEMPORARY PORTABLE RUMBLE STRIPS ON GRAVEL, MILLED SURFACES, OR ASPHALT THAT HAS BEEN PAVED LESS THAN 12 HOURS.




SIGN AND TEMPORARY RUMBLE STRIP ARRAY SPACING TABLE

SPEED LIMIT	SPACING "A"
25-30 MPH	200'
35-40 MPH	350'
45-55 MPH	500'



USE OF W03-4 SIGN IS OPTIONAL. WHEN USED, THIS SIGN SHALL BE LOCATED BETWEEN THE W20-7A AND W20-4A SIGNS, USING SPACING "A".




TRAFFIC CONTROL FOR LANE CLOSURE WITH FLAGGING OPERATION

**TRAFFIC CONTROL FOR
LANE CLOSURE WITH
FLAGGING OPERATION**


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
May 2019 /S/ Andrew Heidtke
DATE WORK ZONE ENGINEER


FHWA




TYPICAL STOP LINE PAVEMENT MARKING
WITH CURB AND GUTTER



TYPICAL STOP LINE PAVEMENT MARKING
FOR SIDEROADS WITH RIGHT TURN LANE



TYPICAL STOP LINE PAVEMENT MARKING FOR
SIDEROADS WITH CROSSWALK MARKING



TYPICAL STOP LINE PAVEMENT MARKING
WITHOUT CURB AND GUTTER

GENERAL NOTES

STOP SIGN SHALL BE PLACED A MINIMUM OF 6 FEET TO A MAXIMUM OF 50 FEET FROM THE EDGE LINE LOCATION.

- 1 18-INCH STOP LINES MAY BE DELETED OR ADDED BY THE REGION MARKING ENGINEER BASED ON VISIBILITY AND SIGHT LINES.
- 2 NO STOP LINE IS REQUIRED IF STOP SIGN IS LESS THAN OR EQUAL TO 40 FEET FROM THE EDGE LINE.
- 3 NO STOP LINE IS REQUIRED IF STOP SIGN IS LESS THAN OR EQUAL TO 30 FEET FROM THE FLANGELINE EXTENSION.
- 4 MOVE CLOSER TO THE EDGE OF TRAVEL LINE AS NEEDED FOR VISIBILITY AND SIGHT LINES (NO CLOSER THAN 4 FEET).
- 5 LADDER BAR CROSSWALKS SHOULD ONLY BE USED FOR MID BLOCK CROSSINGS. USE 2 - 6" TRANSVERSE LINES INSTEAD.

STOP LINE AND CROSSWALK
PAVEMENT MARKING


STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

APPROVED
November 2019 /S/ Matthew Rauch
DATE STATE SIGNING AND MARKING
ENGINEER
FHWA

LEGEND


- TYPE III BARRICADE WITH ATTACHED SIGN
- SIGN ON PERMANENT SUPPORT
- TRAFFIC CONTROL DRUM WITH TYPE "C" STEADY BURN LIGHT
- TRAFFIC CONTROL DRUM
- FLAGS, 16" X 16" MIN. (ORANGE)
- REMOVING PAVEMENT MARKING
- DIRECTION OF TRAFFIC
- ASPHALTIC PAVEMENT WIDENING
- CONCRETE BARRIER TEMPORARY PRECAST
- TEMPORARY SIGNAL. SEE SDD 09G02 FOR EXACT PLACEMENT

WIDTH ON SIGN TO BE APPROX. 1-FOOT LESS THAN AVAILABLE WIDTH. (OMIT IF AVAILABLE WIDTH IS MORE THAN 16 FEET)



GENERAL NOTES

- THE EXACT NUMBER, LOCATION, AND SPACING OF ALL SIGNS AND DEVICES SHALL BE ADJUSTED TO FIT FIELD CONDITIONS AS APPROVED BY THE ENGINEER.
- THE SPACING BETWEEN TRAFFIC CONTROL SIGNS SHOULD BE ADJUSTED TO NOT CONFLICT WITH AND TO PROVIDE A MINIMUM OF 200 FEET (500 FEET DESIRABLE) CLEARANCE TO EXISTING SIGNS THAT WILL REMAIN IN PLACE..
- THIS LANE CLOSURE IS TYPICAL FOR CLOSING RIGHT LANE - REVERSE FOR CLOSING LEFT LANE.
- ALL SIGNS ARE 48" x 48" UNLESS OTHERWISE NOTED.
- "WO" IS THE SAME AS "W" EXCEPT THE BACKGROUND IS ORANGE.
- ANY SIGNS TEMPORARY OR EXISTING, WHICH CONFLICT WITH TRAFFIC CONTROL "IN USE" SHALL BE REMOVED OR COVERED AS NEEDED OR AS APPROVED BY THE ENGINEER.
- PLACE TEMPORARY PAVEMENT MARKING EDGELINE AND CENTERLINE AND REMOVE EXISTING PAVEMENT MARKINGS IF LANE CLOSURE IS TO BE IN PLACE 4 OR MORE CONTINUOUS DAYS AND NIGHTS OR AS NOTED ON DETAIL.
- 500 FOOT SPACING SHOWN IS FOR ROADWAYS WITH A PRE-CONSTRUCTION REGULATORY SPEED LIMIT OF 45 MPH OR MORE. FOR 35 - 40 MPH, USE 350 FOOT TYPICAL SPACING. FOR 25 - 30 MPH, USE 200 FOOT TYPICAL SPACING.
 - USE 300 FOOT SPACING IF THE PRE - CONSTRUCTION REGULATORY SPEED IS 35 MPH OR LESS.
 - DIMENSION DETERMINED BY CBTP TAPER FROM EDGE LINE TO TANGENT SECTION OF THE ROAD.
 - TEMPORARY MARKING STOP LINE REMOVABLE TAPE 18 - INCH.
 - 700 FOOT TEMPORARY MARKING LINE, DOUBLE YELLOW 4 - INCH . WHEN THE DISTANCE FOR THE PRECEDING NO - PASSING ZONE IS LESS THAN THE MINIMUM DISTANCE BETWEEN ZONES AS INDICATED IN THE SPECIFICATIONS, THE TWO ZONES SHALL BE CONNECTED.
 - SEE SDD 15C02 - SHEET "F" FOR ADVANCED WIDTH RESTRICTION SIGNING.





DETAIL OF TUBULAR
STEEL SIGN POST

TUBULAR STEEL POSTS

AREA OF SIGN INSTALLATION (SQ. FT.)	NUMBER OF REQUIRED TUBULAR STEEL POSTS
9 OR LESS	1
GREATER THAN 9 LESS THAN OR EQUAL TO 18	2
GREATER THAN 18 LESS THAN OR EQUAL TO 27	3

SIGNS WIDER THAN 3 FEET OR LARGER THAN 9 SQ. FT. SHALL
BE MOUNTED ON MULTIPLE POSTS (SEE ABOVE TABLE).


SIGNS LARGER THAN 27 SQ. FT. SHALL NOT BE MOUNTED
ON TUBULAR STEEL POSTS.




URBAN AREA

POST MOUNTING DETAIL FOR TEMPORARY TRAFFIC CONTROL FIXED MESSAGE SIGNS

WOOD POST EMBEDMENT DEPTH	
AREA OF SIGN INSTALLATION (SQ. FT.)	D (MIN)
20 OR LESS	4'
GREATER THAN 20	5'



4 "x6 " WOOD POST
MODIFICATION



RURAL AREA

POST SPACING REQUIREMENTS		NUMBER OF WOOD POSTS REQUIRED
L	E	
48" OR LESS AND LESS THAN 20 SQ. FT.	-	1
LESS THAN 60"	12"	2
60" TO 120"	L/5	2
GREATER THAN 120" LESS THAN 168"	12"	3
168" AND GREATER	12"	4


SEE NOTE ③

GENERAL NOTES

- ① 6 FEET FROM THE EDGE OF PAVEMENT (EDGE LINE LOCATION) UNLESS OTHERWISE DIRECTED BY THE PROJECT ENGINEER. LATERAL OFFSET SHOULD BE ADJUSTED TO AVOID THE DITCH FLOWLINE.
- ② THE EXISTENCE OF CURB AND GUTTER DOES NOT IN ITSELF MANDATE THE VERTICAL CLEARANCE ILLUSTRATED. THAT HEIGHT IS TYPICALLY MEASURED WHERE THERE IS SIDEWALK ADJACENT TO THE ROADWAY OR PARKING IS PERMITTED. IN THE ABSENCE OF SIDEWALK, VERTICAL CLEARANCE IS MEASURED FROM THE TOP OF THE CURB. IF NO SIDEWALK AND NO PARKING, VERTICAL CLEARANCE MAY BE REDUCED TO 5 FOOT MINIMUM. OFFSET OF SIGNS IS MEASURED FROM THE CURB FLOWLINE.
- ③ FOR SIGNS REQUIRING 4 POSTS, SPACE INTERMEDIATE POSTS EVENLY.

TEMPORARY TRAFFIC CONTROL
SIGN MOUNTING

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION



NUTS, BOLTS AND LAGS USED FOR MOUNTING SIGNS
SHALL HAVE HEXAGONAL HEADS AND SHALL BE EITHER:

- A. HOT DIP GALVANIZED IN ACCORDANCE WITH ASTM
DESIGNATION: A 153, CLASS D, OR SC 3
- B. ELECTRO-GALVANIZED IN ACCORDANCE WITH ASTM
DESIGNATION: B 633, TYPE III, SC 3

THREADS ON BOLTS AND NUTS SHALL BE MANUFACTURED WITH
SUFFICIENT ALLOWANCE FOR THE CADMIUM PLATE OR GALVANIZED
COATING TO PERMIT THE NUTS TO RUN FREELY ON THE BOLTS.

WOOD POST (4" x 6")
LAG SCREWS - 3/8" x 3"
MACHINE BOLTS - 5/16" x 6 1/2" OR 7" LENGTH W/NUTS

SQUARE STEEL POST (2" x 2")
MACHINE BOLTS - 3/8" x 3 1/4" LENGTH W/NUTS
RIVETS - 3/32" (6605-9-6) BULB-TITE, TRI-FOLD, ALUMINUM
BODY/MANDREL O.D. FLANGE 0.720 - 0.765 INCH,
GRIP RANGE 0.042 - 0.375 INCH

WASHERS (ALL POSTS) -
1 1/4" O.D. x 3/8" I.D. x 1/16" STEEL
1 1/4" O.D. x 3/8" I.D. x 0.080 NYLON

* TWO DIFFERENT FASTENING SYSTEMS ARE SHOWN FOR ILLUSTRATION
PURPOSES. ON ANY INDIVIDUAL SIGN, EITHER ONE OR THE OTHER SYSTEM
SHALL BE USED. ACTUAL NUMBER OF FASTENERS PER SIGN VARIES WITH
THE SIGN AREA. FOR A SINGLE POST INSTALLATION, ALL SIGNS GREATER
THAN 9 SQ. FT. REQUIRE THE USE OF 3 FASTENERS.

ATTACHMENT OF SIGNS TO POSTS	
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION	
APPROVED June 2017 DATE	/S/ Andrew Heidtke WORK ZONE ENGINEER
FHWA	

7



7

7



7

7


TYPICAL INSTALLATION
OF PERMANENT TYPE II
SIGNS ON SINGLE POSTS

WISCONSIN DEPT OF TRANSPORTATION

APPROVED Matthew R Rauch
for State Traffic Engineer

DATE 5/13/2020 PLATE NO. A4-3.22


- TYPICAL INSTALLATION
OF PERMANENT TYPE II
SIGNS ON SINGLE POSTS
-
- WISCONSIN DEPT OF TRANSPORTATION
-
- APPROVED Matthew R Rauch
for State Traffic Engineer
-
- DATE 5/13/2020 PLATE NO. A4-3.22



ELEVATION VIEW


DETAIL OF WOOD 4 X 6 SIGN POST IN BOX-OUT

- NOTES: 1. ALL MATERIAL TO BE APPROVED BY ENGINEER PRIOR TO INSTALLATION
2. SEE SIGN PLATE A4-8 FOR SIGN HARDWARE REQUIREMENTS
3. 18 INCH X 18 INCH SQUARE BOX-OUTS MAY BE USED FOR INSTALLATIONS IN EXISTING CONCRETE OR ASPHALT LOCATIONS.



ELEVATION VIEW

DETAIL OF STEEL 2 X 2 SIGN POST IN BOX-OUT



PLAN VIEW

FOR NEW CONCRETE/ASPHALT INSTALLATIONS

SIGN POST
BOX-OUTS
A4-3B

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 1/27/14 PLATE NO. A4-3B.1






PROJECT NO:

HWY:

COUNTY:

SHEET NO:

E



- GENERAL NOTES
1. For 3 or 4 post installations, individual post spacing shall be greater than 3'-6".
 2. See tables below for required number of posts.
 3. For expressways and freeways, mounting height is 7'-3" (±) or 6'-3" (±) depending upon existence of sub-sign.
 4. The (±) tolerance for mounting height is 3 inches.
 5. J-Assemblies are considered to be one sign for mounting height.
 6. Offset distance shall be consistent with existing signs or consistent throughout length of project.
 7. Folding signs shall be mounted at a height of 5'-3" (±) or as directed by the engineer.
 8. The Double Arrow sign (W12-1) shall be mounted at a height of 2'-3" (±). The Chevron sign (W1-8), Roundabout Chevron panel (R6-4B), Clearance Markers (W5-52), Mile Markers (D10 series), In Road Object Markers (W5-54) & End of Road Markers (W5-56) shall be mounted at a height of 4"-3" (±).

* 6 feet from edge of a paved shoulder or 12 feet from the edge of pavement (edge line location) or 2 feet from outside edge of gravel, whichever is greater unless directed by project engineer.

** The existence of curb and gutter does not in itself mandate the vertical clearance illustrated. That height is typically measured where there is sidewalk adjacent to the roadway or parking is permitted. In the absence of sidewalk vertical clearance is measured from the top of the curb. Offset of signs is measured from the flow line.

*** See A4-3 sign plate for signs 4' or less in width and less than 20 S.F. in area.



SIGN SHAPE OTHER THAN DIAMOND (TWO POSTS REQUIRED)	
L	E
Greater than 48" Less than 60"	12"
60" to 108"	L/5

SIGN SHAPE OTHER THAN DIAMOND (THREE POSTS REQUIRED)	
L	E
Greater than 108" to 144"	12"

POST EMBEDMENT DEPTH

Area of Sign Installation (Sq. Ft.)	D (Min)
20 or Less	4'
Greater than 20	5'

TYPICAL INSTALLATION OF TYPE II SIGNS ON MULTIPLE POSTS	
WISCONSIN DEPT OF TRANSPORTATION	
APPROVED	<i>Matthew R. Rauch</i> for State Traffic Engineer
DATE 8/21/17	PLATE NO. A4-4.15



Nuts, bolts and lags used for mounting signs shall have hexagonal heads and shall be either :

- a. Hot dip galvanized in accordance with ASTM Designation: A 153, Class D, or SC 3
- b. Electro-galvanized in accordance with ASTM Designation : B 633, TYPE III, SC 3.


Threads on bolts and nuts shall be manufactured with sufficient allowance for the cadmium plate or galvanized coating to permit the nuts to run freely on the bolts.

- STRINGER BOLTING TO ALUMINUM SIGNS (SEE SIGN PLATE A4-18)
- MACHINE BOLTS - $\frac{5}{16}$ " X 1-3/4" Length w/ lock nuts
- WOOD POSTS (4" x 6")
- LAG SCREWS - $\frac{3}{8}$ " X 3" (NO STRINGERS ON BACK OF SIGN)
 $\frac{3}{8}$ " X 4" (STRINGERS ON BACK OF SIGN)
- SQUARE STEEL POSTS (2" x 2")
- MACHINE BOLTS - $\frac{3}{8}$ " X 3-1/4" Length w/ nuts (NO STRINGER ON BACK OF SIGN)
 $\frac{3}{8}$ " X 5" Length w/ nuts (STRINGERS ON BACK OF SIGN)
- RIVETS - $\frac{9}{32}$ " (6605-9-6) BULB-TITE, TRI-FOLD, ALUMINUM BODY/MANDREL
O.D. FLANGE .720-.765 INCH, GRIP RANGE .042-.375 INCH
- WASHERS (ALL POSTS) -
- 1-1/4" O.D. X $\frac{3}{8}$ " I.D. X $\frac{1}{16}$ " STEEL
 - 1-1/4" O.D. X $\frac{3}{8}$ " I.D. X .080 NYLON


* Two different fastening systems are shown for illustration purposes. On any individual sign, either one or the other system shall be used. Actual number of fasteners per sign varies with the sign area, but normally there are two. For a single post installation, all signs greater than 9 sq. ft. require the use of 3 fasteners.

ATTACHMENT OF SIGNS TO POSTS	
WISCONSIN DEPT OF TRANSPORTATION	
APPROVED	<i>Matthew R. Rauch</i> For State Traffic Engineer
DATE 4/1/2020	PLATE NO. A4-8.9



TELESCOPIC TUBING ANCHORS
TWO PIECE SYSTEM



DETAIL OF TUBULAR STEEL SIGN POST
(IN POURED CONCRETE OR ASPHALT)



DETAIL OF TUBULAR STEEL SIGN POST
(IN LOCATIONS OTHER THAN POURED CONCRETE OR ASPHALT)



Area of Sign Installation (Sq. Ft.)	Number of Required Posts
9 or less	1
Greater than 9 less than or equal to 18	2
Greater than 18 less than or equal to 27	3

Signs wider than 3 feet or larger than 9 sq. ft shall be mounted on multiple posts (see above table).


TUBULAR STEEL
SIGN POST
A4-9

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 2/05/15 PLATE NO. A4-9.9

7



GENERAL NOTES

1. All 4 x 6 Wood Posts shall be modified by having two 1 1/2" diameter holes drilled perpendicular to the roadway centerline.

7

4 X 6 WOOD POST MODIFICATIONS

WISCONSIN DEPT OF TRANSPORTATION




APPROVED *Chester J. Spang*
for State Traffic Engineer

DATE 3/27/97 PLATE NO. A4-11.2


PROJECT NO:	HWY:	COUNTY:	SHEET NO:	E
-------------	------	---------	-----------	---

BANDING

SINGLE SIGN




WASHER PLACEMENT



WASHERS (ALL POSTS) -
1-1/4" O.D. X 3/8" I.D. X 1/16" STEEL
1-1/4" O.D. X 3/8" I.D. X .080 NYLON
FOR ALL TYPE H SIGNS

CHANNEL
SEE TYPICAL PANEL
INSTALLATION SHEET

"J" ASSEMBLY



SEE DETAIL B

GENERAL NOTES


1. Any sign over 3 feet in width shall use the V-Block banding method. See A5-10 standard plate.
2. Signs 3 feet or greater in height shall have three bracket bands installed. Signs less than 3 feet in height shall have two bracket bands installed.
3. Banding and assembly bracket shall be stainless steel. All bands shall be 3/4" in width and 0.025" thickness.
4. ALL SIGN MOUNTING BOLTS AND WASHERS SHALL BE EITHER:
 - a. Hot dip or mechanically galvanized in accordance with ASTM Designation: A 153, Class D
 - b. Electro-galvanized in accordance with ASTM designation: B 633, Type III, SC 3

STANDARD SIGN
SIGN BANDING DETAILS


WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer
DATE 6/10/19 PLATE NO. A5-9.4

VIEW FROM
BACK



VIEW FROM SIDE



GENERAL NOTES

1. WOOD 4"X6" POST MATERIAL SHALL CONFORM TO 507.2.2 OF THE WisDOT STANDARD SPECIFICATIONS
2. BLOCK BANDING AND CLIPS SHALL BE STAINLESS STEEL, $\frac{3}{4}$ " WIDTH AND 0.025" THICKNESS
3. SIGNS 3' OR GREATER IN HEIGHT SHALL UTILIZE 3 BLOCK BANDS. SIGNS UNDER 3' IN HEIGHT SHALL UTILIZE 2 BLOCK BANDS
4. ACTUAL NUMBER OF FASTENERS PER SIGN VARIES WITH THE SIGN AREA, BUT NORMALLY THERE ARE TWO. FOR SIGNS GREATER THAN 9 S.F. 3 FASTENERS SHALL BE USED.
5. ALL SIGN MOUNTING BOLTS AND WASHERS SHALL BE EITHER:
 - a. Hot dip or mechanically galvanized in accordance with ASTM Designation: A 153, Class D
 - b. Electro-galvanized in accordance with ASTM Designation : B 633, TYPE III, SC 3
6. ALL BOLTS SHALL HAVE HEXAGONAL HEADS.
7. STEEL WASHERS SHALL BE $1\frac{1}{4}$ " O.D. X $\frac{3}{8}$ " I.D. X $\frac{1}{16}$ "
8. NYLON WASHERS SHALL BE $1\frac{1}{4}$ " O.D. X $\frac{3}{8}$ " I.D. X .080 FOR TYPE H OR TYPE F FACE SIGN

✱ LAG BOLTS SHALL BE $\frac{3}{8}$ " X $2\frac{1}{2}$ "

BLOCK BANDING DETAIL
(V-BLOCK OPTION)

WISCONSIN DEPT OF TRANSPORTATION

APPROVED Matthew R. Rauch
for State Traffic Engineer


DATE 6/10/19 PLATE NO. A5-10.2

PROJECT NO:

SHEET NO:

E

7



G20-2A

NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Message Series - C
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.

Metric equivalent
for this sign is:

SIZE	
1	900 mm X 450 mm
2	1200 mm X 600 mm
3	1200 mm X 600 mm
4	1200 mm X 600 mm
5	1200 mm X 600 mm

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.	Area sq. m.
1	36	18	1 1/8	3/8	1/2	4	3 3/4	2 1/2	4 1/8	4 1/8	11 1/8	2	1	12 1/8													4.5	0.41
2	48	24	1 1/2	1/2	5/8	6	4 1/2	3 3/4	5 7/8	6 3/4	16 3/4	2 1/2	1 3/4	18 1/2													8.0	0.72
3	48	24	1 1/2	1/2	5/8	6	4 1/2	3 3/4	5 7/8	6 3/4	16 3/4	2 1/2	1 3/4	18 1/2													8.0	0.72
4	48	24	1 1/2	1/2	5/8	6	4 1/2	3 3/4	5 7/8	6 3/4	16 3/4	2 1/2	1 3/4	18 1/2													8.0	0.72
5	48	24	1 1/2	1/2	5/8	6	4 1/2	3 3/4	5 7/8	6 3/4	16 3/4	2 1/2	1 3/4	18 1/2													8.0	0.72


STANDARD SIGN
G20-2A

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 9/30/09 PLATE NO. G20-2A.8


7



R10-6

NOTES

1. Sign is Type II - Type H Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - White
Message - Black
3. Message Series - D
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.



Arrow Detail

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	24	36	1 1/8	3/8	1/2	5	3	7	2 1/2	4	8	8 3/8	9	1	3	5	5 5/8	6 1/4	60°	5 1/4	2 1/4	7 1/8	1/2	3/8	1 3/8		6.0
2M	24	36	1 1/8	3/8	1/2	5	3	7	2 1/2	4	8	8 3/8	9	1	3	5	5 5/8	6 1/4	60°	5 1/4	2 1/4	7 1/8	1/2	3/8	1 3/8		6.0
3																											
4																											
5																											

STANDARD SIGN R10-6

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 4/5/11 PLATE NO. R10-6.6


PROJECT NO:

HWY:

COUNTY:

SHEET NO:

E



R10-11B

NOTES

- 1. Sign is Type II - Type H Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
- 2. Color:
Background - White
Message - Black
- 3. Message Series - See Note 5.
- 4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
- 5. Line 1 is Series E.
Lines 2 and 3 are Series D.

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	18		1 1/8	3/8	3/8	3	2 3/4	1 3/4	3	3 1/8	5	4 7/8	5 1/4	1 7/8	7 1/8												2.25
2S	24		1 1/8	3/8	1/2	4	3 1/2	2 1/2	3 7/8	4 1/8	6 5/8	6 1/2	6 1/2	3	9 1/8												4.0
2M	24		1 1/8	3/8	1/2	4	3 1/2	2 1/2	3 7/8	4 1/8	6 5/8	6 1/2	6 1/2	3	9 1/8												4.0
3	30		1 3/8	1/2	5/8	5	4 1/2	3	4 7/8	5 1/4	8 1/4	8 1/8	7 3/4	4 1/8	11 7/8												6.25
4																											
5																											

STANDARD SIGN
R10-11B

WISCONSIN DEPT OF TRANSPORTATION

APPROVED
Matthew R. Rauch
For State Traffic Engineer

DATE 4/5/11 PLATE NO. R10-11B.4

PROJECT NO:

HWY:








COUNTY:

SHEET NO:

E

NOTES

1. Sign is Type II - Type F Reflective
2. Color:
Background - Orange
Message - Black
3. Message Series - C
4. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.




SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Areq sq. ft.
1	36		1 5/8	5/8	3/4	5	2 5/8	3 1/4	10 1/8	7	7 5/8	8 7/8	1 1/8	4 1/2	3 1/2	9	3 1/4	2 1/2	2 1/4	5 5/8	9	1 3/8	8	1 3/4	10 3/4	6	9.0
2S	48		2 1/4	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0
2M	48		2 1/4	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0
3	48		2 1/4	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0
4	48		2 1/4	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0
5	48		2 1/4	3/4	1	8	3 3/4	5 1/8	15 3/8	11 1/8	12 1/8	14 3/8	1 5/8	6 7/8	5 3/8	13 7/8	4 3/8	3 7/8	3	8 5/8	13 3/4	2 1/8	11 7/8	2 3/4	16 3/8	9	16.0

STANDARD SIGN
W20-1A, B, C, D, E, F, G & H

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 3/25/2020 PLATE NO. W20-1.11



NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - Black
3. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
4. W01-4L is the same as W01-4R except the arrow is reversed along the vertical centerline.

SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36		1 5/8	5/8	3/4	5 1/4	4	12 3/8	7 7/8	16 7/8	10 1/2	1 5/8	6	4 1/2	1	1/2	2 1/4	7 1/2									9.0
2S	48		2 1/4	3/4	1	7	5 1/4	16 1/2	10 1/2	22 1/2	14	2 1/4	8	6	1 1/4	5/8	3	10									16.0
2M	48		2 1/4	3/4	1	7	5 1/4	16 1/2	10 1/2	22 1/2	14	2 1/4	8	6	1 1/4	5/8	3	10									16.0
3	48		2 1/4	3/4	1	7	5 1/4	16 1/2	10 1/2	22 1/2	14	2 1/4	8	6	1 1/4	5/8	3	10									16.0
4	48		2 1/4	3/4	1	7	5 1/4	16 1/2	10 1/2	22 1/2	14	2 1/4	8	6	1 1/4	5/8	3	10									16.0
5	48		2 1/4	3/4	1	7	5 1/4	16 1/2	10 1/2	22 1/2	14	2 1/4	8	6	1 1/4	5/8	3	10									16.0

STANDARD SIGN W01-4

WISCONSIN DEPT OF TRANSPORTATION


APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 11/18/13 PLATE NO. W01-4.1

PROJECT NO: HWY: COUNTY: SHEET NO: E

NOTES

- 1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
- 2. Color:
Background - Orange
Message - Black
- 3. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.



W01-6


SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1																											
2S	48	24	1 3/8	1/2	5/8		12	13 1/4	1	7 1/2	6 1/2	3 1/4	19 1/2	39													8.0
2M	48	24	1 3/8	1/2	5/8		12	13 1/4	1	7 1/2	6 1/2	3 1/4	19 1/2	39													8.0
3	60	30	1 3/8	1/2	5/8		15	16 1/4	1 1/4	9 1/4	8	4	24 3/8	48 3/4													12.5
4	60	30	1 3/8	1/2	5/8		15	16 1/4	1 1/4	9 1/4	8	4	24 3/8	48 3/4													12.5
5	60	30	1 3/8	1/2	5/8		15	16 1/4	1 1/4	9 1/4	8	4	24 3/8	48 3/4													12.5

STANDARD SIGN
W01-6

WISCONSIN DEPT OF TRANSPORTATION

APPROVED
Matthew R. Rauch
for State Traffic Engineer

DATE 11/18/13 PLATE NO. W01-6.1



NOTES

1. Sign is Type II - Type F Reflective - reference WIS DOT Standard Specification for HIGHWAY and STRUCTURE CONSTRUCTION latest edition.
2. Color:
Background - Orange
Message - See Note 4
3. Corners may be square or rounded when base material is plywood but borders shall be rounded as shown. When base material is metal, the corners and borders shall be rounded.
4. Symbol and border are non-reflective black.
Top circle - Type H Reflectorized Red
Center circle - Same as background
Bottom circle - Type H Reflectorized Green



SIZE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	Area sq. ft.
1	36		1 5/8	5/8	3/4		10	15 3/4	5 3/4	4 1/4																	9.0
2S	48		2 1/4	3/4	1		12 1/2	20	7 1/2	5																	16.0
2M	48		2 1/4	3/4	1		12 1/2	20	7 1/2	5																	16.0
3	48		2 1/4	3/4	1		12 1/2	20	7 1/2	5																	16.0
4	48		2 1/4	3/4	1		12 1/2	20	7 1/2	5																	16.0
5	48		2 1/4	3/4	1		12 1/2	20	7 1/2	5																	16.0

STANDARD SIGN
W03-3

WISCONSIN DEPT OF TRANSPORTATION

APPROVED *Matthew R. Rauch*
for State Traffic Engineer

DATE 11/20/13 PLATE NO. W03-3.1



LIST OF DRAWINGS:

1. GENERAL PLAN & ELEVATION
2. TYPICAL SECTION & DETAILS
3. EXPANSION DEVICE
4. COVER PLATE DETAILS

TRAFFIC DATA

CTH Q USH 51
AADT (2018) = 2,100 AADT (2015) = 12,700
DESIGN SPEED = 60 MPH DESIGN SPEED = 70 MPH

STRUCTURES DESIGN CONTACTS

BRIDGE OFFICE: CONSULTANT:
AARON BONK, PE WILLIAM J. ZIPPEL, PE, SE
(608) 261-0261 ALFRED BENESCH & CO
1300 W CANAL ST, SUITE 150
MILWAUKEE, WI 53233
(414) 308-1321

BENCHMARKS

NAME	ELEVATION	DESCRIPTION	STATION	OFFSET
BM 51	1070.28	SQUARE ON BRIDGE ABUT.	200+84	22.4 LT
BM 52	1056.59	NAIL IN TREE	199+76	274.2 LT



TOTAL ESTIMATE OF QUANTITIES

BID NO.	BID ITEMS	UNIT	WEST ABUT.	PIER	EAST ABUT.	SUPER	TOTAL
502.3101	EXPANSION DEVICE B-35-21	LF	-	-	-	106	106
502.3200	PROTECTIVE SURFACE TREATMENT	SY	-	-	-	1535	1535
502.3210	PIGMENTED SURFACE SEALER	SY	-	-	-	215	215
502.4205	ADHESIVE ANCHORS NO. 5 BARS	EACH	-	-	-	108	108
505.0600	BAR STEEL REINFORCEMENT HS COATED STRUCTURES	LB	-	-	-	7816	7816
505.0906	BAR COUPLERS NO. 6	EACH	-	-	-	20	20
509.0301	PREPARATION DECKS TYPE 1	SY	-	-	-	154	154
509.0302	PREPARATION DECKS TYPE 2	SY	-	-	-	77	77
509.0505.S	CLEANING DECKS TO REAPPLY CONCRETE MASONRY OVERLAY	SY	-	-	-	1535	1535
509.1000	JOINT REPAIR	SY	-	-	-	49	49
509.1500	CONCRETE SURFACE REPAIR	SF	7	1	7	12	27
509.2000	FULL-DEPTH DECK REPAIR	SY	-	-	-	4	4
509.2500	CONCRETE MASONRY OVERLAY DECKS	CY	-	-	-	139	139
509.9005.S	REMOVING CONCRETE MASONRY DECK OVERLAY B-35-21	SY	-	-	-	1535	1535
509.9020.S	EPOXY CRACK SEALING	LF	50	-	50	-	100
509.9050.S	CLEANING PARAPETS	LF	-	-	-	723	723

STATE PROJECT NUMBER

1176-22-60

DESIGN DATA

LIVE LOAD:
DESIGN LOADING: HS20
INVENTORY RATING: HS17
OPERATING RATING: HS28
WISCONSIN STANDARD PERMIT VEHICLE LOAD = 165 KIPS

MATERIAL PROPERTIES (NEW WORK)

CONCRETE MASONRY OVERLAY DECKS f'c= 4000 PSI
CONCRETE MASONRY SURFACE REPAIR f'c= 4000 PSI
STEEL REINFORCEMENT HIGH STRENGTH BAR, GR 60 fy= 60 KSI

EXISTING STRUCTURE

THE EXISTING STRUCTURE IS A TWO SPAN STEEL GIRDER BRIDGE FOUNDED ON A REINFORCED CONCRETE PIER AND ABUTMENTS. THE BRIDGE IS 318'-0 $\frac{3}{4}$ " LONG AND 47'-10" WIDE. THE EXISTING FOUNDATIONS ARE SUPPORTED ON STEEL HP10x42 PILES

NOTES

DRAWINGS SHALL NOT BE SCALED.

DIMENSIONS SHOWN ARE BASED ON THE ORIGINAL STRUCTURE PLANS.

PROTECTIVE SURFACE TREATMENT SHALL BE APPLIED TO THE ENTIRE TOP SURFACE OF THE NEW CONCRETE OVERLAY.

PIGMENTED SURFACE SEALER SHALL BE APPLIED TO THE FRONT FACE AND TOP OF PARAPETS AFTER CLEANING, INCLUDING WINGWALLS.

PREPARATION DECKS TYPE 1, PREPARATION DECKS TYPE 2, AND FULL-DEPTH DECK REPAIR AREAS ARE BASED ON THE PLANS AND AS DETERMINED BY THE ENGINEER. DECK PREPARATION AND FULL DEPTH DECK REPAIRS SHALL BE FILLED WITH "CONCRETE MASONRY OVERLAY DECKS".

PROFILE GRADE LINE SHALL BE DETERMINED IN THE FIELD BASED ON A MINIMUM OVERLAY THICKNESS OF 11/2" PLACED ABOVE THE DECK SURFACE AFTER SURFACE PREPARATION. EXPECTED AVERAGE OVERLAY THICKNESS IS 2 $\frac{1}{8}$ ". IF EXPECTED AVERAGE OVERLAY THICKNESS IS EXCEEDED BY MORE THAN 1/2", CONTACT THE STRUCTURES DESIGN SECTION.

ANY EXCAVATION REQUIRED TO COMPLETE THE OVERLAY OR JOINT REPAIRS AT THE ABUTMENTS TO BE CONSIDERED INCIDENTAL TO THE BID ITEM "CONCRETE OVERLAY DECKS"

ALL CONCRETE REMOVAL NOT COVERED WITH CONCRETE OVERLAY SHALL BE DEFINED BY A 1" DEEP SAW CUT.

SPECIFIC LOCATIONS OF CONCRETE SURFACE REPAIR AT THE NORTH AND SOUTH ABUTMENTS, AND PARAPETS ARE TO BE DETERMINED BY THE FIELD ENGINEER.

NO.	DATE	REVISION	BY
-----	------	----------	----

benesch Alfred Benesch & Company
1300 West Canal Street, Suite 150
Milwaukee, Wisconsin 53233
414-308-1310 Job No. 20260.00

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION
ACCEPTED *[Signature]* SDR 08/11/20
CHIEF STRUCTURES DESIGN ENGINEER DATE

STRUCTURE B-35-21

RIVER AVENUE (CTH Q) OVER USH 51


COUNTY LINCOLN TOWN/CITY/VILLAGE SCOTT

DESIGN SPEC. REHABILITATION N/A
DESIGNED BY JAP DESIGN CKD. WJZ DRAWN BY JAP PLANS CKD. WJZ


GENERAL PLAN
& ELEVATION

SHEET 1 OF 4


FILE= 10-GP&E.DGN
SCALE = 1:40




TYPICAL SECTION THRU CTH Q
(LOOKING EAST)



SECTION THRU DECK
ONE-PIECE THREADED COUPLER SHOWN



DOWEL BAR COUPLER
STAGE 2 DOWEL SCREWS INTO
COUPLER PLACED IN STAGE 1




ONE-PIECE THREADED COUPLER

BAR COUPLER ALTERNATIVES


NOTES

FOR DOWEL BAR COUPLERS, ALL DOWEL BARS SHALL BE LAPPED AND TIED TO THE REINFORCEMENT BARS.

QUANTITY OF CONCRETE FOR THE PARAPET IS INCLUDED IN THE QUANTITY OF "CONCRETE MASONRY OVERLAY DECKS".



ELEVATION




PLAN


(SW PARAPET SHOWN, NE SIMILAR, SE & NW OPPOSITE HAND)

BILL OF BARS

BAR NO.	COATED BAR	NO. REQ'D	LENGTH	BENT BAR	BUNDLED	BAR SERIES	226 # COATED 0 # UNCOATED
							LOCATION
R501	X	16	4'-9"	X			PARAPET - VERTICAL
R502	X	28	5'-0"	X			PARAPET - VERTICAL



SECTION A-A



BENDING DIAGRAMS

STATE PROJECT NUMBER		1176-22-60	
NO.	DATE	REVISION	BY
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION			
STRUCTURE B-35-21			
DRAWN BY		JAP	PLANS CKD. WJZ
TYPICAL SECTION & DETAILS		SHEET 2 OF 4	

NOTES

ONE FIELD SPLICE PERMITTED IN STEEL EXTRUSIONS, UNLESS MORE ARE REQUIRED FOR STAGED CONSTRUCTION, HANDLING OR GALVANIZING REQUIREMENTS. IF USED, DETAILS SHALL BE SUBMITTED FOR APPROVAL. NO SPLICING PERMITTED IN NEOPRENE STRIP SEAL.

AFTER FABRICATION, BUT BEFORE SHIPMENT, STRAIGHTEN STEEL EXTRUSIONS SUCH THAT THEY SHALL BE FREE FROM WARP, TWIST AND SWEEP.

FABRICATOR SHALL PROVIDE MEANS OF KEEPING GALVANIZED EXTRUSIONS CLEAN AND SMOOTH DURING SHIPMENT AND PRIOR TO APPLYING LUBRICANT ADHESIVE FOR NEOPRENE GLAND INSTALLATION.


SANDBLAST PLATES, SUPPORTS AND EXTRUSIONS AFTER FABRICATION IN ACCORDANCE WITH SSPC SP. #6 "COMMERCIAL BLAST CLEANING". AFTER BLAST CLEANING, THE PLATES, SUPPORTS AND EXTRUSIONS SHALL BE HOT DIPPED GALVANIZED.

ANCHOR SYSTEM NO. 8 AND NO. 9 SHALL CONFORM TO ASTM A307 AND SHALL BE GALVANIZED IN ACCORDANCE WITH ASTM A153 CLASS C AND D.


ALL MATERIAL IN THE STRIP SEAL EXPANSION JOINT ASSEMBLY, INCLUDING ANCHOR STUDS AND HARDWARE SHALL BE PAID AT THE UNIT PRICE BID FOR "EXPANSION DEVICE B-35-21", LF.

LEGEND


- ① NEOPRENE STRIP SEAL (4 - INCH) AND STEEL EXTRUSIONS.
- ② STUDS $\frac{5}{8}" \phi \times 6\frac{3}{4}"$ LONG AT 6" ALTERNATE CENTERS. WELD TO EXTRUSIONS AND BEND AS SHOWN AFTER WELDING.
- ②A $\frac{1}{2}"$ THICK ANCHOR PLATE WITH $\frac{5}{8}" \phi$ ROD (OR ALTERNATE STRIP SEAL ANCHOR). WELD ROD TO ANCHOR PLATE, WELD ANCHOR PLATE TO NO. 1 AT 1'-6" CENTERS BETWEEN GIRDERS.
- ③ $\frac{3}{4}" \phi$ THREADED ROD WITH 2 NUTS AND PLATE WASHERS. WELD THREADED ROD TO TOP FLANGE OR ATTACH BY BOLTING THRU FLANGE. ON ABUTMENT SIDE, GROUT THREADED ROD INTO FIELD DRILLED HOLES IN ABUTMENT BACKWALL AS SHOWN.
- ④ $\frac{3}{4}" \phi$ THREADED ROD WITH NUT. TACK WELD NUT TO NO. 5.
- ⑤ FABRICATE SUPPORT FROM 3" X $\frac{1}{2}"$ BAR AS SHOWN OR EQUIVALENT, ONE PER GIRDER PER SIDE. SHOP OR FIELD WELD TO NO. 1. IF FIELD WELDED, COVER WELDED AREAS WITH EPOXY- COATING MATERIAL. PROVIDE $\frac{1}{2}" \phi$ HOLE FOR NO. 3 AND 1" ϕ HOLE FOR NO. 4.
- ⑥ GALVANIZED PLATE $\frac{3}{8}" \times 1'-2" \times 2'-2"$ LONG WITH HOLES FOR NO. 7.
- ⑦ $\frac{3}{4}" \phi \times 1\frac{1}{2}"$ STAINLESS STEEL SOCKET FLAT HEAD SCREWS WITH ANTI-SEIZE LUBRICANT. PLACE IN COUNTERSUNK HOLE. RECESS $\frac{1}{16}"$ BELOW PLATE SURFACE.
- ⑧ $\frac{3}{4}" \phi \times 4"$ GALVANIZED HEX HEAD BOLT. BEND 45°.
- ⑨ $\frac{3}{4}" \phi \times 2\frac{1}{4}"$ GALVANIZED THREADED COUPLING.
- ⑩ 1" X 5" SLOTTED COUNTERSUNK HOLE FOR NO. 7. PLACE SLOT PARALLEL TO DIRECTION OF MOVEMENT.



SECTION THRU JOINT AT ABUTMENT


NORMAL TO ϕ SUBSTRUCTURE

PARTIAL PLAN AT CONSTRUCTION JOINT




SECTION THRU JOINT

EXTERIOR GIRDER TO EDGE OF DECK AND AT PARAPETS, MEDIANS AND SIDEWALKS



ALTERNATE STRIP SEAL ANCHOR



BILL OF BARS


BAR NO.	COATED BAR	NO. REQ'D	LENGTH	BENT BAR	BUNDLED	BAR SERIES	7590 # COATED 0 # UNCOATED
							LOCATION
S601	X	40	27'-0"				DECK - TRANSVERSE
S502	X	48	7'-9"				PAVING BLOCK - TRANSVERSE
S403	X	108	3'-9"	X			PAVING BLOCK - STIRRUP
S504	X	108	2'-3"	X			PAVING BLOCK - ADHESIVE ANCHOR
S405	X	32	11'-3"				DIAPHRAGM - TOP TRANSVERSE
S606	X	40	11'-3"				DIAPHRAGM - BOTTOM TRANSVERSE
S407	X	128	4'-0"	X			DIAPHRAGM - STIRRUP

NOTE: EXISTING TRANSVERSE DECK REINFORCEMENT IS PLACED PERPENDICULAR TO THE GIRDERS. SAVE AND INCORPORATE A MINIMUM OF 1'-6" OF THIS EXISTING REINFORCEMENT. PROPOSED TRANSVERSE DECK REINFORCEMENT (S601) SHALL BE PLACED ALONG THE SKEW AT 6 1/2" MINIMUM SPACING.

■ ADHESIVE ANCHORS NO. 5 BAR: EMBED S504 1'-0" INTO CONCRETE ABUTMENT, SPACE AT 1'-0" MINIMUM AND TURN 10" LEG AS NECESSARY TO FIT.


● BAR COUPLER REQUIRED FOR S601, SEE SHEET 2 FOR DETAILS. BAR LENGTHS ARE COMPUTED TO THE ϕ OF THE CONSTRUCTION JOINT AND SHALL BE MODIFIED BY THE BAR COUPLER MANUFACTURERS RECOMMENDATIONS.

▲ EXISTING BARS ARE LIKELY TO BE CORRODED AND/OR DAMAGED DURING CONCRETE REMOVAL. SALVAGE AND INCORPORATE AS MUCH REBAR AS PRACTICAL. SUPPLEMENT WITH THE BARS INDICATED BY ■.




SECTION THRU JOINT



ROADWAY TRAFFIC AREA BETWEEN EXTERIOR GIRDERS.




PART PLAN



PLAN

VIEW OF PARAPET PLATE
FROM ROADWAY


SECTION A-A





SECTION B-B


- (1) BLOCK OUT CONCRETE 2" EACH SIDE
 (2) JOINT OPENING DIM. ALONG SKEW PLUS 1/2"


NO.	DATE	REVISION	BY
STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION			
STRUCTURE B-35-21			
DRAWN BY JAP		PLANS CKD. WJZ	
COVER PLATE DETAILS		SHEET 4 OF 4	














9

9










9

9










9


9







9		PROJECT NO: 1176-22-60		HWY: CTH Q		COUNTY: LINCOLN		CROSS SECTIONS: EAST APPROACH		SHEET		9
---	--	------------------------	--	------------	--	-----------------	--	-------------------------------	--	-------	--	---

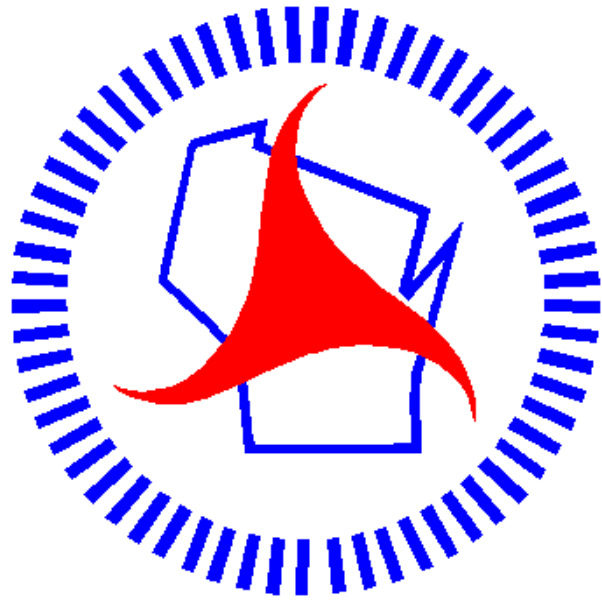

Wisconsin Department of Transportation

Dedicated people creating transportation solutions
through innovation and exceptional service.

<http://www.dot.wisconsin.gov>