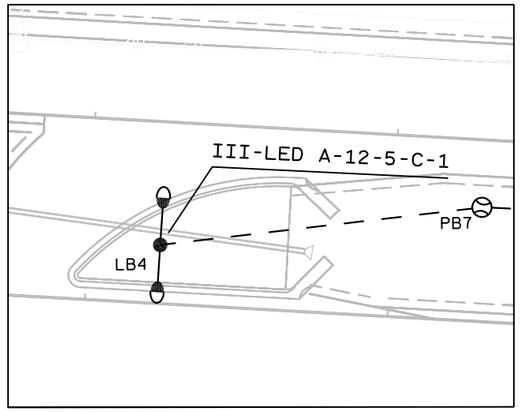


CONDUCTOR COLOR SCHEME

| |
|---|
| Circuit "A" = Black |
| Circuit "B" = Red |
| Circuit "C" = Blue |
| Circuit "D" = Brown |
| Circuit "E" = Orange |
| Circuit "F" = Yellow |

CTH T

CB1
PB1
PB2
LB1
III-LED A-12-5-A-1
3" SPECIAL

STH 23

NOTE:
There are 4 pull boxes between LB3 and LB4
Pull boxes 4-7 are roughly 300' apart each

910
915
300'
300'
PB6
PB5
PB4
LB3
III-LED A-12-5-A-2
PB3
LB2
III-LED A-12-5-B-1

PT: 917+15.27
STA BACK = 917+10.16
STA AHEAD = 917+15.27

STH 23

## LEGEND

- LIGHTING CONTROL CABINET WITH METER BREAKER PEDESTAL
- 2" CONDUIT, NON-METALLIC (unless otherwise noted)
- LIGHTING UNIT
- PULL BOX 24" X 42"
- UTILITY POLE
- ELECTRIC, UNDERGROUND — E —
- ELECTRIC, OVERHEAD — OH —

EXAMPLE (see individual label on each lighting unit)

III-LED A-12-5-A-4

- LIGHT UNIT NUMBER IN CIRCUIT
- CIRCUIT ID
- BASE TYPE
- MAST ARM LENGTH (in feet)
- LAMP WATTAGE
- DISTRIBUTION TYPE

240 VOLT SYSTEM
120/240 VOLT ELECTRIC SERVICE

## NOTES:

WISCONSIN DOT NORTHEAST REGION ELECTRICAL UNIT SHALL APPROVE FINAL LOCATIONS FOR ALL CONCRETE BASES IN THE FIELD PRIOR TO CONSTRUCTION. CONTACT THEM 3 DAYS IN ADVANCE AT (920) 492-5710.

THE LOCATION OF EXISTING AND PROPOSED UTILITIES AS SHOWN ON THE PLANS ARE APPROXIMATE. IN ADDITION, THERE MAY BE OTHER UTILITIES WITHIN THE PROJECT AREA WHICH ARE NOT SHOWN. THE CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL UTILITIES PRIOR TO CONSTRUCTION.

STH 23 & CTH T
TOWN OF GREENBUSH
SHEBOYGAN COUNTY

LIGHTING NO. 59-2014

DESIGNER: WISDOT NE REGION TRAFFIC UNIT

DATE: 7-31-2014 SHEET NO. 1 OF 1

| PROJECT NO: 1440-13-72 | HWY: STH 23 | COUNTY: SHEBOYGON | CONSTRUCTION DETAIL - "J" TURN LIGHTING | SHEET _____ | E |
|---|---|---|---|---|---|

FILE NAME : N:\PDS\C3D\14401301\DESIGN\EDGELINES\FOROTHERS\TRAFFIC\STH23 ALIGN AND EDGLINES_RECOVER.DWG PLOT DATE : 9/3/2008 9:36 AM PLOT BY : TALCOTT, MATTHEW J PLOT NAME : L59-2014,const PLOT SCALE: 50:1

WISDOT/CADDS SHEET 42