



Division of Transportation  
System Development  
Northeast Regional Office  
944 Vanderperren Way  
Green Bay, WI 54304

Scott Walker, Governor  
Dave Ross, Secretary  
Internet web site: [www.wisconsin.gov](http://www.wisconsin.gov)

Telephone: (920)492-5643  
E-mail: [dot.dtsd.ne.utility@dot.wi.gov](mailto:dot.dtsd.ne.utility@dot.wi.gov)

## **SPECIAL SUPPLEMENTAL PERMIT PROVISIONS**

It is understood and agreed that approval of this utility permit is subject to applicant's full compliance with the standard supplemental permit provisions, special supplemental provisions found listed below, and the Wisconsin Department of Transportation's *Utility Accommodation Policy (UAP)*, current edition (Also known as Highway Maintenance Manual – Chapter 9, Section 15) <http://www.dot.wisconsin.gov/business/rules/property-uap.htm>

### **Permit Number: 2017235**

1. If work vehicles/equipment are being parked on STH 15 shoulder, shoulder closures need to be in place.
2. (HMM 09-15-60-4.2) Send the LCS request to WisDOT for review and approval at the appropriate time in accordance with the following advance notifications guidelines:
  - a. 7 calendar days for any freeway ramp, lane or shoulder closure
  - b. 7 calendar days for full roadway closure of any state highway (detour involved)
  - c. 7 calendar days for closures that may impact oversize/overweight (OSOW) permits
  - d. 3 business days for closures non-freeway or shoulder closuresContact Josh Falk, (920) 366-8033 or [joshua.falk@dot.wi.gov](mailto:joshua.falk@dot.wi.gov).
3. (HMM 09-15-45-3.2) Manual tracking is prohibited over traffic lanes. The bore head can be tracked up to the shoulder edge or back of curb.
4. The depth of bury for underground facilities crossing the right of way shall be a minimum of 36 inches as measured from a straight line connecting the lowest points of the finished ground or pavement surface on each side of the right of way to the top of the facility at the time of installation.
5. (HMM 09-15-25-2.0) Bore shall be perpendicular to the highway, and bore pits established to closer to the highway than the toe of in slope or back of curb. The use of the median area is prohibited even to check the boring machine head.
6. (HMM 09-15-45-5.0) Restore any curb, gutter, pavement, shoulder, sidewalk, driveway, gravel base, ballast, or other highway element disturbed to the qualities, grades, compactions, conditions, etc., in accordance with WisDOT's [Standard Specifications for Highway and Structure Construction, current edition](#).

## APPLICATION / PERMIT

**TO CONSTRUCT, OPERATE and MAINTAIN UTILITY FACILITIES ON HIGHWAY RIGHT-OF-WAY**

s.66.0831, 84.08, 85.15, 86.07(2), 86.16, 182.017 and such other applicable Wis. Stats.

1. Applicant (Utility facility owner) Name and Address <b>WE ENERGIES</b> <b>P.O.BOX 1699</b> <b>APPLETON, WI 54912-1699</b>		2. Work Start Date <b>9/1/2017</b>	3. Work Finish Date* <b>9/30/2017</b>	6. Location Description (¼ section, section, town, range; provide plat map or location sketch) <b>SW1/4 Sec 13 T21N R16E</b>	
9. Facility Type (Check all that apply): Size (Diameter, kV, pressure, # fibers, etc.) <input type="checkbox"/> Telecom: _____ <input type="checkbox"/> Electric: _____ <input checked="" type="checkbox"/> Gas/Oil: <b>6" at 50 PSIS</b> <input type="checkbox"/> Water: _____ <input type="checkbox"/> San Sewer: _____ <input type="checkbox"/> _____: _____ <input type="checkbox"/> Transmission <input type="checkbox"/> Service: Std <input checked="" type="checkbox"/> Distribution <input type="checkbox"/> Service: Exp		4. Is the work due to a WisDOT highway project? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No 5. Applicant Work Order (If any) <b>4081700</b>		7. Work Location (Check/list all that apply) <input checked="" type="checkbox"/> Town: <b>Greenville</b> <input type="checkbox"/> Village: _____ <input type="checkbox"/> City: _____ <input checked="" type="checkbox"/> County: <b>Outagamie</b>	
10. Facility Orientation (Check all that apply) <input checked="" type="checkbox"/> Crossing R/W <input type="checkbox"/> Parallel R/W <input checked="" type="checkbox"/> Underground <input type="checkbox"/> Overhead <input type="checkbox"/> Structure attachment		12. Proposed Work Methods (Check all that apply) <input type="checkbox"/> Trench <input type="checkbox"/> Plow <input type="checkbox"/> Casing <input type="checkbox"/> Rock blasting <input type="checkbox"/> Open cut pavement Bore: <input type="checkbox"/> Hydraulic (Auger/Jack) <input type="checkbox"/> Pneumatic (Mole) <input checked="" type="checkbox"/> Directional 1 (Manually tracked) <input type="checkbox"/> Directional 2 (Computer tracked) <input type="checkbox"/> Unknown (At this time)		8. Highway (Check all that apply) <input checked="" type="checkbox"/> WIS <b>STH 15</b> <input type="checkbox"/> US _____ <input type="checkbox"/> Interstate _____ <input type="checkbox"/> _____	
11. Work Types (Check all that apply) <input checked="" type="checkbox"/> New construction <input checked="" type="checkbox"/> Improve/repair existing <input type="checkbox"/> Removal <input type="checkbox"/> Maintenance <input type="checkbox"/> Discontinued, left in place <input type="checkbox"/> Joint installation		Attach to poles/towers: <input type="checkbox"/> New <input type="checkbox"/> Existing <input type="checkbox"/> Guys** (Diameter) (Name of existing owner) (** Provide details for all guy wires on plan sheets) Subsurface utility excavation: <input type="checkbox"/> Water jetting <input type="checkbox"/> Vacuum Tree/vegetation control: <input type="checkbox"/> Cut and/or trim <input type="checkbox"/> Mow <input type="checkbox"/> Chemically treat		13. Work Zone Description (Check all that apply) <input type="checkbox"/> Full road closure: detour <input type="checkbox"/> Full road closure: temporary <input type="checkbox"/> Lane closure: without flagging <input type="checkbox"/> Lane closure: with flagging <input type="checkbox"/> Lane encroachment (2 feet or less) <input type="checkbox"/> Intersection/roundabout <input type="checkbox"/> Shoulder/parking lane closure <input checked="" type="checkbox"/> Off shoulder: within clear zone <input type="checkbox"/> In R/W: outside clear zone <input type="checkbox"/> Near R/W line: within clear zone <input type="checkbox"/> Near R/W line: outside clear zone <input type="checkbox"/> Not applicable	
20. Is the utility a member of Diggers Hotline? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No, provide line-locate number _____		14. Is the proposed facility near a survey monument? (See <a href="http://hmm.org/09-15-35">HMM 09-15-35</a> ) <input type="checkbox"/> Yes (Call: 1-866-568-2852 or e-mail: <a href="mailto:geodetic@dot.wi.gov">geodetic@dot.wi.gov</a> ) <input checked="" type="checkbox"/> No		15. Will any appurtenances be installed with the facility? (If yes, provide a description and/or specification of each item with this application.) <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No 16. Trans 401 project designation? (For all Major projects, provide a formal erosion control plan with this application. See <a href="http://hmm.org/09-15-55">HMM 09-15-55</a> ) <input checked="" type="checkbox"/> Minor <input type="checkbox"/> Major 17. Are any environmental permits, certifications or approvals required from other regulatory agencies? (If yes, provide a copy of each item or proof of agency coordination with this application.) <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	

**\* NOTE: If the work described is not completed by the "Work Finish Date" specified, this permit is null and void, and the work shall not be completed unless authorized through a subsequent permit or an approved time extension. *ANY PERMIT ISSUED IS REVOCABLE.***

18. Utility Person Responsible for Construction <b>Duane Vanderputten</b>	(Area Code) Telephone Number <b>(920)380-3398</b>	19. Utility or Project 24/7 Emergency Contact <b>We energies Emergency Hotline</b>	(Area Code) Telephone Number <b>(800)662-4797</b>
20. Is the utility a member of Diggers Hotline? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No, provide line-locate number _____		It is understood and agreed that approval is subject to applicant's full compliance with the pertinent statutes, as well as any rules and regulations of other jurisdictional agencies, which may be more restrictive, and with the Wisconsin Department of Transportation's <b>Utility Accommodation Policy (UAP)</b> , current edition. <a href="http://www.dot.wisconsin.gov/business/rules/property-uap.htm">http://www.dot.wisconsin.gov/business/rules/property-uap.htm</a>	
21. Provide additional project work details, if needed (Continue on back or include separate page)		<div style="border: 1px solid black; padding: 5px;"> <b>Cody M Jacobson</b>  <div style="text-align: right;">7/12/2017</div> </div>	
22. If not employed by applicant, authorized representative's company name and address		(Signature of Authorized Representative – If filled via computer, Brush Script font) (Date) <b>Cody M. Jacobson Designer</b> (Title and/or print name) <b>(920)380-3565</b> <b>Cody.jacobson@we-energies.com</b> (Authorized Representative Telephone Number) (Authorized Representative E-mail Address)	



**This permit does not transfer any land; nor give, grant or convey any land right, right in land, nor easement in WisDOT right-of-way. It is not assignable or transferrable. If ownership in a utility facility changes, WisDOT may void and supersede a permit and reissue it to the new owner upon request and with sufficient proof of ownership.**

**↓ For Wisconsin DOT Use Only ↓**

<input checked="" type="checkbox"/> <b>THE UTILITY SHALL NOTIFY WisDOT 3 DAYS BEFORE STARTING WORK AT:</b> Region contact, title, office address, telephone number, and e-mail address <b>Linda Skaleski, Utility Permit Coordinator</b> <b>Northeast Region Office</b> <b>944 Vanderperren Way</b> <b>Green Bay, WI</b> <b>920-492-4166</b> <b><a href="mailto:linda.skaleski@dot.wi.gov">linda.skaleski@dot.wi.gov</a></b>	<input checked="" type="checkbox"/> <b>REVIEW ALL SUPPLEMENTAL PERMIT PROVISIONS</b> <input checked="" type="checkbox"/> <b>REVISIONS MADE to DRAWINGS or OTHER PAGES</b> <input checked="" type="checkbox"/> Lane Closure System notification required: <a href="http://hmm.org/09-15-60">HMM 09-15-60</a> <input type="checkbox"/> Insurance or performance bond required <input type="checkbox"/> Joint installation: See permit(s) # _____ <input type="checkbox"/> Private utility (Non-public ownership and/or use) <input type="checkbox"/> Expedited Service Connection Permit <input type="checkbox"/> This permit voids & supersedes # _____ issued: _____ <input type="checkbox"/>	Date Application Received <b>8/7/2017</b> Date Application Completed Date Application Denied Permit Issuance Date <b>8/16/2017</b> Permit Extension Date Permit Number <b>2017235</b>
---	---	---

## INDEMNIFICATION

This Applicant shall save and hold the State, its officers, employees, agents, and all private and governmental contractors and subcontractors with the State under Chapter 84 Wisconsin Statutes, harmless from actions of any nature whatsoever (including any by Applicant itself) which arise out of, or are connected with, or are claimed to arise out of or be connected with any of the work done by the Applicant, or the construction or maintenance of facilities by the Applicant, pursuant to this permit or any other permit issued by the State for location of property, lines or facilities on highway right-of-way, (1) while the Applicant is performing its work, or (2) while any of the Applicant's property, equipment, or personnel, are in or about such place or the vicinity thereof, or (3) while any property constructed, placed or operated by or on behalf of Applicant remains on the State's property or right-of-way pursuant to this permit or any other permit issued by the State for location of property, lines or facilities on highway right-of-way; including without limiting the generality of the foregoing, all liability, damages, loss expense, claims, demands and actions on account of personal injury, death or property loss to the State, its officers, employees, agents, contractors, subcontractors or frequenters; to the Applicant, its employees, agents, contractors, subcontractors, or frequenters; or to any other persons, whether based upon, or claimed to be based upon, statutory (including, without limiting the generality of the foregoing, worker's compensation), contractual, tort, or whether or not caused or claimed to have been caused by active or inactive negligence or other breach of duty by the State, its officers, employees, agents, contractors, subcontractors or frequenters; Applicant, its employees, agents, contractors, subcontractors or frequenters; or any other person. Without limiting the generality of the foregoing, the liability, damage, loss, expense, claims, demands and actions indemnified against shall include all liability, damage, loss, expense, claims, demands and actions for damage to any property, lines or facilities placed by or on behalf of the Applicant pursuant to this permit or any other permit issued by the State for location of property, lines or facilities on highway right-of-way in the past or present, or that are located on any highway or State property or right-of-way with or without a permit issued by the State, for any loss of data, information, or material; for trademark, copyright or patent infringement; for unfair competition or infringement of personal or property rights of any kind whatever. The Applicant shall at its own expense investigate all such claims and demands, attend to their settlement or other disposition, defend all actions based thereon and pay all charges of attorneys and all other costs and expenses of any kind arising from any such liability, damage, loss, claims, demands and actions.

Any transfer, whether voluntary or involuntary, of ownership or control of any property constructed, placed or operated by or on behalf of the Applicant that remains on the State's property or right-of-way pursuant to this permit shall not release Applicant from any of the indemnification requirements of this permit, unless the State is notified of such transfer in writing. Any acceptance by any other person or entity, whether voluntary or involuntary, of ownership or control of any property constructed, placed or operated by or on behalf of the Applicant that remains on the State's property or right-of-way pursuant to this permit, shall include acceptance of all of the indemnification requirements of this permit by the other person or entity receiving ownership or control.

Notwithstanding the foregoing, a private contractor or subcontractor with the State under Chapter 84 Wisconsin Statutes, that fails to comply with sections 66.0831 and 182.0175 Wisconsin Statutes (2007-2008), remains subject to the payment to the Applicant of the actual cost of repair of intentional or negligent damage by the contractor or subcontractor to any property, lines or facilities placed by or on behalf of the Applicant pursuant to this permit or any other permit issued by the State for location of property, lines or facilities on highway right-of-way, and remains subject to payment to the Applicant for losses due to personal injury or death resulting from negligence by the contractor or subcontractor.

Notwithstanding the foregoing, if the State, or its officers, employees and agents, fail to comply with sections 66.0831 and 182.0175 Wisconsin Statutes (2007-2008), the State or its officers, employees and agents, remain subject to the payment to the Applicant of the actual cost of repair of willful and intentional damage by the State, or its officers, employees and agents, to any property, lines or facilities placed by or on behalf of the Applicant pursuant to this permit or any other permit issued by the State for location of property, lines or facilities on highway right-of-way, and remain subject to payment to the Applicant for losses due to personal injury or death resulting from negligence by the State, its officers, employees and agents.

No indemnification of private contractors or subcontractors with the State under Chapter 84 Wisconsin Statutes, shall apply in the event of willful and intentional damage by such private contractors or subcontractors to the property, lines and facilities of the Applicant located on the highway right-of-way pursuant to this permit or any other permit issued by the State for the location of property, lines or facilities on highway right-of-way.



## STANDARD SUPPLEMENTAL PERMIT PROVISIONS

For Wisconsin Department of Transportation Utility Facility Permits

### Acronyms used in this document:

- BMPs: Best Management Practices
- R/W: Right-of-Way
- UAP: Utility Accommodation Policy
- HMM: Highway Maintenance Manual
- WisDOT: Wisconsin Department of Transportation

### 1. GENERAL WORK REQUIREMENTS

- As required by Wisconsin Statute 182.0175, when filing your Diggers Hotline request ensure that this WisDOT Permit Number is in the Remarks Section of the Diggers Hotline Ticket.
- The Permittee shall bore under all driveways, private entrances, wetlands, culverts, and all roadways.
- The Permittee is responsible for obtaining any permits from the Department of Natural Resources, or any other agency that may have an interest in the area impacted by the construction of the utility facility.

2. **WORK DUE TO A WISDOT HIGHWAY PROJECT.** This approved permit constitutes acceptance that the work in this permit is compatible with permit requirements. This approved permit is NOT a Work Plan Approval/Start Work Notice as required by Trans 200.05(07). This approved permit is NOT a Work Plan Approval/Start Work Notice for a non-Trans 220 project. This approved permit does NOT approve or authorize an agreement between WisDOT and the Permittee for compensable work due to a WisDOT highway project.

3. **PERMIT TERM.** For as long as the Permittee continues to own, operate and maintain this utility facility within WisDOT R/W in accordance with the terms of its permit and WisDOT's UAP, this permit shall be valid.

4. **REVOCATION BY WISDOT.** WisDOT may revoke this permit if its own use of the R/W would be facilitated by the full or partial relocation of the Permittee utility facility, and shall provide the Permittee with written notice prior to revocation. At which time WisDOT shall work with the Permittee to find a suitable replacement area on R/W near the terminated location if possible. WisDOT shall not compensate the Permittee to move its utility facility in keeping with WisDOT's policy on compensable / non-compensable utility facility moves.

5. **TERMINATION BY PERMITTEE.** The Permittee may terminate this permit upon 60 days written notice to WisDOT. Upon such termination, the Permittee shall either remove its communication cable facility from the R/W, or abandon it in-place provided it does not constitute an environmental hazard.

6. **HOLIDAY WORK RESTRICTIONS for 2017.** The Permittee shall not work on January 1, May 29, July 4, September 4, and November 23, and December 25.

7. **WORK-TIME RESTRICTIONS.** Weekday work is from sunrise to sunset. Weekend work may be allowed upon prior approval from WisDOT. No work shall take place during nighttime hours unless authorized by WisDOT.

8. **TRAFFIC CONTROL.** All work zone traffic control will be in accordance with the Wisconsin Manual on Uniform Traffic Control Devices. Additional guidance is available from WisDOT through a booklet entitled, *Work Zone Safety, Guidelines for Construction, Maintenance, and Utility Operations* or from HMM 09-15-60.

9. **WORK AREA PROTECTION DURING NON-WORK TIMES.** The Permittee may store vehicles, equipment, or materials on the non-freeway R/W provided they are placed as close to the non-freeway R/W line as possible, but no less than 30 feet from the edge of the nearest travel lane. If vehicles, equipment, or materials must be parked or stored within an area that is less than 30 feet from the edge of the nearest travel lanes, appropriate temporary concrete or water-filled barriers, signing, and devices shall be utilized. The Permittee shall ensure that any excavations left open during non-work times are well marked and secured from public intrusion.

The primary objective will be maintenance of a safe traffic and working environment. No operation shall to any extent pose any hazard neither to, nor in any manner influence traffic at any time.

All vehicles used to conduct the work operations will be equipped with conspicuously visible roof-mounted revolving or strobe lights. These lights shall be in operation just prior to and during the time the work operations are being conducted. Hazard warning lights on the vehicles must also be operating.

10. **WORK RESTRICTIONS.** For the purposes of placement of these facilities, as stated with this permit request, the State security fence shall not be opened or damaged.

11. **CLEAR ZONE / DRAINAGE INTERFERENCE.** No topsoil or other excavated piles of soil shall be deposited in any manner that interferes with the clear zone or regular drainage patterns within the highway.

As much as possible, all equipment, operations, and spoil material should be situated or accomplished off of the highway.

12. **EROSION CONTROL.** The Permittee shall use the appropriate erosion control BMPs to contain soil directly at the site to prevent disturbed soil from getting into nearby waterways and wetlands. All appropriate erosion control devices shall be in place **prior to starting construction activities**. Temporary seeding shall be used as necessary after rough grading and before completion of the project. The Permittee shall ensure that erosion control BMPs used to protect restored areas remain in place until replacement vegetation achieves sustained growth.

The Permittee shall take all precautions necessary to prevent mud, dirt, or other debris from being deposited onto the shoulder or pavement of all access roads or highways. Any materials deposited on the shoulder or pavement shall be removed immediately. Ruts may remain as is if the Permittee is accessing the R/W from private property, but appropriate erosion control BMPs shall be used to contain disturbed soil at the site.

13. **R/W RESTORATION.** Upon completion of the project a variation of erosion control measures will be required to restore the area that has been disturbed allowing it to return to the manner it was in previous to the construction. All disturbed sites will require a seed mixture that includes a quick sprouting variety with fertilizer and mulch. Other possibilities that may have to be considered are Geotextile fabric, e-mat, and stone ditch checks.

The Permittee is responsible to assure that erosion control measures used to protect restored areas remain in place until replacement vegetation achieves sustained growth.

The basic drainage pattern of the highway shall remain undisturbed by the permitted work. Upon project completion, all spoils, debris, refuse, and waste resulting from the permitted work shall be removed from the work site. Should future maintenance work on the Permittee's utility facility result in the disturbance of the existing R/W, the Permittee shall restore the R/W to its original condition as soon as possible.

Any works or operations not in full compliance herewith shall justify an order by any inspecting officer of WisDOT to cease all further progress on the work, and to accomplish all restorations of disturbed areas, including full restorations of the pavement


Upon completion of the work, all disturbed areas shall be restored according to requirements stated in the Utility Accommodation Policy, HMM 09-15-65, and in a manner satisfactory to WisDOT

14. **NOTIFICATIONS / CONTACTS.** Notify Northeast Region permit coordinator/field inspector, by phone or email, three days prior to the start of construction. Notify Diggers' Hotline 800/242-8511 at least three working days prior to the start of any excavation. It is the obligation of the permittee to determine the location of, and avoid any damage to, the pre-existing lines and facilities of others.


15. **TREES.** Prevent the spread of oak wilt by treating all cut surfaces and abrasions sustained **between April 1 and September 30** by healthy oak trees and saplings with a thorough application of tree paint immediately upon discovering a wound. Between these dates, also paint the cut surfaces of the stumps of all healthy oak trees and saplings immediately after cutting, whether remaining in place or grubbed.

This permit approves the installation of facilities as shown on the diagram provided. If the above assigned position is not feasible, an alternate location of facilities shall be approved prior to installing the facilities by contacting the permit coordinator approving the permit. If the facility is later discovered to be at a location other than that designated by the permit you may be required to relocate the facility at your expense.




*This permit is subject to the attached drawings, these supplemental provisions, and WisDOT's Utility Accommodation Policy. New supplemental provisions may be added, or the existing ones deleted or amended in the future as different issues arise during the installation, operation and maintenance of the permittee's facilities.*

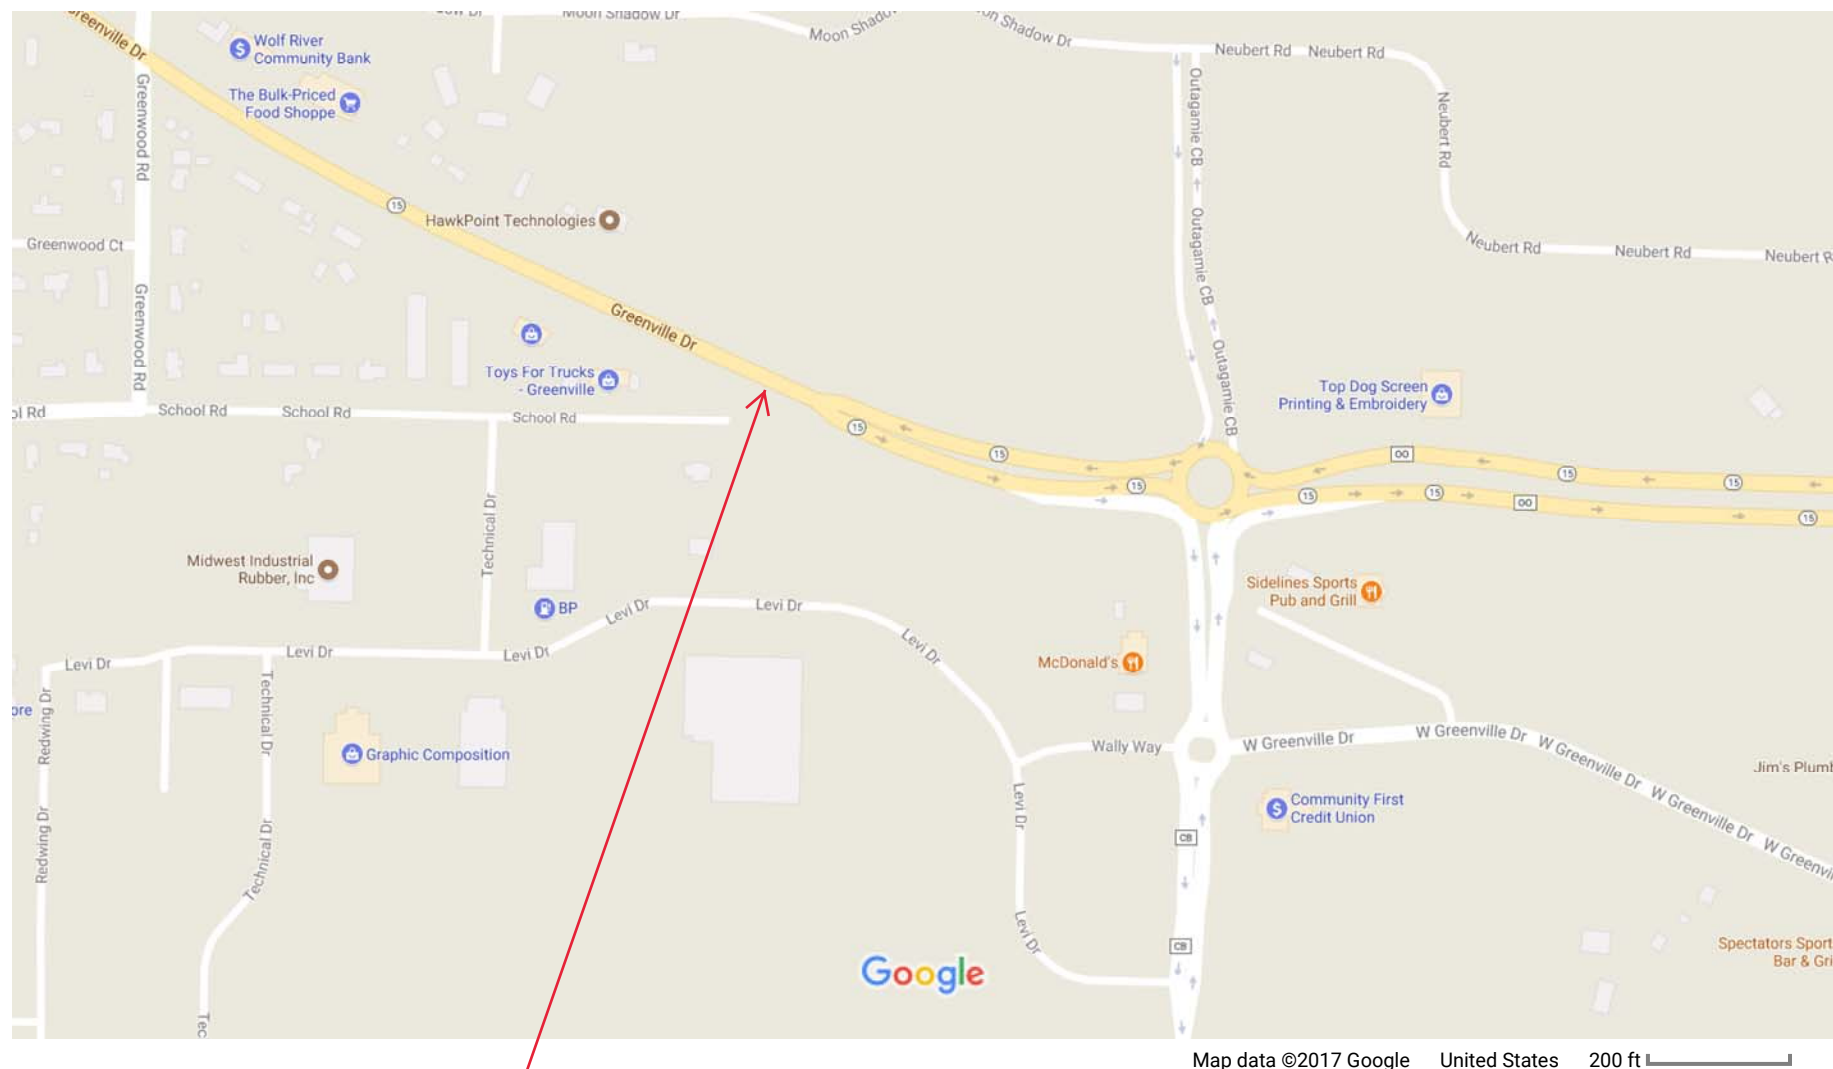

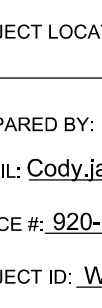






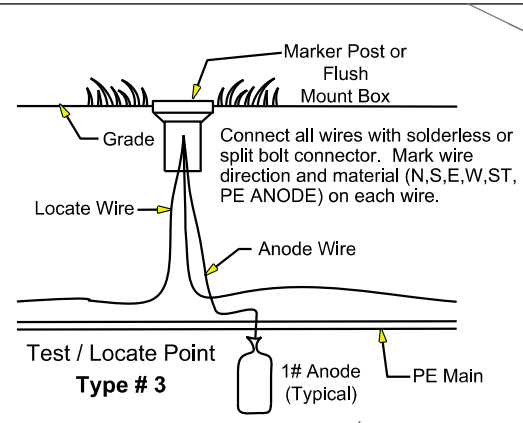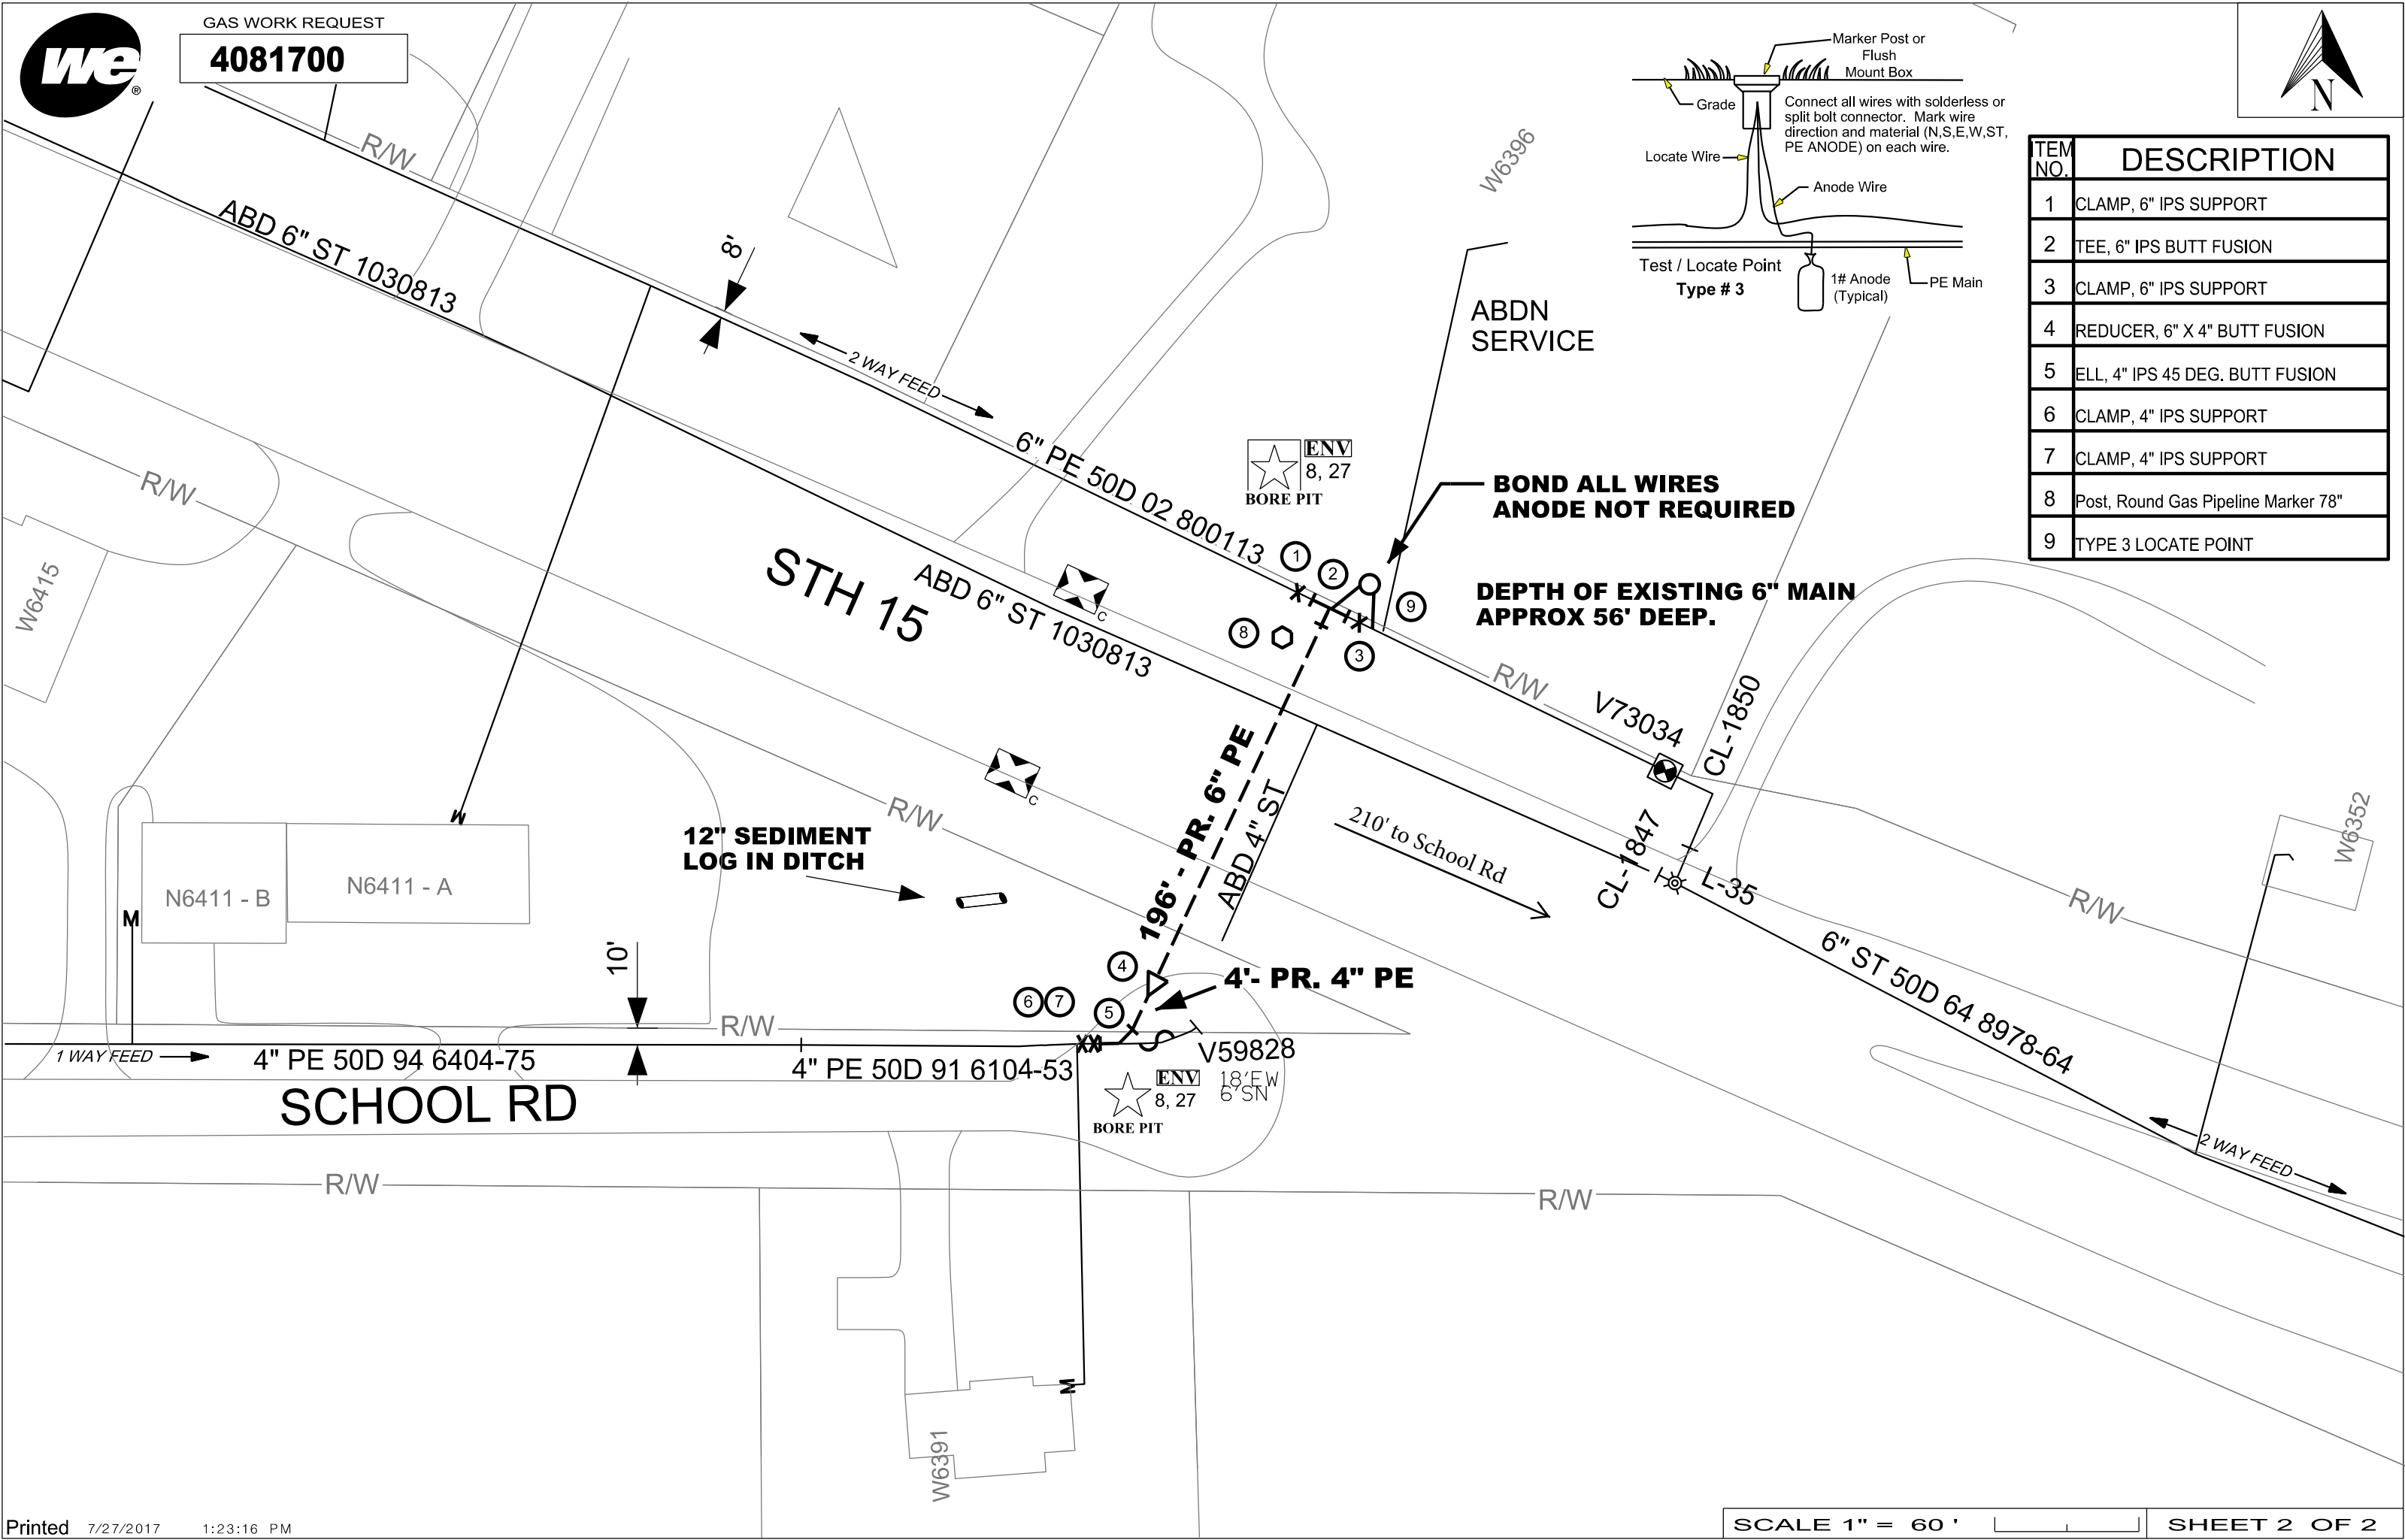

<div style="display: flex; justify-content: space-between; align-items: center;"><div style="text-align: center;"></div><div style="text-align: center;"><small>GAS WORK REQUEST</small></div></div> <div style="border: 1px solid black; padding: 10px; margin: 10px auto; width: 150px; text-align: center; font-size: 24px; font-weight: bold;">4081700</div>	
C <input type="checkbox"/> T <input checked="" type="checkbox"/> V: <u>GREENVILLE</u>	
CUST/PROJ NAME: <u>WE ENERGIES</u>	
PROJECT LOCATION: <u>SCHOOL RD AND STH 15</u>	
PREPARED BY: <u>CODY JACOBSON</u>	
E-MAIL: <u>Cody.jacobson@we-energies.com</u>	
OFFICE #: <u>920-380-3565</u>	CELL #: <u>920-858-4009</u>
PROJECT ID: <u>WI4081700</u>	IO #: <u>MEL21300271</u>
CGS #: _____	
<b>TYPE OF WORK:</b>	
<input type="checkbox"/> GDAM MAIN REPLACEMENT	<input type="checkbox"/> MAIN EXTENSION
<input type="checkbox"/> PAVING RELOCATION	<input type="checkbox"/> SERVICE
<input checked="" type="checkbox"/> OTHER <u>BOS - GDAM</u>	
<b>STAKING REQUIREMENTS:</b>	<b>MAIN / SERVICE IN EASEMENT:</b>
<input checked="" type="checkbox"/> SURVEYOR <input type="checkbox"/> STAKED	<input type="checkbox"/> YES      ROW WR# _____
<input type="checkbox"/> DESIGNER <input type="checkbox"/> NOT NEEDED	
<b>CORROSION CONTACT:</b> <u>JOHN HOOPER</u>	
<b>PHONE #:</b> <u>414-221-4871</u>	
RESTORE PRIVATE PROPERTY: <input checked="" type="checkbox"/> WE ENERGIES <input type="checkbox"/> CUSTOMER	
<b>RAILROAD PERMITTING/FLAGGING REQUIRED</b> <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	
<b>RR NAME</b>	
<b>MAIN SIZE, MAT'L, FT</b>	<b>INSTALL METHOD &amp; FOOTAGE</b>
<u>4", PE, 4'</u>	<u>OPEN CUT 4'</u>
<u>6", PE, 196'</u>	<u>BORE 196'</u>
<b>RELATED WR's</b>	
MAIN RETIREMENT WR _____	FOOTAGE _____
SERVICE REPLACEMENT WR _____	NO. _____
SERVICE RECONNECT WR _____	NO. _____
<b>EROSION CONTROL NOTES</b>	
<input checked="" type="checkbox"/> IF DISTURBANCE OCCURS IN SUMMER, FINAL STABILIZATION SHALL BE NOTED. IF DISTURBANCE OCCURS IN WINTER, TEMPORARY STABILIZATION IS REQUIRED IN SPRING.	
<input type="checkbox"/> IF DISTURBANCE OCCURS WITHIN THE SLOPE INTERCEPT, FINAL STABILIZATION IS REQUIRED. IF DISTURBANCE OCCURS OUTSIDE THE SLOPE INTERCEPT, FINAL STABILIZATION IS REQUIRED. ANCHORED MULCH, UNLESS NOTED.	
<input type="checkbox"/> IF DISTURBANCE OCCURS IN AGRICULTURAL FIELDS, SOIL SEEDING SHALL BE REQUIRED TO PREVENT CONSTRUCTION SOIL STRATIFICATION AND TO PRE-CONSTRUCTIVE SOIL STRATIFICATION.	
<input type="checkbox"/> DEPENDING ON THE TIME OF YEAR AND WEATHER CONDITIONS, STOCKPILE MATERIALS SHALL BE PLACED UPSLOPE FROM EXCAVATION, PROTECT STOCKPILES WITH 12" WATTLES.	
<input type="checkbox"/> PROJECT SPECIFIC EROSION CONTROL NOTES:	




















[illegible]



TEM NO.	DESCRIPTION
1	CLAMP, 6" IPS SUPPORT
2	TEE, 6" IPS BUTT FUSION
3	CLAMP, 6" IPS SUPPORT
4	REDUCER, 6" X 4" BUTT FUSION
5	ELL, 4" IPS 45 DEG. BUTT FUSION
6	CLAMP, 4" IPS SUPPORT
7	CLAMP, 4" IPS SUPPORT
8	Post, Round Gas Pipeline Marker 78"
9	TYPE 3 LOCATE POINT



<div><div>WE ENERGIES - GAS OPERATIONS</div><div>Unless otherwise noted in this document, the following notes apply: Existing facilities should be field verified prior to excavation. Utility information shown are from plans and have not been field verified. Maintain 12" min vertical clearance at crossing of existing electrical facilities. Maintain 6" min vertical clearance at crossing of other existing facilities. Maintain 18" min vertical clearance at crossing of existing storm sewer pipes. Maintain 5' clearance from storm sewer inlets. Staking of route or ROW by surveyor required prior to construction. Clearances shown are min distances - reference permit for specific clearance requirements. Additional information on excavation, backfilling &amp; clearances can be found in the Gas CRS 201. Restore all pavement, ROW, sidewalks, and customer's private property.</div></div>	<div>CONVENTIONAL SYMBOLS</div> <div><div><div></div><div>END OF MAIN CAPPED WITH AN ANODE ATTACHED TO THE TRACER WIRE - 2' x 4' EXCAVATION.</div></div><div><div></div><div>VALVE IN AN 8" DIAMETER METALLIC BOX SET TO GRADE</div></div><div><div></div><div>17# ANODE ATTACHED TO THE MAIN IN THE SAME TRENCH</div></div><div><div></div><div>GAS MAIN CUT OFF AND CAPPED 4' x 5' EXCAVATION</div></div><div><div></div><div>METER CHANGE</div></div><div><div></div><div>TEST &amp; RECONNECT SERVICE</div></div><div><div></div><div>REPLACE SERVICE</div></div></div>
---	--

<div>EROSION CONTROL LEGEND</div> <div><div> ENY 8, 27</div><div> ENY 8, 27</div><div>APPROXIMATE BORE PIT LOCATION (WITH &amp; WITHOUT PERIMETER CONTROL)</div></div> <div><div> INLET PROTECTION, TYPE A/B/C/D</div><div> 12" WATTLE or 12"/20" SEDIMENT LOG or 9.5"/20" EROSION EEL</div><div> STONE DITCH CHECK</div><div> ROCK BAG</div><div> MULCH</div><div> SOIL STABILIZER, TYPE A</div><div> EROSION MAT CLASS I, TYPE A</div><div> EROSION MAT CLASS I, TYPE B</div><div> EROSION MAT CLASS I, TYPE A URBAN</div><div> EROSION MAT CLASS I, TYPE B URBAN</div><div> EROSION MAT CLASS II</div><div> EROSION MAT CLASS III</div><div> VEGETATIVE BUFFER</div><div> TRACKING PAD</div><div> TIMBER MAT</div><div> SILT FENCE</div><div><div><div>TSB</div></div>TEMPORARY SEDIMENT BASIN</div><div> SURFACE WATER FLOW</div></div>	
--	--

WE ENERGIES WORK REQUEST ENVIRONMENTAL NOTES (Notes 1 through 7 apply to ALL work requests)

General

1. If WDNR and/or USACE permits were obtained for the project, all permit conditions shall be met during construction of the project.

2. If soil disturbance occurs on slopes or channels/ditches leading to wetlands or waterways, or within wetlands, the disturbed areas shall be stabilized and appropriate erosion control Best Management Practices (BMP's) shall be implemented.

3. Erosion Control BMR's shall meet or exceed the approved WDNR Storm Water Management Technical Standards ([http://dnr.wi.gov/topic/stormwater/standards/const\\_standards.html](http://dnr.wi.gov/topic/stormwater/standards/const_standards.html)). Refer to We Energies Construction Site Sediment and Erosion Control Standards.

4. Inspect installed erosion control BMP's at least one time per week and after ½" rain events: repair as necessary.

5. When temporary stabilization is required (e.g. for winter or short-term construction) prior to final restoration, soil stabilizer shall be installed wherever possible. Erosion mat shall be used temporarily only where appropriate, in accordance with state standards, and when approved by the Operations Supervisor.

Contaminated Soils

6. Whenever soil exhibiting obvious signs of contamination (e.g., discoloration, petroleum or solvent odor, free liquids other than water, buried containers or tanks, or other obvious signs of environmental impacts) is encountered during excavation or installation, cease work immediately, take appropriate immediate precautions to ensure worker health and safety, and contact the Operations Supervisor or Inspector.

Spills

7. If an oil spill occurs during construction, call the Environmental Incident Response Team (EIRT) at 414-430-3478:

a. Any quantity of oil is spilled into surface water;

b. Any oil spill greater than 50 ppm PCB into a sewer, vegetable garden, or grazing land;

c. Any oil spill containing greater than 500 ppm PCB;

d. Five gallons or more of oil spilled to the ground;

e. Any oil spill involving a police department, fire department, DNR, or concerned property owner.

Notes 8 through 27 apply as noted at specific points within each work request:

Dewatering

8. Dewatering of pits or trenches shall be done in accordance with state standards. Use an approved sediment bag, a straw bale dewatering basin, a combination of both, or equivalent.

Wetlands

9. As much as practicable, the majority of the work shall be staged from the public roadways and road shoulders, keeping equipment out of adjacent wetlands.

10. All work shall be conducted to minimize soil disturbance. No rutting will be allowed within the wetlands.

11. If soils are not frozen or stable to a point that avoids rutting, timber mats, mud tracks, or equivalent shall be utilized to access pole locations.

12. Excavated soils cannot be stockpiled in wetlands.

13. All excess spoils shall be removed from wetlands and placed in a suitable upland location.

14. Trenching and pit excavations within wetlands shall include soil segregation to facilitate restoration of pre-construction soil stratification, and restoration to pre-construction elevations.

15. Poles scheduled to be removed, and that occur within wetland, shall be cut at the ground surface.

16. No work can be performed within the banks or below the ordinary high watermark of any navigable waterways/streams.

17. No crossing of navigable waterways with equipment can occur. Foot traffic is allowed.

18. Any disturbed soil within 75-feet of the ordinary high water mark of any navigable waterways/streams shall be stabilized within 24 hours of construction completion.

Threatened and Endangered Species

19. Threatened or endangered species are known to occur in the work area. It is illegal to harass, harm, or kill a protected species under state and federal regulations. Proper precautions shall be taken to ensure harm to individuals is avoided.

20. In order to protect the threatened or endangered species, work must be conducted between November 5 and March 15.

21. Exclusion fencing must be installed at the work area prior to March 15.

22. A qualified biologist must be present when conducting work at this location.

Invasive Species

23. State regulated invasive species are known to occur in the work area. Reasonable precautions are legally required to prevent the spread of these species. The Wisconsin Council on Forestry Transportation and Utility Right-of Way Best Management Practices should be followed: (<http://council.wisconsinforestry.org/invasives/transportation/>).

Cultural and Historical Resources, cont.

24. The project is within or adjacent to an area that is identified by the State of Wisconsin as potentially having Native American artifacts, burial mounds or burial sites, which could be encountered during construction.

25. If human bone or any artifacts are discovered during construction, work must cease immediately. Contact the Environmental Department who will contact the State Burial Sites Preservation Office and determine the next steps that must be taken in order to comply with state law. Work at that site MAY NOT PROCEED until the Environmental Department authorizes it.

26. A "qualified archaeologist," as specified under Wis. Stats 157.70 (1) (i) and Wis. Admin. Code HS 2.04 (6), must be present to monitor all ground disturbing activities.

Frac-out Contingency Plan


27. A frac-out contingency plan shall be on-site and implemented accordingly. The contingency plan shall incorporate the following components.

a. Continuously inspect the bore paths for frac-outs in order to respond quickly and appropriately.

b. Containment materials (e.g. silt fence, straw bales, sand bags, etc.) shall be on site and available should a frac-out occur.



## Work Beyond the Shoulder

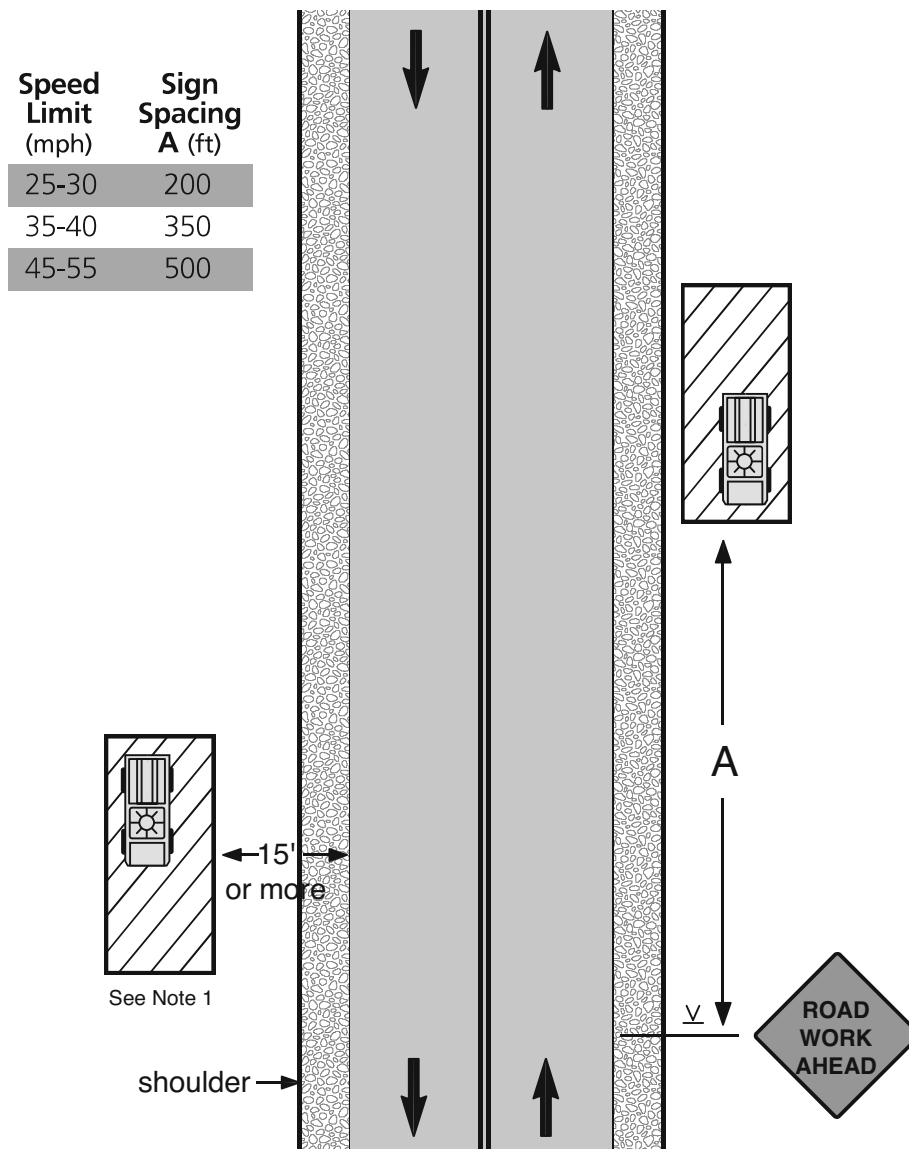

### Notes

1. The warning sign may be omitted where the work area is behind a guard rail, more than 2' behind a curb, 30' or more from the edge of a freeway/expressway, or 15' or more from the edge of any other roadway.
2. For short-term, short-duration, or mobile operations, the warning sign may be omitted if a vehicle with activated high intensity light is used. On state trunk highways, the warning sign can be omitted if the duration of work is less than 60 minutes and activated high intensity lights are used.
3. The ROAD WORK AHEAD sign may be replaced with other appropriate signs such as SHOULDER WORK, UTILITY WORK AHEAD, SURVEY CREW or Workers.