

GENERAL NOTES

THE SILT FENCE RELIEF DETAIL IS A SUPPLEMENTAL DETAIL TO THE SILT FENCE STANDARD DETAILS AND SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND APPLICABLE SPECIAL PROVISIONS.

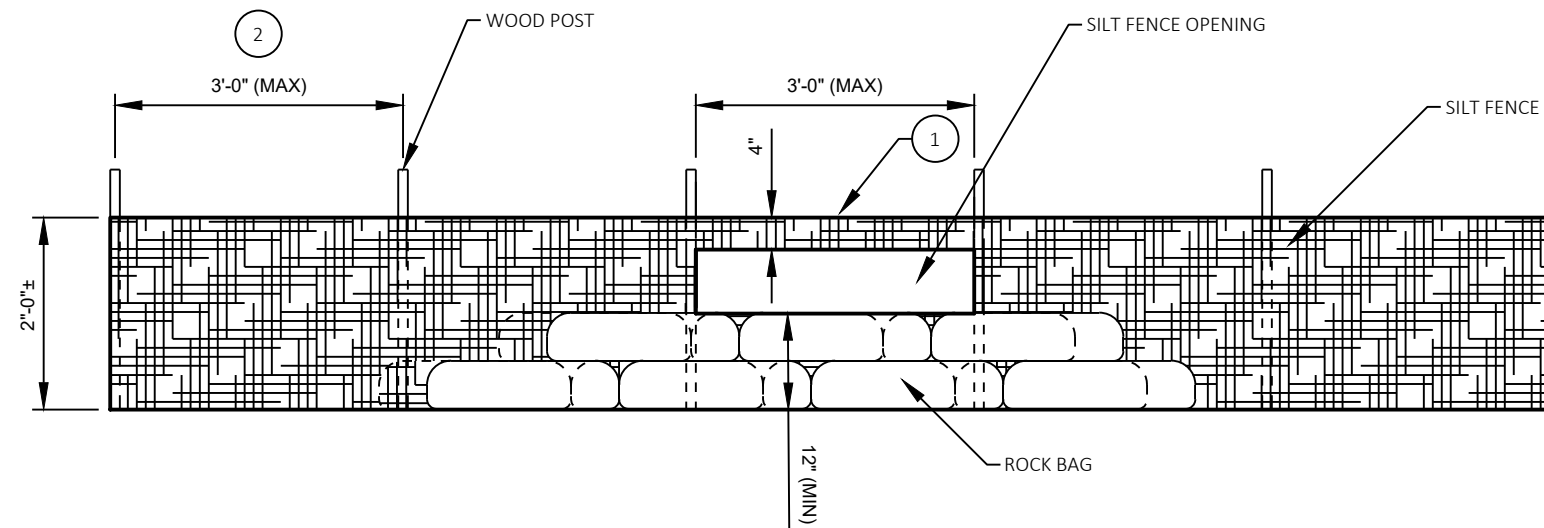
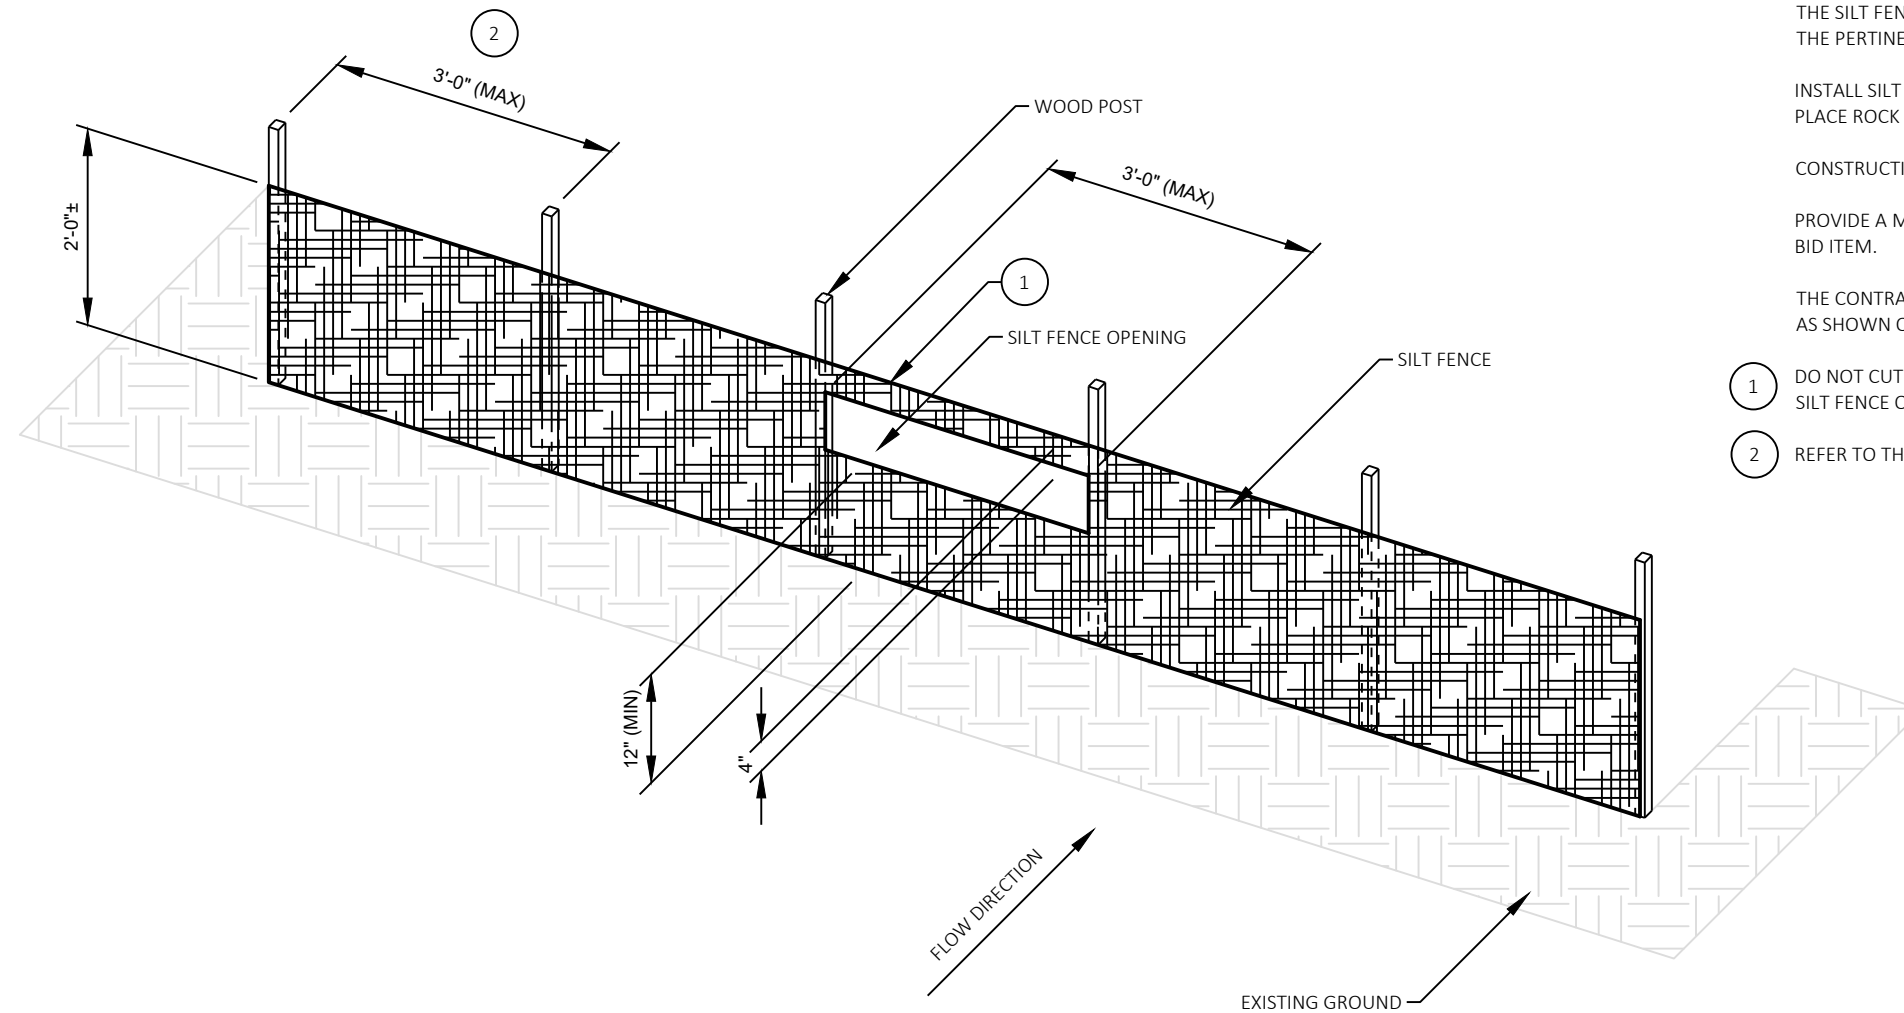
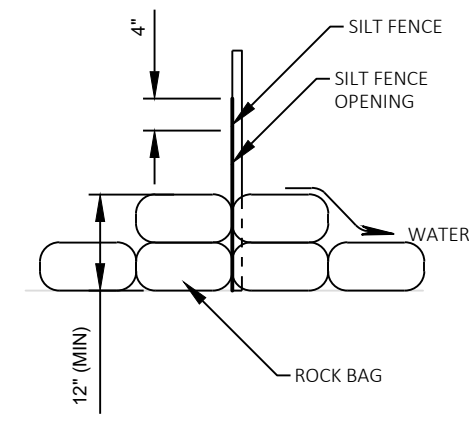
INSTALL SILT FENCE PRIOR TO CONSTRUCTING THE SILT FENCE OPENING. PRIOR TO CONSTRUCTING THE SILT FENCE OPENING, PLACE ROCK BAGS AT THE SILT FENCE OPENING AS SHOWN IN THIS DETAIL.

CONSTRUCTION OF THE SILT FENCE OPENING SHALL BE INCIDENTAL TO THE COST OF THE SILT FENCE BID ITEM.

PROVIDE A MINIMUM OF 22 ROCK BAGS MINIMUM PER 3 FOOT OPENING. ROCK BAGS SHALL BE PAID UNDER THE ROCK BAGS BID ITEM.

THE CONTRACTOR SHALL ADJUST THE SILT FENCE RELIEF OPENINGS WITHIN THE SILT FENCE AS NECESSARY TO PROVIDE RELIEF: AS SHOWN ON THE PLANS, TO FIT FIELD CONDITIONS AND AS DIRECTED BY THE FIELD ENGINEER.

- 1 DO NOT CUT THE SUPPORT CORD OR TENSION TAPE WHEN CONSTRUCTING THE SILT FENCE OPENING. KEEP THE TOP OF THE SILT FENCE OPENING 1"± BELOW THE 3" FOLD AT THE SUPPORT CORD OR TENSION TAPE.
- 2 REFER TO THE SILT FENCE STANDARD DETAILS FOR ALLOWABLE ADJUSTMENTS TO POST SPACING.

SILT FENCE RELIEF DETAILSECTION VIEWROCK BAG DETAIL