

CAST ALUMINUM POLE CAP WITH STAINLESS STEEL HARDWARE

35mm DIA. WIRE ACCESS HOLE (FIELD DRILLED) W/ RUBBER GROMMET

"B" TOP DIA.

TOP 1.5m STRAIGHT



SCHEDULE

CATALOG	QTY	A	B	C	D	E	F
FPFLS8552 DF-DC-WISDOT		203mm	128mm	10mm	5.1m	57mm THRU 25mm	305mm

REFERENCE: TYPE 2 ALUMINUM POLE

"SPUN TAPERED ALUMINUM LIGHTING STANDARD"

SPUN TAPERED ALUMINUM SHAFT ALLOY 6063-T5
 "A" BOTTOM DIA, "B" TOP DIA, "C" WALL THK
 "D" OVERALL LENGTH, MECH. ROTARY Sanded 80 GRIT AND CLEAR ANODIZED AFTER FABRICATION

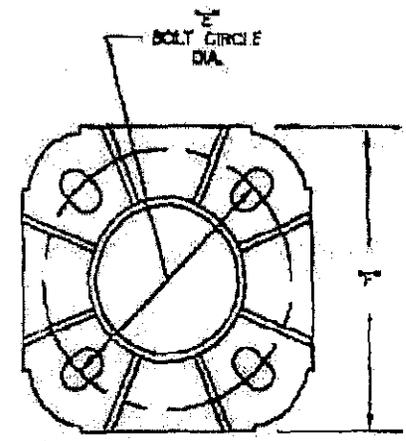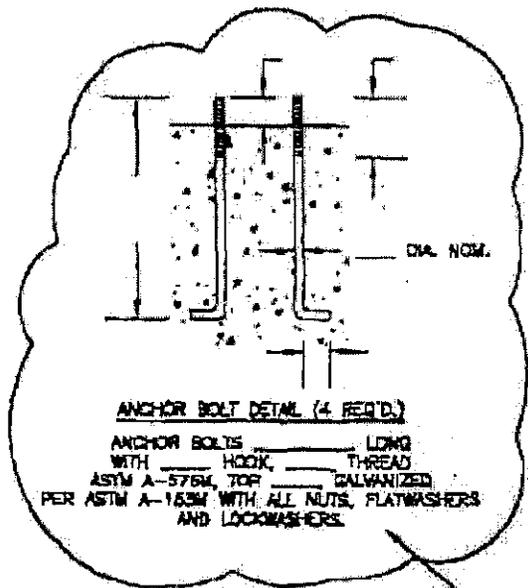

ANCHOR BOLT DETAIL (4 REQ'D.)

ANCHOR BOLTS _____ LONG
 WITH _____ HOOK, _____ THREAD
 ASTM A-576M, TOP GALVANIZED
 PER ASTM A-163M WITH ALL NUTS, FLATWASHERS
 AND LOCKWASHERS.

CAST ALUMINUM SHOEBASE
 ALLOY 356-T5
 WITH 4 CAST ALUMINUM BOLT COVERS
 WITH ST. STL. ATTACHMENT SCREWS

103mm x 152mm NOMINAL REINFORCED, FLUSH HANDHOLE WITH COVER, ST. STL. ATTACHMENT SCREWS AND GROUND PROVISION.

ANCHOR BOLTS NOT INCLUDED (BY OTHERS)

"A" BOTTOM DIA.

NOTE: HANDHOLE SHALL FACE AWAY FROM TRAFFIC

406mm

4043

WISDOT "TYPE 2" POLE

CAST ALUMINUM SHOEBASE WITH CIRCUMFERENTIAL WELDS BOTH INSIDE AND OUT

FLAGPOLES, INC. 95 CHARLED HOLLOW RD. EAST SETAUKET, N.Y. 11733

REVISIONS		
NEL	DATE	BY
1		
2		
3		
4		
5		

PROJECT: STATE OF WISCONSIN DEPT. OF TRANSPORTATION	DIST: TRAFFIC SIGNAL CO. OF WISCONSIN	
CONTRACTOR:	AGENT: THE LIGHTING COMPANY	
DRAWN BY: SAF	DATE:	INTERVAL: AS NOTED
CHEK:	APP'D:	DRAWING NO: 6067
SCALE: NONE	WORK ORDER # 18849	