#### HIGHWAY WORK PROPOSAL

Wisconsin Department of Transportation 06/2017 s.66.0901(7) Wis. Stats

Proposal Number:

COUNTY	STATE PROJECT	<u>FEDERAL</u>	PROJECT DESCRIPTION	<u>HIGHWAY</u>
Crawford	1660-03-67	N/A	Marquette - Prairie Du Chien; Mississippi Rvr Structure B-12-0027	USH 018
Crawford	1660-03-68	WISC 2019070	Marquette - Prairie Du Chien; Mississippi Rvr Struc B-12-28/29/30	USH 018
Grant	5580-00-82	N/A	Bloomington - Prairie Du Chien; Blake Fork Crk Structure B-22-0059	STH 035

This proposal, submitted by the undersigned bidder to the Wisconsin Department of Transportation, is in accordance with the advertised request for proposals. The bidder is to furnish and deliver all materials, and to perform all work for the improvement of the designated project in the time specified, in accordance with the appended Proposal Requirements and Conditions.

Proposal Guaranty Required: \$100,000.00 Attach Proposal Guaranty on back of this PAGE. Payable to: Wisconsin Department of Transportation Firm Name, Address, City, State, Zip Code Bid Submittal Date: January 15, 2019 SAMPLE Time (Local Time): 9:00 am NOT FOR BIDDING PURPOSES Contract Completion Time October 15, 2019 This contract is exempt from federal oversight. Assigned Disadvantaged Business Enterprise Goal 4%

This certifies that the undersigned bidder, duly sworn, is an authorized representative of the firm named above; that the bidder has examined and carefully prepared the bid from the plans, Highway Work Proposal, and all addenda, and has checked the same in detail before submitting this proposal or bid; and that the bidder or agents, officer, or employees have not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of free competitive bidding in connection with this proposal bid.

Do not sign, notarize, or submit this	Highway Work Proposal w	when submitting an electronic bid on the Internet.	
Subscribed and sworn to before me th	is date		
(Signature, Notary Public, St	ate of Wisconsin)	(Bidder Signature)	
(Print or Type Name, Notary Pul	olic, State Wisconsin)	(Print or Type Bidder Name)	
(Date Commission	Expires)	(Bidder Title)	
Notary Seal			
Type of Work: Bridge Rehabilitation	For Depar	rtment Use Only	
Notice of Award Dated		Date Guaranty Returned	

# PLEASE ATTACH PROPOSAL GUARANTY HERE

## **Effective with November 2007 Letting**

# PROPOSAL REQUIREMENTS AND CONDITIONS

The bidder, signing and submitting this proposal, agrees and declares as a condition thereof, to be bound by the following conditions and requirements.

If the bidder has a corporate relationship with the proposal design engineering company, the bidder declares that it did not obtain any facts, data, or other information related to this proposal from the design engineering company that was not available to all bidders.

The bidder declares that they have carefully examined the site of, and the proposal, plans, specifications and contract forms for the work contemplated, and it is assumed that the bidder has investigated and is satisfied as to the conditions to be encountered, as to the character, quality, and quantities of work to be performed and materials to be furnished, and as to the requirements of the specifications, special provisions and contract. It is mutually agreed that submission of a proposal shall be considered conclusive evidence that the bidder has made such examination.

The bidder submits herewith a proposal guaranty in proper form and amount payable to the party as designated in the advertisement inviting proposals, to be retained by and become the property of the owner of the work in the event the undersigned shall fail to execute the contract and contract bond and return the same to the office of the engineer within fourteen (14) days after having been notified in writing to do so; otherwise to be returned.

The bidder declares that they understand that the estimate of quantities in the attached schedule is approximate only and that the attached quantities may be greater or less in accordance with the specifications.

The bidder agrees to perform the said work, for and in consideration of the payment of the amount becoming due on account of work performed, according to the unit prices bid in the following schedule, and to accept such amounts in full payment of said work.

The bidder declares that all of the said work will be performed at their own proper cost and expense, that they will furnish all necessary materials, labor, tools, machinery, apparatus, and other means of construction in the manner provided in the applicable specifications and the approved plans for the work together with all standard and special designs that may be designed on such plans, and the special provisions in the contract of which this proposal will become a part, if and when accepted. The bidder further agrees that the applicable specifications and all plans and working drawings are made a part hereof, as fully and completely as if attached hereto.

The bidder, if awarded the contract, agrees to begin the work not later than ten (10) days after the date of written notification from the engineer to do so, unless otherwise stipulated in the special provisions.

The bidder declares that if they are awarded the contract, they will execute the contract agreement and begin and complete the work within the time named herein, and they will file a good and sufficient surety bond for the amount of the contract for performance and also for the full amount of the contract for payment.

The bidder, if awarded the contract, shall pay all claims as required by Section 779.14, Statutes of Wisconsin, and shall be subject to and discharge all liabilities for injuries pursuant to Chapter 102 of the Statutes of Wisconsin, and all acts amendatory thereto. They shall further be responsible for any damages to property or injury to persons occurring through their own negligence or that of their employees or agents, incident to the performance of work under this contract, pursuant to the Standard Specifications for Road and Bridge Construction applicable to this contract.

In connection with the performance of work under this contract, the contractor agrees to comply with all applicable state and federal statutes relating to non-discrimination in employment. No otherwise qualified person shall be excluded from employment or otherwise be subject to discrimination in employment in any manner on the basis of age, race, religion, color, gender, national origin or ancestry, disability, arrest or conviction record (in keeping with s.111.32), sexual orientation, marital status, membership in the military reserve, honesty testing, genetic testing, and outside use of lawful products. This provision shall include, but not be limited to the following: employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation, and selection for training, including apprenticeship. The contractor further agrees to ensure equal opportunity in employment to all applicants and employees and to take affirmative action to attain a representative workforce.

The contractor agrees to post notices and posters setting forth the provisions of the nondiscrimination clause, in a conspicuous and easily accessible place, available for employees and applicants for employment.

If a state public official (section 19.42, Stats.) or an organization in which a state public official holds at least a 10% interest is a party to this agreement, this contract is voidable by the state unless appropriate disclosure is made to the State of Wisconsin Ethics Board.

# **Effective with August 2015 Letting**

# BID PREPARATION

# Preparing the Proposal Schedule of Items

#### A General

- (1) Obtain bidding proposals as specified in section 102 of the standard specifications prior to 11:45 AM of the last business day preceding the letting. Submit bidding proposals using one of the following methods:
  - 1. Electronic bid on theinternet.
  - 2. Electronic bid on a printout with accompanying diskette or CD ROM.
  - 3. Paper bid under a waiver of the electronic submittal requirements.
- (2) Bids submitted on a printout with accompanying diskette or CD ROM or paper bids submitted under a waiver of the electronic submittal requirements govern over bids submitted on the internet.
- (3) The department will provide bidding information through the department's web site at: <a href="https://wisconsindot.gov/Pages/doing-bus/contractors/hcci/bid-let.aspx">https://wisconsindot.gov/Pages/doing-bus/contractors/hcci/bid-let.aspx</a>

The contractor is responsible for reviewing this web site for general notices as well as information regarding proposals in each letting. The department will also post special notices of all addenda to each proposal through this web site no later than 4:00 PM local time on the Thursday before the letting. Check the department's web site after 5:00 PM local time on the Thursday before the letting to ensure all addenda have been accounted for before preparing the bid. When bidding using methods 1 and 2 above, check the Bid Express<sup>TM</sup> on-line bidding exchange at <a href="http://www.bidx.com/">http://www.bidx.com/</a> after 5:00 PM local time on the Thursday before the letting to ensure that the latest schedule of items Expedite file (\*.ebs or \*.00x) is used to submit the final bid.

(4) Interested parties can subscribe to the Bid Express<sup>TM</sup> on-line bidding exchange by following the instructions provided at the www.bidx.com web site or by contacting:

Info Tech Inc. 5700 SW 34th Street, Suite 1235 Gainesville, FL 32608-5371 email: mailto:customer.support@bidx.com

- (5) The department will address equipment and process failures, if the bidder can demonstrate that those failures were beyond their control.
- (6) Contractors are responsible for checking on the issuance of addenda and for obtaining the addenda. Notice of issuance of addenda is posted on the department's web site at:

  <a href="https://wisconsindot.gov/Pages/doing-bus/contractors/hcci/bid-let.aspx">https://wisconsindot.gov/Pages/doing-bus/contractors/hcci/bid-let.aspx</a>

or by calling the department at (608) 266-1631. Addenda can ONLY be obtained from the departments web site listed above or by picking up the addenda at the Bureau of Highway Construction, 4<sup>th</sup> floor, 4822 Madison Yards Way, Madison, WI, during regular business hours

(7) Addenda posted after 5:00 PM on the Thursday before the letting will be emailed to the eligible bidders for that proposal. All eligible bidders shall acknowledge receipt of the addenda whether they are bidding on the proposal or not. Not acknowledging receipt may jeopardize the awarding of the project.

#### **B Submitting Electronic Bids**

## **B.1** On the Internet

- (1) Do the following before submitting the bid:
  - 1. Have a properly executed annual bid bond on file with the department.

- 2. Have a digital ID on file with and enabled by Info Tech Inc. Using this digital ID will constitute the bidder's signature for proper execution of the bidding proposal.
- (2) In lieu of preparing, delivering, and submitting the proposal as specified in 102.6 and 102.9 of the standard specifications, submit the proposal on the internet as follows:
  - 1. Download the latest schedule of items reflecting all addenda from the Bid Express TM web site.
  - 2. Use Expedite TM software to enter a unit price for every item in the schedule of items.
  - 3. Submit the bid according to the requirements of Expedite<sup>TM</sup> software and the Bid Express<sup>TM</sup> web site. Do not submit a bid on a printout with accompanying diskette or CD ROM or a paper bid. If the bidder does submit a bid on a printout with accompanying diskette or a paper bid in addition to the internet submittal, the department will disregard the internet bid.
  - 4. Submit the bid before the hour and date the Notice to Contractors designates.
  - Do not sign, notarize, and return the bidding proposal described in 102.2 of the standard specifications.
- (3) The department will not consider the bid accepted until the hour and date the Notice to Contractors designates.

# B.2 On a Printout with Accompanying Diskette or CD ROM

(1) Download the latest schedule of items from the Wisconsin pages of the Bid Express<sup>TM</sup> web site reflecting the latest addenda posted on the department's web site at:

https://wisconsindot.gov/Pages/doing-bus/contractors/hcci/bid-let.aspx

Use Expedite TM software to prepare and print the schedule of items. Provide a valid amount for all price fields. Follow instructions and review the help screens provided on the Bid Express Web site to assure that the schedule of items is prepared properly.

(2) Staple an 8 1/2 by 11 inch printout of the Expedite<sup>TM</sup> generated schedule of items to the other proposal documents submitted to the department as a part of the bidder's sealed bid. As a separate submittal, not in the sealed bid envelop but due at the same time and place as the sealed bid, also provide the Expedite<sup>TM</sup> generated schedule of items on a 3 1/2 inch computer diskette or CD ROM. Label each diskette or CD ROMwith the bidder's name, the 4 character department-assigned bidder identification code from the top of the bidding proposal, and a list of the proposal numbers included on that diskette or CD ROM as indicated in the following example:

**Bidder Name** 

**BN00** 

Proposals: 1, 12, 14, & 22

- (3) If bidding on more than one proposal in the letting, the bidder may include all proposals for that letting on one diskette or CD ROM. Include only submitted proposals with no incomplete or other files on the diskette or CD ROM.
- (4) The bidder-submitted printout of the Expedite<sup>TM</sup> generated schedule of items is the governing contract document and must conform to the requirements of section 102 of the standard specifications. If a printout needs to be altered, cross out the printed information with ink or typewriter and enter the new information and initial it in ink. If there is a discrepancy between the printout and the diskette or CD ROM, the department will analyze the bid using the printout information.
- (5) In addition to the reasons specified in section 102 of the standard specifications, proposals are irregular and the department may reject them for one or more of the following:
  - 1. The check code printed on the bottom of the printout of the Expedite<sup>TM</sup> generated schedule of items is not the same on each page.
  - 2. The check code printed on the printout of the Expedite<sup>TM</sup> generated schedule of items is not the same as the check code for that proposal provided on the diskette or CD ROM.

3. The diskette or CD ROM is not submitted at the time and place the department designates.

#### C Waiver of Electronic Submittal

- (1) The bidder may request a waiver of the electronic submittal requirements. Submit a written request for a waiver in lieu of bids submitted on the internet or on a printout with accompanying diskette or CD ROM. Use the waiver that was included with the paper bid document sent to the bidder or type up a waiver on the bidder's letterhead. The department will waive the electronic submittal requirements for a bidding entity (individual, partnership, joint venture, corporation, or limited liability company) for up to 4 individual proposals in a calendar year. The department may allow additional waivers for equipment malfunctions.
- (2) Submit a schedule of items on paper conforming to section 102 of the standard specifications. The department charges the bidder a \$75 administrative fee per proposal, payable at the time and place the department designates for receiving bids, to cover the costs of data entry. The department will accept a check or money order payable to: "Wisconsin, Dept. of Transportation."
- (3) In addition to the reasons specified in section 102 of the standard specifications, proposals are irregular and the department may reject them for one or more of the following:
  - 1. The bidder fails to provide the written request for waiver of the electronic submittal requirements.
  - 2. The bidder fails to pay the \$75 administrative fee before the time the department designates for the opening of bids unless the bidder requests on the waiver that they be billed for the \$75.
  - 3. The bidder exceeds 4 waivers of electronic submittal requirements within a calendar year.
- (4) In addition to the reasons specified in section 102 of the standard specifications, the department may refuse to issue bidding proposals for future contracts to a bidding entity that owes the department administrative fees for a waiver of electronic submittal requirements.

#### PROPOSAL BID BOND

DT1303 1/2006

Wisconsin Department of Transportation

Proposal Number	Project Number		Letting Date
Name of Principal			
Name of Surety		State in Which Surety is	Organized

We, the above-named Principal and the above-named Surety, are held and firmly bound unto the State of Wisconsin in the sum equal to the Proposal Guaranty for the total bid submitted for the payment to be made; we jointly and severally bind ourselves, our heirs, executors, administrators, successors and assigns. The condition of this obligation is that the Principal has submitted a bid proposal to the State of Wisconsin acting through the Department of Transportation for the improvement designated by the Proposal Number and Letting Date indicated above.

If the Principal is awarded the contract and, within the time and manner required by law after the prescribed forms are presented for signature, enters into a written contract in accordance with the bid, and files the bond with the Department of Transportation to guarantee faithful performance and payment for labor and materials, as required by law, or if the Department of Transportation shall reject all bids for the work described, then this obligation shall be null and void; otherwise, it shall be and remain in full force and effect. In the event of failure of the Principal to enter into the contract or give the specified bond, the Principal shall pay to the Department of Transportation within 10 business days of demand a total equal to the Proposal Guaranty as liquidated damages; the liability of the Surety continues for the full amount of the obligation as stated until the obligation is paid in full.

The Surety, for value received, agrees that the obligations of it and its bond shall not be impaired or affected by any extension of time within which the Department of Transportation may accept the bid; and the Surety does waive notice of any such extension.

IN WITNESS, the Principal and Surety have agreed and have signed by their proper officers and have caused their corporate seals to be affixed this date: **(DATE MUST BE ENTERED)** 

#### **PRINCIPAL**

(Company Name) (Affix C	orporate Seal)		
(Signature and Title)			
(Company Name)			
(Signature and Title)			
(Company Name)			
(Signature and Title)		(Name of Surety) (Affix Seal)	
(Company Name)		(Signature of Attorney-in-Fact)	
(Signature and Title)			
NOTA	RY FOR PRINCIPAL	NOTARY FOR	SURETY
	(Date)	(Date)	)
State of Wisconsin	)	State of Wisconsin	)
	) ss. County )	(	) ss. County )
On the above date, this instrunamed person(s).	ument was acknowledged before me by the	On the above date, this instrument was named person(s).	acknowledged before me by the
(Signature, Note	ary Public, State of Wisconsin)	(Signature, Notary Public,	State of Wisconsin)
(Print or Type Name	, Notary Public, State of Wisconsin)	(Print or Type Name, Notary Po	ublic, State of Wisconsin)
(Date	Commission Expires)	(Date Commission	on Expires)

Notary Seal Notary Seal

IMPORTANT: A certified copy of Power of Attorney of the signatory agent must be attached to the bid bond.

# **CERTIFICATE OF ANNUAL BID BOND**

DT1305 8/2003

Wisconsin Department of Transportation

Time Period Valid (	(From/To)
Name of Surety	
Name of Contracto	ır
Certificate Holder	Wisconsin Department of Transportation
	y that an annual bid bond issued by the above-named Surety is currently on file with the partment of Transportation.
	is issued as a matter of information and conveys no rights upon the certificate holder amend, extend or alter the coverage of the annual bid bond.
Cancellation:	Should the above policy be cancelled before the expiration date, the issuing surety will give thirty (30) days written notice to the certificate holder indicated above.
	(Signature of Authorized Contractor Representative) (Date

#### March 2010

#### LIST OF SUBCONTRACTORS

Section 66.0901(7), Wisconsin Statutes, provides that as a part of the proposal, the bidder also shall submit a list of the subcontractors the bidder proposes to contract with and the class of work to be performed by each. In order to qualify for inclusion in the bidder's list a subcontractor shall first submit a bid in writing, to the general contractor at least 48 hours prior to the time of the bid closing. The list may not be added to or altered without the written consent of the municipality. A proposal of a bidder is not invalid if any subcontractor and the class of work to be performed by the subcontractor has been omitted from a proposal; the omission shall be considered inadvertent or the bidder will perform the work personally.

No subcontract, whether listed herein or later proposed, may be entered into without the written consent of the Engineer as provided in Subsection 108.1 of the Standard Specifications.

Name of Subcontractor	Class of Work	<b>Estimated Value</b>
-		

#### **DECEMBER 2000**

# CERTIFICATION REGARDING DEBARMENT, SUSPENSION, AND OTHER RESPONSIBILITY MATTERS - PRIMARY COVERED TRANSACTIONS

# **Instructions for Certification**

- 1. By signing and submitting this proposal, the prospective contractor is providing the certification set out below.
- 2. The inability of a person to provide the certification required below will not necessarily result in denial of participation in this covered transaction. The prospective contractor shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective contractor to furnish a certification or an explanation shall disqualify such person from participation in this transaction.
- 3. The certification in this clause is a material representation of fact upon which reliance was placed when the department determined to enter into this transaction. If it is later determined that the contractor knowingly rendered an erroneous certification in addition to other remedies available to the Federal Government the department may terminate this transaction for cause or default.
- 4. The prospective contractor shall provide immediate written notice to the department to whom this proposal is submitted if at any time the prospective contractor learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.
- 5. The terms "covered transaction," "debarred," "suspended," "ineligible," "lower tier covered transaction," "participant," "person," "primary covered transaction," "principal," "proposal," and "voluntarily excluded," as used in this clause, have the meanings set out in the Definitions and Coverage sections of the rules implementing Executive Order 12549. You may contact the department to which this proposal is being submitted for assistance in obtaining a copy of those regulations.
- 6. The prospective contractor agrees by submitting this proposal that, should this contract be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department entering into this transaction.
- 7. The prospective contractor further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," which is included as an addendum to PR-1273 "Required Contract Provisions Federal Aid Construction Contracts," without

modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions.

- 8. The contractor may rely upon a certification of a prospective subcontractor/materials supplier that it is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A contractor may decide the method and frequency by which it determines the eligibility of its principals. Each contractor may, but is not required to, check the Disapproval List (telephone # 608/266/1631).
- 9. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of a contractor is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.
- 10. Except for transactions authorized under paragraph 6 of these instructions, if a contractor in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department may terminate this transaction for cause or default.

Certification Regarding Debarment, Suspension, and Other Responsibility Matters - Primary Covered Transactions

- (1) The prospective contractor certifies to the best of its knowledge and belief, that it and its principals:
  - (a) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency;
  - (b) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements or receiving stolen property;
  - (c) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offense enumerated in paragraph (1)(b) of this certification; and
  - (d) Have not within a three-year period preceding this proposal had one or more public transactions (Federal, State or local) terminated for cause or default.
- (2) Where the prospective contractor is unable to certify to any of the statements in this certification, such prospective contractor shall attach an explanation to this proposal.

# **Special Provisions**

# **Table of Contents**

	Article	Description	Page #
1.	General		3
2.	Scope of Work		3
3.	Prosecution and Progress		3
4.	Traffic		4
5.	Holiday Work Restrictions		6
6.	Utilities		7
7.	Railroad Insurance and Coordina	ation - Dakota, Minnesota and Eastern Railroad (CP)	7
8.	Railroad Insurance and Coordina	ation - Wisconsin and Southern Railroad Company	8
9.	Construction Over or Adjacent to	Navigable Waters.	9
10.	Erosion Control Structures		9
11.	Archaeological Site		10
12.	Notice to Contractor, Notification	of Demolition and/or Renovation No Asbestos Found	10
13.	Notice to Contractor, Verification	of Asbestos Inspection, No Asbestos Found	11
14.		ng Material Structure B-12-29, Item 203.0210.S.01; Abatement of ructure B-12-30, Item 203.0210.S.02.	
15.	Debris Containment B-12-27, Iter	m 203.0225.S.01	12
16.	Debris Containment B-12-28, Iter	m 203.0225.S.02	13
17.	Removing Old Structure Over Wa 203.0600.S.02; Removing Old St	aterway With Minimal Debris Station 95+85, Item 203.0600.S.01; aterway With Minimal Debris Station 141+80, Item tructure Over Waterway With Minimal Debris Station 168+39,	40
40			
18.		717.S	
19.	•	12-30	
20.	<b>o</b>		15
21.		m 506.7050.S.01; Removing Bearings, B-12-30, Item	16
22.	Sawing Pavement Deck Prepara	tion Areas, Item 509.0310.S.	16
23.	Cleaning Decks to Reapply Cond	crete Masonry Overlay, Item 509.0505.S.	17
24.	HMA Overlay Polymer-Modified,	Item 509.3500.S.	17
25.	Masonry Deck Overlay B-12-28, B-12-29, Item 509.9005.S.03; Re	ck Overlay B-12-27, Item 509.9005.S.01; Removing Concrete Item 509.9005.S.02; Removing Concrete Masonry Deck Overlay Emoving Concrete Masonry Deck Overlay B-12-30, Item	20
26.	Epoxy Crack Sealing, Item 509.9	020.S	21
27.	Epoxy Injection Crack Repair, Ite	m 509.9025.S; Cored Holes 2-Inch Diameter, Item 509.9026.S	22
28.	Cleaning Parapets, Item 509.905	io.S	24
29.	Structure Repainting General		24
30.	Labeling and Disposal of Waste I	Material	25
31.	Temporary Traffic Signals for Brid	dges (Structure) B-22-0059, Item 661.0100.01	27
32.	Concrete Masonry Deck Repair -	- High Early Strength, Item SPV.0035.01	27

33.	Cement Slurry Mixture, Item SPV.0035.02.	28
34.	Bearing Repairs B-12-27, Item SPV.0060.01.	29
35.	Parapet Cover Plates, Item SPV.0060.02	30
36.	Downspout Repair, Item SPV.0060.03.	31
37.	Embedded Galvanic Anodes, Item SPV.0060.04.	32
38.	Haunch Removal B-12-27, Item SPV.0090.01; Haunch Removal B-12-28, Item SPV.0090.02	33
39.	Pipe Underdrain Wrapped 6-Inch Special, Item SPV.0090.03.	34
40.	Structure Spot Cleaning and Painting B-12-27, Item SPV.0105.01; Structure Spot Cleaning and Painting B-12-28, Item SPV.0105.05.	34
41.	Strip Seal Gland Replacement B-12-27, Item SPV.0105.02.	36
42.	Pier Cap Repairs B-12-27, Item SPV.0105.03; Pier Cap Repairs B-12-28, Item SPV.0105.06	37
43.	Cleaning and Caulking Floor Beams B-12-27, Item SPV.0105.04.	38
44.	Parapet Cover Plate Fastener Repairs, Item SPV.0105.07	39
45.	Access Hatch Repairs, Item SPV.0105.08.	39
46.	Geocomposite Drain Board, Item SPV.0165.01.	40
47.	Abutment Seat Cleaning and Sealing, Item SPV.0180.01	41

# STSP'S Revised June 28, 2018 SPECIAL PROVISIONS

#### 1. General.

Perform the work under this construction contract for Project 1660-03-67, Marquette – Prairie du Chien, Mississippi Rvr Structure B-12-27; USH 18, Crawford County, Wisconsin; Project 1660-03-68, Marquette – Prairie du Chien, Mississippi Rvr Struc B-12-28/29/30, USH 18, Crawford County, Wisconsin; and Project 5580-00-82, Bloomington – Prairie du Chien, Blake Fork Crk Structure B-22-59, STH 35, Grant County, Wisconsin as the plans show and execute the work as specified in the State of Wisconsin, Department of Transportation, Standard Specifications for Highway and Structure Construction, 2019 Edition, as published by the department, and these special provisions.

If all or a portion of the plans and special provisions are developed in the SI metric system and the schedule of prices is developed in the US standard measure system, the department will pay for the work as bid in the US standard system.

100-005 (20180628)

# 2. Scope of Work.

The work under this contract shall consist of deck repair, abutment repair, parapet cleaning and repair, bearing repairs and replacement, strip seal gland replacement, structure spot cleaning and painting, pier cap repairs, parapet cover plate repairs, epoxy injection crack repairs, downspout repairs, joint repairs, concrete overlays, guardrail replacement, HMA polymer-modified asphalt overlays, preparing foundation for asphaltic shoulders, asphaltic surface, sealing deck cracks with epoxy sealant, replacing wing walls, placing flowable fill on an abutment, pavement marking, traffic control and all incidental items necessary to complete the work as shown on the plans and included in the proposal and contract.

104-005 (20090901)

# 3. Prosecution and Progress.

Begin work within ten calendar days after the engineer issues a written notice to do so.

Provide the start date to the engineer in writing within a month after executing the contract but at least 14 calendar days before the preconstruction conference. Upon approval, the engineer will issue the notice to proceed within ten calendar days before the approved start date.

To revise the start date, submit a written request to the engineer at least two weeks before the intended start date. The engineer will approve or deny that request based on the conditions cited in the request and its effect on the department's scheduled resources.

#### Project 5580-00-82 Interim Completion

Complete all contract work under 5580-00-82 within 110 calendar days of beginning work under 5580-00-82.

If the contractor fails to complete all contract work on 5580-00-82 and open STH 35 to traffic within 110 calendar days, the department will assess the contractor \$815 in interim liquidated damages for each calendar day any contract work remains incomplete beyond 110 calendar days. An entire calendar day will be charged for any period of time within a calendar day that any contract work remains and the road remains closed beyond 12:01 AM.

If contract time expires before completing all contract work, additional liquidated damages will be affixed according to standard spec 108.11.

#### **Coast Guard**

At least five weeks prior to beginning work on the project, submit a work plan for United States Coast Guard review and approval. The plan must be submitted to the department for forwarding. Submit the plan to Tim Maedke, WisDOT Southwest Region, 3550 Mormon Coulee Road, La Crosse, WI 54601;

Telephone: (608) 789-6317; E-mail: Timothy.Maedke@dot.wi.gov. Include in the plan a narrative description of how the work will be accomplished and include 8½ x 11-inch drawings that will enhance understanding of the plan.

During the work over the Mississippi River shipping channel, provide a vertical clearance of at least 55 feet at all times.

#### Flea Market Under the Bridge

The City of Marquette, Iowa has a craft show referred to as the "Flea Market Under the Bridge". This event occurs along Iowa Route 76 under Structure B-12-27, and attracts 8,000 to 15,000 people to the area. Do not store materials, equipment, or vehicles such that it conflicts with the craft show. Dates and times for the craft show are as follows:

- May 24-28, 2019, 9:00 AM to 5:00 PM;
- · July 4-7, 2019, 9:00 AM to 5:00 PM;
- August 31-September 2, 2019, 9:00 AM to 5:00 PM;
- October 3-6, 2019, 9:00 AM to 5:00 PM;
- October 11-13, 2019, 9:00 AM to 5:00 PM;

#### **Migratory Birds**

Swallow and other migratory birds' nests have been observed on or under the existing bridge. All active nests (when eggs or young are present) of migratory birds are protected under the federal Migratory Bird Treaty Act.

The nesting season for swallows and other birds is usually between May 1 and August 30. Either prevent active nests from becoming established, or apply for a depredation permit from the US Fish and Wildlife Service for work that may disturb or destroy active nests. The need for a permit may be avoided by removing the existing bridge structure prior to nest occupation by birds, or clearing nests from all structures before the nests become active in early spring. As a last resort, prevent birds from nesting by installing a suitable netting device on the remaining structure prior to nesting activity. Include the cost for preventing nesting in the cost of Debris Containment.

#### Fish Spawning

There shall be no instream disturbance of Blake Fork Creek as a result of construction activity under or for this contract, from March 1 to June 15 both dates inclusive, in order to avoid adverse impacts upon the spawning of fish and substrate for aquatic organisms.

Any change to this limitation will require submitting a written request by the contractor to the engineer, subsequent review and concurrence by the Department of Natural Resources in the request, and final approval by the engineer. The approval will include all conditions to the request as mutually agreed upon by WisDOT and DNR.

#### 4. Traffic.

#### General

Keep USH 18 and STH 35, on which these projects are located, open to through vehicle traffic throughout the project except as noted below.

Do not store equipment, vehicles, or materials on adjacent streets beyond the project limits without specific approval of the engineer.

Conduct operations in a manner that will cause the least interference to traffic movements and farm, business, and residential access adjacent to and within construction areas. This includes the following restrictions:

- a) Do not disturb, remove or obliterate any traffic control signs, advisory signs, shoulder delineators or beam guard in place on USH 18 and STH 35 without the approval of the engineer. Replace or repair all damage done to the above, caused by construction operations, at the contractor's expense.
- b) Temporary lane closures will only be allowed when there is pertinent work being done on the roadways and structures and shall adhere to SDD 15c12 Traffic Control for Lane Closure with Flagging Operation. Temporary lane closures will not be allowed within the peak hour traffic times of 6:00 AM to 9:00 AM and 3:00 PM to 6:00 PM on weekdays unless authorized in writing from the engineer.
- c) Traffic control drums are included in this contract to be used to delineate lane shifts, intersection disturbance, beam guard removals, and other hazards within work zone areas. Do not remove beam guard until subsequent operations require removal in order to perform work.
- d) Temporary precast concrete barrier is included in this contract to separate traffic from the work zone. Do not install traffic control and temporary concrete barrier until the work item of preparation of decks is expected to start within 5 days at the structure location. Install, maintain, move, and remove the temporary precast concrete barrier during daylight hours only.
- e) Keep the roadways, bridge decks, and adjacent approaches free of all equipment, vehicles, and materials except behind the drums and temporary precast concrete barrier.
- Remove or cover all signing not applicable to non-work periods during the non-work periods of times.
- g) Any transverse bumps caused by the item cleaning decks shall be appropriately ramped the same day.
- h) All construction vehicles and equipment entering or leaving live traffic lanes will yield to through traffic. Unsafe actions will result in an individual's removal from the project unless approved to resume project activities by the engineer.
- i) Equip all construction vehicles and equipment entering or leaving live traffic lanes with a hazard identification beam (flashing amber signal) of 8-inch minimum diameter. Activate the beam when merging into or exiting a live traffic lane.

Coordinate all arrangements for handling traffic with the engineer before work is started on a new stage of construction that will change the traffic pattern existing at the time. Ensure that all traffic control devices and markings are in place and approved by the engineer before beginning each stage.

Traffic control staging details are shown in the plans and described below. Any adjustments to the proposed traffic control staging must be approved by the engineer.

## Project 1660-03-67 Traffic Staging

Perform construction operations on USH 18 in stages as shown in the traffic control staging plan. The project consists of 3 stages to complete the proposed work on the structure as follows:

- Stage 1 will require shifting traffic to the northern portion of the structure while repair work is
  done to the southern portion of the structure. There will be a 10-foot width restriction in place
  during this stage.
- Stage 2 will consist of repair work to the middle portion of the structure. There will be an 11-foot width restriction in place during this stage.
- Stage 3 will be the opposite of Stage 1, shifting traffic to the south to perform work on the northern portion. There will be a 10-foot width restriction in place during this stage.

# Project 1660-03-68 Traffic Staging

Perform construction operations on USH 18 in stages as shown in the traffic control staging plan. The project will consist of 3 stages to complete the proposed work on B-12-28 and 4 stages (4A-D) to complete the work on B-12-29 and B-12-30. The construction staging for B-12-28 is identical to B-12-27; the staging for B-12-29 and 30 is as follows:

• Stage 4A will involve installing a temporary crash cushion to the southwest quadrant of B-12-30 to accommodate bi-directional traffic during Stage 4B.

- Stage 4B will require detouring eastbound traffic to B-12-30 while work is performed to B-12-29.
- Stage 4C will require the southern lane of westbound traffic on B-12-30 to be closed while work
  is performed to that portion of the bridge. Guardrail will be replaced on the southeast quadrant
  of the structure. Eastbound traffic will be directed back to B-12-29. There will be an 11-foot
  width restriction in place during this stage, which will coincide with the width restriction for Stage
  2 of B-12-27 and 28.
- Stage 4D will require the northern lane of westbound traffic to be closed while work is
  performed to that portion of the structure. Guardrail will be replaced on the northeast quadrant
  of the structure.

There is sufficient distance between Structures B-12-27 and B-12-28 (approximately 2000 feet) such that the structures can be in different stages of construction at the same time. Additionally, the 3 stages of construction for B-12-28 are coincident of the 4 stages of construction for B-12-29 and B-12-30. Stage 1 shall coincide with Stages 4A and B; Stage 2 shall coincide with Stage 4C; and Stage 3 shall coincide with Stage 4D. All work must be completed for each stage prior to moving onto the next.

# Project 5580-00-82 Traffic Staging

Perform construction operations on STH 35 in stages as shown in the traffic staging plan.

This structure shall be completed in two phases, with the phases being half of the structure. All work must be completed for each phase prior to moving onto the next.

The proposed work shall be constructed in two phases while maintaining one lane of traffic utilizing standard traffic techniques: temporary traffic signals, temporary signing, drums and barricades. There are lane width restrictions of 14 feet during both phases.

## Wisconsin Lane Closure System Advance Notification

Provide the following advance notification to the engineer for incorporation into the Wisconsin Lane Closure System (LCS).

Closure type with height, weight, or width restrictions MINIMUM NOTIFICATION (available width, all lanes in one direction < 16') Lane and shoulder closures 7 calendar days Full roadway closures 7 calendar days Ramp closures 7 calendar days **Detours** 7 calendar days Closure type without height, weight, or width restrictions MINIMUM NOTIFICATION (available width, all lanes in one direction ≥16') Lane and shoulder closures 3 business days Ramp closures 3 business days Modifying all closure types 3 business days

TABLE 108-1 CLOSURE TYPE AND REQUIRED MINIMUM ADVANCE NOTIFICATION

Discuss LCS completion dates and provide changes in the schedule to the engineer at weekly project meetings in order to manage closures nearing their completion date.

# 5. Holiday Work Restrictions.

Do not perform work on, nor haul materials of any kind along or across any portion of the highway carrying USH 18 or STH 35 traffic, and entirely clear the traveled way and shoulders of such portions of the highway of equipment, barricades, signs, lights, and any other material that might impede the free flow of traffic during the following holiday periods:

- From noon Friday, May 24, 2019 to 6:00 AM Tuesday, May 28, 2019 for Memorial Day;
- From noon Wednesday, July 3, 2019 to 6:00 AM Monday, July 8, 2019 for Independence Day;
- From noon Friday, August 30, 2019 to 6:00 AM Tuesday, September 3, 2019 for Labor Day.

stp-107-005 (20050502)

#### 6. Utilities.

This contract comes under the provision of Administrative Rule Trans 220. stp-107-065 (20080501)

#### Projects 1660-03-67/68

Coordinate construction activities with a call to Diggers Hotline or a direct call to the utilities for the underground facilities in the area, as required per state statutes. Use caution to maintain the integrity of utilities. Coordinate with the engineer to adjust plans as needed to avoid any unanticipated utility conflicts.

**Mediacom Wisconsin LLC** – Mediacom has a fiber optic duct attached underneath bridges B-12-27 and B-12-30. Bridge B-12-27 will need brackets taken apart at Station 94+25 and Station 122+00 to allow for 1-2" of raising of bridge deck. Brackets will be taken apart by Mediacom forces and supported with rope to allow for bridge deck movement. Bridge B-12-30 will need brackets taken apart at Station 178+25 to allow for 4-5" of raising of bridge deck. Brackets will be taken apart by Mediacom forces and supported with rope to allow for bridge deck movement. All work to be done prior to construction. Mediacom contact is Craig Eggert, telephone (563) 419-5160, email <a href="mailto:ceggert@mediacomcc.com">ceggert@mediacomcc.com</a>.

**Wisconsin DOT RWIS Program** – WisDOT RWIS has several pavement sensors under the pavement at approximately Station 178+20. Sensors are clear to be milled out during project. Contractor shall provide 30-day notice prior to start of work on B-12-30 and approaches. Work to replace sensors after pavement has been replaced will take one working day and will be completed by others. WisDOT RWIS contact is Mike Adams, telephone (608) 266-5004, email <a href="mailto:Michael.adams@dot.wi.gov">Michael.adams@dot.wi.gov</a>.

**Alliant Energy** – Alliant Energy has facilities within the project area; however, no adjustments are anticipated.

#### Project 5580-00-82

The following utility owners have facilities within the project area; however, no adjustments are anticipated:

- American Transmission Company, LLC Electricity Transmission
- · TDS Telecom Communication Line
- · We Energies Gas/Petroleum

#### 7. Railroad Insurance and Coordination - Dakota, Minnesota and Eastern Railroad (CP).

#### **A Description**

Comply with standard spec 107.17 for all work affecting Dakota, Minnesota and Eastern Railroad (CP) property and any existing tracks.

#### A.1 Railroad Insurance Requirements

In addition to standard spec 107.26, provide railroad protective liability insurance coverage as specified in standard spec 107.17.3. Insurance is filed in the name of Dakota, Minnesota and Eastern Railroad d/b/a Canadian Pacific.

Notify evidence of the required coverage, and duration to Jim Krieger, Manager Public Works; Canadian Pacific Plaza, 120 South 6th Street, Suite 700, Minneapolis, MN 55402; Telephone (612) 330-4555; E-mail: <a href="mailto:jim\_krieger@cpr.ca">jim\_krieger@cpr.ca</a>.

Also send a copy to the following: Scott Willinger, SW Region Railroad Coordinator; 3550 Mormon Coulee Road, La Crosse, WI 54601; Telephone (608) 792-1360; E-mail: <a href="mailto:gene.willinger@dot.wi.gov.">gene.willinger@dot.wi.gov.</a>

Include the following information on the insurance document:

- Project ID: 1660-03-37,67

Project Location: Marquette, IowaRoute Name: USH 18, Clayton County

- Crossing ID: 376 183K

- Railroad Subdivision: Marquette Subdivision

Railroad Milepost: MP97.98

- Work Performed: Deck repair and parapet repair

#### A.2 Train Operation

Approximately 12 through freight trains operate daily (6 per day and 6 per night) at up to 25 mph. Four switching movements daily at this location noted by the railroad.

#### A.3 Names and Addresses of Railroad Representatives for Consultation and Coordination

#### **Construction Contact**

Jim Krieger, Manager Public Works; Canadian Pacific Plaza, 120 South 6th Street, Suite 700, Minneapolis, MN 55402; Telephone (612) 330-4555; E-mail <u>jim krieger@cpr.ca</u> for consultation on railroad requirements during construction.

Amend standard spec 108.4 to include the railroad in the distribution of the initial bar chart, and monthly schedule updates. The bar chart shall specifically show work involving coordination with the railroad.

#### **Flagging Contact**

Dave LeClaire, Supervisor of Public Works; Canadian Pacific Plaza, 120 South 6th Street, Suite 700, Minneapolis, MN 55402; Telephone (612) 330-4556; E-mail <a href="mailto:dave.leclaire@cpr.ca">dave.leclaire@cpr.ca</a> a minimum of 40 working days in advance to arrange for a railroad flagger. Reference the Crossing ID, Wisconsin Milepost and Subdivision found in A.1.

\* Contact DM&E (CP) prior to letting for flagman work hour availability.

#### **Cable Locate Contact**

In addition to contacting Diggers Hotline, contact CP Call Before You Dig line at (866) 291-0741, five working days before the locate is needed. Reference the Crossing ID, Wisconsin Milepost and Subdivision found in A.1.

DM&E (CP) will only locate railroad owned facilities located in the railroad right-of-way. The railroad does not locate any other utilities.

# A.4 Work by Railroad

The railroad will perform the work described in this section, except for work described in other special provisions, and will be accomplished without cost to the contractor. None.

#### A.5 Temporary Grade Crossing

If a temporary grade crossing is desired, submit a written request to the railroad representative named in A.3 at least 40 days prior to the time needed. Approval is subject to the discretion of the railroad. The department has made no arrangements for a temporary grade crossing.

stp-107-026 (20170615)

#### 8. Railroad Insurance and Coordination - Wisconsin and Southern Railroad Company.

#### **A Description**

Comply with standard spec 107.17 for all work affecting Wisconsin and Southern Railroad Company property and any existing tracks.

#### A.1 Railroad Insurance Requirements

In addition to standard spec 107.26, provide railroad protective liability insurance coverage as specified in standard spec 107.17.3. Insurance is filed in the name of Wisconsin and Southern Railroad Company.

Notify evidence of the required coverage, and duration to Amanda Haggerty, Office Administrator; 1890 E Johnson Street, Madison, WI 53704; Telephone (608) 620-2048; E-mail: ahaggerty@watcocompanies.com.

Also send a copy to the following: Scott Willinger, SW Region Railroad Coordinator; 3550 Mormon Coulee Road, La Crosse, WI 54601; Telephone (608) 792-1360; E-mail: <a href="mailto:gene.willinger@dot.wi.gov">gene.willinger@dot.wi.gov</a>.

Include the following information on the insurance document:

- Project ID: 1660-03-38,68

- Project Location: Prairie du Chien, Wisconsin

- Route Name: USH 18, Crawford County

- Crossing ID: 391 943L

- Railroad Subdivision: Prairie Subdivision

- Railroad Milepost: MP236.27

- Work Performed: Deck repair and parapet repair

# **A.2 Train Operation**

Approximately 2 through freight trains operate daily at up to 10 mph. Six switching movements daily at this location noted by the railroad.

#### A.3 Names and Addresses of Railroad Representatives for Consultation and Coordination

#### **Construction Contact**

Roger Schaalma, Superintendent of Maintenance of Way, Wisconsin and Southern Railroad Co.; 1890 East Johnson Street, Madison, WI 53704; Telephone (608) 620-2044; E-mail <a href="mailto:rschaalma@watcocompanies.com">rschaalma@watcocompanies.com</a> for consultation on railroad requirements during construction.

Amend standard spec 108.4 to include the railroad in the distribution of the initial bar chart, and monthly schedule updates. The bar chart shall specifically show work involving coordination with the railroad.

#### **Flagging Contact**

See Construction Contact. Reference the Crossing ID, Wisconsin Milepost and Subdivision found in A.1.

#### **Cable Locate Contact**

In addition to contacting Diggers Hotline, contact Amanda Haggerty, Office Administrator; Telephone (608) 620-2048; E-mail <a href="mailto:ahaggerty@watcocompanies.com">ahaggerty@watcocompanies.com</a> at least five working days before the locate is needed. Reference the Crossing ID, Wisconsin Milepost and Subdivision found in A.1.

WSOR will only locate railroad owned facilities located in the railroad right-of-way. The railroad does not locate any other utilities.

#### A.4 Work by Railroad

The railroad will perform the work described in this section, except for work described in other special provisions, and will be accomplished without cost to the contractor. None.

#### A.5 Temporary Grade Crossing

If a temporary grade crossing is desired, submit a written request to the railroad representative named in A.3 at least 40 days prior to the time needed. Approval is subject to the discretion of the railroad. The department has made no arrangements for a temporary grade crossing.

stp-107-026 (20170615)

#### 9. Construction Over or Adjacent to Navigable Waters.

The Mississippi River is classified as a federal navigable waterway under standard spec 107.19. stp-107-060 (20171130)

# 10. Erosion Control Structures.

Within seven calendar days after beginning work on the bridge superstructure, place all permanent erosion control devices, including riprap, erosion mat, ditch checks, seed, fertilizer, mulch, soil stabilizer,

or any other item required by the contract or deemed necessary by the engineer. These devices shall be in place in the area under the bridge and on both sides of the roadway, from the waterway to a point 100-feet behind the backwall of the abutment. Within said limits, place these devices to a height equivalent to the calculated water elevation resulting from a storm that occurs on the average of once every two years (Q2) as shown on the plan, or as the engineer directs. Before initial construction operations, place turbidity barriers, silt screens, and other temporary erosion control measures as the plans show, and remove them after the permanent erosion control devices are in place unless directed otherwise by the engineer.

In the event that construction activity does not disturb the existing ground below the Q2 elevation, the above timing requirements for permanent erosion control shall be waived.

stp-107-070 (20030820)

# 11. Archaeological Site.

The following archaeologically significant sites exist within the project area:

- 47CR57 (Marais) located between Station 171+00 and Station 174+00 LT
- 47CR436/BCR-0311 (Waterfront) located between Station 159+00 and Station 161+00 LT/RT
- 47CR682 (Street Agency House) located southeast of Structure B-12-29 between Station 178+00 and the intersection of W. Iowa St and S Beaumont Rd

Notify the Bureau of Technical Services – Environmental Process and Document Section (BTS-EPDS) at (608) 266-0099 at least two weeks before commencement of any ground disturbing activities beyond the existing slope intercept. BTS-EPDS will determine if a qualified archaeologist will need to be on site during construction of this area.

Do not use the sites for borrow or waste disposal. Do not use any site area not currently capped by asphalt/concrete for the staging of personnel, equipment and/or supplies.

stp-107-220 (20180628)

## 12. Notice to Contractor, Notification of Demolition and/or Renovation No Asbestos Found.

John Roelke, License Number All-119523, and Nathan Braun, License Number All-206950, inspected Structures B-12-27 and 28 for asbestos on June 30 and July 7, 2015. No regulated Asbestos Containing Material (RACM) was found on this structure. A copy of the inspection report is available from: Tim Maedke, SW Region Project Manager; 3550 Mormon Coulee Road, La Crosse, WI 54601; Telephone (608) 789-6317; E-mail: <a href="mailto:timothy.Maedke@dot.wi.gov">timothy.Maedke@dot.wi.gov</a>.

According to NR447 and DHS159, ensure that DNR or DHS receives a completed Notification of Demolition and/or Renovation (DNR Form 4500-113 (R 4/11), or subsequent revision) via U.S. mail, hand-delivery, or using the online notification system at least 10 working days before beginning any construction or demolition. Pay all associated fees. Provide a copy of the completed 4500-113 form to Tim Maedke, SW Region Project Manager; 3550 Mormon Coulee Road, La Crosse, WI 54601; Telephone (608) 789-6317; E-mail: <a href="mailto:Timothy.Maedke@dot.wi.gov">Timothy.Maedke@dot.wi.gov</a> and DOT BTS-ESS attn: Hazardous Materials Specialist, PO Box 7965, Madison, WI 53707-7965. In addition, comply with all local or municipal asbestos requirements.

Use the following information to complete WisDNR form 4500-113:

- Site Name: Structure B-12-27, USH 18 STH 60 over IA Route 76 (Mississippi River); Structure B-12-28, USH 18 – STH 60 over Mississippi River
- Site Address: Structure B-12-27 at Iowa State Line, Town of Bridgeport; Structure B-12-28 0.7 miles east of Iowa State Line
- Ownership Information: WisDOT Transportation SW Region, 3550 Mormon Coulee Rd, La Crosse, WI 54601
- Contact: Tim Maedke
- Phone: (608) 789-6317
- Age: 44 years old. These structures were constructed in 1974.
- Area: Structure B-12-27 124,355 SF of deck; Structure B-12-28 83,929 SF of deck

Insert the following paragraph in Section 6.g.:

If asbestos not previously identified is found or previously non-friable asbestos becomes crumbled, pulverized, or reduced to a powder, stop work immediately, notify the engineer, and the engineer will notify the department's Bureau of Technical Services at (608) 266-1476 for an emergency response as specified in standard spec 107.24. Keep material wet until it is abated or until it is determined to be non-asbestos containing material.

stp-107-125 (20120615)

## 13. Notice to Contractor, Verification of Asbestos Inspection, No Asbestos Found.

John Roelke, License Number All-119523, inspected Structure B-22-0059 for asbestos on September 20, 2016. No regulated Asbestos Containing Material (RACM) was found on this structure. A copy of the inspection report is available from: Steve Vetsch, (608) 785-9049.

stp-107-127 (20120615)

# 14. Abatement of Asbestos Containing Material Structure B-12-29, Item 203.0210.S.01; Abatement of Asbestos Containing Material Structure B-12-30, Item 203.0210.S.02.

#### **A Description**

This special provision describes abating asbestos containing material on structures.

B (Vacant)

#### **C** Construction

John Roelke, License Number AII-119523, inspected Structure B-12-29 and B-12-30 for asbestos on September 20, 2016. Regulated Asbestos Containing Material (RACM) was found on this structure in the following locations and quantities: the caulk located in the parapet expansion joints and the abutment joints tested positive for asbestos greater than 1%, approximately 154 LF for both structures.

The RACM on this structure must be abated by a licensed abatement contractor. A copy of the inspection report is available from Tim Maedke, SW Region Project Manager; 3550 Mormon Coulee Road, La Crosse, WI 54601; Telephone (608) 789-6317; E-mail: <a href="mailto:Timothy.Maedke@dot.wi.gov">Timothy.Maedke@dot.wi.gov</a>. According to NR447 and DHS159, ensure that DNR or DHS receives a completed Notification of Demolition and/or Renovation (DNR Form 4500-113 (R 4/11), or subsequent revision) via U.S. mail, hand-delivery, or using the online notification system at least 10 working days before beginning any construction or demolition. Pay all associated fees. Provide a copy of the completed 4500-113 form and the abatement report to Tim Maedke, SW Region Project Manager; 3550 Mormon Coulee Road, La Crosse, WI 54601; Telephone (608) 789-6317; E-mail: <a href="mailto:Timothy.Maedke@dot.wi.gov">Timothy.Maedke@dot.wi.gov</a> and DOT BTS-ESS attn: Hazardous Materials Specialist, PO Box 7965, Madison, WI. 53707-7965. In addition, comply with all local or municipal asbestos requirements.

Use the following information to complete WisDNR form 4500-113:

- Site Name: Structure B-12-29, USH 18 Eastbound STH 60 Eastbound over Marais de St. Feriole; Structure B-12-30, USH 18 Westbound – STH 60 Westbound over Marais de St. Feriole
- Site Address: Structure B-12-29 1.3 miles east of Iowa State Line; Structure B-12-30 0.5 miles west of STH 35
- Ownership Information: WisDOT Transportation SW Region, 3550 Mormon Coulee Rd, La Crosse, WI 54601
- Contact: Tim Maedke
- Phone: (608) 789-6317
- Age: 44 years. These structures were constructed in 1974.
- Area: Structure B-12-29 17,454 SF of deck; Structure B-12-30 18,148 SF of deck

#### Insert the following paragraph in Section 6.g.:

- If asbestos not previously identified is found or previously non-friable asbestos becomes crumbled, pulverized, or reduced to a powder, stop work immediately, notify the engineer, and the engineer will notify the department's Bureau of Technical Services at 608-266-1476 for an emergency response as specified in standard spec 107.24. Keep material wet until it is abated or until it is determined to be non-asbestos containing material.

#### **D** Measurement

The department will measure Abatement of Asbestos Containing Material (Structure), completed in according to the contract and accepted, as a single complete unit of work.

#### **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
203.0210.S.01	Abatement of Asbestos Containing Material Structure B-12-29	LS
203.0210.S.02	Abatement of Asbestos Containing Material Structure B-12-30	LS

Payment is full compensation for submitting necessary forms; removing all asbestos; properly disposing of all waste materials; and for furnishing all labor, tools, equipment, and incidentals necessary to complete the contract work.

stp-203-005 (20120615)

# 15. Debris Containment B-12-27, Item 203.0225.S.01.

#### **A Description**

This special provision describes providing a containment system to prevent debris from structure removal, reconstruction, or other construction operations from falling onto facilities located under the structure. Using this containment system does not relieve the contractor of requirements under standard spec 107.17 and standard spec 107.19 or requirements under a US Army Corps of Engineers Section 404 Permit.

## B (Vacant)

#### **C** Construction

Before starting work, submit a debris containment plan to the engineer for review. Incorporate engineer-requested modifications. Do not start work over Dakota, Minnesota and Eastern Railroad (CP) until the engineer approves the debris containment plan.

Maintain adequate protection throughout construction for people and property within the potential fall zone. Ensure that a containment system capable of protecting underlying facilities from falling construction debris is in place before beginning deck repair, parapet removal, or other operations that may generate debris.

At least 15 working days before conducting potential debris generating operations, contact the following owners or lessees:

- Jim Krieger, Manager Public Works; Canadian Pacific Plaza, 120 South 6th Street, Suite 700, Minneapolis, MN 55402; Telephone (612) 330-4555; E-mail jim\_krieger@cpr.ca
- 2. Dave LeClaire, Supervisor of Public Works; Canadian Pacific Plaza, 120 South 6th Street, Suite 700, Minneapolis, MN 55402; Telephone (612) 330-4556; E-mail <a href="mailto:dave.leclaire@cpr.ca">dave.leclaire@cpr.ca</a>

#### **D** Measurement

The department will measure Debris Containment B-12-27 as a single lump sum unit of work for each structure, acceptably completed.

# **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBERDESCRIPTIONUNIT203.0225.S.01Debris Containment B-12-27LS

Payment is full compensation for furnishing, installing, maintaining, and removing a debris containment system.

stp-203-010 (20080902)

#### 16. Debris Containment B-12-28, Item 203.0225.S.02.

## **A Description**

This special provision describes providing a containment system to prevent debris from structure removal, reconstruction, or other construction operations from falling onto facilities located under the structure. Using this containment system does not relieve the contractor of requirements under standard spec 107.17 and standard spec 107.19 or requirements under a US Army Corps of Engineers Section 404 Permit.

#### B (Vacant)

#### **C** Construction

Before starting work, submit a debris containment plan to the engineer for review. Incorporate engineer-requested modifications. Do not start work over Wisconsin and Southern Railroad Company until the engineer approves the debris containment plan.

Maintain adequate protection throughout construction for people and property within the potential fall zone. Ensure that a containment system capable of protecting underlying facilities from falling construction debris is in place before beginning deck repair, parapet removal, or other operations that may generate debris.

At least 15 working days before conducting potential debris generating operations, contact the following owners or lessees:

1. Roger Schaalma, Superintendent of Maintenance of Way, Wisconsin and Southern Railroad Co.; 1890 East Johnson Street, Madison, WI 53704; Telephone (608) 620-2044; E-mail rschaalma@watcocompanies.com

#### **D** Measurement

The department will measure Debris Containment B-12-28 as a single lump sum unit of work for each structure, acceptably completed.

#### **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBERDESCRIPTIONUNIT203.0225.S.02Debris Containment B-12-28LS

Payment is full compensation for furnishing, installing, maintaining, and removing a debris containment system.

stp-203-010 (20080902)

# 17. Removing Old Structure Over Waterway With Minimal Debris Station 95+85, Item 203.0600.S.01:

Removing Old Structure Over Waterway With Minimal Debris Station 141+80, Item 203.0600.S.02;

Removing Old Structure Over Waterway With Minimal Debris Station 168+39, Item 203.0600.S.03.

Conform to standard spec 203 as modified in this special provision.

Add the following to standard spec 203:

#### 203.3.6 Removals Over Waterways and Wetlands

# 203.3.6.2 Removing Old Structure Over Waterway with Minimal Debris

(1) Remove the existing Structures B-12-27 and B-12-28 over the Mississippi River and Structure B-22-59 over the Blake Fork Creek in large sections and conforming to the contractor's approved structure removal and clean-up plan. During superstructure removal, prevent all large pieces and minimize the number of small pieces from entering the waterway or wetland. Remove all reinforcing steel, all concrete, and all other debris that falls into the waterway or wetland. The contractor may leave limited amounts of small concrete pieces scattered over the waterway floor or wetland only if the engineer allows.

- (2) Submit a structure removal and clean-up plan as part of the erosion control implementation plan required under standard spec 107.20. Do not start work under the structure removal and clean-up plan without the department's written approval of the plan. Include the following information in the structure removal and clean-up plan:
  - Methods and schedule to remove the structure.
  - Methods to control potentially harmful environmental impacts.
  - Methods for superstructure removal that prevent all large pieces and minimize the number of small pieces from entering the waterway or wetlands.
  - Methods to control dust and contain slurry.
  - Methods for removing piers and abutments. If blasting in water, include restrictions that regulatory agencies and the contract require.
  - Methods for cleaning the waterway or wetlands.
- (3) If stockpiling spoil material, place it on an upland site an adequate distance from the waterway, wetland, or any open water created by excavation. Install silt fence between the spoil pile and the waterway, wetland, or excavation site.

Add the following Removing Old Structure bid item to standard spec 203.5.1:

ITEM NUMBER	DESCRIPTION	UNIT
203.0600.S.01	Removing Old Structure Over Waterway With Minimal Debris Station 95+85	LS
203.0600.S.02	Removing Old Structure Over Waterway With Minimal Debris Station 141+80	LS
203.0600.S.03	Removing Old Structure Over Waterway With Minimal Debris Station 168+39	LS
stp-203-020 (2017	70615)	

# 18. Crack Sealing Epoxy, Item 502.0717.S.

#### **A Description**

This special provision describes sealing transverse and longitudinal cracks in bridge decks.

#### **B** Materials

Provide a penetrating sealant that is listed on the department's approved product listing, "Low Viscosity Crack Sealers".

#### **C** Construction

Clean the cracks to be sealed by the use of high pressure air after Cleaning Deck and Preparation Deck are completed.

Pour the epoxy sealant into the cracks to be sealed after the deck preparation has been completed and before the overlay is placed. Place the sealant in as narrow a band as possible so that the bond of the new concrete overlay to the existing concrete is not impaired.

At no expense to the department, clean all spills and clean all areas of too wide a band of sealant before the overlay is placed.

#### **D** Measurement

The department will measure Crack Sealing Epoxy in length by the linear foot of cracks, sealed and accepted.

# **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER DESCRIPTION UNIT 502.0717.S Crack Sealing Epoxy LF

Payment is full compensation for furnishing and placing the epoxy sealant, including any required cleaning.

stp-502-015 (20090901)

#### 19. Expansion Device, B-12-29 & B-12-30.

# **A Description**

This special provision describes furnishing and installing an expansion device as the plans show conforming to standard spec 502 as modified in this special provision.

#### **B** Materials

The minimum thickness of the polychloroprene strip seal shall be 1/4 inch for non-reinforced elastomeric glands and 1/8 inch for reinforced glands. Furnish the strip seal gland in lengths suitable for a continuous one-piece installation at each individual expansion joint location. Provide preformed polychloroprene strip seals that conform to the requirements ASTM D3542, and have the following physical properties:

Property Requirements	Value	<b>Test Method</b>
Tensile Strength, min.	2000 psi	ASTM D412
Elongation @ Break, min	250%	ASTM D412
Hardness, Type A, Durometer	55 ± 5 pts.	ASTM D2240
Compression Set, 70 hours @212°F, max.	35%	D395 Method B Modified
Ozone Resistance, after 70 hrs. at 100°F under 20% Strain with 100 pphm ozone	No Cracks	ASTM D1149 Method A
Mass Change in Oil 3 after 70 hr. 212°F Mass Change, max.	45%	ASTM D471

Install the elastomeric strip seal gland with tools recommended by the manufacturer, and with a lubricant adhesive conforming to the requirements of ASTM D4070.

The manufacturer and model number shall be one of the following approved strip seal expansion device products:

**Model Number** 

	Strip Seal Gland Size <sup>[1]</sup>			
Manufacturer	4-Inch	5-Inch		

Manufacturer	4-Inch	5-Inch	6-Inch
D.S. Brown	SSA2-A2R-400	SSA2-A2R-XTRA	SSA2-A2R-XTRA
R.J. Watson	RJA-RJ400	RJA-RJ500	RJA-RJ600
Watson Bowman Acme	A-SE400	A-SE500	A-SE800
Commercial Fabricators	A-AS400		

<sup>[1]</sup> Expansion device strip seal gland size requirement of 4", 5", and 6" shall be as the plans show.

Furnish manufacturer's certification for production of polychloroprene represented showing test results for the cured material supplied, and certifying that it meets all specified requirements.

The steel extrusion or retainer shall conform to ASTM designation A 709 grade 36 steel. After fabrication, steel shall be galvanized conforming to the requirements ASTM A123.

Manufacturer's certifications for adhesive and steel shall attest that the materials meet the specification requirements.

stp-502-020 (20171130)

# 20. Pigmented Surface Sealer.

Add the following to standard spec 502.3.13.3 (3):

Apply pigmented surface sealer no less than 7 days, but preferably 21 days, after the curing period has expired.

# 21. Removing Bearings, B-12-29, Item 506.7050.S.01; Removing Bearings, B-12-30, Item 506.7050.S.02.

#### **A Description**

This special provision describes raising the girders and removing the existing bearings, as the plans show.

#### B (Vacant)

#### **C** Construction

Raise the structure's girders and remove the existing bearings as the plans show

Obtain prior approval from the engineer for the method of jacking the girders and of supporting them as required.

#### **D** Measurement

The department will measure Removing Bearings, B-12-29 and B-12-30 by the unit for each bearing removed.

#### **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBERDESCRIPTIONUNIT506.7050.S.01Removing Bearings, B-12-29EACH506.7050.S.02Removing Bearings, B-12-30EACH

Payment is full compensation for raising the bridge girders; and for removing the old bearings.

Cost of furnishing and installing the bearings will be paid for under separate bid items.

stp-506-035 (20130615)

# 22. Sawing Pavement Deck Preparation Areas, Item 509.0310.S.

#### **A** Description

This special provision describes sawing around deteriorated areas requiring deck repairs under the Preparation Decks bid items on decks receiving asphalt or polymer overlays and for deck repairs that will not receive an overlay.

#### B (Vacant)

#### **C** Construction

The department will sound and mark areas of deteriorated concrete that require deck preparation. The engineer may identify and mark additional areas as the work is being performed.

Wet cut a minimum of 1 inch deep and at least 2 inches outside of the marked areas. Bound each marked area by providing cuts aligned parallel and perpendicular to the deck centerline.

Remove sawing sludge after completing each area. Do not allow sludge or resulting residue to enter a live lane of traffic, storm sewer, stream, lake, reservoir, marsh, or wetland. Dispose of sludge at an acceptable material disposal site located off the project limits or, if the engineer allows, within the project limits.

#### **D** Measurement

The department will measure Sawing Pavement Deck Preparation Areas by the linear foot, acceptably completed, measured as the total linear feet of bounding cuts.

The department will not measure for payment over-cuts or cuts made beyond what is required to bound engineer-marked deterioration limits.

# **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBERDESCRIPTIONUNIT509.0310.SSawing Pavement Deck Preparation AreasLF

Payment is full compensation for making all saw cuts; and for debris disposal.

stp-509-070 (20180628)

# 23. Cleaning Decks to Reapply Concrete Masonry Overlay, Item 509.0505.S.

#### **A Description**

This special provision describes cleaning the entire bridge deck after the existing concrete masonry overlay is removed, prior to placing a new concrete masonry overlay.

#### B (Vacant)

#### **C** Construction

Blast-clean the entire surface of the deck, the vertical faces of curbs, sidewalks and parapets to the depth of the adjoining concrete overlay. Blast-clean all exposed existing reinforcing steel. Repair damage to existing epoxy-coated reinforcement remaining in place that is either uncovered by or damaged by the contractor's operations. Use engineer-approved patching or repair material compatible with the existing coating and inert in concrete.

Clean the surface on which the new concrete will be placed to remove all loose particles and dust by either brooming and water pressure using a high-pressure nozzle, or by water and air pressure. Use water for cleaning that conforms to specifications for water under standard spec 501.2.4.

#### **D** Measurement

The department will measure Cleaning Decks to Reapply Concrete Masonry Overlay by the square yard, acceptably completed.

#### **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBERDESCRIPTIONUNIT509.0505.SCleaning Decks to Reapply Concrete Masonry OverlaySY

Payment for Cleaning Decks to Reapply Concrete Masonry Overlay is full compensation for cleaning the concrete surfaces.

stp-509-065 (20171130)

## 24. HMA Overlay Polymer-Modified, Item 509.3500.S.

#### **A Description**

This special provision describes providing a polymer-modified HMA overlay on bridge decks.

#### **B** Materials

#### **B.1 Mixture Composition**

Furnish a mixture composed of fine and coarse aggregates, mineral filler if used, asphalt cement, and polymer modifier additive. Ensure that the final job mix design conforms to polymer modifier manufacturer requirements and is approved by the engineer.

Use fine and course aggregate conforming to standard spec 460.2.2. Do not use blast furnace slag, expanded shale, porous limestone, lightweight aggregates, or other porous aggregate. Ensure that mineral filler, if used, conforms to standard spec 450.

Use asphalt cement conforming to standard spec 455 and virgin thermoplastic polymer modifier additive. Furnish additive packaged in 22.5-pound meltable polyethylene bags, in 2,025-pound super sacks containing 45 units per sack, or as bulk material in tankers.

#### **B.2 Deck Preparation Materials**

Furnish tack coat and edge sealer conforming to the polymer modifier manufacturer's requirements. Furnish rubberized asphalt joint sealer conforming to ASTM D3405, or if the polymer modifier manufacturer recommends, use a 20-inch wide strip of geotextile paving fabric applied according to their recommendations.

#### **C** Construction

#### C.1 General

Ensure that an on-site polymer modifier manufacturer representative oversees mixture production, placement, and compaction of polymer-modified HMA.

# C.2 Proportioning and Mix Design

Seven days before the pre-construction meeting, submit the name and location of the intended sources for bituminous pavement products. Furnish HMA mixture from an engineer-approved automated plant conforming to ASTM D995 and SS405 and equipped with interlocks and printouts.

Coordinate with the polymer modifier manufacturer to formulate a job mix formula (JMF). Submit a JMF to the engineer that shows the gradation and conforms to the generic requirements under this special provision. As a part of the submittal include the following:

- Mineral aggregate sources and types.
- Grade and source of bituminous material.
- Type and source of all asphalt modifiers.
- Samples of aggregates to be used.

Submit a complete HMA mix design to the engineer according to department test method 1559 described in CMM 8.65.5. Submit a new JMF for engineer review if changing the production plant, aggregate, asphalt, or asphalt modifier.

#### C.3 Verification of the JMF

Unless the asphalt content (AC) of specimens used to develop the JMF is the same as the proposed design AC, prepare additional specimens at the proposed AC to ensure that gyratory test results accurately represent the design.

**Generic Formulation of the Polymer-Modified HMA Mixture** 

	<u>-                                    </u>		
Sieve Size, metric	Nominal size of aggregate/Percent passing	Gradation Control	
(imperial)	9.5mm	on JMF	
12.5 mm (1/2")	100	±7%	
9.5 mm (3/8")	90 – 100	±7%	
4.75 mm (#4)	55 – 85	±7%	
2.36 mm (#8)	32 – 67	± 4 %	
1.18 mm (#16)	Report	± 4 %	
600 microns (#30)	Report	± 4 %	
300 microns (#50)	7 – 23	± 4 %	
150 microns (#100)	Report	± 4 %	
75 microns (#200)	2 – 10	± 2 %	

AC (% Total Mix) 5.0% minimum

Thermoplastic Polymer 2.25% by weight of total mix

#### Generic Minimum/Maximum Desired Physical Properties of the Design Mixture

Volumetric mix design parameters			
Volumetric	Control requirement	Nominal size of aggregate/percent passing	
parameter		9.5mm	
Gyratory volumetric requirements			
VMA	Minimum	16.5%	
VFA	Minimum	90.0%	
%G <sub>mm</sub>	@ N <sub>ini</sub> (6 gyrations)	>87.0%	
%G <sub>mm</sub>	@ N <sub>des</sub> (50 gyrations)	99.0%	
%G <sub>mm</sub>	@ N <sub>max</sub> (75 gyrations)	>99.0%	

Target Void Percentage: 1%

Weigh and heat aggregates for batching in an oven to 401 - 419 F. Add polymer modifier at a rate of 45 pounds per ton of mix or 2.25 percent of total batch weight. Dry mix the heated aggregate and the polymer modifier for 10 seconds at 374 - 383 F; introduce AC-binder at 302 - 320 F; and mix together for 90 seconds. Mix until aggregates are completely and uniformly coated. Verify that the temperature of the finished mix is 347 - 374 F. After mixing is completed, condition the material according to AASHTO R30 before compacting. Compact at 338 - 356 F. Evaluate the gyratory specimen at  $N_{ini}$ = 6,  $N_{des}$ =50, and  $N_{max}$ =75 gyrations regardless of class designation or aggregate structure.

After reviewing the JMF, the engineer will authorize initial placement. Once production begins, provide the engineer daily certification that in-place materials conform to the JMF and contract specifications.

Polymer modifier manufacturer personnel shall certify material production, take samples, and are authorized to reject material not meeting contract specifications. The polymer modifier manufacturer shall retain samples available upon engineer request for department examination and testing throughout the contract duration. The engineer may take additional independent samples and examine certifications to verify material quality.

Provide the engineer with access to the plant and equipment as necessary to review and verify certifications of material quality. The engineer may reject affected mixture placed if the contractor fails to perform quality control or submits an incorrect certification. The engineer may halt production and require the contractor to dispose of material due to temperature, oxidation, contamination, segregation, or incomplete coating of aggregate. The engineer may base rejection on visual inspection.

#### C.4 Deck Preparation

After deck patching and before placing polymer-modified HMA, prepare the deck surface. Cure the repaired deck a minimum of 7 days before placing the polymer-modified HMA overlay. Ensure that a polymer modifier manufacturer representative is present to oversee edge sealer and tack coat application.

Prepare the entire deck surface area by shot blasting. Include the vertical face of curbs or parapets to the specified finish overlay surface elevation. Collect and dispose of used steel shot and dust. Remove pavement-marking lines within the cleaning area to prevent bleeding through the tack coat. After shot blasting operations, clean the deck by sweeping, air blasting, pressure washing, or other engineer-approved method.

Clean the existing surfaces to remove any milled material or debris which would reduce or prevent bonding. Ensure that the surface is clean, dry, and free from loose debris or other contaminants. Saw cut and seal construction joints. Apply edge sealer and tack coat. Place an impermeable hot-mix waterproofing asphalt course on the cleaned and tack coated bridge deck, to the lines, grades, width, and depth the plans show.

Seal all edges of the planned day's placement of the asphalt waterproofing course with 4-6 inches of edge sealer applied at the manufacturer specified rate. Ensure that vertical edges of headers, drains, scuppers, expansion joints, or other areas where compaction may be difficult to achieve are adequately sealed. For vertical edges, apply sealer from the specified finish overlay surface elevation and out horizontally 4-6 inches. Maximize drying time by sealing as early as possible on the day of, or even the day before, overlay placement.

#### C.5 Placement

Before placing tack coat, ensure that the deck moisture is 6 percent or less. Apply tack coat at a rate of 0.07 to 0.15 gallons per square yard without puddles for concrete decks and at 0.04 to 0.1 gallons per square yard for steel decks. Cover and protect all deck drains and joints before paving.

Place the polymer-modified material in a uniform 2-inch thick layer.

Seal butt joints made during paving that have cooled below 150 F before placing the adjoining asphalt lift. Saw cut construction joints ½-inch wide and fill to within 1/8 inch of the surface with joint sealer. Do not overfill sawed joints since excess sealer will cause surface ripples requiring contractor correction.

Apply edge sealer to all terminations of the paved asphalt, including curb lines and deck joints, as soon as possible after the pavement has cooled.

## **C.6 Compaction**

Because of higher compaction temperatures, use extra water applied evenly across the mat to keep material from sticking to the steel rolls.

Compact within a temperature range of 212 - 374 F conforming to standard spec 450.3.2.6. Use a minimum of two static rollers, one for break down and one for finish rolling. Have a third roller available on the job as a backup. Ensure that roller unit compression is 250 pounds or more per inch of driving roll width. Use three-wheel and tandem steel-wheel rollers with a manufacturer's rating of eight tons or more or use three-axle tandem steel-wheel rollers with a manufacturer's rating of 12 tons or more. Do not use pneumatic tired rollers. The contractor may use other compaction means in areas that cannot be accessed by the specified roller. The contractor may use an asphalt vibrator wacker with a water system.

Breakdown roll closely behind the spreading operation and finish roll to remove mat imperfections. Use a straight rolling pattern aligned with the paving direction. Do not turn except as necessary to move from pass to pass. Use the pattern and frequency the polymer modifier manufacturer's representative specifies. Do not change paving or rolling procedures without approval from the polymer modifier manufacturer's representative.

The department will waive the contract QMP HMA pavement nuclear density requirements for polymer-modified HMA overlay work.

#### **D** Measurement

The department will measure HMA Overlay Polymer-Modified by the ton, acceptably completed.

# **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBERDESCRIPTIONUNIT509.3500.SHMA Overlay Polymer-ModifiedTON

Payment is full compensation for providing overlays including mixture design and surface preparation; and for the polymer modifier manufacturer's on-site mix production and placement oversight.

The department will pay separately for repairs under the Curb Repair, Concrete Surface Repair, and Full-Depth Deck Repair bid items as specified in standard spec 509.

stp-509-035 (20141107)

# 25. Removing Concrete Masonry Deck Overlay B-12-27, Item 509.9005.S.01; Removing Concrete Masonry Deck Overlay B-12-28, Item 509.9005.S.02; Removing Concrete Masonry Deck Overlay B-12-29, Item 509.9005.S.03; Removing Concrete Masonry Deck Overlay B-12-30, Item 509.9005.S.04.

# **A Description**

This special provision describes removing concrete bridge deck overlays by milling the entire bridge deck as the plans show.

Conform to standard spec 204 as modified in this special provision.

#### B (Vacant)

#### **C** Construction

#### C.1 Milling

Use a self-propelled milling machine that is specially designed and constructed for milling bridge decks. It shall mill without tearing or gouging the concrete masonry underlying the deck overlay. The machine shall consist of a cutting drum with carbide or diamond tip teeth. Space the teeth on the drum to mill a surface finish that is acceptable to the engineer.

Shroud the machine to prevent discharge of any loosened material into adjacent work areas or live traffic lanes. Equip the machine with electronic devices that provide accurate depth, grade and slope control, and an acceptable dust control system.

Perform milling in a manner that precludes damage to the bridge floor and results in a uniform textured finish that:

- 1. Is free of sharp protrusions;
- 2. Has uniform transverse grooves that measure up to 1/4 inch vertically and transversely; and
- 3. If applicable, is acceptable to the manufacturer of the sheet waterproof membrane.

Windrowing and storing of the removed milled concrete masonry on the bridge is only permitted in connection with the continuous removal and pick-up operation. During nonworking hours, clear the bridge of all materials and equipment.

#### **D** Measurement

The department will measure Removing Concrete Masonry Deck Overlay (Structure) in area by the square yard, acceptably completed.

#### E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
509.9005.S.01	Removing Concrete Masonry Deck Overlay B-12-27	SY
509.9005.S.02	Removing Concrete Masonry Deck Overlay B-12-28	SY
509.9005.S.03	Removing Concrete Masonry Deck Overlay B-12-29	SY
509.9005.S.04	Removing Concrete Masonry Deck Overlay B-12-30	SY

Payment is full compensation for removing the concrete masonry; and for properly disposing of all materials. stp-509-005 (20171130)

# 26. Epoxy Crack Sealing, Item 509.9020.S.

#### **A Description**

This special provision describes sealing vertical cracks in abutments as the plan details show.

#### **B** Materials

Furnish a penetrating epoxy sealant manufactured by Sika, Adhesive Engineering, Technical Sealants, Dayton Superior, or equal. Before using, obtain the engineer's approval for the epoxy system which is proposed to seal the cracks.

#### **C** Construction

Before sealing, clean the cracks by chipping and by using high-pressure air.

After all of the cleaning is completed, inject epoxy sealant into the cracks to be sealed. Seal the cracks using the penetrating epoxy sealant as recommended by the sealant manufacturer.

#### **D** Measurement

The department will measure Epoxy Crack Sealing in length by the linear foot of crack, acceptably sealed.

#### **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER DESCRIPTION UNIT
509.9020.S Epoxy Crack Sealing LF

Payment is full compensation for cleaning the cracks; and for furnishing and placing the epoxy sealant. stp-509-020 (20100709)

# 27. Epoxy Injection Crack Repair, Item 509.9025.S; Cored Holes 2-Inch Diameter, Item 509.9026.S.

#### **A Description**

This special provision describes repairing structural cracks in piers using the epoxy injection method, and coring 2 inch diameter core samples the repaired cracks.

Conform to standard spec 509 as modified in this special provision.

#### **B** Materials

Furnish epoxy injection material that is insensitive to the presence of water and is composed of a twocomponent epoxy resin designed specifically for structurally re-bonding cracks in Portland cement concrete. The epoxy injection material shall conform to the following physical properties at 77 degrees F:

	Unmixed		Mixed
	Component A (Resin)	Component B (Catalyst)	
Weight per gallon, lbs	9.15 ±0.1	8.2 ±0.1	9.15 ±0.1
Viscosity, cps	500-700	120-160	275-350
Specific Gravity, g/cc	1.128 ±0.012	0.984 ±0.012	1.099 ±0.012
Color Straw	Straw	Straw	Straw
Shelf Life (closed containers)	2 years	2 years	
Solids by Weight			100%
Pot Life (200 gram mass)			12-15 mins.
Mixing Ratio (by weight)	80%	20%	
Mixing Ratio (by volume)	78%	22%	
Bond Strength			2000 psi min
Shrinkage Resistance			ASTM C883
Thermal Compatibility			ASTM C884

Furnish surface seal material for confining the injected epoxy resin in the cracks that meets the following requirements:

- Adequate strength to hold the injection fittings firmly in place to resist injection pressures and prevent leakage during injection
- 2. Non-sag consistency
- 3. Insensitive to the presence of water
- 4. Controlled cure time
- 5. Two-component epoxy resin
- 6. 100% solids by weight
- 7. Applicable to wet surfaces
- 8. Viscosity should be paste

#### **C** Construction

#### **C.1 Injection Equipment**

Use equipment to meter and mix the two-epoxy resin components and to inject the mixture into the cracks. The equipment shall be portable and have positive displacement type pumps equipped with an interlock to provide positive ration control of exact proportions of the two components at the nozzle. Use electric or air powered pumps that provide in-line metering and mixing.

Use injection equipment that has automatic pressure control capable of discharging the mixture at any present pressure up to 160 psi (±5 psi), and is equipped with a manual pressure control override.

The equipment shall have the capability of maintaining the volume ratio for the mixture prescribed by the manufacturer of the epoxy resin material within a tolerance of ±5% by volume at any discharge pressure up to 160 psi.

The injection equipment shall be equipped with sensors on both the Component A and B reservoirs that will automatically stop the machine when only one component is being pumped to the mixing head.

## **C.2 Surface Area Preparation**

Clean the surface areas adjacent to cracks of all dirt, dust, grease, oil, efflorescence, or other foreign matter, which may be detrimental to adhesion of the surface seal material. Acids and corrosives will not be permitted for cleaning.

Install injection ports along the cracks on both faces of the pier at intervals of 4 to 10 inches, or as appropriate to accomplish full penetration of the injection resin. Center the injection ports over the cracks and secure in place using surface seal material. Where possible, install the injection ports over the widest areas of the cracks.

Apply the surface seal material to the face of the crack between the entry ports. For known through cracks, apply the surface seal material to both faces of the member. Before proceeding with the injection operation, allow sufficient time to elapse for the surface seal material to gain adequate strength.

## **C.3 Epoxy Injection**

Install the epoxy injection resin according to the manufacturer's instructions.

During installation, in general, limit pressures to 35 psi at the point of entry into the crack.

On vertical cracks, start the injection at the lowest point and continue upward along the crack. While injecting, resin should flow to and out of the next higher port. When this flow is established, cap the lower port and continue the injection until all ports have been injected and flow has been established between them.

On horizontal cracks, follow the same procedures used for vertical cracks; start the injection at one end and continue the injection in succession along the crack until all ports have been injected and flow has been established between them.

## C.4 Finishing and Clean-Up

When cracks are completely filled, cure the epoxy resin for a sufficient length of time so that when the surface seal is removed, there is no draining or runback of the epoxy material from the cracks. Grind, or use other appropriate method, to remove surface seal material, excess epoxy material, and injection ports. No epoxy material shall extend beyond the plane of the surfaces of the in-situ concrete.

#### C.5 Core Sampling

To determine if the crack injection is complete, obtain two 2-inch diameter core samples from the repaired pier. Take the cores to the depth of the element or at least 12 inches. Take the cores at locations selected by the engineer. The engineer will have the option of increasing or decreasing the number of cores taken.

The injection shall be considered complete if more than 90% of the crack void, to 12 inches deep, is filled with the epoxy resin in each of the samples taken. If the injection is incomplete, re-injection and additional cores may be required.

Repair the core holes left in the member using one of the two following methods:

- 1. Fill core holes with an epoxy mortar consisting of one part epoxy injection resin to four parts clean, dry, bagged fine aggregate mixed by volume. Match the finish repair to the surrounding surface.
- 2. Fill core holes with an epoxy mortar consisting of one part epoxy gel to one part clean, dry, bagged fine aggregate mixed by volume. Match the finish repair to the surrounding surface.

## **D** Measurement

The department will measure Epoxy Injection Crack Repair in length by the linear foot crack, acceptably repaired.

The department will measure Cored Holes 2-Inch Diameter as each individual cored hole, as approved by the engineer and acceptably completed. Additional cores taken as required by the engineer after reinjection (due to incomplete injection) will not be measured for payment. Additional cores taken by the contractor that are not ordered by the engineer will not be measured for payment.

#### **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid items:

ITEM NUMBERDESCRIPTIONUNIT509.9025.SEpoxy Injection Crack RepairLF509.9026.SCored Holes 2-Inch DiameterEACH

Payment is full compensation for furnishing and placing the epoxy sealant, including any cleaning before and after injection; coring samples of the work; inspecting the core samples; and for repairing the core holes left in the member.

stp-509-025 (20100709)

## 28. Cleaning Parapets, Item 509.9050.S.

## **A Description**

This special provision describes cleaning the inside faces and top surface of the concrete parapet as the plans show and as the engineer directs.

#### B (Vacant)

#### **C** Construction

## **C.1 Blast Cleaning Operation**

Blast clean the inside face and top surface of the concrete parapet according to SSPC SP-13 and ASTM D4259 for an abrasive blast cleaning to a surface roughness and finish as the engineer directs. Before abrasive blast cleaning operations are to begin for the entire bridge parapet, prepare a representative trial area on the parapet concrete surface, and have the method of blast cleaning approved by the engineer.

## **C.2 Water Cleaning Operation**

After abrasive blast cleaning operations are completed, clean the prepared parapet surface with water according to ASTM D4258. Remove with this water cleaning all dust and loose material from the parapet inside face and top that is to be coated with pigmented surface sealer. Provide an adequate drying time of the parapet inside face and top surface of at least 24 hours before coating with the pigmented surface sealer. Remove all loose concrete, dirt, dust, or blast material that remains on the bridge deck, as the engineer directs.

#### **D** Measurement

The department will measure Cleaning Parapets in length by the linear foot of parapet, acceptably cleaned.

#### **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBERDESCRIPTIONUNIT509.9050.SCleaning ParapetsLF

Payment is full compensation for abrasive blast cleaning; for water cleaning; and for all additional cleanup of the concrete surface and surrounding bridge deck area.

stp-509-050 (20151210)

## 29. Structure Repainting General.

## A General

#### A.1 Inspection

On all structures in this contract, notify the engineer of any missing or broken bolts or nuts, any missing or broken rivets, or of any cracks or flaws in the steel members while cleaning or painting.

#### A.2 Date Painted

At the completion of all painting work, stencil in black paint or contrasting color paint the date of painting the bridge. The numbers shall be three inches (75 mm) in height and shall show the month and year in which the painting was completed: e.g., 11-95 (November 1995). On each bridge painted, stencil the date at two locations. On truss bridges, stencil the date on the cover plates of end posts near and above the top of the railings at the oncoming traffic end. On steel girder bridges, stencil the date on the inside of the outside stringers at the abutments. The date on grade separation bridges shall be readable when going under the structure or at some equally visible surface near the ends of the bridge, as designated by the engineer.

#### A.3 Graffiti Removal

Remove any graffiti on concrete abutments, piers, pier caps, parapet railings, slope paving or any other location at the direction of the engineer. Use a brush sandblast to remove graffiti.

The above work will not be measured and paid for separately, but will be considered incidental to other items in the contract.

#### B (Vacant)

#### **C** Construction

## C.1 Repainting Methods

Do not perform blasting, cleaning and painting on days of high winds. Prevailing winds in excess of 15 mph (25 km/hr) shall be considered high winds.

Place the final field coat of paint on the exterior of the exterior beams as a continuous painting operation. Stop at splices, vertical stiffeners or other appropriate locations so that lap marks are not evident or noticeable.

Completely clean and remove spent abrasive and other waste materials resulting from the contractor's operation from bridge deck surfaces, gutter lines, drains, curbs, bridge seats, pier caps, slope paving, roadway below, and all structural members and assemblies.

### C.2 Inspection

Add the following to standard spec 105.9:

Furnish, erect and move scaffolding and other equipment to allow the inspector to closely observe all affected surfaces. The scaffolding, with appropriate safety devices, shall meet the approval of the engineer. stp-517-005 (20150630)

## 30. Labeling and Disposal of Waste Material.

The EPA ID number for Structure B-12-27 is WID988623096.

The EPA ID number for Structure B-12-28 is WID988623088.

The state has an exclusive mandatory use contract with a private waste management contractor to transport and dispose of hazardous waste.

The state's waste management contractor shall furnish and deliver appropriate hazardous waste containers and site-specific labels to each bridge site. The provided containers shall be placed at preselected drop-off and pick-up points at each bridge site, and these locations shall be determined at the preconstruction conference. The custody of the containers and labels shall be the responsibility of the painting contractor while they are at the job site.

Contact the waste management contractor a minimum of one week in advance of the start of the project to request container drop-off. Provide the waste management contractor with the project ID, structure number, EPA ID, and the agreed-upon location for container staging. Contact information for the waste management contractor is located on the WisDOT Internet site at


http://wisconsindot.gov/Documents/doing-bus/eng-consultants/cnslt-rsrces/environment/hazwaste-contacts.pdf.

Report all reportable spills and discharges according to the contingency plan.

Labels are site-specific. Check the labels to ensure that the project ID, structure number, and EPA ID match the structure generating the waste. Apply a label to each drum when it is opened for the first time.

Fill in the date on the label the first day material is accumulated in the drum. The following page is an example of a properly filled-in label.

During paint removal operations, continuously monitor and notify the project inspector of the status of waste generation and quantity stored so that timely disposal can be arranged.

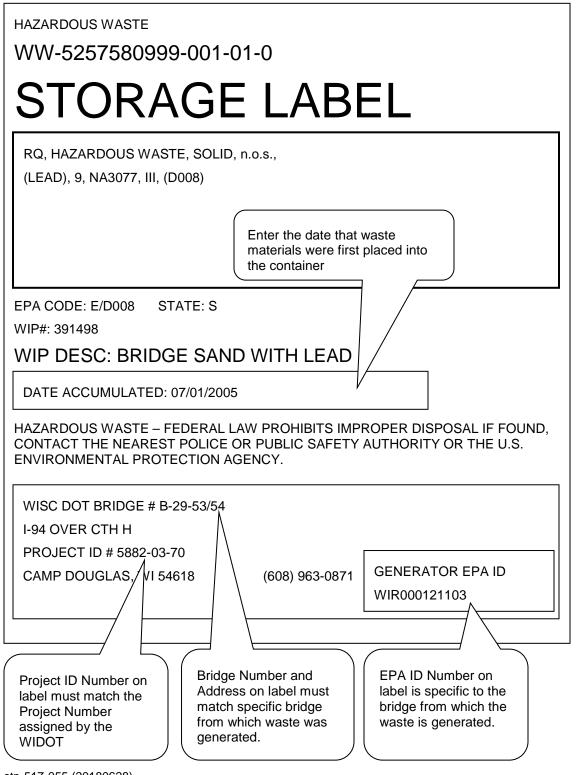

stp-517-055 (20180628)

## 31. Temporary Traffic Signals for Bridges (Structure) B-22-0059, Item 661.0100.01.

The following timing plan is required as a part of the installation. Timing is based on pre-timed operation. Signal timing subject to change at pre-construction conference depending on the type of temporary signal that the contractor plans to use.

SIGNAL SEQUENCE			
INTERVAL	NB/EB	SB/WB	Seconds
1	G	R	15.4
2	Υ	R	5.5
3	R	R	12.7
4	R	G	12.6
5	R	Y	5.5
6	R	R	12.7

Cycle length = 64.4

Any changes to the timing plan need to be approved by the Regional Traffic Engineer prior to implementing the changes in the field.

Contact Jeff Vollmar at (608) 789-5542 at least 3 business days prior to turning on temporary signals.

## 32. Concrete Masonry Deck Repair – High Early Strength, Item SPV.0035.01.

## **A Description**

This special provision describes providing concrete masonry on the sawed deck preparation areas of the concrete bridge deck and in full depth deck, curb, and joint repair areas. Conform to standard spec 502 and standard spec 509 and as follows.

#### **B** Materials

#### **B.1 Neat Cement**

Furnish a neat cement bonding grout. Mix the neat cement in a water-cement ratio approximately equal to 5 gallons of water per 94 pounds of cement.

#### **B.2 Concrete**

Furnish grade C, C-FA, C-S, C-IS, C-IP, C-IT, or E concrete conforming to standard spec 501 for deck preparation, full-depth deck repair, curb repair and joint repair areas except as follows:

- 1. Required 24-hour minimum compressive strength shall be 3000 psi.
  - Additional compressive strength tests during production will be required to verify the required strength is met in 24 hours. The initial sampling rate for 24-hour tests will be the same as the initial sampling rate for 28-day compressive strength acceptance.
- 2. The contractor may increase slump of grade E concrete to 3 inches.
- 3. The contractor may use ready-mixed concrete.
- 4. The contractor may use non-chloride accelerating admixtures conforming to standard spec 501.2.3.4.

#### **C** Construction

#### **C.1 Neat Cement**

Immediately before placing the concrete deck patching, coat the prepared surfaces with a neat cement mixture. Ensure the prepared concrete surfaces are moist without any standing water before coating with the neat cement mixture. Brush the neat cement mixture over the prepared concrete surfaces to ensure that all parts receive an even coating, and do not allow excess neat cement to collect in pockets. Apply the neat cement at a rate that ensures the cement does not dry out before being covered with the new concrete.

## **C.2 Placing Concrete**

Place concrete conforming to standard spec 509. As determined by the engineer, consolidate smaller areas by internal vibration, strike them off, and finish the areas with hand floats to produce plane surfaces that conform to the grade and elevation of the adjoining surfaces. Give all deck patching areas a final hand float finish.

#### C.3 Curing Concrete

Cure the concrete masonry deck repairs conforming to standard spec 502.2.6(1).

#### C.4 Application of Loads

After placement of concrete masonry deck repair material, work in/over the repair areas shall cease until the 24-hour compressive strength tests are completed and the strength is shown to meet the minimum required amount indicated in section B.

#### **D** Measurement

The department will measure the Concrete Masonry Deck Repair – High Early Strength bid item by the cubic yard, acceptably completed.

The department will measure concrete used in deck preparation areas and in full depth deck, curb, and joint repair as part of the Concrete Masonry Deck Repair – High Early Strength bid item.

The department will not measure wasted concrete.

### **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBERDESCRIPTIONUNITSPV.0035.01Concrete Masonry Deck Repair – High Early StrengthCY

Payment is full compensation for furnishing, hauling, preparing, placing, finishing, curing, and protecting all materials.

## 33. Cement Slurry Mixture, Item SPV.0035.02.

## **A Description**

This special provision describes the furnishing, hauling, preparing, placing, curing of cement slurry mixture and appurtenances for raising existing concrete pavement approach slabs and/ or filling the void between the bottom of the existing concrete pavement approach slab and the base, and/or filling the void that exists adjacent to and under the abutment, as shown in the plans.

#### **B** Materials

## **B.1 Cement Slurry Mixture**

#### **Mixture**

Provide slurry mixture meeting requirements of standard spec 501 and be composed of lime, sand, ground clay, Portland Cement (Type II), and fly ash. Following are the portions by volume:

Lime / Fly Ash Mixture passing #50 sieve 100% 27%
Fine Aggregates passing #4 sieve 100% 15%
Ground clay passing #4 sieve 100% 50%
Portland Cement – 3 ½ bag mix (approx.) 8%

(Should Fly Ash and/or Lime not be readily available, increase the amount of Fine Aggregates by 27% to mixture.)

The slurry mixture shall contain enough potable water to a workable consistency (3 to 6-inch slump). Material once mixed shall be utilized within one hour and may not be retempered.

#### Strength

All materials pumped shall have a 150 psi strength, 8 hours following placement. All materials pumped shall be of a minimum of 500 psi to a maximum of 1,000 psi mix design in 28 days.

#### **Work Site**

All materials for job site shall at all times be mobile and not stored in the road or work area, unless agreed upon by the engineer.

#### **B.2** Equipment

Provide mixing equipment consisting of a self-contained continuous mixer, with calibrated mixing and delivery capability, carrying all water, cement and aggregate needed for the job site. Mixing equipment must meet or exceed the Standards of Calibration as set forth by the Volumetric Mixer Manufacturer Bureau (VMMB), a member of the National Ready Mix Concrete Association (NRMCA), and conforming to ASTM 685, ACI 3 04.6 and CSA 23.7, and to 501.3.6.4.

#### C (Vacant)

#### **D** Measurement

The department will measure Cement Slurry Mixture by the cubic yard, acceptably completed.

## **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBERDESCRIPTIONUNITSPV.0035.02Cement Slurry MixtureCY

Payment is full compensation for furnishing, hauling, preparing, and curing of cement slurry mixture including water, mixing, and pumping.

## 34. Bearing Repairs B-12-27, Item SPV.0060.01.

#### **A Description**

This special provision describes raising the girders, removing the existing bearing components, and replacing them with new components as shown in the plans, and as hereinafter provided.

#### **B** Materials

#### **B.1 General**

Furnish structural steel according to standard spec 506.

Furnish all other bearing components according to standard spec 506.2.8.3.

Blast clean fabricated structural steel components as specified in standard spec 506.3.31.3 before zinc coating or painting.

For components that are to be galvanized, zinc coat according to ASTM A123. After zinc coating, shop apply a wash primer to the fabricated components and the coating system in a color similar to number 25240 (blue) of Federal Standard Number 595B.

For components that are to be painted, use one shop coat of organic zinc-rich primer and one shop coat of high-build gray epoxy paint conforming with standard spec 517.2.4. Do not paint the surfaces of steel plates in areas to be epoxy bonded with teflon/PTFE. Only blast clean the surfaces in these areas. On plates to be welded to stainless steel or requiring field welding, use only one shop coat of weldable primer. Touch-up paint welded areas in the field under "Structure Spot Cleaning and Painting B-12-27" item.

Do not blast clean, zinc coat, or paint stainless steel and teflon/PTFE surfaces.

#### **C** Construction

Construction shall be according to standard spec 506.3, in addition to the following.

#### C.1 Removal of Existing Bearing Components

Prior to removal, raise the structure's girders. Obtain prior approval from the engineer for the method of jacking the girders and of supporting them as required. Ensure parapet cover plates or other plates spanning the joint, which would be damaged as a result of raising the structure on one side of the joint and not the other, have been removed prior to raising the structure. Raise the structure during a full closure of the roadway, and provide positive, non-hydraulic axial support prior to reopening to traffic. Ensure jacking system accommodates the thermally induced longitudinal movements of the structure, and is stable under all vertical and horizontal loads imposed by the structure once raised and reopened to traffic. Subject to approval of the engineer, provide a means of ramping the approaches in front of raised structure to provide a gradual vertical transition of not more than ½" vertical per 1 feet horizontal until the grade of raised structure is meet.

Remove the portions of the existing bearings as detailed in the plans. Take care to prevent damage to existing girders, anchor bolts, and masonry plates to be preserved.

Dispose of removed material according to pertinent provisions of standard spec 203. Existing paint may contain lead.

#### **D** Measurement

The department will measure Bearing Repairs B-12-27 as each individual bearing, acceptably completed.

## **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBERDESCRIPTIONUNITSPV.0060.01Bearing Repairs B-12-27EACH

Payment is full compensation for raising the bridge girders; ramping the approaches as required; removing and disposing of existing bearing components; and for furnishing and installing the new bearing components.

## 35. Parapet Cover Plates, Item SPV.0060.02.

## **A Description**

This special provision describes replacing parapet cover plate assemblies as shown in the plans, and as hereinafter provided.

#### **B** Materials

#### **B.1 General**

Furnish structural steel according to standard spec 506.

Furnish steel plates and bars that have been fabricated from high strength, low alloy grade 36, 36W, 50, or 50W steel conforming to ASTM A709.

Stainless steel fasteners and nuts shall conform to ASTM F879, Grade 304 or 316.

Furnish welded stud shear connectors according to standard spec 506.2.7.

Blast clean fabricated structural steel components as specified in standard spec 506.3.31.3 before zinc coating.

Galvanize after fabrication, according to ASTM A123, all steel surfaces, except stainless steel cap screws.

## **C** Construction

Construction shall be according to standard spec 506.3.

#### **D** Measurement

The department will measure Parapet Cover Plates as each individual parapet cover plate assembly, acceptably completed.

#### E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBERDESCRIPTIONUNITSPV.0060.02Parapet Cover PlatesEACH

Payment is full compensation for providing all materials, fabricating, and installing the cover plate assemblies.

## 36. Downspout Repair, Item SPV.0060.03.

## **A Description**

This special provision describes cleaning and painting existing downspouts and extending them with new steel tubes. Work and material shall be according to standard spec 506, the plans, as directed by the engineer, and as hereinafter provided.

#### **B** Materials

Steel tubing shall conform to ASTM A500 Grade B.

Shop paint new steel pieces with a three-coat paint system according to standard spec 517. Blast clean steel tubing as specified in standard spec 506.3.31.2 before priming. Furnish a final coat matching color number 26293 (gray) according to Federal Standard Number 595B, as printed in 1989.

For field painting of existing steel, furnish a three-coat paint system from the department's approved products list for "Structure Overcoating Cleaning and Priming". Furnish a final coat matching color number 26293 (gray) according to Federal Standard Number 595B, as printed in 1989.

#### **C** Construction

### C.1 Field Surface Preparation

Prepare existing steel surfaces according to SSPC-SP3 Power Tool Cleaning. Prime the same day, or reclean before application, all metal surfaces receiving a SP3 cleaning.

#### C.2 Field Containment and Collection

Use power tools with vacuum shrouds attached to a High Efficiency Particulate Abatement (HEPA-VAC) vacuum cleaner to collect the spent material from the surface preparation of steel surfaces. Consider and treat all spent materials as hazardous waste because it may contain lead.

Store all waste material collected by this operation at a secure location on or near the bridge site. Collect and store all waste materials at the end of each workday or more often if needed. Store materials in 5-gallon lidded plastic containers.

Label each container with the date the first waste was placed in the container and the words "Hazardous Waste – EPA Waste Code D008." Lock and secure all containers at the end of each workday. Keep the containers covered at all times except to add or remove waste material. Store the containers in an accessible and secured area, not located in a storm water runoff course, flood plain or exposed to standing water.

#### C.3 Field Painting

Apply three coats of an approved coating system from the department's approved products list to the surfaces as described in A.1. Apply paint in a neat, workmanlike manner. The resultant paint film shall be smooth and uniform without skips or areas of excessive paint. Apply coating according to the manufacturer's recommendations.

Prior to applying the prime coat, coat with primer all edges, rivet and bolt heads, nuts and washers by using either a brush, roller, or spray application.

Dry Film Thickness per coat shall be a minimum of 3-mil. The dry film thickness shall be determined by use of a magnetic film thickness gage. The gage shall be calibrated for dry film thickness measurement according to SSPC-PA 2.

During surface preparation and coating application, the ambient and steel temperature shall be between 39 and 100 degrees F. The steel temperature shall be at least 5 degrees F above the dew point temperature, and the relative humidity shall not exceed 85%.

#### C.4 Downspout Extensions

Install new steel tube downspout extensions as detailed in the plans and according to standard spec 506.3.

## **D** Measurement

The department will measure Downspout Repair as each individual downspout, acceptably painted and extended.

#### **E** Payment

The department will pay for the measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0060.03	Downspout Repair	EACH

Payment is full compensation for furnishing and installing downspout extension and field cleaning and painting existing downspouts.

## 37. Embedded Galvanic Anodes, Item SPV.0060.04.

### **A Description**

This special provision describes furnishing all labor, materials, and equipment necessary to properly install embedded galvanic anodes in concrete.

#### **B** Materials

Furnish pre-manufactured galvanic anodes designed for cathodic protection when embedded in concrete and tied to steel reinforcing. The core of the anode shall consist of a minimum of 1.3 ounces of electrolytic high grade zinc in compliance with ASTM B418 cast around a pair of steel tie wires and encased in a highly alkaline cementitious shell with a pH of 14. The anodes shall have one side that is less than 1½-inches in height.

Submit the product information to the engineer for approval. Supply a certification of compliance to the engineer before starting work. Deliver, store, and handle all materials according to the manufacturer's instructions.

Use one of the qualified galvanic anode products and manufacturers given below. An equivalent system may be used with the written approval of the engineer.

Galvashield Vector Corrosion Technologies (319) 364-5355 Sentinel Euclid Chemical Company (800) 321-7628 Emaco CP Intact BASF Building Systems (262) 227-4045	Product Name	Manufacturer/Supplier	<u>Telephone Number</u>
	Sentinel	3	(800) 321-7628

#### **C** Construction

#### C.1 Concrete Repair

Repair the concrete and prepare the exposed reinforcing steel according to standard spec 509. Use Portland cement based repair concrete materials with suitable electrical conductivity.

#### C.2 Galvanic Anode Installation

Install embedded galvanic anodes according to manufacturer's recommendations, as shown on the plans, and as listed in this specification.

- **C.2.2** Install galvanic anodes to existing reinforcement along the perimeter of the repair at spacing as specified on the plans. In no case shall the distance between anodes exceed 24 inches.
- **C.2.3** Provide 3/4-inch clearance between anodes and substrate to allow repair material to encase anode.
- **C.2.4** Secure the galvanic anodes as close as possible to the patch edge using the anode tie wires. Tighten the tie wires to allow little or no free movement.

If the anode is to be tied onto a single bar, or if less than 1½-inch of concrete cover is expected, place anode beneath the uncoated bar and secure to reinforcing steel.

If 1½-inch concrete cover will exist over the anode, the anode may be placed at the intersection between two bars and secured to each bar.

#### **C.3 Electrical Continuity**

Confirm electrical connection between anode tie wire and uncoated reinforcing steel with a multi-meter. The maximum DC resistance shall be 1 Ohm. Confirm electrical continuity of the exposed uncoated reinforcing steel within the repair area. Steel reinforcement shall be considered continuous when the DC resistance is 1 Ohm or less. If necessary, establish the electrical continuity with uncoated steel tie wire.

#### C.4 Inspection

The engineer will verify proper installation of the galvanic anodes prior to placement of the concrete.

#### D Measurement

The department will measure Embedded Galvanic Anodes as each individual anode, acceptably installed.

## **E** Payment

The department will pay for the measured quantities at the contract unit price under the following bid item:

ITEM NUMBERDESCRIPTIONUNITSPV.0060.04Embedded Galvanic AnodesEACH

Payment is full compensation for furnishing and for properly installing; and for establishing and checking electrical continuity.

Concrete repair work will be paid for separately.

## Haunch Removal B-12-27, Item SPV.0090.01; Haunch Removal B-12-28, Item SPV.0090.02.

## **A Description**

This special provision describes removing portions of loose and delaminated concrete beam haunch from the underside of the bridge deck along the edge of a beam as shown on the plans, and as directed by the engineer, according to these specifications.

### B (Vacant)

#### **C** Construction

The contractor shall remove loose and delaminated portions of the concrete beam haunch over the entire length and width of the structure.

Loose concrete shall be removed with hand hammers or pneumatic/rotary hammers which do not damage the sound concrete in the bottom of the bridge deck, the adjacent steel beam, and sound portions of the haunch to remain. The maximum weight of pneumatic/rotary hammers used in the removal shall be 30 pounds.

After removal, portions of the steel beam top flange exposed by haunch removal shall be cleaned and painted under the "Structure Spot Cleaning and Painting" item for the associated structure.

Contractor shall take adequate measures to prevent removed concrete, tools and materials from accumulating on the bridge structure and prevent any material from dropping onto any of the land or waterways below the structure. All removal shall conform to special provision 203.0600.S.

Protective shielding over the railroad right-of-way shall comply with Railroad requirements noted elsewhere in these special provisions and shall be subject to the approval of the Railroad prior to installation and use.

All debris shall be promptly swept up, removed, and satisfactorily disposed of by the contractor from the site. Work over the railroad shall be performed according to railroad access and protection requirements.

#### **D** Measurement

The department will measure Haunch Removal by the linear foot, acceptably completed.

#### **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid items:

 ITEM NUMBER
 DESCRIPTION
 UNIT

 SPV.0090.01
 Haunch Removal B-12-27
 LF

 SPV.0090.02
 Haunch Removal B-12-28
 LF

Payment is full compensation for removal and disposal of loose haunch concrete.

## 39. Pipe Underdrain Wrapped 6-Inch Special, Item SPV.0090.03.

### A Description

This special provision describes furnishing and installing a pipe underdrain system as shown on the plans, as specified herein, and as directed by the engineer.

#### **B** Materials

Provide wrapped perforated pipe underdrain and apron endwalls meeting standard spec 612. Provide rodent shields for the underdrain according to plan.

Provide drainage aggregate meeting standard spec 310.

#### **C** Construction

Construct the pipe underdrain and apron endwalls according to the applicable requirements of standard spec 612 except as modified below.

Construct the pipe underdrain system consisting of a wrapped perforated pipe drain situated at the bottom of an area of drainage aggregate wrapped completely in geotechnical fabric and shall be installed to the lines and gradients as shown on the plans.

## **D** Measurement

The department will measure Pipe Underdrain Wrapped 6-Inch Special by linear foot, acceptably completed.

#### E Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER DESCRIPTION UNIT SPV.0090.03 Pipe Underdrain Wrapped 6-Inch Special LF

Payment is full compensation for furnishing and installing pipe underdrain, endwalls and drainage aggregate.

Geotextile Fabric is paid for under a separate item.

# 40. Structure Spot Cleaning and Painting B-12-27, Item SPV.0105.01; Structure Spot Cleaning and Painting B-12-28, Item SPV.0105.05.

#### **A Description**

This special provision describes cleaning and painting steel surfaces exhibiting active corrosion (rust) or failed paint system at spot locations on the bridge.

Areas to be cleaned and painted are shown on the plans and described below.

## **B** Materials

Furnish a three coat paint system from the department's approved products list for "Structure Overcoating Cleaning and Priming". Furnish a final coat matching color number 25240 (blue) according to Federal Standard Number 595B, as printed in 1989.

Provide 5-gallon lidded plastic containers for containing the spent material.

#### **C** Construction

#### C.1 Surface Preparation

Prepare steel surfaces described below according to SSPC-SP3 Power Tool Cleaning.

Steel surfaces to be cleaned and painted:

- 1. Rusted surfaces greater than 1" diameter (size of a quarter) and greater than 6" linearly along edges that fall within the limits shown on the plans;
- Rusted surfaces are defined as surface rust, rust blisters, and rust undercutting as defined in SSPC-VIS 2 Standard Method of Evaluating Degree of Rusting on Painted Steel Surfaces.
- 3. Areas of paint failure paint system pealing, blistering, flaking, etc.

Structure B-12-27		
SPAN	SF	DESCRIPTION
1 through 4; 6 through 13	11,200	SP3 Power Tool Clean and paint spot areas.
5	3,400	SP3 Power Tool Clean and paint spot areas on the entire span including but not limited to interior and exterior of the arch and tie girder, floor beams, stringer, cable hangers, and cross braces. Limit exterior work to 15' above the deck surface.  Interior painting of the arch ribs shall extend from each end of the span to the first closest cable hanger (there is no access beyond these points).
TOTAL	14,600	

Structure B-12-28		
SPAN	SF	DESCRIPTION
1 through 10	6100	SP3 Power Tool Clean and paint spot areas.
TOTAL	6100	

Prime the same day, or re-clean before application, all metal surfaces receiving a SP3 cleaning.

## **C.2 Containment and Collection**

Use power tools with vacuum shrouds attached to a High Efficiency Particulate Abatement (HEPA-VAC) vacuum cleaner to collect the spent material from the surface preparation of steel surfaces. Consider and treat all spent materials as hazardous waste because it may contain lead.

Store all waste material collected by this operation at a secure location on or near the bridge site. Collect and store all waste materials at the end of each workday or more often if needed. Store materials in 5-gallon lidded plastic containers.

Label each container with the date the first waste was placed in the container and the words "Hazardous Waste – EPA Waste Code D008." Lock and secure all containers at the end of each workday. Keep the containers covered at all times except to add or remove waste material. Store the containers in an accessible and secured area, not located in a storm water runoff course, flood plain or exposed to standing water.

## C.3 Painting

Apply three coats of an approved coating system from the department's approved products list to the surfaces as described in A.1. Apply paint in a neat, workmanlike manner. The resultant paint film shall be smooth and uniform without skips or areas of excessive paint. Apply coating according to the manufacturer's recommendations.

Prior to applying the prime coat, coat with primer all edges, rivet and bolt heads, nuts and washers by using either a brush, roller, or spray application.

Dry Film Thickness per coat shall be a minimum of 3-mil. The dry film thickness shall be determined by use of a magnetic film thickness gage. The gage shall be calibrated for dry film thickness measurement according to SSPC-PA 2.

During surface preparation and coating application, the ambient and steel temperature shall be between 39 and 100 degrees F. The steel temperature shall be at least 5 degrees F above the dew point temperature, and the relative humidity shall not exceed 85%.

#### **D** Measurement

The department will measure Structure Spot Cleaning and Painting (structure), completed according to the contract and accepted, as a single complete lump sum unit of work.

#### **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0105.01	Structure Spot Cleaning and Painting B-12-27	LS
SPV.0105.05	Structure Spot Cleaning and Painting B-12-28	LS

Payment is full compensation for preparing and cleaning the designated surfaces; for collecting, labeling, and storing spent materials in appropriate containers; and for furnishing and applying the paint.

## 41. Strip Seal Gland Replacement B-12-27, Item SPV.0105.02.

## **A Description**

This special provision describes removing deteriorated strip seal glands at expansion joints, and furnishing and installing new strip seal glands as shown on the plans, and as hereinafter provided.

#### **B** Materials

The minimum thickness of the polychloroprene (neoprene) strip seal shall be ¼-inch for non-reinforced elastomeric glands and 1/8-inch for reinforced glands. Furnish the strip seal gland in lengths suitable for a continuous one-piece installation at each individual expansion joint location. Provide preformed polychloroprene strip seals that conform to the requirements of ASTM D3542, and have the following physical properties:

Property Requirements	Value	Test Method
Tensile Strength, min.	2000 psi	ASTM D412
Elongation @ Break, min	250%	ASTM D412
Hardness, Type A, Durometer	60 ± 5 pts.	ASTM D2240
Compression Set, 70 hours @212°F, max.	35%	D395 Method B Modified
Ozone Resistance, after 70 hrs. at 100°F	No Cracks	ASTM D1149 Method A
under 20% Strain with 100 pphm ozone		
Mass Change in Oil 3 after 70 hr. @212°F	45%	ASTMD471
Mass Change, max.		

Install the elastomeric strip seal gland with tools recommended by the manufacturer, and with a lubricant adhesive conforming to the requirements of ASTM D4070.

The manufacturer and model number shall match the existing strip seals to be replaced as follows:

Manufacturer	Model Number (Size)	Joint Location
DS Brown	A2R-400 (4-inch)	East Abutment
Watson Bowman Acme	SE-300 (3-inch)	Modular Joint-Span 7

Furnish manufacturer's certification for production of polychloroprene represented showing test results for the cured material supplied, and certifying that it meets all specified requirements.

Manufacturer's certifications for adhesive shall attest that the materials meet the specification requirements.

#### **C** Construction

Remove accumulated foreign material from the joint surface prior to removing existing strip seal glands.

After a joint's surface has been cleaned and allowed to dry out, remove the existing strip seal gland. Cut the existing gland down the center and remove/cut-out as much of the existing neoprene between the joint as possible to aid in removing the portions of the neoprene embedded in the steel retainer channels. Remove the remaining portions of neoprene embedded in the steel channels, using steel picks and tire spoons as required. Dispose of all removed waste material according to applicable solid waste disposal regulations.

After the steel channels are empty and free of the existing neoprene, clean the steel channel's interior section that comes in contact with the neoprene extrusions using wire brushes or by sand blasting in order to remove all debris and old adhesive. Use a compressed air wand to remove any abrasive material

that has accumulated in the steel channels after blasting. If cleaning is done by blasting, spent abrasive material shall be collected and prevented from falling into the water or onto the land below, and be disposed of according to applicable solid waste disposal regulations. Cleaning of the steel channels shall be done just prior to new gland installation. The joint must be dry during new gland installation, therefore, do not clean the joint if precipitation is imminent.

Install the new elastomeric strip seal glands with tools recommended by the manufacturer, and with a lubricant adhesive conforming to the requirements of ASTM D4070. Adhesive shall arrive to job-site in factory sealed containers and shall have been produced less than one year prior to the installation date.

#### **D** Measurement

The department will measure Strip Seal Gland Replacement B-12-27 as a single lump sum unit of work for the structure, acceptably completed.

#### **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBERDESCRIPTIONUNITSPV.0105.02Strip Seal Gland Replacement B-12-27LS

Payment is full compensation for removing and disposing of existing strip seal glands; cleaning steel retainer channels; and furnishing and installing the new strip seal glands including adhesive.

## 42. Pier Cap Repairs B-12-27, Item SPV.0105.03; Pier Cap Repairs B-12-28, Item SPV.0105.06.

#### **A Description**

This special provision describes cleaning the top surface of concrete pier caps, filling voids below existing bearing masonry plates with grout, and sealing the top of the pier cap as the plans show and as the engineer directs.

#### **B** Materials

Submit to engineer for approval the proposed method and materials to be used to fill voids in the concrete located below the existing bearings' masonry plates. Furnish a prepackaged, pre-proportioned, 100% solids epoxy grout or a prepackaged, pre-blended, non-shrink, freeze-thaw resistant cementitious grout. Material and method of placement chosen shall be specifically identified by the manufacturer as intended for the grouting of bearing/base/masonry plates. Material used shall have minimum 28-day compressive strength of 3,500 psi as identified by the manufacturer's technical data sheets.

For bridge seat protection, seal the top of the pier caps with a type of epoxy resin the manufacturer recommends for sealing exterior concrete surfaces, subject to the engineer's approval.

#### **C** Construction

#### **C.1 Blast Cleaning Operation**

Blast clean the top surface of the concrete pier caps according to SSPC SP-13 and ASTM D4259 for an abrasive blast cleaning to a surface roughness and finish as the engineer directs. Before abrasive blast cleaning operations are to begin, prepare a representative trial area on the pier cap surface, and have the method of blast cleaning approved by the engineer.

## **C.2 Water Cleaning Operation**

After abrasive blast cleaning operations are completed, clean the prepared pier cap surface with water according to ASTM D4258. Remove with this water cleaning all dust and loose material from the top surface of the pier caps that is to be coated with epoxy for bridge seat protection. Provide an adequate drying time of at least 24 hours before coating with epoxy. Remove all loose concrete, dirt, dust, or blast material that remains on the pier, as the engineer directs.

## C.3 Grouting Voids Below Masonry Plates

Submit to engineer for approval the proposed method and materials to be used to fill voids in the concrete located below the existing bearings' masonry plates. Prepare all surfaces as directed by the grout manufacturer's written instruction. Mix and apply grout per the manufacturer's written instructions.

### C.4 Bridge Seat Protection

After cleaning and grouting, apply bridge seat protection epoxy per standard spec 502.3.12.

#### **D** Measurement

The department will measure Pier Cap Repairs (structure), completed according to the contract and accepted, as a single complete lump sum unit of work.

#### **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0105.03	Pier Cap Repairs B-12-27	LS
SPV.0105.06	Pier Cap Repairs B-12-28	LS

Payment is full compensation for abrasive blast cleaning; for water cleaning; for all additional cleanup of the concrete surfaces and surrounding pier areas; for furnishing grout and filling the voids below the existing bearing masonry plates; and for furnishing and applying bridge seat protection.

## 43. Cleaning and Caulking Floor Beams B-12-27, Item SPV.0105.04.

## **A Description**

This special provision describes cleaning, painting, and caulking the exposed top flange of the floor beams at the edge of the concrete deck in span 5 on Structure B-12-27 as shown on the plans, as directed by the engineer, and according to the standard specifications.

FOR INFORMATIONAL PURPOSES (Approximate quantities for 42 locations on 21 floor beams)		
Area for steel cleaning and painting:	60 SF	
Linear footage of silicone caulk:	1176 LF	
Area of concrete preparation:	28 SF	

#### **B** Materials

Furnish 100% clear silicone caulk.

Furnish a three coat paint system as indicated in special provision "Structure Spot Cleaning and Painting B-12-27"

## **C** Construction

## C.1 Surface Preparation

Remove any loose concrete by chipping with hand tools or other approved method. Prepare the concrete surface for caulk with a wire wheel or brush or other approved method to remove dust and laitance.

Spot clean and paint the steel surfaces according to special provision "Structure Spot Cleaning and Painting B-12-27". Apply paint in a neat, workmanlike manner, and according to the manufacturer's instructions and recommendations.

Place caulk after paint has cured sufficiently. Place enough caulk along joint between top flange and concrete deck in a uniform bead to provide a smooth finished radius covering a minimum width of ½".

## **D** Measurement

The department will measure Cleaning and Caulking Floor Beams, completed according to the contract and accepted, as a single complete lump sum unit of work.

#### **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBER	DESCRIPTION	UNIT
SPV.0105.04	Cleaning and Caulking Floor Beams B-12-27	LS

Payment is full compensation for preparing (including removing loose concrete) and cleaning the designated surfaces; cleaning up; containing, collecting and disposal of all waste materials; and furnishing and applying caulk.

## 44. Parapet Cover Plate Fastener Repairs, Item SPV.0105.07.

## **A Description**

This special provision describes inspecting and retightening loose fasteners holding the parapet cover plates in place, and replacing any fasteners where missing as the plans show and as the engineer directs.

#### **B** Materials

Stainless steel fasteners shall conform to ASTM F879, Grade 304 or 316.

#### **C** Construction

Inspect all cover plate fasteners at each modular joint of the bridge. Retighten any fasteners found too loose, and install new fasteners where missing.

#### **D** Measurement

The department will measure Parapet Cover Plate Fastener Repairs, completed according to the contract and accepted, as a single complete lump sum unit of work.

### **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBERDESCRIPTIONUNITSPV.0105.07Parapet Cover Plate Fastener RepairsLS

Payment is full compensation for inspecting all fasteners, tightening loose fasteners, and furnishing and installing new fasteners where missing.

## 45. Access Hatch Repairs, Item SPV.0105.08.

### **A Description**

This special provision describes removing and resetting existing access hatch manholes, and replacing the gasket between the hatch frame and hatch door.

#### **B** Materials

Provide non-shrink grout from the department's approved list.

Provide new, watertight, neoprene seals for the hatch doors from the access hatch manufacturer.

Provide adhesive recommended by the manufacturer for attaching neoprene seal to hatch frames.

## **C** Construction

Remove concrete around existing access hatch frames as required to free the frames and allow for resetting. Take care to minimize concrete removal and prevent damage of existing components and reinforcement to remain. Reset each hatch as the plans show, and set in non-shrink grout. Fill all areas where concrete was removed with non-shrink grout.

Remove the existing gasket between the access hatch door and frame and thoroughly power tool clean frame to remove any remaining gasket, old adhesive, rust, or foreign material. Attach new gaskets to hatch frames with an adhesive recommended by the manufacturer.

#### **D** Measurement

The department will measure Access Hatch Repairs, completed according to the contract and accepted, as a single complete lump sum unit of work.

#### **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBERDESCRIPTIONUNITSPV.0105.08Access Hatch RepairsLS

Payment is full compensation for removing and disposing of concrete as required to free access hatches, furnishing non-shrink grout, resetting hatches in non-shrink grout, removing and disposing of existing hatch gaskets, cleaning the hatch frames, and furnishing and installing the new hatch gaskets.

## 46. Geocomposite Drain Board, Item SPV.0165.01.

## **A Description**

As part of this work, furnish and install prefabricated geocomposite drain board on the soil side of abutment walls, wing walls, retaining walls, and culvert sidewalls as indicated on the plans. Perform work according to the plans and as hereinafter provided.

#### **B** Materials

#### **B.1 Geocomposite Drain Board**

Provide geocomposite drain board composed of a flexible geocomposite consisting of a supporting structure or core, the soil side of which is bonded to an approved geotextile weighing not less than 3.5 oz/sq yd. The drainage core should provide support to and be bonded to the geotextile at intervals not exceeding 1 1/8 in. in any direction, and permit unobstructed flow through not less than 75 percent of the geotextile.

Provide board with a core flow rate of not less than 10 gal/min/ft at a hydraulic gradient of 1.0 when subjected to a normal pressure on the soil side face of 6,000 lb/sq feet. Core deflection cannot not exceed 20 percent. Provide board with a core fabricated of polyethylene with a minimum cell classification of PE 112110 according to ASTM D 3350 or other approved material.

Furnish the drain board with the following: 1) approved fittings to connect with outlet pipes and weep holes; 2) suitable approved splices; 3) end, top, and bottom caps to prevent the intrusion of backfill material into the core; and 4) approved fastening systems to secure the drain board to the wall.

#### **C** Construction

#### C.1 General

Handle the prefabricated geocomposite drainage board in such a manner as to ensure the geocomposite is not damaged in any way. Deliver, store, and handle the geocomposite according to manufacturer's recommendations.

Construct the geocomposite drain board in horizontal courses. Construct geocomposite with a direct contact with the wall with the fabric facing outward towards the backfill and secured with concrete nails not less than 2 in. long with approved washers not less than 9 sq in. in area. Space concrete nails as direct by the engineer, with spacing not be more than 3 feet apart, both horizontally and vertically. Provide at least one horizontal row of nails in each course.

Form horizontal seams by a 4 in. flap of geotextile extending from the upper course and lapping over the top of the lower course or by a 12 in. wide continuous strip of geotextile centered over the seam and securely fastened to the upper course with continuous 3 in. wide plastic tape. Fasten the overlapping flap or strip to the lower course intermittently as directed by the engineer, but with spacing that does not exceed 2 ft. Form vertical splices by a 4 in. flap of geotextile extending from one or the other abutting pieces or by a 12 in. wide continuous strip of geotextile centered over the splice. Continuously fasten vertical splice flaps or strips to the geocomposite with continuous applications of contact adhesive or 3 in. wide plastic tape.

Cover the bottom, side, and top edges of the geocomposite with a suitable cap formed by folding a 6 in. flap or a 12 in. wide strip of geotextile over the edge and securing it in place with a continuous application of contact adhesive or 3 in. wide plastic tape. Construct all seams, splices, bottom caps, top caps, and end caps so that backfill material cannot enter the geocomposite during or after construction.

Connection to pipe outlet systems as shown on the plans. Fasten outlet fittings to the drain board as directed by the manufacturer and so that backfill materials cannot enter the system during or after construction. If necessary, to facilitate the rapid and complete flow of water from the drain board into the pipe outlet, a portion of the drain board core equal to the cross section at the outlet may be removed. Provide weep holes by cutting a matching hole through the drain board. Securely fasten an approved weep hole cover extending at least 4 in. from the edge(s) of the hole to the soil side of the drain board by 3 in. wide plastic tape or contact adhesive applied continuously around its periphery.

#### **D** Measurement

The department will be measure Geocomposite Drain Board in square feet, acceptably completed, measured along both vertical and horizontal planes. The department will not pay for repairs to the geocomposite caused from contractor damage and will not pay for overlap of drain elements.

#### **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBERDESCRIPTIONUNITSPV.0165.01Geocomposite Drain BoardSF

Payment is full compensation for furnishing, installing, and trimming all materials and fasteners; and for disposal of excess materials.

## 47. Abutment Seat Cleaning and Sealing, Item SPV.0180.01.

#### **A Description**

This special provision describes cleaning the top surfaces of concrete abutments and sealing them as the plans show and as the engineer directs.

#### **B** Materials

For bridge seat protection/sealing, coat the tops of abutments with a type of epoxy resin the manufacturer recommends for sealing exterior concrete surfaces, subject to the engineer's approval.

#### **C** Construction

#### C.1 Blast Cleaning Operation

Blast clean the top surface of the abutment according to SSPC SP-13 and ASTM D4259 for an abrasive blast cleaning to a surface roughness and finish as the engineer directs. Before abrasive blast cleaning operations are to begin, prepare a representative trial area on the abutment surface, and have the method of blast cleaning approved by the engineer. Provide means of protecting bearings and girders such that their coatings/paint are not removed or damaged during blasting operations.

## **C.2 Water Cleaning Operation**

After abrasive blast cleaning operations are completed, clean the prepared pier cap surface with water according to ASTM D4258. Remove with this water cleaning all dust and loose material from the top surface of the abutments to be coated with epoxy for bridge seat protection. Provide an adequate drying time of at least 24 hours before coating with epoxy. Remove all loose concrete, dirt, dust, or blast material that remains in the area around the abutment, as the engineer directs.

## C.3 Bridge Seat Protection

After cleaning, apply bridge seat protection epoxy per standard spec 502.3.12.

#### **D** Measurement

The department will measure Abutment Seat Cleaning and Sealing by the square yard, acceptably completed.

## **E** Payment

The department will pay for measured quantities at the contract unit price under the following bid item:

ITEM NUMBERDESCRIPTIONUNITSPV.0180.01Abutment Seat Cleaning and SealingSY

Payment is full compensation for abrasive blast cleaning; for water cleaning; for all additional cleanup of the concrete surfaces and surrounding abutment areas; and for furnishing and applying bridge seat protection.

# ADDITIONAL SPECIAL PROVISION 1 (ASP 1) FOR TRANSPORTATION ALLIANCE FOR NEW SOLUTIONS (TrANS) PROGRAM EMPLOYMENT PLACEMENTS AND APPRENTICESHIPS

The Safe, Accountable, Flexible, Efficient Transportation Equity Act: A Legacy for Users (SAFETEA-LU), Section 5204(e) – Surface Transportation Workforce Development Training and Education, provides for 100 percent Federal funding if the core program funds are used for training, education, or workforce development purposes, including "pipeline" activities. The core programs includes: Congestion Mitigation and Air Quality Improvement (CMAQ) Program, Highway Bridge Program (HBP), Interstate Maintenance (IM), National Highway System (NHS), and Surface Transportation Program (STP). These workforce development activities cover surface transportation workers, including OJT/SS programs for women and minorities as authorized in 23 U.S.C. §140(b).

*TrANS* is an employment program originally established in 1995 in Southeastern Wisconsin. Currently TrANS has expanded to include TrANS program locations to serve contractors in Southeast (Milwaukee and surrounding counties), Southcentral (Dane County and surrounding counties including Rock County), and most Northeastern Wisconsin counties from locations in Keshena, Rhinelander and surrounding far Northern areas. TrANS attempts to meet contractor's needs in other geographic locations as possible. It is an industry driven plan of services to address the outreach, preparation, placement and retention of women, minorities and non-minorities as laborers and apprentices in the highway skilled trades. These candidate preparation and contractor coordination services are provided by community based organizations. For a list of the TrANS Coordinators contact the Disadvantaged Business Enterprise Office at (414) 438-4583 in Milwaukee or (608) 266-6961 in Madison. These services are provided to you at no cost.

## I. BASIC CONCEPTS

Training reimbursements to employing contractors for new placements, rehires or promotions to apprentice of TrANS Program graduates will be made as follows:

- 1) On-the-Job Training, Item ASP.1T0G, ASP 1 Graduate. At the rate of \$5.00 per hour on federal aid projects when TrANS graduates are initially hired, or seasonally rehired, as unskilled laborers or the equivalent.
  - <u>Eligibility and Duration:</u> To the employing contractor, for up to 2000 hours from the point of initial hire as a TrANS program placement.
  - <u>Contract Goal:</u> To maintain the intent of the Equal Employment Opportunity program, it is a goal that <u>2</u> (number) TrANS Graduate(s) be utilized on this contract.
- 2) On-the-Job Training, Item ASP.1T0A, ASP 1 Apprentice. At the rate of \$5.00 per hour on federal aid projects at the point when an employee who came out of the TrANS Program is subsequently entered into an apprenticeship contract in an underutilized skilled trade (this will include the Skilled Laborer Apprenticeship when that standard is implemented).

<u>Eligibility and Duration:</u> To the employing contractor, for the length of time the TrANS graduate is in apprentice status.

<u>Contract Goal:</u> To maintain the intent of the Equal Employment Opportunity program, it is a goal that <u>3</u> (number) TrANS Apprentice(s) be utilized on this contract.

- The maximum duration of reimbursement is two years as a TrANS graduate plus time in apprentice status.
- 4) If a TrANS program is not available in the contractor's area and another training program is utilized, payment of On-the-Job Training hours may be approved by the Wisconsin Department of Transportation (WisDOT) if the training program meets the established acceptance criteria. Only On-the-Job Training Hours accumulated after WisDOT approval will be reimbursed as specified under Items ASP.1T0G and ASP.1T0A. For more information, contact the Disadvantaged Business Enterprise Office at the phone numbers listed above.
- 5) WisDOT reserves the right to deny payments under items ASP.1T0G and ASP.1T0A if the contractor either fails to provide training or there is evidence of a lack of good faith in meeting the requirements of this training special provision.

## I. RATIONALE AND SPECIAL NOTE

The \$5.00 per hour now being paid for TrANS placements is intended to cover the duration of two years to allow for reaching entry-level laborer status. An additional incentive, the \$5.00 rate, would promote movement into the underutilized skilled trades' apprenticeships and applies until the individual completes their apprenticeship. These incentives benefit TrANS candidates by giving them a better opportunity to enter a skilled trade; benefits contractors who will be assisted in meeting their EEO profiles and goals; and benefits the public who will see the program reinforce larger public-private employment reform in Wisconsin. The pool of TrANS graduates was created for the purpose of addressing underutilization in the skilled trades, an objective that is further reinforced by a parallel retention pilot program, known as the Companywide Reporting. Whether or not reimbursement is involved, the WisDOT reassures contractors who are in the Companywide Program that TrANS placements still contribute toward fulfilling the new hire goal of 50% women and minorities. Based on data administered by United States Department of Labor (US DOL), the highway skilled trades remain underutilized for women statewide (less than 6.9%); and for minorities in all counties (% varies by county).

<u>NOTE</u>: Unless using other advancement strategies, contractors are encouraged to use some or all of this monetary incentive to offset the cut in hourly wages an individual may incur when entering an apprenticeship if the full general laborer hourly rate has been previously paid. No special accounting measures are required.

## II. IMPLEMENTATION

The implementation of ASP 1 is intended to cover only the amount of time it takes for underutilization to be resolved across the trades. This will be measured annually at the county and/or state levels using data administered by WisDWD in relation to goals set by the USDOL-

OFCCP. With appropriate state and federal approvals, we may also do some measurement at the company level.

It is the contractor's responsibility to note on their Certified Payrolls if their employee is a TrANS graduate or a TrANS apprentice. The District EEO Coordinators utilize the information on the Certified Payrolls to track the hours accumulated by TrANS Graduates and TrANS apprentices on WisDOT contracts. Payment under this ASP 1 is made based on the hours recorded off of the Certified Payrolls. Tracking may eventually include improved linkages with the WisDWD apprentice database, information from company and committee level sources.

TrANS is nondiscriminatory by regulation, and is a tool for optional use by contractors to address the underutilization of women and minorities as laborers and apprentices in our industry's skilled trades.

## IV. TRANS TRAINING

As part of the contractor's equal employment opportunity affirmative action program, training shall be provided to employees enrolled in apprenticeship and on-the-job training programs as follows:

The contractor shall provide on-the-job training aimed at developing full journey workers in the type of trade or job classifications involved. In the event the contractor subcontracts a portion of the contract work, the contractor shall determine how many, if any, of the trainees are to be trained by the subcontractor provided, however, that the contractor shall retain the primary responsibility for meeting the training requirements imposed by this special provision. The contractor shall also insure that this training special provision is made applicable to such subcontract.

Training and upgrading of minorities and women toward journey workers status is a primary objective of this training special provision. Accordingly, the contractor shall make every effort to enroll minority trainees and women (e.g., by conducting systematic and direct recruitment through public and private sources likely to yield minority trainees and women trainees); to the extent such persons are available within a reasonable area of recruitment. The contractor will be given an opportunity and will be responsible for demonstrating the steps that they have taken in pursuance thereof, prior to determination as to whether the contractor is in compliance with this training special provision. This training commitment is not intended, and shall not be used, to discriminate against any applicant for training, whether a member of a minority group or not.

No employee shall be employed as a trainee in any classification in which they have successfully completed a training course leading to journey workers status or in which they have been employed as a journey worker. The contractor should satisfy this requirement by including appropriate questions in the employee application or by other suitable means. Regardless of the method used, the contractor's records should document the findings in each case.

## V. APPRENTICESHIP TRAINING

The Federal Highway Administration's (FHWA) policy is to require full use of all available training and skill improvement opportunities to assure increased participation of minority groups, disadvantaged persons and women in all phases of the highway construction industry. The FHWA On-the-Job Training (OJT) Program requires the State transportation agencies (STAs) to establish apprenticeships and training programs targeted to move women, minorities, and disadvantaged individuals into journey-level positions to ensure that a competent workforce is available to meet highway construction hiring needs, and to address the historical underrepresentation of members of these groups in highway construction skilled crafts.

The OJT Supportive Services (OJT/SS) Program was established in Title 23 Code of Federal Regulations (CFR), Part 230) to supplement the OJT program and support STA training programs by providing services to highway construction contractors and assistance to highway construction apprentices and trainees. The primary objectives of OJT/SS are:

- (1) To increase the overall effectiveness of the State highway agencies' approved training programs.
- (2) To seek other ways to increase the training opportunities for women, minorities, and disadvantaged individuals.

The STAs are responsible for establishing procedures, subject to the availability of Surface Transportation and Bridge Funds under 23 U.S.C. §140(b) (Nondiscrimination), for the provision of supportive services with respect to training programs approved under 23 CFR, Part 230(a) (Equal Employment Opportunity on Federal and Federal-aid Construction Contracts – including Supportive Services).

The contractor and subcontractor shall maintain records to demonstrate compliance with these apprenticeship requirements. Reasonable exemptions and modifications to and from any or all of these requirements will be determined by the Wisconsin Department of Transportation-Civil Rights Office. A request for an exemption or modification, with justification, shall be made in writing, addressed to WisDOT Civil Rights Office, 4802 Sheboygan Avenue, P.O. Box 7965, Rm. 451, Madison, WI 53707.

## **ADDITIONAL SPECIAL PROVISION 3**

## DISADVANTAGED BUSINESS ENTERPRISE [DBE] PROGRAM IMPLEMENTATION

## 1. Description

- a. The federal DBE program requirements outlined in the Code of Federal Regulations at 49 CFR Part 26 apply to this Wisconsin Department of Transportation contract. WisDOT is a recipient of federal funds and this contract includes federal funds. United States Department of Transportation Federal DBE Program requires the following provisions:
  - (1) Pursuant to the federal DBE program regulation at 49 CFR Part 26, a contractor's failure to comply with any provision of the DBE regulations will be considered a material breach of contract. This is non-negotiable. If a contractor fails to carry out the DBE program and Title VI nondiscrimination requirements of its contracts, the following sanctions will be assessed depending upon the facts, reasoning, severity and remedial efforts of the contractor: termination of contract, withholding payment, assessment of monetary sanctions, assessment of liquidated damages and/or suspension/debarment proceedings that may result in the disqualification of the contractor from bidding for a designated period of time.
  - (2) The contractor shall utilize the specific DBEs listed to perform the work and supply the materials for which each is listed unless the contractor obtains the federal fund recipient's [DOT] written consent. Unless [WisDOT] consent is provided, the contractor shall not be entitled to any payment for work or material unless it is performed or supplied by the listed DBE.
- b. The Wisconsin Department of Transportation [WisDOT] is committed to the compliant administration of the DBE Program. Each WisDOT Secretary affirms this commitment with his/her signed assurance. <a href="https://wisconsindot.gov/Documents/doing-bus/civil-rights/dbe/policy-statement.pdf">https://wisconsindot.gov/Documents/doing-bus/civil-rights/dbe/policy-statement.pdf</a>
  - (1) The department encourages the contractor to assist and develop DBE firms to become fully knowledgeable contractors to successfully perform on its contracts. Under the contract, the contractor agrees to provide the assistance to participating DBE's in the following areas:
    - i. Produce accurate and complete quotes.
    - ii. Understand highway plans applicable to their work.
    - iii. Understand specifications and contract requirements applicable to their work.
    - iv. Understand contracting reporting requirements.
  - (2) Wisconsin DOT identifies the assigned DBE goal in its contract advertisements and posts the contract DBE goal on the cover of the bidding proposal. The contractor can meet the assigned, specified contract DBE goal by subcontracting work to a DBE or by procuring services or materials from a DBE. The department calculates the DBE participation as the dollar value of DBE participation included in the bid expressed as a percentage of the total contract bid amount.
  - (3) For more comprehensive information on the disadvantaged business program, visit the department's Civil Rights and Compliance Section website at: <a href="https://wisconsindot.gov/Pages/doing-bus/civil-rights/dbe/default.aspx">https://wisconsindot.gov/Pages/doing-bus/civil-rights/dbe/default.aspx</a>

## 2. Definitions

Interpret these terms, used throughout this additional special provision, as follows:

- a. Bid Percentage: The DBE percentage indicated in the bidding proposal at the time of bid.
- b. **DBE:** A small business certified as disadvantaged business enterprise (DBE) under the federal DBE program and included on the Wisconsin UCP DBE Directory deemed ready, willing and able.
- c. **DBE goal:** The amount of DBE participation expected in the contract as shown on the cover of the Highway Work Proposal.
- d. **Manufacturer:** A firm that operates or maintains a factory or establishment that produces, on the premises, the materials, supplies, articles, or equipment required under the contract.
- e. **Supplier:** A firm that owns, operates, or maintains a store, warehouse, or other establishment in which the materials, supplies, articles or equipment required under the contract are bought, kept in stock, and regularly sold or leased to the public.
- f. **Voluntary Achievement:** The amount of DBE participation achieved and reported in the contract in excess of the assigned goal.

## 3. DBE Percentage Required at Bid Submission

Indicate the bid percentage (i.e. 0% through 100%) of DBE participation on the completed bidding proposal. For electronic submittals, show the percentage in the miscellaneous data folder, Item 3, DBE Percent. For paper submittals, show the percentage on the sheet included after the schedule of items. By submission of the bid, the bidder contractually commits to DBE participation at or above the bid percentage, or certifies that they have utilized comprehensive good faith efforts to solicit and utilize DBE firms to meet the DBE participation requirements of this contract proposal, and that the bid percentage is reflective of these good faith efforts. The bid percentage should demonstrate the efforts of the prime contractor prior to bid. If the bidder does not indicate the bid percentage of DBE participation on the completed bidding proposal, the department will consider the bid irregular and may reject the bid.

## 4. WisDOT Interpretation of Federal DBE Program Provision

Prime contractors must utilize the specific DBEs listed to perform the work and/or supply the materials for which each is listed on the Commitment to Subcontract to DBE Form [DT1506] and approved by WisDOT's DBE office to execute its contract. The approved Commitment to Subcontract to DBE Form [DT1506] becomes a contract document/record.

## a. Department's DBE Evaluation Process

WisDOT evaluates DBE using the Commitment to Subcontract to DBE, payments to subcontractors and contract documentation. The prime contractor shall list the specific DBE certified firms and items of work s/he intends to use toward the fulfillment of the assigned DBE contract goal. The prime contractor receives DBE credit for payments made to the DBE firms performing the work listed on the approved Form DT1506.

## b. Documentation Submittal

The contractor is to identify, by name, the DBE firms whose utilization is intended to satisfy this provision, the items of work of the DBE subcontract or supply agreement and the dollar value of those items of work by completing the Commitment to Subcontract to DBE Form [DT1506]. Effective January 1, 2017, the contractor will be required to submit the documentation within 5 business days after bid opening. All necessary supporting documentation including Attachment 'A' forms and/or Good Faith Efforts Form

[DT1202] must be submitted no later than 2 business days from contractor's initial submission of the DT 1506. The contractor must provide a signed Attachment 'A' form to the DBE office within the time limit in order to receive authorization for contract execution; the DBE office reserves the right accept alternate documentation in lieu of the signed form in extenuating circumstances. Documentation must be submitted to the DBE Office by email at DBE\_Alert@dot.wi.gov (DBE\_Alert@dot.wi.gov) or by postal mail ATTN: DBE Office, PO Box 7965, Madison, WI 53707-7965.

#### (1) Bidder Meets DBE Goal

If the bidder indicates that the contract DBE goal is met, after award and before execution, the department will evaluate the Commitment to Subcontract to DBE Form DT1506 and attachment A(s) to verify the actual DBE percentage calculation. If the DBE commitment is verified, the contract is eligible for execution with respect to the DBE commitment.

#### (2) Bidder Does Not Meet DBE Goal

- i. If the bidder indicates a bid percentage on the Commitment to Subcontract to DBE Form [DT1506] that does not meet the contract DBE goal, the bidder must submit a Good Faith Efforts Form [DT1202] and supporting documentation. After award and before execution, the department will evaluate the bidder's DBE commitment and consider the bidder's good faith efforts submission.
- ii. The department will evaluate the bidder's good faith effort request and notify the bidder of one of the following:
  - (a) If the department grants a good faith efforts, the bid is eligible for contract execution with respect to DBE commitment.
  - (b) If the department rejects the good faith efforts request, the department may declare the bid ineligible for execution. The department will provide a written explanation of why the good faith efforts request was rejected. The bidder may appeal the department's rejection as allowed under 7 a. & b.

#### c. Bidder Fails to Submit Documentation

If the contractor fails to furnish the Commitment to Subcontract to DBE Form [DT1506] within the specified time, the department may cancel the award. Delay in fulfilling this requirement is not a cause for extension of the contract time and shall not be used as a tool to delay execution.

## 5. Department's Criteria for Good Faith Effort

Appendix A of 49 CFR Part 26, is the guiding regulation concerning good faith efforts. However, the federal regulations do not explicitly define "good faith" but states that bidder must actively and aggressively attempt to meet the goal. The federal regulations are general and do not include every factor or effort that can be considered. As a result, each state must establish its own processes and consider the factors established in its own practices to create a process for making a determination of adequate good faith. WisDOT evaluates good faith on a contract basis just as each contract award is evaluated individually.

The department will only approve a contractor's good faith efforts if the bidder has made the effort, given the relevant circumstances under the contract that a bidder actively and aggressively seeking to meet the goal would make. The department will evaluate the bidder's good faith effort to determine whether a good faith efforts will be granted. The bidder must demonstrate, on the DT1202 that they have aggressively solicited DBE participation in an attempt to meet the contract DBE goal and attaining the stated DBE goal is not feasible.

a. The department, in conjunction with industry stakeholders, has developed the following guidance for contractor good faith effort. The guidance and the attached appendices provide a framework for the actions required by all parties in the processing and evaluation of bidder's total efforts to achieve the project specific DBE goal prior to the bid letting date.

- b. Prime Contractors should:
  - (1) <u>Document</u> all efforts and decisions made toward achieving the DBE goal on the contract. The bidder should use the Civil Rights & Compliance System [CRCS] and related WisDOT- approved DBE outreach tools, including the Bid Express Small Business Network, to foster DBE participation on all applicable contracts.
  - (2) Prime contractors <u>may</u> request assistance with DBE outreach and follow-up by contacting the department's DBE Support Services Office by phone or email request at least 14 days prior to the bid letting date. Requesting assistance with outreach <u>is not</u> a decisive factor in the review Good faith effort evaluation. Phone numbers are 414-438-4584 and/or 414-659-0487; Fax: 414-438-5392; E-mail: DOTDBESupportServices@dot.wi.gov.
  - (3) Request quotes by identifying potential items to subcontract and solicit. Prime contractors are strongly encouraged to include in their initial contacts a single page including a detailed list of items for which they are accepting quotes, by project, within a letting. See attached sample entitled "Sample Contractor Solicitation Letter" in Appendix A. Prime contractors should also indicate a willingness to accept quotes in areas they are planning to perform themselves, as required by federal rules. In some cases, it might be appropriate to use DBE's to do work in a prime contractor's area of specialization.
    - i. Solicit quotes from certified DBE firms who match 'possible items to subcontract' using all reasonable and available means. Additionally, forward copies of solicitations highlighting the work areas for which you are seeking quotes to <a href="mailto:DOTDBESupportServices@dot.wi.gov">DOTDBESupportServices@dot.wi.gov</a>.
    - ii. SBN is the preferred outreach tool. <a href="https://www.bidx.com/wi/main">https://www.bidx.com/wi/main</a>. Other acceptable means include postal mail, email, fax, phone call.
      - (a) Primes must ask DBE firms for a response in their solicitations. See *Sample Contractors Solicitation Letter* in Appendix. This letter can be included as an attachment to the SBN sub-quote request.
      - (b) Solicit quotes at least 10 calendar days prior to the letting date, at least two Fridays before the letting, to allow DBE firms sufficient time to respond. Prime contractors should contact DBE firms early, asking if they need help organizing their quote, assistance confirming equipment needs, or other assistance supporting their submission of a competitive quote for their services.
      - (c) Second solicitation should take place within 5 calendar days. Email and SBN are the preferred delivery of the follow-up solicitation.
    - iii. Upon request, provide interested DBE firms with adequate information about plans, specifications and the requirements of the contract by letter, information session, email, phone call and/or referral.
    - iv. When potential exists, the contractor should advise interested DBE firms on how to obtain bonding, line of credit or insurance if requested.
    - v. Document DBE firm's interest in quoting by taking appropriate steps to follow up initial solicitation with:
      - (a) Email to all prospective DBE firms in relevant work areas.
      - (b) Phone call log to DBE firms who express interest via written response or call.
      - (c) Fax/letter confirmation
      - (d) Signed copy of Bid Express SBN Record of Subcontractor Outreach Effort.
- c. <u>Evaluate DBE quotes</u> Documentation is critical if a prime does not utilize the DBE firm's quote for any reason.
  - Evaluate DBE firm's capability to perform 'possible items to subcontract' using legitimate reasons, including but not limited to, *a discussion with the DBE firm* regarding its capabilities prior to the bid letting. If lack of capacity is your reason for not utilizing the DBE quote, you are required to contact the DBE by phone and email regarding their ability to perform the work indicated in the UCP directory listed as their work area by NAICS code. Only the work area and/or NAICS code listed in the UCP directory can be counted toward DBE credit. Documentation of the conversation is required.
  - (2) In striving to meet an assigned DBE contract goal, prime contractors are expected to use DBE quotes that are responsive and reasonable. This includes DBE quotes that are not the low quote.

- (3) Special Circumstance Evaluation of DBE quotes with tied bid items. "Tied quotes are the condition in which a subcontractor submits quotes including multiple areas of expertise across multiple work areas noting that the items and price are tied. Typically this type of quoting represents a cost saving to the prime but is not clearly stated as a discount; tied quotes are usually presented as 'all or none' quote to the prime." When non-DBE subcontractors submit tied bid items in their quotes to the prime, the DBE firms' quote may seem not competitive. In such a case, the following steps are taken in comparing the relevant quotes. These are qualitative examples.
  - i. Compare bid items common to both quotes, noting the reasonableness in the price comparison.
  - ii. Review quotes from other firms for the bid items not quoted by the DBE firm to see if combining both can provide the same competitive advantage that the tied bid items offered.
- d. Immediately after notification of contract award, the prime submits all 'Commitment to Subcontract' forms to the DBE Office. Prime contractor has 5 days to submit the completed form for the DBE firms it intends to use on the contract for DBE credit. If the goal is not met in full, the prime contractor must provide the following information along with WisDOT form DT1202: Certificate of Good Faith Efforts.
  - (1) The names, addresses, e-mail addresses, telephone numbers of DBE's contacted. The dates of both initial and follow-up contact.
  - (2) A description of information provided to the DBE's regarding the plans, specifications, and estimated quantities for portions of the work to be performed by that DBE.
  - (3) Photocopies or electronic copies of all written solicitations to DBE's. A printed copy of SBN solicitation is acceptable.
  - (4) Documentation of each quote received from a DBE and, if rejected, the reason for that rejection.
  - (5) Bidder attendance at any pre-solicitation or pre-bid meetings the department held to inform DBE's of participation opportunities available on the project.

The prime contractor must obtain written consent from the DBE Office to change or replace any DBE firm listed on the approved Commitment to Subcontract to DBE Form [DT1506]. If the prime contractor utilizes another contractor, including the use of its own workforce, to perform the work assigned to a DBE on the approved DT1506, the prime contractor will not be entitled to payment for that work. Any changes to DBE after the approval of the DT1506 must be reviewed and approved by the DBE office prior to the change.

## 6. Use of Joint Checks

The use of joint checks is allowable if it is a commonly recognized business practice in the material industry. A joint check is defined as a two-party check between a DBE, a prime contractor and the regular dealer of materials supplier who is neither the prime nor an affiliate of the prime. Typically, the prime contractor issues one check as payor to the DBE subcontractor and to the supplier jointly (to guarantee payment to the supplier) as payment for the material/supplies used by the DBE in cases where the prime has submitted the DBE and material for DBE credit. The DBE subcontractor gains the opportunity to establish a direct contracting relationship with the supplier to potentially facilitate a business rapport that results in a line of credit or increased partnering opportunities.

The cost of material and supplies purchased by the DBE is part of the value of work performed by the DBE to be counted toward the goal. To receive credit, the DBE must be responsible for negotiating price, determining quality and quantity, ordering the materials, and installing (where applicable) and "paying for the material itself." See 49 CFR 26.55(c)(1).

The approval to use joint checks constitutes a commitment to provide further information to WisDOT, upon request by staff. WisDOT will allow the use of joint checks when the following conditions are met:

- a. The Prime must request permission to use joint checks from the DBE Office by submitting the Application to Use Joint Checks.
  - (1) Request should be made when the DBE Commitment form or Request to Sublet is submitted; the request will not be considered if submitted after the DBE Subcontractor starts its work.
  - (2) Approval/Permission must be granted prior to the issuance of any joint checks.
  - (3) The payment schedule for the supplier must be presented to the DBE office before the first check is issued.
  - (4) The joint check for supplies must be strictly for the cost of supplies.
- b. DBE subcontractor is responsible to furnish and/or install the material/work item. The DBE subcontractor shall not be an 'extra participant' in the transaction; the DBE's role in the transaction cannot be limited solely to signing the check(s) to release payment to the material supplier. At a minimum, the DBE subcontractor's tasks should include the following.
  - (1) The DBE subcontractor (not the prime/payor) negotiates the quantities, price and delivery of materials;
  - (2) The DBE subcontractor consents to sign/release the check to the supplier by signing the Application to Use Joint Checks after establishing the conditions and documentation of payment within the subcontract terms or in a separate written document.
- c. The Prime contractor/payor acts solely as a guarantor,
  - (1) The prime agrees to furnish the check used for the payment of materials/supplies under the contract.
  - (2) The prime contractor/payor cannot require the subcontractor to use a specific supplier or the prime contractors negotiated unit price.

## 7. Bidder's Appeal Process

- a. A bidder can appeal the department's decision to deny the bidder's good faith effort submission. The bidder must provide written documentation refuting the specific reasons for rejection as stated in the department's rejection notice. The bidder may meet in person with the department if so requested. Failure to appeal within 7 calendar days after receiving the department's written denial notice of a good faith effort evaluation constitutes a forfeiture of the bidder's right of appeal. A contract cannot be executed without documentation that the DBE provisions have been fulfilled.
- b. The department will appoint a representative, who did not participate in the original determination, to assess the bidder's appeal. The department will issue a written decision within 5 calendar days after the bidder presents all written and oral testimony. In that written decision, the department will explain the basis for finding that the bidder did or did not meet the contract DBE goal or make an adequate good faith effort to meet the contract DBE goal. The department's decision is final. If the department finds that the bidder did not meet the contract DBE goal or did not make adequate efforts to meet the DBE goal, the department may declare the bid ineligible for execution.

## 8. Department's Criteria for DBE Participation

## **Directory of DBE firms**

a. The only resource for DBE certified firms certified in the state of Wisconsin is the Wisconsin Unified Certification Program [UCP] DBE List. Wisconsin Department of Transportation maintains a current list of certified DBE firms titled Wisconsin UCP DBE Directory on the website at:

https://wisconsindot.gov/Documents/doing-bus/civil-rights/dbe/dbe-ucp-directory.xlsx

b. The DBE office is also available to assist at 414-438-4583 or 608-267-3849.

## 9. Counting DBE Participation

## **Assessing DBE Work**

- a. The department will only count the DBE usage towards the contract DBE goal if the DBE firm is certified as a DBE by one of the unified certification program agencies. If a firm becomes DBE certified before entering into a subcontract, the department may consider that DBE usage towards the contract goal. The department only counts the value of the work a DBE actually performs towards the DBE goal. The department assesses the DBE work as follows:
- b. The department counts work performed by the DBE's own resources. The department includes the cost of materials and supplies the DBE obtains for the work. The department also includes the cost of equipment the DBE leases for the work. The department will not include the cost of materials, supplies, or equipment the DBE purchases or leases from the prime contractor or its affiliate, except the department will count non-project specific leases the DBE has in place before the work is advertised.
- c. The department counts fees and commissions the DBE charges for providing a bona fide professional, technical, consultant, or managerial services. The department also counts fees and commissions the DBE charges for providing bonds or insurance. The department will only count costs the engineer deems reasonable based on experience or prevailing market rates.
- d. If a DBE subcontracts work, the department counts the value of the subcontracted work only if the DBE's subcontractor is also a DBE.
- e. The contractor shall maintain records and may be required to furnish periodic reports documenting its performance under this item.
- f. It is the prime contractor's responsibility to determine whether the work that is committed and/or contracted to a DBE certified firm can be counted for DBE credit by referencing the work type and NAICS code listed for the DBE firm on the Wisconsin UCP DBE Directory.
- g. It is the prime contractor's responsibility to assess the DBE firm's ability to perform the work for which s/he is committing/contracting the DBE to do. Note that the department encourages the prime contractor to assist and develop DBE firms to become fully knowledgeable contractors to successfully perform on its contracts.

## 10. Commercially Useful Function

- a. Commercially useful function is evaluated after the contract has been executed, while the DBE certified firm is performing its work items. A DBE performs a commercially useful function when it is responsible for execution of the work of the contract and is carrying out its responsibilities by actually performing, managing, and supervising the work involved.
- b. The department uses Form DT1011: DBE Commercially Useful Function Review and Certification to evaluate whether the DBE is performing a commercially useful function. WisDOT counts expenditures of a DBE toward the DBE goal only if the DBE is performing a commercially useful function on that contract.
- c. A DBE is performing a commercially useful function if the following conditions are met:
  - (1) For contract work, the DBE is responsible for executing a distinct portion of the contract work and it is carrying out its responsibilities by actually performing, managing, and supervising that work.
  - (2) For materials and supplies, the DBE is responsible for negotiating price, determining quality and quantity, ordering, and paying for those materials and supplies.

## 11. Credit Evaluation for Trucking

All bidders are expected to adhere to the department's current trucking policy posted on the HCCI website at <a href="https://wisconsindot.gov/Documents/doing-bus/civil-rights/dbe/trucking-utilization-policy.pdf">https://wisconsindot.gov/Documents/doing-bus/civil-rights/dbe/trucking-utilization-policy.pdf</a>

## 12. Credit Evaluation for Manufacturers, Suppliers, Brokers

The department will calculate the amount of DBE credit awarded to a prime using a DBE firm for the provisions of materials and supplies on a contract-by-contract basis. The department will count the material and supplies that a DBE provides under the contract for DBE credit based on whether the DBE is a manufacturer, supplier or broker. Generally, DBE crediting measures and evaluates the DBE owner's role, responsibility and contribution to the transaction: maximum DBE credit when the DBE manufactures materials or supplies; DBE credit decreases when the DBE solely supplies material and minimal credit is allotted when the DBE's role is administrative or transactional.

It is the bidder's responsibility to find out if the DBE is considered a supplier or a manufacturer before listing them on Commitment to Subcontract to DBE form DT1506.

#### a. Manufacturers

- (1) A manufacturer is a firm that operates or maintains a factory or establishment that produces, on the premises, the materials, supplies, articles, or equipment required under the contract and of the general character described by the specifications.
- (2) If the materials or supplies are obtained from a DBE manufacturer, count **100**% percent of the cost of the materials or supplies toward DBE goals.
- b. Regular Dealers of Material and/or Supplies
  - (1) A regular dealer is a firm that owns, operates, or maintains a store, warehouse, or other establishment in which the materials, supplies, articles or equipment of the general character described by the specifications and required under the contract are bought, kept in stock, and regularly sold or leased to the public in the usual course of business.
  - (2) If the materials or supplies are purchased from a DBE regular dealer, count **60%** percent of the cost of the materials or supplies toward DBE goals.
  - (3) At a minimum, a regular dealer must meet the following criteria to be counted for DBE credit:
    - i. The DBE firm must be an established, regular business that engages, as its principal business and under its own name, in the purchase and sale or lease of the products in question.
    - ii. The DBE firm must both own and operate distribution equipment for the product--bulk items such as petroleum products, steel, cement, gravel, stone, or asphalt. If some of the distribution equipment is leased, the lease agreement must accompany the DBE Commitment form for evaluation of the dealer's control before the DBE office approves the DBE credit.
- c. Brokers, Transaction Expediters, Packagers, Manufacturers Representatives
  - (1) No portion of the cost of the materials, supplies, services themselves will count for DBE credit; however, WisDOT will evaluate the fees or commissions charged when a prime purchases materials, supplies or services from a DBE certified firm which is neither a manufacturer nor a regular dealer, namely: brokers, packagers, manufacturers' representatives or other persons who arrange or expedite transactions.
  - (2) Brokerage fees have historically been calculated as 10% of the purchase amount.
  - (3) WisDOT may count the amount of fees or commissions charged for assistance in the procurement of the materials and supplies, or fees or transportation charges for the delivery of materials or supplies required on a job site.
  - (4) The evaluation will review the contract need for the item/service, review the sub-contract or invoice for the item/service, compare the fees customarily allowed for similar services to determine whether they are reasonable.

When DBE suppliers are contracted, additional documentation must accompany the DT1506 and Attachment 'A' forms. An invoice or bill-of-sale that includes the company names of the bidder and the DBE supplier and documentation of the calculations used as the basis for the purchase agreement, subcontract or invoice. WisDOT recognizes that the amount on the Attachment 'A' form may be more or less than the amount on the invoice. Please respond to the following questions and submit with your DBE Commitment Form.

- 1. What is the product or material?
- 2. Is this item in the prime's inventory or was the item purchased when contract was awarded?
- 3. Which contract line items were referenced to develop this quote?
- 4. What is the amount of material or product used on the project?

## 13. Credit Evaluation for DBE Primes

Wisconsin DOT calculates DBE credit based on the amount and type of work performed by DBE certified firms. If the prime contractor is a DBE certified firm, the department will only count the work that DBE prime contractor performs with its own forces for DBE credit. We will also calculate DBE credit for the work performed by any other DBE certified subcontractor, DBE certified supplier, DBE certified manufacturer on that contract in that DBE's approved work areas/NAICS code. Crediting for manufacturers and suppliers is calculated consistent with paragraph 12 of this document and 49 CFR Part 26.

#### 14. Joint Venture

If a DBE performs as a participant in a joint venture, the department will only count that portion of the total dollar value of the contract equal to that portion of the work that the DBE performs with its own forces for DBE credit.

## 15. Mentor Protégé

- a. If a DBE performs as a participant in a mentor protégé agreement, the department will count for credit the portion of the work performed by the DBE protégé firm.
- b. DBE credit will be evaluated and confirmed by the DBE Office for any contracts on which the mentor protégé team identifies itself to the DBE Office as a current participant of the Mentor Protégé Program.
- c. Refer to WisDOT's Mentor Protégé guidelines for guidance on the number of contracts and amount of DBE credit that can be counted on any WisDOT project.

## 16. DBE Replacement or Termination

#### **Contractual Requirement**

The contractor shall utilize the specific DBEs listed to perform the work and supply the materials for which each is listed unless the contractor obtains written consent from the Department's DBE Office. If the Department does not provide consent to replace or terminate a DBE firm, the prime contractor shall not be entitled to any payment for work or material unless it is performed or supplied by the listed DBE.

## **Contractor Considerations**

a. A prime contractor cannot terminate and/or replace a DBE subcontractor listed on the approved Commitment to Subcontract to DBE Form [DT1506] without prior written consent from the DBE Office. This includes, but is not limited to, instances in which a prime contractor seeks to perform work originally designated for a DBE subcontractor with its own forces or those of an affiliate, a non-DBE firm, or with another DBE firm.

- b. If a prime contractor feels it is necessary to replace or terminate a DBE firm that has been approved for DBE credit toward its contract, s/he will be required to provide reasons and documentation to support why the prime cannot fulfill the contractual commitment that it made to the Department regarding the DBE utilization.
- c. Prime contractor is required to make affirmative efforts to find another DBE subcontractor to perform at least the same amount of work under the contract as the DBE that was terminated, to the extent needed to meet the assigned DBE contract goal.
- d. In circumstances when a DBE subcontractor fails to complete its work on the contract for any reason or is terminated from a contract, the prime contractor is expected to make affirmative efforts to maintain its commitment to the assigned DBE goal.
- e. The DBE firm should communicate with the prime contractor regarding its schedule and capacity in the context of the contract. If the DBE anticipates that it cannot fulfill its subcontract, s/he shall advise the prime contractor and suggest a DBE that may replace their services or provide written consent to be released from its subcontract.
  - (1) Before the prime contractor can request to terminate or substitute a DBE firm; s/he must:
    - i. Make every effort to fulfill the DBE commitment by working with the listed DBE to ensure that they are fully knowledgeable of your expectations for successful performance on the contract. Document these efforts in writing.
    - ii. If those efforts fail, provide written notice to the DBE subcontractor of your *intent to* request to terminate and/or replace the firm including the reason(s) you want to pursue this action.
    - iii. Copy the DBE Office on all correspondence related to changing a DBE firm who has been approved for DBE credit on a contract including the preparation and coordination efforts with the DBE on the contract.
    - iv. Clearly state the amount of time the DBE firm has to remedy and/or respond to your notice of intent to replace/terminate their firm from the contract. The DBE shall be allowed five days to respond, in writing. Exception: The prime contractor must provide a verifiable reason for a response period shorter than five days. For example a WisDOT project manager must verify that waiting 5 days for a DBE performing traffic control work to respond would affect the public safety.
    - v. The DBE subcontractor must forward a written response to the prime contractor and copy the DBE Office. The written response must outline why it objects to the proposed termination of its subcontract and list the reasons that WisDOT should not approve the request for their firm to be replaced or removed from the contract.

## The Request to Replace or Terminate a DBE

The prime contractor must provide a written request to replace or terminate a DBE firm that has been approved for DBE credit on a WisDOT contract. The written request can be an email or printed document delivered by email or fax; at minimum, the request must contain the following:

- 1. Contract ID number.
- 2. Wisconsin DOT Contract Project Manager name and contact information.
- 3. DBE name and work type and/or NAICS code.
- 4. Contract's progress schedule.
- 5. Reason(s) for requesting that the DBE be replaced or terminated.
- 6. Attach/include all communication with the DBE to deploy/address/resolve work completion,

WisDOT will review your request and any supporting documentation that you submit to evaluate whether the circumstance and the reasons constitute a good cause for replacing or terminating the DBE that was approved for DBE credit on that contract.

Examples of Good Causes to Replace a DBE according to the federal DBE program guidelines [49 CFR part 26.53]

- The listed DBE subcontractor fails or refuses to execute a written contract.
- The listed DBE subcontractor fails or refuses to perform the work of its subcontract in a way consistent
  with normal industry standards. Provided, however, that good cause does not exist if the failure or
  refusal of the DBE subcontractor to perform its work on the subcontract results from the bad faith or
  discriminatory action of the prime contractor.
- The listed DBE subcontractor fails or refuses to meet the prime contractor's reasonable, nondiscriminatory bond requirements.
- The listed DBE subcontractor becomes bankrupt, insolvent, or exhibits credit unworthiness.
- The listed DBE subcontractor is ineligible to work on public works projects because of suspension and debarment proceedings pursuant 2 CFR Parts 180, 215 and 1,200 or applicable state law.
- · You have determined that the listed DBE subcontractor is not a responsible contractor.
- The listed DBE subcontractor voluntarily withdraws from the project and provides to you written notice of its withdrawal.
- The listed DBE is ineligible to receive DBE credit for the type of work required.
- A DBE owner dies or becomes disabled with the result that the listed DBE contractor is unable to complete its work on the contract.

## **Evaluation and Response to the Request**

If WisDOT determines that your reasons comply with the good cause standards; the DBE office will send the prime contractor and the WisDOT project manager an email stating that we concur with the reasons and approve the replacement or termination.

If WisDOT determines that your reasons do not comply with the good cause standards of the federal DBE program, the DBE Office will send the prime contractor an email that includes *the requirement* to utilize the committed DBE, *remedial actions* to support the completion of the contractual commitment, a list of available WisDOT support services *and administrative remedies that may be invoked* for failure to comply with federal DBE guidelines for DBE replacement.

The Wisconsin Department of transportation contact for all actions related to replacing a DBE is the DBE Program Chief and/or the DBE Program Engineer which can be reached at <a href="mailto:DBE\_Alert@dot.wi.gov">DBE\_Alert@dot.wi.gov</a> or by calling 608-267-3849.

## 17. DBE Utilization beyond the approved DBE Commitment Form DT1506

If the Prime/subcontractor increases the scope of work for a participating DBE or adds a DBE subcontractor that was not on the approved Form DT1506 at any time after contract award, s/he should follow these steps so that the participation can be accurately credited toward the DBE goal.

- a. Send an email to the DBE Engineer at <u>DBE\_Alert@dot.wi.gov</u> describing the work to be performed by the new DBE including the proposed schedule or duration, DBE name and contact information. You may also call the DBE Engineer at 414-659-0487 to notify him of the change verbally.
  If the scope change added work for a participating DBE; list the date and reason for the scope change.
- b. Forward a complete, signed Attachment 'A' form to the DBE Office at <a href="mailto:DBE\_Alert@dot.wi.gov">DBE\_Alert@dot.wi.gov</a>. A complete Attachment A includes DBE contact information, signature, subcontract value and proper description of the work areas to be performed by the DBE.
  - The DBE office will confirm the DBE participation and revise the DT1506 based on the email/discussion and attach the new/revised Attachment A to the Contract record/documentation.

## 18. Contract Modifications

When additional opportunity is available by contract modifications, the Prime Contractor shall utilize DBE Subcontractors that were committed to equal work items, in the original contract.

## 19. Payment

Costs for conforming to this Additional Special Provision (ASP) and any associated DBE requirements are incidental to the contract.

# APPENDIX A Sample Contractor Solicitation Letter Page 1 This sample is provided as a guide not a requirement

#### **GFW SAMPLE MEMORANDUM**

TO: DBE FIRMS

FROM: POTENTIAL PRIME CONTRACTOR OR MAJOR SUBCONTRACTOR

SUBJECT: REQUEST FOR DBE QUOTES

DATE: MONTH DAY YEAR
CC: DBE OFFICE ENGINEER

Our company is considering bidding on the projects indicated on the next page, as a prime and/or a subcontractor for the Wisconsin Department of Transportation Month-date -year Letting. Page 2 lists the projects and work items that we may subcontract for this letting. We are interested in obtaining subcontractor quotes for these projects and work categories. Also note that we are willing to accept quotes in areas we may be planning to perform ourselves as required by federal rules.

Please review page 2, respond whether you plan to quote, highlight the projects and work items you are interested in performing and return it via fax or email within 3 days. Plans, specifications and addenda are available through WisDOT at the DBE Support Services office or at the Highway Construction Contract Information (HCCI) site at https://wisconsindot.gov/Pages/doing-bus/contractors/hcci/default.aspx

Your quote should include all of the costs required to complete the items you propose to perform including labor, equipment, material, and related bonding or insurance. The quote should note items that you are DBE certified to perform, tied items, and any special terms. Page 2, with the indicated projects and items you plan to quote, should be used as a cover sheet for your quote.

Please make every effort to have your quotes into our office by time deadline the prior to the letting date. <u>Make sure the correct letting date</u>, <u>project ID and proposal number</u>, <u>unit price and extension are included in your quote</u>. We prefer quotes be sent via SBN but <u>prime's alternatives</u> are acceptable. Our office hours are <u>include hours and days</u>. Please call our office as soon as possible prior to the letting if you need information/clarification to prepare your quote at contact number.

If you wish to discuss or evaluate your quote in more detail, contact us after the contract is awarded. Status of the contract can be checked at WisDOT's HCCI site at <a href="https://wisconsindot.gov/Pages/doing-bus/contractors/hcci/default.aspx">https://wisconsindot.gov/Pages/doing-bus/contractors/hcci/default.aspx</a> All questions should be directed to:

Project Manager, John Doe,

Phone: (000) 123-4567

Email: Joe@joetheplumber.com

Fax: (000) 123- 4657

# Sample Contractor Solicitation Letter Page 2 This sample is provided as a guide not a requirement

REQUEST FOR QUOTATION

etting Date:							
roject ID:							
ease check all that apply	_						
Yes, we will be quoting on No, we are not interested in Please take our name off you We have questions about questions	n quoting on to our monthly D	he letting OBE conta	or its items ct list			his number	
Prime Contractor 's Contact P	erson	<b>¬</b>		DBE Co	ntractor Co	ontact Perso	n
3			DI				
Phone:		_	Phone				
Tax:		_	Fax				
Email:		_	Email				
		_					
	circle the jo						T 7
Proposal No.	1	2	3	4	5	6	7
ORK DESCRIPTION:	X		X	X		X	X
ORK DESCRIPTION: Clear and Grub	X X		X X	X X		X X	X
ORK DESCRIPTION: Clear and Grub Dump Truck Hauling							
ORK DESCRIPTION: Clear and Grub Dump Truck Hauling Curb & Gutter/Sidewalk, Etc.	X		X	X		X	X
ORK DESCRIPTION: Clear and Grub Dump Truck Hauling Curb & Gutter/Sidewalk, Etc. Erosion Control Items	X		X X	X X		X X	X
Clear and Grub Dump Truck Hauling Curb & Gutter/Sidewalk, Etc. Erosion Control Items Signs and Posts/Markers	X X X	X	X X X	X X X		X X X	X X X
County  /ORK DESCRIPTION:  Clear and Grub  Dump Truck Hauling  Curb & Gutter/Sidewalk, Etc.  Erosion Control Items  Signs and Posts/Markers  Traffic Control  Electrical Work/Traffic Signals	X X X	X	X X X X	X X X X		X X X X	X X X X
Clear and Grub Dump Truck Hauling Curb & Gutter/Sidewalk, Etc. Erosion Control Items Signs and Posts/Markers Traffic Control	X X X	X X	X X X X X X	X X X X X X	X	X X X X X X	X X X X X
Clear and Grub Dump Truck Hauling Curb & Gutter/Sidewalk, Etc. Erosion Control Items Signs and Posts/Markers Traffic Control Electrical Work/Traffic Signals Pavement Marking	X X X	X X X	X X X X X	X X X X X X X	X	X X X X X X X	X X X X X X
Clear and Grub Dump Truck Hauling Curb & Gutter/Sidewalk, Etc. Erosion Control Items Signs and Posts/Markers Traffic Control Electrical Work/Traffic Signals Pavement Marking Sawing Pavement QMP, Base	X X X X	X X	X X X X X X	X X X X X X X X		X X X X X X	X X X X X
Clear and Grub Dump Truck Hauling Curb & Gutter/Sidewalk, Etc. Erosion Control Items Signs and Posts/Markers Traffic Control Electrical Work/Traffic Signals Pavement Marking Sawing Pavement QMP, Base Pipe Underdrain	X X X X	X X X	X X X X X X	X X X X X X X X X	X X	X X X X X X X X	X X X X X X X
Clear and Grub Dump Truck Hauling Curb & Gutter/Sidewalk, Etc. Erosion Control Items Signs and Posts/Markers Traffic Control Electrical Work/Traffic Signals Pavement Marking Sawing Pavement QMP, Base Pipe Underdrain Beam Guard	X X X X	X X X	X X X X X X	X X X X X X X X	X	X X X X X X X	X X X X X X X
Clear and Grub Dump Truck Hauling Curb & Gutter/Sidewalk, Etc. Erosion Control Items Signs and Posts/Markers Traffic Control Electrical Work/Traffic Signals Pavement Marking Sawing Pavement QMP, Base Pipe Underdrain	X X X X	X X X	X X X X X X	X X X X X X X X X	X X	X X X X X X X X	X X X X X X X

# APPENDIX B BEST PRACTICES FOR PRIME CONTRACTOR & DBE SUBCONTRACTOR GOOD FAITH EFFORT

## This list is not a set of requirements; it is a list of potential strategies

#### **Primes**

- Ø Prime contractor open houses inviting DBE firms to see the bid "war room" or providing technical assistance.
- Ø Participate in speed networking and mosaic exercises as arranged by DBE office.
- Ø Host information sessions not directly associated with a bid letting.
- Ø Participate in a formal mentor protégé or joint venture with a DBE firm.
- Ø Participate in WisDOT advisory committees i.e. TRANSAC, or Mega Project committee meetings.
- Ø Facilitate a small group DBE 'training session' Clarifying how your firm prepares for bid letting, evaluates subcontractors, preferred qualifications and communication methods.
- Ø Encourage subcontractors to solicit and highlight DBE participation in their quotes to you.
- Ø Quality of communication, not quantity creates the best results. Contractors should do as thorough a job as possible in communicating with DBE firms before the bid and provide any assistance requested to assure best possible bid.

## **DBE**

- Ø DBE firms should contact primes as soon as possible with questions regarding their quotes or bid; seven days prior is optimal.
- Ø Continually check for contract addendums on the HCCI website through the Thursday prior to letting to stay abreast of changes.
- Ø Review the status of contracts on the HCCI website reviewing the 'apparent low bidder' list, and bid tabs at a minimum.
- Ø Prepare a portfolio or list of related projects and prime and supplier references; be sure to note transportation-related projects of similar size and scope, firm expertise and staffing.
- Ø Participate in DBE office assessment programs.
- Ø Participate on advisory and mega-project committees.
- Ø Sign up to receive the DBE Contracting Update.
- Ø Consider membership in relevant industry or contractor organizations.
- Ø Active participation is a must. Quote as many projects as you can reasonably work on; quoting the primes and bidding as a prime with the department are the only ways to get work.

## **APPENDIX C**

## Types of Efforts considered in determining GFE

This list represents concepts being assessed; analysis requires additional steps

- 1. Whether the contractor attended any pre-solicitation or pre-bid meetings that were scheduled by WisDOT to inform DBEs of contracting and subcontracting opportunities.
- 2. Whether the contractor provided written notice to a reasonable number of specific DBEs that their interest in the contract was being solicited, in sufficient time to allow the DBEs to participate effectively.
- 3. Whether the contractor followed up initial solicitations of interest by contacting DBEs to determine if the DBEs were interested; returned the phone calls of interested DBE firms.
- 4. Whether the contractor selected portions of the work to be performed by DBEs in order to increase the likelihood of meeting the DBE goal.
- 5. Whether the contractor provided interested DBEs with adequate information about the plans, specifications and requirements of the contract.
- 6. Whether the contractor negotiated in good faith with interested DBEs, not rejected DBEs as unqualified without sound reasons based on a thorough investigation of their capabilities.
- 7. Whether the contractor made efforts to assist interested DBEs in being more competitive.
- 8. Whether the contractor effectively used the services of available minority community organizations: minority contractors groups, local, state, and Federal minority business assistance offices, and other organizations that provide assistance to small businesses and DBE firms.
- 9. Whether Prime used CRCS to identify DBE who specialize in relevant work areas.
- 10. Whether the contractor used available resources including contacting the DBE office, using WisDOT's website
- 11. Whether the contractor returned calls of firms expressing interest in a timely manner.

## APPENDIX D

## Good Faith Effort Evaluation Guidance Excerpt from Appendix A of 49 CFR Part 26

## APPENDIX A TO PART 26 -- GUIDANCE CONCERNING GOOD FAITH EFFORTS

- I. When, as a recipient, you establish a contract goal on a DOT assisted contract, a bidder must, in order to be responsible and/or responsive, make good faith efforts to meet the goal. The bidder can meet this requirement in either of two ways. First, the bidder can meet the goal, documenting commitments for participation by DBE firms sufficient for this purpose. Second, even if it doesn't meet the goal, the bidder can document adequate good faith efforts. This means that the bidder must show that it took all necessary and reasonable steps to achieve a DBE goal or other requirement of this part which, by their scope, intensity, and appropriateness to the objective, could reasonably be expected to obtain sufficient DBE participation, even if they were not fully successful.
- II. In any situation in which you have established a contract goal, part 26 requires you to use the good faith efforts mechanism of this part. As a recipient, it is up to you to make a fair and reasonable judgment whether a bidder that did not meet the goal made adequate good faith efforts. It is important for you to consider the quality, quantity, and intensity of the different kinds of efforts that the bidder has made. The efforts employed by the bidder should be those that one could reasonably expect a bidder to take if the bidder were actively and aggressively trying to obtain DBE participation sufficient to meet the DBE contract goal. Mere pro forma efforts are not good faith efforts to meet the DBE contract requirements. We emphasize, however, that your determination concerning the sufficiency of the firm's good faith efforts is a judgment call: meeting quantitative formulas is not required.
- III. The Department also strongly cautions you against requiring that a bidder meet a contract goal (i.e., obtain a specified amount of DBE participation) in order to be awarded a contract, even though the bidder makes an adequate good faith efforts showing. This rule specifically prohibits you from ignoring bona fide good faith efforts.
- IV. The following is a list of types of actions which you should consider as part of the bidder's good faith efforts to obtain DBE participation. It is not intended to be a mandatory checklist, nor is it intended to be exclusive or exhaustive. Other factors or types of efforts may be relevant in appropriate cases.
  - A. Soliciting through all reasonable and available means (e.g. attendance at pre-bid meetings, advertising and/or written notices) the interest of all certified DBEs who have the capability to perform the work of the contract. The bidder must solicit this interest within sufficient time to allow the DBEs to respond to the solicitation. The bidder must determine with certainty if the DBEs are interested by taking appropriate steps to follow up initial solicitations.
  - B. Selecting portions of the work to be performed by DBEs in order to increase the likelihood that the DBE goals will be achieved. This includes, where appropriate, breaking out contract work items into economically feasible units to facilitate DBE participation, even when the prime contractor might otherwise prefer to perform these work items with its own forces.
  - C. Providing interested DBEs with adequate information about the plans, specifications, and requirements of the contract in a timely manner to assist them in responding to a solicitation.
  - D. (1) Negotiating in good faith with interested DBEs. It is the bidder's responsibility to make a portion of the work available to DBE subcontractors and suppliers and to select those portions of the work or material needs consistent with the available DBE subcontractors and suppliers, so as to facilitate DBE participation. Evidence of such negotiation includes the names, addresses, and telephone numbers of DBEs that were considered; a description of the information provided regarding the plans and specifications for the work selected for subcontracting; and evidence as to why additional agreements could not be reached for DBEs to perform the work.
    - (2) A bidder using good business judgment would consider a number of factors in negotiating with subcontractors, including DBE subcontractors, and would take a firm's price and capabilities as well as contract goals into consideration. However, the fact that there may be some additional costs involved in finding and using DBEs is not in itself sufficient reason for a bidder's failure to meet the contract DBE goal, as long as such costs are reasonable. Also, the ability or desire of a prime contractor to perform the work of a

- contract with its own organization does not relieve the bidder of the responsibility to make good faith efforts. Prime contractors are not, however, required to accept higher quotes from DBEs if the price difference is excessive or unreasonable.
- E. Not rejecting DBEs as being unqualified without sound reasons based on a thorough investigation of their capabilities. The contractor's standing within its industry, membership in specific groups, organizations, or associations and political or social affiliations (for example union vs. non-union employee status) are not legitimate causes for the rejection or non solicitation of bids in the contractor's efforts to meet the project goal.
- F. Making efforts to assist interested DBEs in obtaining bonding, lines of credit, or insurance as required by the recipient or contractor.
- G. Making efforts to assist interested DBEs in obtaining necessary equipment, supplies, materials, or related assistance or services.
- H. Effectively using the services of available minority/women community organizations; minority/women contractors' groups; local, state, and Federal minority/women business assistance offices; and other organizations as allowed on a case-by-case basis to provide assistance in the recruitment and placement of DBEs.
- V. In determining whether a bidder has made good faith efforts, you may take into account the performance of other bidders in meeting the contract. For example, when the apparent successful bidder fails to meet the contract goal, but others meet it, you may reasonably raise the question of whether, with additional reasonable efforts, the apparent successful bidder could have met the goal. If the apparent successful bidder fails to meet the goal, but meets or exceeds the average DBE participation obtained by other bidders, you may view this, in conjunction with other factors, as evidence of the apparent successful bidder having made good faith efforts.

# Appendix E Small Business Network [SBN] Overview

The Small Business Network is a part of the Bid Express® service that was created to ensure that prime bidders have a centralized online location to find subs - including small and disadvantaged business enterprises (DBEs). It is available for prime bidders to use as part of their Basic Service subscription.

Within the Small Business Network. **Prime Contractors** can:

## 1. Easily select proposals, work types and items:

a. After adding applicable work types, select items that you wish to quote. Enter the sub-quote quantities and add comments, if desired. Adding or removing items and work types can be done quickly. If needed, you can save the sub-quote for completion at a later time.

## 2. Create sub-quotes for the subcontracting community:

- a. Create sub-quotes with ease using the intuitive sub-quote creator. In seven short steps, you can rapidly create a custom sub-quote directed to all subcontractors that bid on the applicable work types. Steps include: provide contact information and sub-quote expiration date, select letting and proposal, add work types and items, specify terms and conditions, upload attachments, and select vendors.
- b. Create a sub-quote to send to subcontractors or suppliers that lists the items in a proposal that you want quoted
- c. Create an unlimited number of sub-quotes for items you want quoted, and optionally mark them as a DBE-preferred request.
- d. Add attachments to sub-quotes.

## 3. View sub-quote requests & responses:

- a. After logging into the Bid Express service, you can quickly review all of your sub-quote requests and all unsolicited sub-quote requests from subcontractors. To simplify the Small Business Network home screen, subquote requests can be hidden with one click if they are not applicable.
- b. View or receive unsolicited sub-quotes that subcontractors have posted, complete with terms, conditions and pricing.

## 4. View Record of Subcontractor Outreach Effort:

- a. For each sub-quote produced, a *Record of Subcontractor Outreach Effort* is generated that shows the response statistics for a particular sub-quote. If accepted by the letting agency, this report may serve as proof of a "Good Faith" effort in reaching out to the DBE community.
- b. Easily locate pre-qualified and certified small and disadvantaged businesses.
- c. Advertise to small and disadvantaged businesses more efficiently and cost effectively.
- d. Document your interactions with subs/DBEs by producing an Outreach Report (may be accepted as proof of DBE outreach at the discretion of each agency).

The Small Business Network is a part of the Bid Express® service that was created to ensure that small businesses have a centralized area to access information about upcoming projects. It can help small businesses learn more about opportunities, compete more effectively, network with other contractors and subcontractors, and win more jobs.

## 1. View and reply to sub-quote requests from primes:

a. After logging into the Bid Express service, you can quickly review all incoming sub-quote requests and all unsolicited sub-quotes created by your company. Receive notifications by selected work type. To simplify on the Small Business Network home screen, sub-quote requests can be filtered by work types relevant to your interests, or hidden with one click if they are not applicable.

## 2. Select items when responding to sub-quote requests from primes:

- a. You have the freedom to choose and price any number of items when responding to a sub-quote request. Quantities can be modified, and per-item comments are also available.
- b. View requests for sub-quotes for work that primes have posted for projects they are bidding, add your pricing, terms, and conditions, and submit completed sub-quotes to the requesting primes.
- c. Add attachments to a sub-quote.

## 3. Create and send unsolicited sub-quotes to specific contractors:

a. Create unsolicited sub-quotes with ease using the intuitive sub-quote creator. In eight short steps, you can rapidly create a custom sub-quote directed at any number of specific vendors of your choosing. Steps include: provide contact information and sub-quote expiration date, select letting and proposal, add work types and items, specify terms and conditions, upload attachments, and select vendors.

## 4. Easily select and price items for unsolicited sub-quotes:

- a. After adding applicable work types, select items that you wish to quote. The extended price calculates automatically, cutting out costly calculation errors. Comments can be provided on a per-item basis as well.
- b. Create an unsolicited sub-quote that lists the items from a proposal that you want to quote, include pricing, terms and conditions, and send it to selected prime/plan holder.
- c. Add attachments to a sub-quote.
- d. Add unsolicited work items to sub-quotes that you are responding to.

## 5. Easy Access to Valuable Information

- a. Receive a confirmation that your sub-quote was opened by a prime.
- b. View Bid Tab Analysis data from past bids, including the high, average and low prices of items.
- c. View important notices and publications from DOT targeted to small and disadvantaged businesses.

## 6. Accessing Small Business Network for WisDOT contracting opportunities

- a. If you are a contractor not yet subscribing to the Bid Express service, go to <a href="www.bidx.com">www.bidx.com</a> and select "Order Bid Express." The Small Business Network is a part of the Bid Express Basic Service.
- DBE firms can request a Bid Express Small Business Network Account at no cost by calling 414-438-4588.

November 2013 ASP-4

## ADDITIONAL SPECIAL PROVISION 4

## **Payment to First-Tier Subcontractors**

Within 10 calendar days of receiving a progress payment for work completed by a subcontractor, pay the subcontractor for that work. The prime contractor may withhold payment to a subcontractor if, within 10 calendar days of receipt of that progress payment, the prime contractor provides written notification to the subcontractor and the department documenting "just cause" for withholding payment.

The prime contractor may also withhold routine retainage from payments due subcontractors.

## **Payment to Lower-Tier Subcontractors**

Ensure that subcontracting agreements at all tiers provide prompt payment rights to lower-tier subcontractors that parallel those granted first-tier subcontractors in this provision.

## **Release of Routine Retainage**

After granting substantial completion the department may reduce the routine retainage withheld from the prime contractor to 75 percent of the original total amount retained.

When the Department sends the semi-final estimate the department may reduce the routine retainage withheld from the prime contractor to 10 percent of the original total amount retained.

Within 30 calendar days of receiving the semi-final estimate from the department, submit written certification that subcontractors at all tiers are paid in full for acceptably completed work and that no routine retainage is being withheld. The department will pay the prime contractor in full and reduce the routine retainage withheld from the prime contractor to zero when the department approves the final estimate.

This special provision does not limit the right of the department, prime contractor, or subcontractors at any tier to withhold payment for work not acceptably completed or work subject to an unresolved contract dispute.

# ADDITIONAL SPECIAL PROVISION 6 ASP 6 - Modifications to the standard specifications

Make the following revisions to the standard specifications:

#### 107.17.1 General

Replace paragraph seven with the following effective with the December 2018 letting:

(7) Have a professional engineer registered in the state of Wisconsin sign and seal the shop drawings. At least 30 calendar days before starting falsework, form, or shoring construction; submit a PDF file of shop drawings to the railroad's chief engineering officer and to the engineer. The engineer and the railroad may review the shop drawings. If the engineer or the railroad finds the shop drawings unsatisfactory, the contractor shall make the required changes. A satisfactory shop drawing review does not relieve the contractor of responsibility and liability for the structural integrity and proper functioning of the falsework, forms, or shoring.

#### 109.1.1 General

Replace the entire text with the following effective with the January 2019 letting:

- (1) The engineer will use the US standard system to measure all work completed under the contract. The engineer will determine quantities of materials the contractor furnishes and work the contractor performs using measurement methods and computations conforming to standard engineering practice, modified to meet department requirements. The engineer will document these measurements using department procedures.
- (2) The engineer will measure the work as the contract measurement subsection for individual items specifies. The department will measure the actual quantities of work the contractor acceptably completes and make final payment based on those actual measured quantities except as follows:
  - 1. If the measurement subsection for a bid item specifically restricts the quantity measured for payment or allows for use of conversion factors.
  - If the engineer executes a contract change order modifying the method of measurement for specific bid items, the engineer will measure the quantities of applicable bid items for payment using the change order methods.
  - 3. If the engineer, under 105.3.1(2), approves a contractor-requested plan dimension change between US standard and SI metric dimensions, the engineer will measure whichever of the following is less:
    - Actual quantities constructed.
    - Quantities derived from the original plan dimensions.
  - 4. For substitutions made under 106.2.3 between US standard and SI metric products, the engineer will measure the actual quantities of the substitute products using the original contract measuring system.

#### 305.2.1 General

Replace paragraph two with the following effective with the December 2018 letting:

(2) Where the contract specifies or allows 1 1/4-inch base, do not place reclaimed asphalt, reprocessed material, or blended materials below virgin aggregate materials unless the contract specifies or the engineer allows in writing. The department will allow virgin aggregate above reclaimed asphalt, reprocessed material, or blended materials in shoulder areas adjacent to concrete pavement.

#### 420.3.2.1 General

Replace paragraph one with the following effective with the December 2018 letting:

(1) Use self-propelled grinding machines with depth, grade, and slope controls designed for grinding and texturing concrete. Equip grinding machines with diamond blades and a vacuuming system capable of removing liquid and solid residue from the ground surface. Shroud the machine to prevent discharging loosened material into adjacent work areas or live traffic lanes. Provide the specified effective wheelbase, defined as the center of the front to center of the rear main support wheels.

#### 420.3.2.2 Continuous Grinding

Replace paragraph one with the following effective with the December 2018 letting:

(1) Under the Continuous Diamond Grinding Concrete Pavement bid item, ensure that the grinding machine, including the grinding head, weighs 35,000 pounds or more, will grind a strip at least 4 feet wide, and has an effective wheel base of 25 feet or more. For pavements with a design speed less than 40 miles per hour and areas difficult to access, the contractor may use equipment with an effective wheel base of 12 feet or more.

## 450.3.2.8 Jointing

Replace paragraphs three through five with the following effective with the December 2018 letting:

- (3) Construct notched wedge longitudinal joints for mainline paving if the pavement thickness conforms to the minimums specified in 460.3.2, unless the engineer directs or allows an alternate joint. Construct the wedge using a slope no steeper than 3:1. Extend the wedge 12 inches beyond the normal lane width, or as the engineer directs. Ensure that the wedge for all layers directly overlaps and slopes in the same direction.
- (4) Locate the joint at the pavement centerline for 2-lane roadways, or at lane lines if the roadway has more than 2 lanes. Construct a vertical notch 1/2-inch to 3/4-inch high on the centerline or lane line at the top of each wedge. Place a 1/2-inch to 3/4-inch notch at the outside bottom edge of the wedge after compacting each layer. Align the finished longitudinal joint line of the upper layer with the centerline or lane line.
- (5) Construct the wedge for each layer using an engineer-approved strike-off device that will provide a uniform slope and will not restrict the main screed. Shape and compact the wedge with a weighted steel side roller wheel the same width as the wedge. Apply a tack coat to the wedge surface and both notches before placing the adjacent lane.

### 455.2.4.3 Emulsified Asphalts

Replace paragraph two with the following effective with the December 2018 letting:

(2) The bill of lading for emulsified asphalts shall indicate the asphalt content of the original emulsion and dilution rate of the additional water added to the original emulsion. If undiluted samples are not available, test the diluted material and modify AASHTO M140, M208, or M316 to reflect properties resulting from dilution of the asphalt.

### 460.2.8.3.1.4 Department Verification Testing Requirements

Replace paragraph three with the following effective with the December 2018 letting:

(3) The department will perform testing conforming to the following standards:

Bulk specific gravity (G<sub>mb</sub>) of the compacted mixture according to AASHTO T166.

Maximum specific gravity (G<sub>mm</sub>) according to AASHTO T209.

Air voids (V<sub>a</sub>) by calculation according to AASHTO T269.

VMA by calculation according to AASHTO R35.

Asphalt content by ignition oven according to AASHTO T308 as modified in CMM 8-36.6.3.6, chemical extraction according to AASHTO T-164, or Asphalt Analyzer™ according to manufacturer recommendations.

## 460.2.8.3.1.6 Acceptable Verification Parameters

Replace paragraph one with the following effective with the December 2018 letting:

- (1) The engineer will provide test results to the contractor within 2 mixture-production days after obtaining the sample. The quality of the product is acceptably verified if it meets the following limits:
  - Va is within a range of 2.0 to 4.3 percent. For SMA, Va is within a range of 2.7 to 5.3 percent.
  - VMA is within minus 0.5 of the minimum requirement for the mix design nominal maximum aggregate size.
  - Asphalt content is within minus 0.3 percent of the JMF.

#### 460.2.8.3.1.7 Dispute Resolution

Replace paragraph one with the following effective with the December 2018 letting:

(1) When QV test results do not meet the specified limits for 100 percent pay, the bureau's AASHTO accredited laboratory and certified personnel will referee test the retained portion of the QV sample and the retained portion of the required forward and backward QC retained samples according to CMM 8-36.

#### 460.5.2.1 General

Replace paragraphs five and six with the following effective with the December 2018 letting:

(5) The department will reduce pay for nonconforming QMP HMA mixtures as specified in 460.2.8.2.1.7, starting from the stop point to the point when the running average of 4 is back inside the warning limits. The engineer will determine the quantity of material subject to pay reduction based on the testing data and an inspection of the completed payement. The department will reduce pay as follows:

#### PAYMENT FOR MIXTURE[1][2][3]

	PRODUCED WITHIN	PRODUCED OUTSIDE
ITEM	WARNING BANDS	JMF LIMITS
Gradation	90%	75%
Asphalt Content <sup>[4]</sup>		
Air Voids	70%	50%
VMA	90%	75%

- <sup>[1]</sup> For projects or plants where the total production of each mixture design requires less than 4 tests refer to CMM 8-36.
- Payment is in percent of the contract unit price for the HMA Pavement bid item. The department will reduce pay based on the nonconforming property with lowest percent pay. If the quantity of material subject to pay adjustment based on the running average of 4 is also subject to pay adjustment resulting from dispute resolution in accordance with 460.2.8.3.1.7, the department will apply the single pay adjustment resulting in the lowest percent pay.
- [3] In addition to any pay adjustment listed in the table above, the department will adjust pay for nonconforming binder under the Nonconforming QMP Asphaltic Material administrative item. The department will deduct 25 percent of the contract unit price of the HMA Pavement bid item per ton of pavement placed with nonconforming PG binder the engineer allows to remain in place.
- <sup>[4]</sup> The department will not adjust pay based on a running average of 4 asphalt content tests; however, corrective action will be applied to nonconforming material according to 460.2.8.2.1.7.
- (6) If during a QV dispute resolution investigation the department discovers unacceptable mixture defined by one or more of the following:
  - Va greater than 5.0 or less than 1.5.
  - VMA more than 1.0 below the minimum allowed in table 460-1.
  - AC more than 0.5 % below the JMF target.

Remove and replace the material, or if the engineer allows the mixture to remain in place, the department will pay for the quantity of affected material at 50 percent of the contract price.

### 506.3.2 Shop Drawings

Replace paragraph four with the following effective with the December 2018 letting:

(4) Ensure that the fabricator submits a PDF file of shop drawings for railroad structures to the railroad company's chief engineering officer upon contract completion.

#### 646.3.1.2 Liquid Marking

Replace paragraph five with the following effective with the January 2019 letting:

(5) Apply liquid marking and glass beads across the line at or exceeding the following:

LIQUID MARKING	PAVEMENT TYPE	THICKNESS	BEAD APPLICATION
		(mils)	(pounds per gallon)
Paint	all	16	8
Epoxy	SMA, seal coats, and polymer overlays	25	25
Epoxy	all other	20	22.5
Wet Reflective Epoxy	/ all	20	18

#### 646.3.2.3.2 Wet Reflective Epoxy

Replace paragraph five with the following effective with the January 2019 letting:

- (1) Apply wet reflective epoxy binder in a grooved slot, and provide a double drop bead system as follows:
  - First: wet reflective/recoverable elements at the application rate specified for the product chosen from the department's APL.
  - Second: glass beads at the application rate specified in 646.3.1.2(5).

#### 650.3.1 General

Replace the entire text with the following effective with the December 2018 letting:

- (1) Department and contractor responsibilities for construction staking are specified in 105.6. Conform to 105.6 and the additional requirements specified here in 650.3 for the individual contractor-staking bid items the contract includes.
- (2) Protect and preserve known property and survey marks and land monuments as specified in 107.11.3. The contract may require related work under the 621 bid items.
- (3) Obtain or calculate benchmark data, grades, and alignment from plan information. The engineer will furnish data for the horizontal and vertical control points, control point ties, horizontal alignments, profiles, and elevations. Reestablish, set additional, and maintain the horizontal and vertical control points and control point ties, as needed for bid items.
- (4) Check horizontal and vertical information including but not limited to alignments, locations, elevations, and dimensions, that either the plans show or the engineer provides, for compatibility with existing field conditions. Conduct similar compatibility checks and accuracy checks of horizontal and vertical positions either the department or the contractor establishes in the field.
- (5) Perform survey work using conventional methods, or AMG methods capable of achieving the lines and grades the plans show for the work in question. Establish additional benchmarks and control points as necessary to support the method of operation.

#### 650.3.1.1 Staking

- (1) Furnish, set, reference, and maintain stakes and markings necessary to establish the alignment, location, benchmarks, elevations, and continuous profile-grades for road and structure work as needed for bid items. Supervise and coordinate construction staking.
- (2) Maintain neat, orderly, and complete survey notes, drawings, and computations used in establishing the lines and grades. Make the survey notes and computations available to the engineer within 24 hours, upon request, as the work progresses.
- (3) Furnish surveying equipment, stakes, flags, pins, lath, whiskers, and other materials necessary to perform this work, subject to the engineer's approval.

#### 650.3.1.2 Automated Machine Guidance

### 650.3.1.2.1 General

(1) The contractor may substitute AMG for conventional staking on all or part of the work under the individual staking bid items. Coordinate with the engineer throughout the course of construction to ensure that work performed using AMG conforms to the contract tolerances and that the methods employed conform to the contractor's AMG work plan and accepted industry standards. Revert to conventional staking methods for all or part of the work at any point during construction if AMG is producing unacceptable results.

#### 650.3.1.2.2 AMG Work Plan

(1) Submit a comprehensive written AMG work plan for department review at least 5 business days before the preconstruction conference. In that plan discuss how AMG technology will be integrated into other

technologies employed on the project. List the staking bid items that will have work performed using AMG and, for each bid item listed, include the following:

- 1. Designate which portions of the contract will be done using AMG and which portions will be done using conventional staking.
- 2. Designate a single staff person as the primary contact for AMG technology issues.
- 3. List and map the primary and secondary control points required under 105.6.2 enveloping the site.
- 4. Describe the contractor's quality control procedures. Include the frequency and type of checks performed to ensure that the work conforms to the contract plans.
- (2) The engineer will review the plan to determine if it conforms to the contract. Do not perform AMG work until the engineer approves the governing portion of the AMG workplan. Perform the work as the contractor's AMG work plan provides. Update the plan as necessary.

### 650.3.1.2.3 Geometric and Surface Information

#### 650.3.1.2.3.1 Department Responsibilities

(1) At any time after the contract is awarded the contractor may request the contractor data packet. The department will provide the packet within 5 business days of receiving the contractor's request.

#### 650.3.1.2.3.2 Contractor Responsibilities

- (1) Develop and maintain a contractor construction model for areas of the project employing AMG. Confirm that the resulting model agrees with the contract plans.
- (2) If the engineer requests, provide the construction model to the department in LandXML or other engineer-approved format.

#### 650.3.1.2.4 Managing and Updating Information

- (1) Notify the department of any errors or discrepancies in department-provided information. The department will determine what revisions may be required. The department will revise the contract plans, if necessary, to address errors or discrepancies that the contractor identifies. The department will provide the best available information related to those contract plan revisions.
- (2) Revise the construction model as required to support construction operations and to reflect any contract plan revisions the department makes. Perform checks to confirm that the revised construction model agrees with the contract plan revisions. If the engineer requests, provide construction model updates to the engineer. The department will pay for costs incurred to incorporate contract plan revisions as extra work.

## 650.3.1.2.5 Construction Checks

- (1) Check the work against the plan elevation at randomly selected points on cross-sections located at stations evenly divisible by 100 at the frequency the engineer approved as a part of the AMG work plan. Submit the results of these random checks to the engineer daily. Notify the engineer immediately if a check exceeds the tolerances specified in 650.3.1.2.6 below.
- (2) Check the work at additional points as the engineer directs. The department may conduct periodic independent checks.

#### 650.3.1.2.6 Construction Tolerances

- (1) Ensure that the finished work vertically matches existing or other completed features. Ensure that the work conforms to revised plan elevations as follows:
  - Subgrade: +/- 0.10 feet.
  - Base: within the tolerance specified in 301.3.4.1(2).

#### **650.3.3** Subgrade

Retitle and replace the entire text with the following effective with the December 2018 letting:

## 650.3.3 Subgrade Staking

(1) Set construction stakes or marks at intervals of 100 feet, or more frequently, for rural sections and at intervals of 50 feet, or more frequently, for urban sections. Include additional stakes at each cross-section as necessary to match the plan cross-section, achieve the required accuracy, and to support construction operations. Also set and maintain stakes as necessary to establish the horizontal and vertical positions of intersecting road radii, auxiliary lanes, horizontal and vertical curves, and curve

transitions. Locate stakes to within 0.25 feet horizontally and establish the grade elevation to within 0.03 feet vertically.

#### **Errata**

### 520.3.3 Laying Pipe

Correct errata by replacing "sections" with "joints" to clarify the intent that the last 3 joints need ties.

(5) Provide joint ties on the upstream and downstream ends of circular and horizontal elliptical concrete culvert and concrete cattle pass installations. Tie the next 3 pipe joints or, if using apron endwalls, the endwall joint and the last 2 pipe joints. Ties are not required on culverts with masonry endwalls unless the plans show otherwise.

#### 608.3.3 Laying Pipe

Correct errata by replacing "sections" with "joints" to clarify the intent that the last 3 joints need ties.

(5) Provide joint ties on concrete storm sewer system infall and outfall pipes. Tie the last 3 pipe joints or, if using apron endwalls, the endwall joint and the next 2 pipe joints. Ties are not required on installations with masonry endwalls unless the plans show otherwise.

## **ADDITIONAL SPECIAL PROVISION 7**

- A. Reporting 1<sup>st</sup> Tier and DBE Payments During Construction
  - 1. Comply with reporting requirements specified in the department's Civil Rights Compliance, Contractor's User Manual, Sublets and Payments.
  - 2. Report payments to all DBE firms within 10 calendar days of receipt of a progress payment by the department or a contractor for work performed, materials furnished, or materials stockpiled by a DBE firm. Report the payment as specified in A(1) for all work satisfactorily performed and for all materials furnished or stockpiled.
  - 3. Report payments to all first tier subcontractor relationships within 10 calendar days of receipt of a progress payment by the department for work performed. Report the payment as specified in A(1) for all work satisfactorily performed.
  - 4. All tiers shall report payments as necessary to comply with the DBE payment requirement as specified in A(2).
  - 5. Require all first tier relationships, DBE firms and all other tier relationships necessary to comply with the DBE payment requirement in receipt of a progress payment by contractor to acknowledge receipt of payment as specified in A(1), (2), (3) and (4).
  - 6. All agreements made by a contractor shall include the provisions in A(1), (2), (3), (4) and (5), and shall be binding on all first tier subcontractor relationships and all contractors and subcontractors utilizing DBE firms on the project.
- B. Costs for conforming to this special provision are incidental to the contract.

NOTE: CRCS Prime Contractor payment is currently not automated and will need to be manually loaded into the Civil Rights Compliance System. Copies of prime contractor payments received (check or ACH) will have to be forwarded to <a href="mailto:paul.ndon@dot.wi.gov">paul.ndon@dot.wi.gov</a> within 5 days of payment receipt to be logged manually.

\*\*\*Additionally, for information on Subcontractor Sublet assignments, Subcontractor Payments and Payment Tracking, please refer to the CRCS Payment and Sublets manual at:

 $\underline{https://wisconsindot.gov/Documents/doing-bus/civil-rights/labornwage/crcs-payments-sublets-\underline{manual.pdf}}$ 

# ADDITIONAL SPECIAL PROVISION 9 Electronic Certified Payroll Submittal

(1) Use the department's Civil Rights Compliance System (CRCS) to submit certified payrolls electronically. Details are available online through the department's highway construction contractor information (HCCI) site on the Labor, Wages, and EEO Information page at:

https://wisconsindot.gov/Pages/doing-bus/civil-rights/labornwage/default.aspx

- (2) Ensure that all tiers of subcontractors, including all trucking firms, submit their weekly certified payrolls electronically through CRCS. These payrolls are due within seven calendar days following the close of the payroll period. Every firm providing physical labor towards completing the project is a subcontractor under this special provision.
- (3) Upon receipt of contract execution, promptly make all affected firms aware of the requirements under this special provision and arrange for them to receive CRCS training as they are about to begin payrolls. The department will provide training either in a classroom setting at one of our regional offices or by telephone. Contact Paul Ndon at (414) 438-4584 to schedule the training.
- (4) The department will reject all paper submittals of forms DT-1816 and DT-1929 for information required under this special provision. All costs for conforming to this special provision are incidental to the contract.
- (5) Firms wishing to export payroll data from their computer system into CRCS should have their payroll coordinator contact Paul Ndon at <a href="mailto:paul.ndon@dot.wi.gov">paul.ndon@dot.wi.gov</a>. Not every contractor's payroll system is capable of producing export files. For details, see Section 4.8 CPR Auto Submit (Data Mapping) on pages 49-50; 66-71 of the CRCS Payroll Manual at:

https://wisconsindot.gov/Documents/doing-bus/civil-rights/labornwage/crcs-payroll-manual.pdf

## REQUIRED CONTRACT PROVISIONS FEDERAL-AID CONSTRUCTION CONTRACTS

- I. General
- II. Nondiscrimination
- III. Nonsegregated Facilities
- IV. Davis-Bacon and Related Act Provisions
- Contract Work Hours and Safety Standards Act Provisions
- VI. Subletting or Assigning the Contract
- VII. Safety: Accident Prevention
- VIII. False Statements Concerning Highway Projects
- IX. Implementation of Clean Air Act and Federal Water Pollution Control Act
- Compliance with Governmentwide Suspension and Debarment Requirements
- Certification Regarding Use of Contract Funds for Lobbying

#### **ATTACHMENTS**

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

#### I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under Title 23 (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services).

The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Form FHWA-1273 must be included in all Federal-aid designbuild contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services). The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

Contracting agencies may reference Form FHWA-1273 in bid proposal or request for proposal documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract).

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

- 3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.
- 4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors.

#### II. NONDISCRIMINATION

The provisions of this section related to 23 CFR Part 230 are applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR 60, 29 CFR 1625-1627, Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding \$10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR 60, and 29 CFR 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), and Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The following provision is adopted from 23 CFR 230, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

1. Equal Employment Opportunity: Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630, 29 CFR 1625-1627, 41 CFR 60 and 49 CFR 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under

this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

- a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract.
- b. The contractor will accept as its operating policy the following statement:

"It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."

- 2. EEO Officer: The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so.
- 3. Dissemination of Policy: All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:
- a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.
- b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.
- c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.
- d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.
- e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

- **4. Recruitment:** When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.
- a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.
- b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.
- c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.
- **5. Personnel Actions:** Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:
- a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.
- b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.
- c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.
- d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.

#### 6. Training and Promotion:

a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are

applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.

- b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).
- c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.
- d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.
- 7. Unions: If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women. Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:
- a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.
- b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.
- c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information.
- d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide sufficient referrals (even though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.
- 8. Reasonable Accommodation for Applicants / Employees with Disabilities: The contractor must be familiar

with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established there under. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.

- 9. Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.
- The contractor shall notify all potential subcontractors and suppliers and lessors of their EEO obligations under this contract.
- b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.

#### 10. Assurance Required by 49 CFR 26.13(b):

- a. The requirements of 49 CFR Part 26 and the State DOT's U.S. DOT-approved DBE program are incorporated by reference.
- b. The contractor or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the contracting agency deems appropriate.
- 11. Records and Reports: The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.
- a. The records kept by the contractor shall document the following:
- (1) The number and work hours of minority and nonminority group members and women employed in each work classification on the project;
  - (2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and
  - (3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women;
- b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on <a href="Form FHWA-1391">Form FHWA-1391</a>. The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-the-job training is being required by special provision, the contractor

will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

#### **III. NONSEGREGATED FACILITIES**

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of \$10,000 or more.

The contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location, under the contractor's control, where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

#### IV. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding \$2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size). The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. Contracting agencies may elect to apply these requirements to other projects.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 "Contract provisions and related matters" with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

#### 1. Minimum wages

a. All laborers and mechanics employed or working upon the site of the work, will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph 1.d. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in 29 CFR 5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under paragraph 1.b. of this section) and the Davis-Bacon poster (WH-1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

- b.(1) The contracting officer shall require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The contracting officer shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:
  - (i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and
  - (ii) The classification is utilized in the area by the construction industry; and
  - (iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.
  - (2) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.
  - (3) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. The Wage and Hour Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or

will notify the contracting officer within the 30-day period that additional time is necessary.

- (4) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraphs 1.b.(2) or 1.b.(3) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.
- c. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.
- d. If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, Provided, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

#### 2. Withholding

The contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor under this contract, or any other Federal contract with the same prime contractor, or any other federallyassisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the contracting agency may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

#### 3. Payrolls and basic records

a. Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work and preserved for a period of three years thereafter for all laborers and mechanics working at the site of the work. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-

Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.

- b.(1) The contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the contracting agency. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee ( e.g., the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired. Optional Form WH-347 is available for this purpose from the Wage and Hour Division Web site at http://www.dol.gov/esa/whd/forms/wh347instr.htm or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors. Contractors and subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the contracting agency for transmission to the State DOT, the FHWA or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. It is not a violation of this section for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the contracting agency...
- (2) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:
  - (i) That the payroll for the payroll period contains the information required to be provided under §5.5 (a)(3)(ii) of Regulations, 29 CFR part 5, the appropriate information is being maintained under §5.5 (a)(3)(i) of Regulations, 29 CFR part 5, and that such information is correct and complete;
  - (ii) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;
  - (iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

- (3) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH–347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(2) of this section.
- (4) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.
- c. The contractor or subcontractor shall make the records required under paragraph 3.a. of this section available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the FHWA may, after written notice to the contractor, the contracting agency or the State DOT, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

#### 4. Apprentices and trainees

a. Apprentices (programs of the USDOL).

Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice.

The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly

rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

b. Trainees (programs of the USDOL).

Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration.

The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration.

Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Equal employment opportunity. The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

d. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

- **5. Compliance with Copeland Act requirements.** The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract.
- **6. Subcontracts.** The contractor or subcontractor shall insert Form FHWA-1273 in any subcontracts and also require the subcontractors to include Form FHWA-1273 in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.
- **7. Contract termination: debarment.** A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.
- **8. Compliance with Davis-Bacon and Related Act requirements.** All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract.
- 9. Disputes concerning labor standards. Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

#### 10. Certification of eligibility.

- a. By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).
- b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).
- c. The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

## V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

The following clauses apply to any Federal-aid construction contract in an amount in excess of \$100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchmen and guards.

- 1. Overtime requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.
- 2. Violation; liability for unpaid wages; liquidated damages. In the event of any violation of the clause set forth in paragraph (1.) of this section, the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (1.) of this section, in the sum of \$10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (1.) of this section.
- 3. Withholding for unpaid wages and liquidated damages. The FHWA or the contacting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (2.) of this section.
- **4. Subcontracts.** The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (1.) through (4.) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (1.) through (4.) of this section.

#### VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System.

- 1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).
- a. The term "perform work with its own organization" refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions:
- the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;
- (2) the prime contractor remains responsible for the quality of the work of the leased employees;
- (3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and
  - (4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.
- b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract.
- 2. The contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.
- 3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.
- 4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is

evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

5. The 30% self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements.

#### VII. SAFETY: ACCIDENT PREVENTION

- This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.
- 1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.
- 2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).
- 3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C.3704).

## VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federalaid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

## IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

By submission of this bid/proposal or the execution of this contract, or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

- 1. That any person who is or will be utilized in the performance of this contract is not prohibited from receiving an award due to a violation of Section 508 of the Clean Water Act or Section 306 of the Clean Air Act.
- 2. That the contractor agrees to include or cause to be included the requirements of paragraph (1) of this Section X in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements.

# X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost \$25,000 or more – as defined in 2 CFR Parts 180 and 1200.

#### 1. Instructions for Certification - First Tier Participants:

- a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.
- b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this

covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

- c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default.
- d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.
- e. The terms "covered transaction," "debarred,"
  "suspended," "ineligible," "participant," "person," "principal,"
  and "voluntarily excluded," as used in this clause, are defined
  in 2 CFR Parts 180 and 1200. "First Tier Covered
  Transactions" refers to any covered transaction between a
  grantee or subgrantee of Federal funds and a participant (such
  as the prime or general contract). "Lower Tier Covered
  Transactions" refers to any covered transaction under a First
  Tier Covered Transaction (such as subcontracts). "First Tier
  Participant" refers to the participant who has entered into a
  covered transaction with a grantee or subgrantee of Federal
  funds (such as the prime or general contractor). "Lower Tier
  Participant" refers any participant who has entered into a
  covered transaction with a First Tier Participant or other Lower
  Tier Participants (such as subcontractors and suppliers).
- f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.
- g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.
- h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (https://www.epls.gov/), which is compiled by the General Services Administration.

- i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.
- j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

\* \* \* \* \*

# 2. Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:

- a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:
- Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency;
- (2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;
- (3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification; and
- (4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.
- b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

#### 2. Instructions for Certification - Lower Tier Participants:

(Applicable to all subcontracts, purchase orders and other lower tier transactions requiring prior FHWA approval or estimated to cost \$25,000 or more - 2 CFR Parts 180 and 1200)

- a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.
- b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which

this transaction originated may pursue available remedies, including suspension and/or debarment.

- c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.
- d. The terms "covered transaction," "debarred,"
  "suspended," "ineligible," "participant," "person," "principal,"
  and "voluntarily excluded," as used in this clause, are defined
  in 2 CFR Parts 180 and 1200. You may contact the person to
  which this proposal is submitted for assistance in obtaining a
  copy of those regulations. "First Tier Covered Transactions"
  refers to any covered transaction between a grantee or
  subgrantee of Federal funds and a participant (such as the
  prime or general contract). "Lower Tier Covered Transactions"
  refers to any covered transaction under a First Tier Participant"
  refers to the participant who has entered into a covered
  transaction with a grantee or subgrantee of Federal funds
  (such as the prime or general contractor). "Lower Tier
  Participant" refers any participant who has entered into a
  covered transaction with a First Tier Participant or other Lower
  Tier Participants (such as subcontractors and suppliers).
- e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.
- f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the \$25,000 threshold.
- g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (<a href="https://www.epls.gov/">https://www.epls.gov/</a>), which is compiled by the General Services Administration.
- h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.
- i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the

department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

\* \* \* \*

#### Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

- 1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency.
- 2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

\* \* \* \* :

## XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed \$100,000 (49 CFR 20).

- 1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:
- a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.
- b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.
- 2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.
- 3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed \$100,000 and that all such recipients shall certify and disclose accordingly.

# ATTACHMENT A - EMPLOYMENT AND MATERIALS PREFERENCE FOR APPALACHIAN DEVELOPMENT HIGHWAY SYSTEM OR APPALACHIAN LOCAL ACCESS ROAD CONTRACTS

This provision is applicable to all Federal-aid projects funded under the Appalachian Regional Development Act of 1965.

- 1. During the performance of this contract, the contractor undertaking to do work which is, or reasonably may be, done as on-site work, shall give preference to qualified persons who regularly reside in the labor area as designated by the DOL wherein the contract work is situated, or the subregion, or the Appalachian counties of the State wherein the contract work is situated, except:
- a. To the extent that qualified persons regularly residing in the area are not available.
- b. For the reasonable needs of the contractor to employ supervisory or specially experienced personnel necessary to assure an efficient execution of the contract work.
- c. For the obligation of the contractor to offer employment to present or former employees as the result of a lawful collective bargaining contract, provided that the number of nonresident persons employed under this subparagraph (1c) shall not exceed 20 percent of the total number of employees employed by the contractor on the contract work, except as provided in subparagraph (4) below.
- 2. The contractor shall place a job order with the State Employment Service indicating (a) the classifications of the laborers, mechanics and other employees required to perform the contract work, (b) the number of employees required in each classification, (c) the date on which the participant estimates such employees will be required, and (d) any other pertinent information required by the State Employment Service to complete the job order form. The job order may be placed with the State Employment Service in writing or by telephone. If during the course of the contract work, the information submitted by the contractor in the original job order is substantially modified, the participant shall promptly notify the State Employment Service.
- 3. The contractor shall give full consideration to all qualified job applicants referred to him by the State Employment Service. The contractor is not required to grant employment to any job applicants who, in his opinion, are not qualified to perform the classification of work required.
- 4. If, within one week following the placing of a job order by the contractor with the State Employment Service, the State Employment Service is unable to refer any qualified job applicants to the contractor, or less than the number requested, the State Employment Service will forward a certificate to the contractor indicating the unavailability of applicants. Such certificate shall be made a part of the contractor's permanent project records. Upon receipt of this certificate, the contractor may employ persons who do not normally reside in the labor area to fill positions covered by the certificate, notwithstanding the provisions of subparagraph (1c) above.
- 5. The provisions of 23 CFR 633.207(e) allow the contracting agency to provide a contractual preference for the use of mineral resource materials native to the Appalachian region.

6. The contractor shall include the provisions of Sections 1 through 4 of this Attachment A in every subcontract for work which is, or reasonably may be, done as on-site work.

## **Non-discrimination Provisions**

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the "contractor") agrees as follows:

- **1. Compliance with Regulations:** The contractor (hereinafter includes consultants) will comply with the Acts and the Regulations relative to Non-discrimination in Federally-assisted programs of the U.S. Department of Transportation, Federal Highway Administration, as they may be amended from time to time, which are herein incorporated by reference and made a part of this contract.
- **2. Non-discrimination:** The contractor, with regard to the work performed by it during the contract, will not discriminate on the grounds of race, color, or national origin in the selection and retention of subcontractors, including procurements of materials and leases of equipment. The contractor will not participate directly or indirectly in the discrimination prohibited by the Acts and the Regulations, including employment practices when the contract covers any activity, project, or program set forth in Appendix B of 49 CFR Part 21.
- **3. Solicitations for Subcontracts, Including Procurements of Materials and Equipment:** In all solicitations, either by competitive bidding, or negotiation made by the contractor for work to be performed under a subcontract, including procurements of materials, or leases of equipment, each potential subcontractor or supplier will be notified by the contractor of the contractor's obligations under this contract and the Acts and the Regulations relative to Non-discrimination on the grounds of race, color, or national origin.
- **4. Information and Reports:** The contractor will provide all information and reports required by the Acts, the Regulations, and directives issued pursuant thereto and will permit access to its books, records, accounts, other sources of information, and its facilities as may be determined by the Recipient or the Federal Highway Administration to be pertinent to ascertain compliance with such Acts, Regulations, and instructions. Where any information required of a contractor is in the exclusive possession of another who fails or refuses to furnish the information, the contractor will so certify to the Recipient or the Federal Highway Administration, as appropriate, and will set forth what efforts it has made to obtain the information.
- **5. Sanctions for Noncompliance:** In the event of a contractor's noncompliance with the Non-discrimination provisions of this contract, the Recipient will impose such contract sanctions as it or the Federal Highway Administration may determine to be appropriate, including, but not limited to:
  - a. Withholding payments to the contractor under the contract until the contractor complies; and/or
  - b. Cancelling, terminating, or suspending a contract, in whole or in part.

**6. Incorporation of Provisions:** The contractor will include the provisions of paragraphs one through six in every subcontract, including procurements of materials and leases of equipment, unless exempt by the Acts, the Regulations and directives issued pursuant thereto. The contractor will take action with respect to any subcontract or procurement as the Recipient or the Federal Highway Administration may direct as a means of enforcing such provisions including sanctions for noncompliance. Provided, that if the contractor becomes involved in, or is threatened with litigation by a subcontractor, or supplier because of such direction, the contractor may request the Recipient to enter into any litigation to protect the interests of the Recipient. In addition, the contractor may request the United States to enter into the litigation to protect the interests of the United States.

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the "contractor") agrees to comply with the following non-discrimination statutes and authorities; including but not limited to:

## **Pertinent Non-Discrimination Authorities:**

- Title VI of the Civil Rights Act of 1964 (42 U.S.C. § 2000d et seq., 78 stat. 252), (prohibits discrimination on the basis of race, color, national origin); and 49 CFR Part 21.
- The Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970, (42 U.S.C. § 4601), (prohibits unfair treatment of persons displaced or whose property has been acquired because of Federal or Federal-aid programs and projects);
- Federal-Aid Highway Act of 1973, (23 U.S.C. § 324 et seq.), (prohibits discrimination on the basis of sex);
- Section 504 of the Rehabilitation Act of 1973, (29 U.S.C. § 794 et seq.), as amended, (prohibits discrimination on the basis of disability); and 49 CFR Part 27;
- The Age Discrimination Act of 1975, as amended, (42 U.S.C. § 6101 et seq.), (prohibits discrimination on the basis of age);
- Airport and Airway Improvement Act of 1982, (49 USC § 471, Section 47123), as amended, (prohibits discrimination based on race, creed, color, national origin, or sex);
- The Civil Rights Restoration Act of 1987, (PL 100-209), (Broadened the scope, coverage and applicability of Title VI of the Civil Rights Act of 1964, The Age Discrimination Act of 1975 and Section 504 of the Rehabilitation Act of 1973, by expanding the definition of the terms "programs or activities" to include all of the programs or activities of the Federal-aid recipients, sub-recipients and contractors, whether such programs or activities are Federally funded or not);
- Titles II and III of the Americans with Disabilities Act, which prohibit discrimination on the basis of disability in the operation of public entities, public and private transportation systems, places of public accommodation, and certain testing entities (42 U.S.C. §§ 12131-12189) as implemented by Department of Transportation regulations at 49 C.F.R. parts 37 and 38;
- The Federal Aviation Administration's Non-discrimination statute (49 U.S.C. § 47123) (prohibits discrimination on the basis of race, color, national origin, and sex);

- Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations, which ensures Non-discrimination against minority populations by discouraging programs, policies, and activities with disproportionately high and adverse human health or environmental effects on minority and low-income populations;
- Executive Order 13166, Improving Access to Services for Persons with Limited English Proficiency, and resulting agency guidance, national origin discrimination includes discrimination because of Limited English proficiency (LEP). To ensure compliance with Title VI, you must take reasonable steps to ensure that LEP persons have meaningful access to your programs (70 Fed. Reg. at 74087 to 74100);
- Title IX of the Education Amendments of 1972, as amended, which prohibits you from discriminating because of sex in education programs or activities (20 U.S.C. 1681 et seq).

### **SEPTEMBER 2002**

# NOTICE OF REQUIREMENT FOR AFFIRMATIVE ACTION TO ENSURE EQUAL EMPLOYMENT OPPORTUNITY (EXECUTIVE ORDER 11246)

- 1. The Offeror's or Bidder's attention is called to the "Employment Practices" and "Equal Opportunity Clause" set forth in the Required Contract Provisions, FHWA 1273.
- 2. The goals and timetables for minority and female participation expressed in percentage terms for the contractor's aggregate work force in each trade, on all construction work in the covered area, are as follows:

## Goals for Minority Participation for Each Trade:

_County_		_County_	_%_	_County_	<u>%</u>
Adams	1.7	Iowa	1.7	Polk	2.2
Ashland	1.2	Iron	1.2	Portage	0.6
Barron	0.6	Jackson	0.6	Price	0.6
Bayfield	1.2	Jefferson	7.0	Racine	8.4
Brown	1.3	Juneau	0.6	Richland	1.7
Buffalo	0.6	Kenosha	3.0	Rock	3.1
Burnett	2.2	Kewaunee	1.0	Rusk	0.6
Calumet	0.9	La Crosse	0.9	St. Croix	2.9
Chippewa	0.5	Lafayette	0.5	Sauk	1.7
Clark	0.6	Langlade	0.6	Sawyer	0.6
Columbia	1.7	Lincoln	0.6	Shawano	1.0
Crawford	0.5	Manitowoc	1.0	Sheboygan	7.0
Dane	2.2	Marathon	0.6	Taylor	0.6
Dodge	7.0	Marinette	1.0	Trempealeau	0.6
Door	1.0	Marquette	1.7	Vernon	0.6
Douglas	1.0	Menominee	1.0	Vilas	0.6
Dunn	0.6	Milwaukee	8.0	Walworth	7.0
Eau Claire	0.5	Monroe	0.6	Washburn	0.6
Florence	1.0	Oconto	1.0	Washington	8.0
Fond du Lac	1.0	Oneida	0.6	Waukesha	8.0
Forest	1.0	Outagamie	0.9	Waupaca	1.0
Grant	0.5	Ozaukee	8.0	Waushara	1.0
Green	1.7	Pepin	0.6	Winnebago	0.9
Green Lake	1.0	Pierce	2.2	Wood	0.6

## Goals for female participation for each trade: 6.9%

These goals are applicable to all the contractor's construction work, (whether or not it is federal or federally assisted), performed in the covered area. If the contractor performs construction work in the geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the contractor also is subject to the goals for both its federally involved and nonfederally involved construction.

The contractor's compliance with the Executive Order and the Regulations in 41 CFR Part 60-4 shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4.3(a), and its efforts to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade, and the contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from contractor to contractor or from project to project for the sole purpose of meeting the contractor's goals shall be a violation of the contract, the Executive Order and the Regulations in 41 CFR Part 60-4. Compliance with the goals will be measured against the total work hours performed.

3. The contractor shall provide written notification to the Director of the Office of Federal Contract Compliance Programs within ten (10) working days of award of any construction subcontract in excess of \$10,000.00 at any tier for construction work under the contract resulting from this solicitation. The notification shall list the name, address and telephone number of the subcontractor, employer identification number of the subcontractor; estimated dollar amount of the subcontract; estimated starting and completion dates of the subcontract; and the geographical area in which the subcontract is to be performed.

As referred to in this section, the Director means:

Director Office of Federal Contract Compliance Programs Ruess Federal Plaza 310 W. Wisconsin Ave., Suite 1115 Milwaukee, WI 53202

The "Employer Identification Number" means the Federal Social Security number used on the Employer's Quarterly Federal Tax Return, U.S. Treasury Department Form 941.

4. As used in this notice, and in the contract resulting from solicitation, the "covered area" is the county(ies) in Wisconsin to which this proposal applies.

### **APRIL 2013**

### ADDITIONAL FEDERAL-AID PROVISIONS

## NOTICE TO ALL BIDDERS

To report bid rigging activities call:

## 1-800-424-9071

The U.S. Department of Transportation (DOT) operates the above toll-free "hotline" Monday through Friday, 8:00 a.m. to 5:00 p.m., Eastern Time. Anyone with knowledge of possible bid rigging, bidding collusion, or other fraudulent activities should use the "hotline" to report such activities.

The "hotline" is part of the DOT's continuing effort to identify and investigate highway construction contract fraud and abuse and is operated under the direction of the DOT Inspector General. All information will be treated confidentially and caller anonymity will be respected.

## **Effective August 2015 letting**

### **BUY AMERICA PROVISION**

All steel and iron materials permanently incorporated in this project shall be domestic products and all manufacturing and coating processes for these materials from smelting forward in the manufacturing process must have occurred within the United States. Coating includes epoxy coating, galvanizing, painting and any other coating that protects or enhances the value of a material subject to the requirements of Buy America. The exemption of this requirement is the minimal use of foreign materials if the total cost of such material permanently incorporated in the product does not exceed one-tenth of one percent (1/10 of 1%) of the total contract cost or \$2,500.00, whichever is greater. For purposes of this paragraph, the cost is that shown to be the value of the subject products as they are delivered to the project. The contractor shall take actions and provide documentation conforming to CMM 2-28.5 to ensure compliance with this "Buy America" provision.

## https://wisconsindot.gov/rdwy/cmm/cm-02-28.pdf

Upon completion of the project certify to the engineer, in writing using department form WS4567, that all steel, iron, and coating processes for steel or iron incorporated into the contract work conform to these "Buy America" provisions. Attach a list of exemptions and their associated costs to the certification form. Department form WS4567 is available at:

https://wisconsindot.gov/hcciDocs/contracting-info/ws4567.doc

1 of 1

## Cargo Preference Act Requirement

All Federal-aid projects shall comply with 46 CFR 381.7 (a) – (b) as follows:

- (a) Agreement Clauses. "Use of United States-flag vessels:"
- (1) Pursuant to Pub. L. 664 (43 U.S.C. 1241(b)) at least 50 percent of any equipment, materials or commodities procured, contracted for or otherwise obtained with funds granted, guaranteed, loaned, or advanced by the U.S. Government under this agreement, and which may be transported by ocean vessel, shall be transported on privately owned United States-flag commercial vessels, if available.
- (2) Within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, 'on-board' commercial ocean bill-of-lading in English for each shipment of cargo described in paragraph (a)(1) of this section shall be furnished to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Division of National Cargo, Office of Market Development, Maritime Administration, Washington, DC 20590."
- (b) Contractor and Subcontractor Clauses. "Use of United States-flag vessels: The contractor agrees—"
- (1) To utilize privately owned United States-flag commercial vessels to ship at least 50 percent of the gross tonnage (computed separately for dry bulk carriers, dry cargo liners, and tankers) involved, whenever shipping any equipment, material, or commodities pursuant to this contract, to the extent such vessels are available at fair and reasonable rates for United States-flag commercial vessels.
- (2) To furnish within 20 days following the date of loading for shipments originating within the United States or within 30 working days following the date of loading for shipments originating outside the United States, a legible copy of a rated, 'on-board' commercial ocean bill-of-lading in English for each shipment of cargo described in paragraph (b) (1) of this section to both the Contracting Officer (through the prime contractor in the case of subcontractor bills-of-lading) and to the Division of National Cargo, Office of Market Development, Maritime Administration, Washington, DC 20590.
- (3) To insert the substance of the provisions of this clause in all subcontracts issued pursuant to this contract.

## WISCONSIN DEPARTMENT OF TRANSPORTATION DIVISION OF TRANSPORTATION AND SYSTEM DEVELOPMENT

## SUPPLEMENTAL REQUIRED CONTRACT PROVISIONS FOR PROJECTS WITH FEDERAL AID

#### I. PREVAILING WAGE RATES

The attached U.S. Department of Labor (Davis-Bacon Minimum Wage Rates) furnishes the minimum prevailing wage rates pursuant to the Davis-Bacon and Related Acts. The wage rates shown are the minimum rates required by the contract to be paid during its life, however this is not a representation that labor can be obtained at these rates. It is the responsibility of bidders to inform themselves as to the local labor conditions and prospective changes or adjustments of wage rates. No increase in the contract price will be allowed or authorized on account of the payment of wage rates in excess of those listed herein.

### II. COVERAGE OF TRUCK DRIVERS

Truck drivers are covered by Davis-Bacon Minimum Wage Rates in the following circumstances:

- Drivers of a contractor or subcontractor for time spent working on the site of the work.
- Drivers of a contractor or subcontractor for time spent loading and/or unloading materials and supplies on the site of the work, if such time is not de minimis. https://www.dol.gov/whd/FOH/FOH\_Ch15.pdf
- Truck drivers transporting materials or supplies between a facility that is deemed part of the site of the work and the actual construction site.
- Truck drivers transporting portions of the building or work between a site
  established specifically for the performance of the contract where a
  significant portion of such building or work is constructed and the physical
  place where the building or work called for in the contract will remain.

Truck drivers are not covered by Davis-Bacon Minimum Wage Rates in the following circumstances:

- · Material delivery truck drivers while off the site of the work.
- Drivers of a contractor or subcontractor traveling between a Davis-Bacon job and a commercial supply facility while they are off the site of the work."
- Truck drivers whose time spent on the site of the work is de minimis, such as only a few minutes at a time merely to pick up or drop off materials or supplies.

Details are available online at:

https://www.dol.gov/whd/recovery/pwrb/Tab9.pdf https://wisconsindot.gov/Pages/doing-bus/civil-rights/labornwage/trckng.aspx

### III. POSTINGS AT THE SITE OF THE WORK

In addition to the required postings furnished by the department, the contractor shall post the following in at least one conspicuous and accessible place at the site of work:

a. A copy of the contractor's Equal Employment Opportunity Policy.

All required documents shall be posted by the first day of work and be accurate and complete. Postings must be readable, in an area where they will be noticed, and maintained until the last day of work.

#### IV. RESOURCES

Required information regarding compliance with federal provisions is found in the following resources:

- · FHWA-1273 included in this contract
- U.S. Department of Labor Prevailing Wage Resource Book
- · U.S. Department of Labor Field Operations Handbook
- U.S. Code of Federal Regulations
- Any applicable law, Act, or Executive Order enacted by the federal government at the time of the letting of this contract

General Decision Number: WI180010 11/30/2018 WI10

Superseded General Decision Number: WI20170010

State: Wisconsin

Construction Type: Highway

Counties: Wisconsin Statewide.

HIGHWAY, AIRPORT RUNWAY & TAXIWAY CONSTRUCTION PROJECTS (does not include bridges over navigable waters; tunnels; buildings in highway rest areas; and railroad construction)

Note: Under Executive Order (EO) 13658, an hourly minimum wage of \$10.35 for calendar year 2018 applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2015. If this contract is covered by the EO, the contractor must pay all workers in any classification listed on this wage determination at least \$10.35 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract in calendar year 2018. The EO minimum wage rate will be adjusted annually. Please note that this EO applies to the above-mentioned types of contracts entered into by the federal government that are subject to the Davis-Bacon Act itself, but it does not apply to contracts subject only to the Davis-Bacon Related Acts, including those set forth at 29 CFR 5.1(a) (2)-(60). Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Modification	Number	Publication	Date
0		01/05/2018	
1		05/18/2018	
2		05/25/2018	
3		06/15/2018	
4		06/22/2018	
5		07/20/2018	
6		08/03/2018	
7		08/31/2018	
8		09/28/2018	
9		10/12/2018	
10		11/30/2018	

BRWI0001-002 06/01/2017

CRAWFORD, JACKSON, JUNEAU, LA CROSSE, MONROE, TREMPEALEAU, AND VERNON COUNTIES

	Rates	Fringes
BRICKLAYER	\$ 32.03	22.40
BRWI0002-002 06/01/2017		

ASHLAND, BAYFIELD, DOUGLAS, AND IRON COUNTIES

	Rates	Fringes	
BRICKLAYER	\$ 38.07	20.67	
DDWT0002-005 06/01/2017			-

BRWI0002-005 06/01/2017

ADAMS, ASHLAND, BARRON, BROWN, BURNETT, CALUMET, CHIPPEWA, CLARK, COLUMBIA, DODGE, DOOR, DUNN, FLORENCE, FOND DU LAC, FOREST, GREEN LAKE, IRON, JEFFERSON, KEWAUNEE, LANGLADE, LINCOLN, MANITOWOC, MARATHON, MARINETTE, MARQUETTE, MENOMINEE, OCONTO, ONEIDA, OUTAGAMIE, POLK, PORTAGE, RUSK, ST CROIX, SAUK, SHAWANO, SHEBOYGAN, TAYLOR, VILAS, WALWORTH, WAUPACA, WAUSHARA, WINNEBAGO, AND WOOD COUNTIES

	Rates	Fringes
CEMENT MASON/CONCRETE FINISHER.	\$ 34.87	21.46
BRWI0003-002 06/01/2017		

		AND OCONTO COUNTIES
	Rates	Fringes
BRICKLAYER	\$ 32.41	22.02
BRWI0004-002 06/01/2017		
KENOSHA, RACINE, AND WALWORTH (	COUNTIES	
	Rates	Fringes
BRICKLAYER	\$ 36.79	22.99
BRWI0006-002 06/01/2017		
ADAMS, CLARK, FOREST, LANGLADE, ONEIDA, PORTAGE, PRICE, TAYLOR,	, LINCOLN, MAR , VILAS AND WO	ATHON, MENOMINEE, OD COUNTIES
	Rates	Fringes
BRICKLAYER	\$ 33.25	21.18
BRWI0007-002 06/01/2017		
GREEN, LAFAYETTE, AND ROCK COUN	NTIES	
	Rates	Fringes
BRICKLAYER	\$ 33.77	22.37
BRWI0008-002 06/01/2017		
MILWAUKEE, OZAUKEE, WASHINGTON,	, AND WAUKESHA	COUNTIES
	Rates	Fringes
BRICKLAYER	\$ 37.25	22.10
BRWI0011-002 06/01/2016		
CALUMET, FOND DU LAC, MANITOWOO	C, AND SHEBOYG	AN COUNTIES
	Rates	Fringes
BRICKLAYER	\$ 32.22	20.57
	, 02.22	
BRWI0019-002 06/01/2017		
BARRON, BUFFALO, BURNETT, CHIPI	PEWA, DUNN, EA	U CLAIRE, PEPIN,
BARRON, BUFFALO, BURNETT, CHIPI	PEWA, DUNN, EA SAWYER AND WA	U CLAIRE, PEPIN,
BARRON, BUFFALO, BURNETT, CHIPPIERCE, POLK, RUSK, ST. CROIX,	PEWA, DUNN, EA SAWYER AND WA Rates	U CLAIRE, PEPIN, SHBURN COUNTIES Fringes
BARRON, BUFFALO, BURNETT, CHIPP PIERCE, POLK, RUSK, ST. CROIX,	PEWA, DUNN, EA SAWYER AND WA Rates	U CLAIRE, PEPIN, SHBURN COUNTIES Fringes
BARRON, BUFFALO, BURNETT, CHIPPIERCE, POLK, RUSK, ST. CROIX, BRICKLAYER	PEWA, DUNN, EA SAWYER AND WA Rates	U CLAIRE, PEPIN, SHBURN COUNTIES Fringes
BARRON, BUFFALO, BURNETT, CHIPPIERCE, POLK, RUSK, ST. CROIX,  BRICKLAYER	PEWA, DUNN, EA SAWYER AND WA Rates	U CLAIRE, PEPIN, SHBURN COUNTIES Fringes
BARRON, BUFFALO, BURNETT, CHIPPIERCE, POLK, RUSK, ST. CROIX,  BRICKLAYER	PEWA, DUNN, EA SAWYER AND WA Rates \$ 32.17	U CLAIRE, PEPIN, SHBURN COUNTIES  Fringes 22.26  Fringes
BARRON, BUFFALO, BURNETT, CHIPPIERCE, POLK, RUSK, ST. CROIX,  BRICKLAYER	PEWA, DUNN, EA SAWYER AND WA Rates \$ 32.17	U CLAIRE, PEPIN, SHBURN COUNTIES  Fringes 22.26  Fringes
BARRON, BUFFALO, BURNETT, CHIPPIERCE, POLK, RUSK, ST. CROIX,  BRICKLAYER	PEWA, DUNN, EASAWYER AND WARates\$ 32.17  Rates\$ 33.74	U CLAIRE, PEPIN, SHBURN COUNTIES  Fringes  22.26  Fringes  22.40  POLK (W. of Hwys)
BARRON, BUFFALO, BURNETT, CHIPPIERCE, POLK, RUSK, ST. CROIX,  BRICKLAYER	PEWA, DUNN, EA SAWYER AND WA Rates \$ 32.17 Rates \$ 33.74	U CLAIRE, PEPIN, SHBURN COUNTIES  Fringes  22.26  Fringes  22.40  POLK (W. of Hwys)
BARRON, BUFFALO, BURNETT, CHIPPIERCE, POLK, RUSK, ST. CROIX,  BRICKLAYER	PEWA, DUNN, EA SAWYER AND WA Rates\$ 32.17  Rates\$ 33.74  (W. of Hwy 29 of Hwy 65) C	U CLAIRE, PEPIN, SHBURN COUNTIES  Fringes  22.26  Fringes  22.40  ), POLK (W. of Hwysounties)

CRAWFORD, DANE, DODGE, DOOR, DUNN, EAU CLAIRE, FLORENCE (except area bordering Michigan State Line), FOND DU LAC, FOREST, GRANT, GREEN, GREEN LAKE, IOWA, IRON, JACKSON, JEFFERSON, GRANT, GREEN, GREEN LAKE, IOWA, IRON, JACKSON, JEFFERSON,
JUNEAU, KEWAUNEE, LA CROSSE, LAFAYETTE, LANGLADE, LINCOLN,
MANITOWOC, MARATHON, MARINETTE (except N.E. corner), MARQUETTE,
MENOMINEE, MONROE, OCONTO, ONEIDA, OUTAGAMIE, PEPIN, PIERCE (E.
of Hwys 29 & 65), POLK (E. of Hwys 35, 48 & 65), PORTAGE,
PRICE, RICHLAND, ROCK, RUSK, SAUK, SAWYER, SHAWANO, SHEBOYGAN,
ST CROIX (E. of Hwy 65), TAYLOR, TREMPEALEAU, VERNON, VILAS,
WALWORTH, WASHBURN, WAUPACA, WAUSHARA, WINNEBAGO, AND WOOD COUNTIES

	Rates	Fringes
CARPENTER CARPENTER	\$ 35.08	18.00 18.35 18.00
~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~		

CARP0252-010 06/01/2016

ASHLAND COUNTY

	Rates	Fringes	
Carpenters			
Carpenter	\$ 33.56	18.00	
Millwright	\$ 35.08	18.35	
Pile Driver	\$ 34.12	18.00	

CARP0264-003 06/01/2016

KENOSHA, MILWAUKEE, OZAUKEE, RACINE, WAUKESHA, AND WASHINGTON COUNTIES

	Rates	Fringes	
CARPENTER	\$ 35.78	22.11	
CARP0361-004 05/01/2018			

CARP0361-004 05/01/2018

BAYFIELD (West of Hwy 63) AND DOUGLAS COUNTIES

	Rates	Fringes
CARPENTER	.\$ 36.15	20.43
CARP2337-001 06/01/2016		

ZONE A: MILWAUKEE, OZAUKEE, WAUKESHA AND WASHINGTON

ZONE B: KENOSHA & RACINE

	Rates	Fringes	
PILEDRIVERMAN			
Zone A		22.69	
Zone B	\$ 31.03	22.69	

ELEC0014-002 06/04/2018

ASHLAND, BARRON, BAYFIELD, BUFFALO, BURNETT, CHIPPEWA, CLARK (except Maryville, Colby, Unity, Sherman, Fremont, Lynn & Sherwood), CRAWFORD, DUNN, EAU CLAIRE, GRANT, IRON, JACKSON, LA CROSSE, MONROE, PEPIN, PIERCE, POLK, PRICE, RICHLAND, RUSK, ST CROIX, SAWYER, TAYLOR, TREMPEALEAU, VERNON, AND WASHBURN COUNTIES

	Rates	Fringes	
Electricians:	\$ 34.21	20.46	
TI DOO 1 4 007 06 /05 /0010			

ELEC0014-007 06/05/2018

REMAINING COUNTIES

Rates Fringes Low voltage construction, installation, maintenance and removal of teledata facilities (voice, data, and video) including outside plant, telephone and data inside wire, interconnect, terminal equipment, central offices, PABX, fiber optic cable and equipment, micro waves, V-SAT, bypass, CATV, WAN (wide area networks), LAN (local area networks), and ISDN (integrated systems digital network).

ELEC0127-002 06/01/2017

KENOSHA COUNTY

BROWN, DOOR, KEWAUNEE, MANITOWOC (except Schleswig), MARINETTE (Wausuakee and area South thereof), OCONTO, MENOMINEE (East of a ine 6 miles West of the West boundary of Oconto County), SHAWANO (Except Area North of Townships of Aniwa and Hutchins) COUNTIES

COLUMBIA, DANE, DODGE (Area West of Hwy 26, except Chester and Emmet Townships), GREEN, LAKE (except Townships of Berlin, Seneca, and St. Marie), IOWA, MARQUETTE (except Townships of Neshkoka, Crystal Lake, Newton, and Springfield), and SAUK COUNTIES

FLORENCE COUNTY (Townships of Aurora, Commonwealth, Fern, Florence and Homestead) AND MARINETTE COUNTY (Township of Niagara)

Rates Fringes

Electricians:
Electrical contracts over
\$180,000.....\$32.38
Electrical contracts under
\$180,000.....\$30.18
18.42

ELEC0242-005 05/16/2018

DOUGLAS COUNTY

Rates Fringes

Electricians:......\$ 36.85 26.17

ELEC0388-002 06/03/2018

ADAMS, CLARK (Colby, Freemont, Lynn, Mayville, Sherman, Sherwood, Unity), FOREST, JUNEAU, LANGLADE, LINCOLN, MARATHON, MARINETTE (Beecher, Dunbar, Goodman & Pembine), MENOMINEE (Area West of a line 6 miles West of the West boundary of Oconto County), ONEIDA, PORTAGE, SHAWANO (Aniwa and Hutchins), VILAS AND WOOD COUNTIES

Rates Fringes

Electricians:.....\$ 32.55 19.02

ELEC0430-002 06/01/2018

RACINE COUNTY (Except Burlington Township)

Rates Fringes

Electricians:.....\$ 38.78 21.49

\_\_\_\_\_

ELEC0494-005 06/01/2018

MILWAUKEE, OZAUKEE, WASHINGTON, AND WAUKESHA COUNTIES

Rates Fringes

Electricians:.....\$ 39.31 24.69

ELEC0494-006 06/01/2018

CALUMET (Township of New Holstein), DODGE (East of Hwy 26 including Chester Township), FOND DU LAC, MANITOWOC (Schleswig), and SHEBOYGAN COUNTIES

	Rates	Fringes
Electricians:	\$ 33.40	22.08

<sup>\*</sup> ELEC0494-013 06/01/2018

DODGE (East of Hwy 26 including Chester Twp, excluding Emmet Twp), FOND DU LAC (Except Waupuin), MILWAUKEE, OZAUKEE, MANITOWOC (Schleswig), WASHINGTON, AND WAUKESHA COUNTIES

	Rates	Fringes
Sound & Communications		
Installer	\$ 19.56	15.78
Technician	\$ 28.99	16.25

Installation, testing, maintenance, operation and servicing of all sound, intercom, telephone interconnect, closed circuit TV systems, radio systems, background music systems, language laboratories, electronic carillion, antenna distribution systems, clock and program systems and low-voltage systems such as visual nurse call, audio/visual nurse call systems, doctors entrance register systems. Includes all wire and cable carrying audio, visual, data, light and radio frequency signals. Includes the installation of conduit, wiremold, or raceways in existing structures that have been occupied for six months or more where required for the protection of the wire or cable, but does not mean a complete conduit or raceway system. work covered does not include the installation of conduit, wiremold or any raceways in any new construction, or the installation of power supply outlets by means of which external electric power is supplied to any of the foregoing equipment or products

ELEC0577-003 06/01/2018

CALUMET (except Township of New Holstein), GREEN LAKE (N. part including Townships of Berlin, St Marie, and Seneca), MARQUETTE (N. part including Townships of Crystal Lake, Neshkoro, Newton, and Springfield), OUTAGAMIE, WAUPACA, WAUSHARA, AND WINNEBAGO COUNTIES

\_\_\_\_\_\_

Rates Fringes

Electricians:......\$ 32.18 18.59

ELEC0890-003 06/01/2018

DODGE (Emmet Township only), GREEN, JEFFERSON, LAFAYETTE, RACINE (Burlington Township), ROCK AND WALWORTH COUNTIES

Rates Fringes

Electricians:.....\$34.15 19.63

ELEC0953-001 07/01/2015

Rates Fringes

Line Construction:
(1) Lineman......\$42.14 32% + 5.00
(2) Heavy Equipment
Operator.....\$40.03 32% + 5.00
(3) Equipment Operator....\$33.71 32% + 5.00
(4) Heavy Groundman Driver..\$26.78 14.11
(5) Light Groundman Driver..\$24.86 13.45
(6) Groundsman.....\$23.18 32% + 5.00

ENGI0139-005 06/04/2018

	Rates	Fringes
Power Equipment Operator		
Group 1	\$ 40.72	22.10
Group 2		22.10
Group 3		22.10
Group 4	\$ 39.46	22.10
Group 5		22.10
Group 6		22.10

### HAZARDOUS WASTE PREMIUMS:

EPA Level "A" protection - \$3.00 per hour EPA Level "B" protection - \$2.00 per hour EPA Level "C" protection - \$1.00 per hour

### POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1: Cranes, tower cranes, and derricks with or without attachments with a lifting capacity of over 100 tons; or cranes, tower cranes, and derricks with boom, leads and/or jib lengths measuring 176 feet or longer.

GROUP 2: Cranes, tower cranes and derricks with or without attachments with a lifting capacity of 100 tons or less; or cranes, tower cranes, and derricks with boom, leads, and/or jibs lengths measuring 175 feet or under and Backhoes (excavators) weighing 130,000 lbs and over; caisson rigs; pile driver; dredge operator; dredge engineer; Boat Pilot.

GROUP 3: Mechanic or welder - Heavy duty equipment; cranes with a lifting capacity of 25 tons or under; concrete breaker (manual or remote); vibratory/sonic concrete breaker; concrete laser screed; concrete slipform paver; concrete batch plant operator; concrete pvt. spreader - heavy duty (rubber tired); concrete spreader & distributor; automatic subgrader (concrete); concrete grinder & planing machine; concrete slipform curb & gutter machine; slipform concrete placer; tube finisher; hydro blaster (10,000 psi & over); bridge paver; concrete conveyor system; concrete pump; Rotec type Conveyor; stabilizing mixer (self-propelled); shoulder widener; asphalt plant engineer; bituminious paver; bump cutter & grooving machine; milling machine; screed (bituminous paver); asphalt heater, planer & scarifier; Backhoes (excavators) weighing under 130,000 lbs; grader or motor patrol; tractor (scraper, dozer, pusher, loader); scraper - rubber tired (single or twin engine); endloader; hydraulic backhoe (tractor type); trenching machine; skid rigs; tractor, side boom (heavy); drilling or boring machine (mechanical heavy); roller over 5 tons; percussion or rotary drilling machine; air track; blaster; loading machine (conveyor); tugger; boatmen; winches & A-frames; post driver; material hoist.

GROUP 4: Greaser, roller steel (5 tons or less); roller (pneumatic tired) - self propelled; tractor (mounted or towed compactors & light equipment); shouldering machine; self- propelled chip spreader; concrete spreader; finishing machine; mechanical float; curing machine; power subgrader; joint sawer (multiple blade) belting machine; burlap machine; texturing machine; tractor endloader (rubber tired) - light; jeep digger; forklift; mulcher; launch

operator; fireman, environmental burner

GROUP 5: Air compressor; power pack; vibrator hammer and extractor; heavy equipment, leadman; tank car heaters; stump chipper; curb machine operator; Concrete proportioning plants; generators; mudjack operator; rock breaker; crusher or screening plant; screed (milling machine); automatic belt conveyor and surge bin; pug mill operator; Oiler, pump (over 3 inches); Drilling Machine Tender.

GROUP 6: Off-road material hauler with or without ejector.

IRON0008-002 06/01/2017

BROWN, CALUMET, DOOR, FOND DU LAC, KEWAUNEE, MANITOWOC, MARINETTE, OCONTO, OUTAGAMI, SHAWANO, SHEBOYGAN, AND WINNEBAGO COUNTIES:

Rates Fringes

IRONWORKER.....\$ 31.24 26.97

Paid Holidays: New Year's Day, Memorial Day, July 4th, Labor Day, Thanksgiving Day & Christmas Day.

IRON0008-003 06/01/2017

KENOSHA, MILWAUKEE, OZAUKEE, RACINE, WALWORTH (N.E. 2/3), WASHINGTON, AND WAUKESHA COUNTIES

Rates Fringes

IRONWORKER.....\$ 33.19 26.97

Paid Holidays: New Year's Day, Memorial Day, July 4th, Labor Day, Thanksgiving Day & Christmas Day.

\_\_\_\_\_\_

IRON0383-001 06/01/2017

ADAMS, COLUMBIA, CRAWFORD, DANE, DODGE, FLORENCE, FOREST, GRANT, GREENE, (Excluding S.E. tip), GREEN LAKE, IOWA, JEFFERSON, JUNEAU, LA CROSSE, LAFAYETTE, LANGLADE, MARATHON, MARQUETTE, MENOMINEE, MONROE, PORTAGE, RICHLAND, ROCK (Northern area, vicinity of Edgerton and Milton), SAUK, VERNON, WAUPACA, WAUSHARA, AND WOOD COUNTIES

Rates Fringes
IRONWORKER.....\$34.50 23.82

IRON0498-005 06/01/2016

GREEN (S.E. 1/3), ROCK (South of Edgerton and Milton), and WALWORTH (S.W. 1/3) COUNTIES:

Rates Fringes

IRONWORKER.....\$ 36.29 30.77

IRON0512-008 05/01/2017

BARRON, BUFFALO, CHIPPEWA, CLARK, DUNN, EAU CLAIRE, JACKSON, PEPIN, PIERCE, POLK, RUSK, ST CROIX, TAYLOR, AND TREMPEALEAU COUNTIES

Rates Fringes

IRONWORKER.....\$ 36.50 26.45

IRON0512-021 05/01/2017

ASHLAND, BAYFIELD, BURNETT, DOUGLAS, IRON, LINCOLN, ONEIDA,

	Rates	Fringes
IRONWORKER	\$ 32.04	26.45

LABO0113-002 06/04/2018

MILWAUKEE AND WAUKESHA COUNTIES

		Rates	Fringes
Group Group Group	1	28.03 28.23 28.38	21.76 21.76 21.76 21.76
	5		21.76

#### LABORERS CLASSIFICATIONS

GROUP 1: General Laborer; Tree Trimmer; Conduit Layer; Demolition and Wrecking Laborer; Guard Rail, Fence, and Bridge Builder; Landscaper; Multiplate Culvert Assembler; Stone Handler; Bituminous Worker (Shoveler, Loader, and Utility Man); Batch Truck Dumper or Cement Handler; Bituminous Worker (Dumper, Ironer, Smoother, and Tamper); Concrete Handler

GROUP 2: Air Tool Operator; Joint Sawer and Filler (Pavement); Vibrator or Tamper Operator (Mechanical Hand Operated); Chain Saw Operator; Demolition Burning Torch Laborer

GROUP 3: Bituminous Worker (Raker and Luteman); Formsetter (Curb, Sidewalk, and Pavement); Strike Off Man

GROUP 4: Line and Grade Specialist

GROUP 5: Blaster and Powderman

GROUP 6: Flagperson; traffic control person

\_\_\_\_\_

LABO0113-003 06/04/2018

OZAUKEE AND WASHINGTON COUNTIES

	Rates	Fringes
LABORER		
Group Group Group Group	1\$ 27.13 2\$ 27.23 3\$ 27.28 4\$ 27.48 5\$ 27.33 6\$ 24.22	21.76 21.76 21.76 21.76 21.76

### LABORERS CLASSIFICATIONS

GROUP 1: General Laborer; Tree Trimmer; Conduit Layer; Demolition and Wrecking Laborer; Guard Rail, Fence, and Bridge Builder; Landscaper; Multiplate Culvert Assembler; Stone Handler; Bituminous Worker (Shoveler, Loader, and Utility Man); Batch Truck Dumper or Cement Handler; Bituminous Worker (Dumper, Ironer, Smoother, and Tamper); Concrete Handler

GROUP 2: Air Tool Operator; Joint Sawer and Filler (Pavement); Vibrator or Tamper Operator (Mechanical Hand Operated);

GROUP 3: Bituminous Worker (Raker and Luteman); Formsetter (Curb, Sidewalk, and Pavement); Strike Off Man

GROUP 4: Line and Grade Specialist

GROUP 5: Blaster; powderman

\_\_\_\_\_

LABO0113-011 06/04/2018

KENOSHA AND RACINE COUNTIES

		Rates	Fringes
LABORER	1	¢ 26 04	21 76
	1		21.76 21.76
	2		, 0
Group	3	\$ 27.29	21.76
	4		21.76
Group	5	\$ 27.59	21.76
Group	6	\$ 24.08	21.76

#### LABORERS CLASSIFICATIONS:

GROUP 1: General laborer; Tree Trimmer; Conduit Layer; Demolition and Wrecking Laborer; Guard Rail, Fence, and Bridge Builder; Landscaper; Multiplate Culvert Assembler; Stone Handler; Bituminous Worker (Shoveler, Loader, and Utility Man); Batch Truck Dumper or Cement Handler; Bituminous worker (Dumper, Ironer, Smoother, and Tamper); Concrete Handler

GROUP 2: Air Tool Operator; Joint Sawer and Filler (Pavement); Vibrator or Tamper Operator (Mechanical Hand Operated); Chain Saw Operator; Demolition Burning Torch Laborer

GROUP 3: Bituminous Worker (Raker and Luteman); Formsetter (Curb, Sidewalk, and Pavement); Strike Off Man

GROUP 4: Line and Grade Specialist

GROUP 5: Blaster and Powderman

GROUP 6: Flagman; traffic control person

#### LABO0140-002 06/04/2018

ADAMS, ASHLAND, BARRON, BAYFIELD, BROWN, BUFFALO, BURNETT, CALUMET, CHIPPEWA, CLARK, COLUMBIA, CRAWFORD, DODGE, DOOR, DOUGLAS, DUNN, EAU CLAIRE, FLORENCE, FOND DU LAC, FOREST, GRANT, GREEN, GREEN LAKE, IRON, JACKSON, JUNEAU, IOWA, JEFFERSON, KEWAUNEE, LA CROSSE, LAFAYETTE, LANGLADE, LINCOLN, MANITOWOC, MARATHON, MARINETTE, MARQUETTE, MENOMINEE, MONROE, OCONTO, ONEIDA, OUTAGAMIE, PEPIN, PIERCE, POLK, PORTAGE, PRICE, RICHLAND, ROCK, RUSK, SAUK, SAWYER, SHAWANO, SHEBOYGAN, ST. CROIX, TAYLOR, TREMPEALEAU, VERNON, VILLAS, WALWORTH, WASHBURN, WAUPACA, WAUSHARA, WINNEBAGO, AND WOOD COUNTIES

		Rates	Fringes
	1		17.20 17.20
Group Group Group	2	\$ 31.95 \$ 32.15 \$ 32.00	17.20 17.20 17.20 17.20

#### LABORER CLASSIFICATIONS

GROUP 1: General Laborer; Tree Trimmer; Conduit Layer; Demolition and Wrecking Laborer; Guard Rail, Fence, and Bridge Builder; Landscaper; Multiplate Culvert Assembler; Stone Handler; Bitminous Worker (Shoveler, Loader, and Utility Man); Batch Truck Dumper or Cement Handler; Bituminous Worker (Dumper, Ironer, Smoother and Tamper); Concrete Handler

GROUP 2: Air Tool Operator; Joint Sawer and Filler (Pavement); Vibrator or Tamper Operator (Mechanical Hand Operated); Chain Saw Operator, Demolition Burning Torch Laborer

```
GROUP 3: Bituminous Worker (Raker and Luteman); Formsetter
  (Curb, Sidewalk and Pavement); Strike Off Man
GROUP 4: Line and Grade Secialist
GROUP 5: Blaster; powderman
GROUP 6: Flagperson; Traffic Control
LABO0464-003 06/04/2018
DANE COUNTY
```

		Rates	Fringes
LABORER			
Group	1	.\$ 32.08	1720
Group	2	\$ 32.18	1720
	3		1720
	4		1720
	5		1720
	6		1720

#### LABORERS CLASSIFICATIONS:

GROUP 1: General Laborer; Tree Trimmer; Conduit Layer; Demolition and Wrecking Laborer; Guard Rail, Fence, and Bridge Builder; Landscaper; Multiplate Culvert Assembler; Stone Handler; Bituminous Worker (Shoveler, Loader, and Utility Man); Batch Truck Dumper or Cement Handler; Bituminious Worker (Dumper, Ironer, Smoother, and Tamper); Concrete Handler

GROUP 2: Air Tool Operator; Joint Sawer and Filler (Pavement); Vibrator or Tamper Operator (Mechanical Hand Operated); Chain Saw Operator; Demolition Burning Torch Laborer

GROUP 3: Bituminous Worker (Raker and Luteman); Formsetter (Curb, Sidewalk, and Pavement); Strike Off Man

GROUP 4: Line and Grade Specialist

GROUP 5: Blaster; Powderman

GROUP 6: Flagperson and Traffic Control Person

PAIN0106-008 05/01/2017

ASHLAND, BAYFIELD, BURNETT, AND DOUGLAS COUNTIES

		Rates	Fringes
Painters:			
New: Brush	Roller\$	30 33	17.27
Spray,	Sandblast, Steel\$		17.27
Repaint			
	Roller\$		17.27
Spray,	Sandblast, Steel\$	29.43	17.27

PAIN0108-002 06/01/2017

RACINE COUNTY

	Rates	Fringes	
Painters: Brush, Roller Spray & Sandblast		18.95 18.95	

PAIN0259-002 05/01/2008

BARRON, CHIPPEWA, DUNN, EAU CLAIRE, PEPIN, PIERCE, POLK, RUSK, SAWYER, ST. CROIX, AND WASHBURN COUNTIES

> Rates Fringes

PAINTER	\$ 24.11 	12.15
PAIN0259-004 05/01/2015		
BUFFALO, CRAWFORD, JACKSON, LA CREVERNON COUNTIES	OSSE, MONROE, I	REMPEALEAU, AND
	Rates	Fringes
PAINTER	\$ 22.03	12.45
PAIN0781-002 06/01/2017		
JEFFERSON, MILWAUKEE, OZAUKEE, WA	SHINGTON, AND W	NAUKESHA COUNTIES
	Rates	Fringes
Painters: Bridge Brush Spray & Sandblast	\$ 30.25	22.80 22.80 22.80
PAIN0802-002 06/01/2017		
COLUMBIA, DANE, DODGE, GRANT, GREENCK, AND SAUK COUNTIES	EN, IOWA, LAFAY	YETTE, RICHLAND,
	Rates	Fringes
PAINTER Brush	\$ 28.25	17.72
PREMIUM PAY: Structural Steel, Spray, Bridge hour.	s = \$1.00 add	ditional per
PAIN0802-003 06/01/2017		
ADAMS, BROWN, CALUMET, CLARK, DOOL LAKE, IRON, JUNEAU, KEWAUNEE, LAN MARATHON, MARINETTE, MARQUETTE, M OUTAGAMIE, PORTAGE, PRICE, SHAWAN WAUSHARA, WAUPACA, WINNEBAGO, AND	ENOMINEE, OCOÑ O, SHEBOYGAN,	ITO, ONEIDA,
	Rates	Fringes
PAINTER	\$ 24.89	12.05
PAIN0934-001 06/01/2017		
KENOSHA AND WALWORTH COUNTIES		
	Rates	Fringes
Painters:		
Brush	\$ 33.74 \$ 34.74 \$ 33.89	18.95 18.95 18.95
PAIN1011-002 06/01/2017		
FLORENCE COUNTY		
	Rates	Fringes
Painters:	\$ 24.86	12.23
PLAS0599-010 06/01/2017		
	Rates	Fringes
CEMENT MASON/CONCRETE FINISHER Area 1	\$ 39.46 \$ 35.07	17.17 19.75
Area 3Area 4Area 5	\$ 34.70	19.40 20.51 18.73

Area 6.....\$ 32.02 22.99

#### AREA DESCRIPTIONS

AREA 1: BAYFIELD, DOUGLAS, PRICE, SAWYER, AND WASHBURN COUNTIES

AREA 2: ADAMS, ASHLAND, BARRON, BROWN, BURNETT, CALUMET, CHIPPEWA, CLARK, COLUMBIA, DODGE, DOOR, DUNN, FLORENCE, FOND DU LAC, FOREST, GREEN LAKE, IRON, JEFFERSON, KEWAUNEE, LANGLADE, LINCOLN, MANITOWOC, MARATHON, MARINETTE, MARQUETTE, MENOMINEE, OCONTO, ONEIDA, OUTAGAMIE, POLK, PORTAGE, RUSK, ST CROIX, SAUK, SHAWANO, SHEBOYGAN, TAYLOR, VILAS, WALWORTH, WAUPACA, WAUSHARA, WINNEBAGO, AND WOOD COUNTIES

AREA 3: BUFFALO, CRAWFORD, EAU CLAIRE, JACKSON, JUNEAU, LA CROSSE MONROE, PEPIN, PIERCE, RICHLAND, TREMPEALEAU, AND VERNON COUNTIES

AREA 4: MILWAUKEE, OZAUKEE, WASHINGTON, AND WAUKESHA COUNTIES

AREA 5: DANE, GRANT, GREEN, IOWA, LAFAYETTE, AND ROCK COUNTIES

AREA 6: KENOSHA AND RACINE COUNTIES

\_\_\_\_\_\_

TEAM0039-001 06/01/2018

	Rates	Fringes
TRUCK DRIVER  1 & 2 Axles  3 or more Axles; Euclids Dumptor & Articulated, Truck Mechanic	·	21.20
	20.27 	21.20
WELL DRILLER	\$ 16.52	3.70

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

\_\_\_\_\_\_

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year. Employees must be permitted to use paid sick leave for their own illness, injury or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

-----

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of "identifiers" that indicate whether the particular rate is a union rate (current union negotiated rate for local), a survey rate (weighted average rate) or a union average rate

(weighted union average rate).

Union Rate Identifiers

A four letter classification abbreviation identifier enclosed in dotted lines beginning with characters other than "SU" or "UAVG" denotes that the union classification and rate were prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2014. PLUM is an abbreviation identifier of the union which prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. 07/01/2014 is the effective date of the most current negotiated rate, which in this example is July 1, 2014.

Union prevailing wage rates are updated to reflect all rate changes in the collective bargaining agreement (CBA) governing this classification and rate.

Survey Rate Identifiers

Classifications listed under the "SU" identifier indicate that no one rate prevailed for this classification in the survey and the published rate is derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As this weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SULA2012-007 5/13/2014. SU indicates the rates are survey rates based on a weighted average calculation of rates and are not majority rates. LA indicates the State of Louisiana. 2012 is the year of survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. 5/13/2014 indicates the survey completion date for the classifications and rates under that identifier.

Survey wage rates are not updated and remain in effect until a new survey is conducted.

Union Average Rate Identifiers

Classification(s) listed under the UAVG identifier indicate that no single majority rate prevailed for those classifications; however, 100% of the data reported for the classifications was union data. EXAMPLE: UAVG-OH-0010 08/29/2014. UAVG indicates that the rate is a weighted union average rate. OH indicates the state. The next number, 0010 in the example, is an internal number used in producing the wage determination. 08/29/2014 indicates the survey completion date for the classifications and rates under that identifier.

A UAVG rate will be updated once a year, usually in January of each year, to reflect a weighted average of the current negotiated/CBA rate of the union locals from which the rate is based.

-----

#### WAGE DETERMINATION APPEALS PROCESS

- 1.) Has there been an initial decision in the matter? This can be:
- \* an existing published wage determination
- \* a survey underlying a wage determination
- \* a Wage and Hour Division letter setting forth a position on a wage determination matter
- a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations Wage and Hour Division U.S. Department of Labor 200 Constitution Avenue, N.W. Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator U.S. Department of Labor 200 Constitution Avenue, N.W. Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board U.S. Department of Labor 200 Constitution Avenue, N.W. Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

\_\_\_\_\_\_

END OF GENERAL DECISION

General Decision Number: WI180015 11/30/2018 WI15

Superseded General Decision Number: WI20170015

State: Wisconsin

Construction Type: Heavy

Counties: Wisconsin Statewide.

HEAVY CONSTRUCTION PROJECTS (Excluding Tunnel, Sewer, and Water Lines).

Note: Under Executive Order (EO) 13658, an hourly minimum wage of \$10.35 for calendar year 2018 applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2015. If this contract is covered by the EO, the contractor must pay all workers in any classification listed on this wage determination at least \$10.35 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract in calendar year 2018. The EO minimum wage rate will be adjusted annually. Please note that this EO applies to the above-mentioned types of contracts entered into by the federal government that are subject to the Davis-Bacon Act itself, but it does not apply to contracts subject only to the Davis-Bacon Related Acts, including those set forth at 29 CFR 5.1(a) (2)-(60). Additional information on contractor requirements and worker protections

under the EO is available at www.dol.gov/whd/govcontracts.

$\mathop{\texttt{Modification}}_{0}$	Number	Publication Date 01/05/2018
1		05/18/2018
2		05/25/2018
3		06/15/2018
4		06/22/2018
5		07/20/2018
6		08/03/2018
7		08/24/2018
8		08/31/2018
9		09/28/2018
10		10/12/2018
11		11/30/2018

BOIL0107-001 01/01/2017

	Rates	Fringes
BOILERMAKER Boilermaker	¢ 25 65	29.89
Small Boiler Repair (under	r	29.09
25,000 lbs/hr)	\$ 26.91 	16.00

BRWI0001-002 06/01/2017

CRAWFORD, JACKSON, JUNEAU, LA CROSSE, MONROE, TREMPEALEAU, AND VERNON COUNTIES

	Rates	Fringes	
BRICKLAYER	\$ 32.03	22.40	
BRWI0002-002 06/01/2017			

ASHLAND, BAYFIELD, DOUGLAS, AND IRON COUNTIES

	Rates	Fringes	
BRICKLAYER	\$ 38.07	20.67	
BRWI0002-005 06/01/2017			

ADAMS, ASHLAND, BARRON, BROWN, BURNETT, CALUMET, CHIPPEWA, CLARK, COLUMBIA, DODGE, DOOR, DUNN, FLORENCE, FOND DU LAC, FOREST, GREEN LAKE, IRON, JEFFERSON, KEWAUNEE, LANGLADE, LINCOLN, MANITOWOC, MARATHON, MARINETTE, MARQUETTE, MENOMINEE, OCONTO, ONEIDA, OUTAGAMIE, POLK, PORTAGE, RUSK, ST CROIX, SAUK,

SHAWANO, SHEBOYGAN, TAYLOR, VILAS, WALWORTH, WAUPACA, WAUSHARA, WINNEBAGO, AND WOOD COUNTIES

	Rates	Fringes
CEMENT MASON/CONCRETE FINISHER	.\$ 34.87	21.46
BRWI0003-002 06/01/2017		
BROWN, DOOR, FLORENCE, KEWAUNEE,	MARINETTE,	AND OCONTO COUNTIES
	Rates	Fringes
BRICKLAYER	.\$ 32.41	22.02
BRWI0004-002 06/01/2017		
KENOSHA, RACINE, AND WALWORTH CO	UNTIES	
	Rates	Fringes
BRICKLAYER	.\$ 36.79	22.99
BRWI0006-002 06/01/2017		
ADAMS, CLARK, FOREST, LANGLADE, ONEIDA, PORTAGE, PRICE, TAYLOR,		
	Rates	Fringes
BRICKLAYER	.\$ 33.25	21.18
BRWI0007-002 06/01/2017		
GREEN, LAFAYETTE, AND ROCK COUNT	CIES	
	Rates	Fringes
BRICKLAYER	.\$ 33.77	22.37
BRWI0008-002 06/01/2017		
MILWAUKEE, OZAUKEE, WASHINGTON,	AND WAUKESH	A COUNTIES
	Rates	Fringes
BRICKLAYER	.\$ 37.25	22.10
BRWI0009-001 06/01/2017		
GREEN LAKE, MARQUETTE, OUTAGAMIE AND WINNEBAGO COUNTIES	E, SHAWANO,	WAUPACA, WASHARA,
	Rates	Fringes
BRICKLAYER	.\$ 32.41	22.02
BRWI0011-002 06/01/2016		
CALUMET, FOND DU LAC, MANITOWOC,	AND SHEBOY	GAN COUNTIES
	Rates	Fringes
BRICKLAYER	.\$ 32.22	20.57
BRWI0013-002 06/01/2017		
DANE, GRANT, IOWA, AND RICHLAND	COUNTIES	
	Rates	Fringes
BRICKLAYER	.\$ 33.74	22.40
BRWI0019-002 06/01/2017		
BARRON, BUFFALO, BURNETT, CHIPPE		
PIERCE, POLK, RUSK, ST. CROIX, S	ANIEK AND W.	WOUDOWN COONLIFY

	Datas	Dui a sa a
DD 7077 1 17D	Rates	-
BRICKLAYER	\$ 32.1/ 	22.26
BRWI0021-002 06/01/2017		
DODGE AND JEFFERSON COUNTIES		
		Fringes
BRICKLAYER	\$ 34.46 	21.66
BRWI0034-002 06/01/2017		
COLUMBIA AND SAUK COUNTIES		
	Rates	Fringes
BRICKLAYER	\$ 33.74 	22.40
CARP0087-001 05/01/2016		
BURNETT (W. of Hwy 48), PIERCE (W 35, 48 & 65), AND ST. CROIX (W. o.	. of Hwy 29), P f Hwy 65) COUNT	OLK (W. of Hwys IES
	Rates	Fringes
Carpenter & Piledrivermen	\$ 36.85	18.39
CARP0252-002 06/01/2016		
area bordering Michigan State Line GRANT, GREEN, GREEN LAKE, IOWA, II JUNEAU, KEWAUNEE, LA CROSSE, LAFA MANITOWOC, MARATHON, MARINETTE (e: MENOMINEE, MONROE, OCONTO, ONEIDA Of Hwys 29 & 65), POLK (E. of Hwys PRICE, RICHLAND, ROCK, RUSK, SAUK ST CROIX (E. of Hwy 65), TAYLOR, WALWORTH, WASHBURN, WAUPACA, WAUST COUNTIES	RON, JACKSON, J YETTE, LANGLADE XCEPT N.E. COTN , OUTAGAMIE, PE S 35, 48 & 65), , SAWYER, SHAWA TREMPEALEAU, VE	EFFERSON, , LINCOLN, er), MARQUETTE, PIN, PIERCE (E. PORTAGE, NO, SHEBOYGAN, RNON, VILAS,
	Rates	Fringes
CARPENTER CARPENTER. MILLWRIGHT. PILEDRIVER.  CARP0252-010 06/01/2016	à ar aa	18.00 18.35 18.00
ASHLAND COUNTY	Rates	Fringes
Compontons	Races	Fringes
Carpenters CarpenterMillwright Pile Driver	\$ 33.56 \$ 35.08 \$ 34.12	18.00 18.35 18.00
CARP0264-003 06/01/2016		
KENOSHA, MILWAUKEE, OZAUKEE, RACII COUNTIES	NE, WAUKESHA, A	ND WASHINGTON
	Rates	Fringes
CARPENTER	\$ 35.78 	22.11
CARP0361-004 05/01/2018		
BAYFIELD (West of Hwy 63) AND DOUG	GLAS COUNTIES	
	Rates	Fringes

CARPENTER.....\$ 36.15 20.43 CARP2337-001 06/01/2016

ZONE A: MILWAUKEE, OZAUKEE, WAUKESHA AND WASHINGTON

ZONE B: KENOSHA & RACINE

Rates Fringes

PILEDRIVERMAN

Zone A......\$ 31.03 22.69

Zone B......\$ 31.03 22.69

CARP2337-003 06/01/2016

Rates Fringes

MILLWRIGHT

Zone A......\$ 29.98 21.53

Zone B.....\$ 29.98 21.53

ZONE DEFINITIONS

ZONE A: MILWAUKEE, OZAUKEE, WAUKESHA AND WASHINGTON COUNTIES

ZONE B: KENOSHA & RACINE COUNTIES

-----

ELEC0014-002 06/04/2018

ASHLAND, BARRON, BAYFIELD, BUFFALO, BURNETT, CHIPPEWA, CLARK (except Maryville, Colby, Unity, Sherman, Fremont, Lynn & Sherwood), CRAWFORD, DUNN, EAU CLAIRE, GRANT, IRON, JACKSON, LA CROSSE, MONROE, PEPIN, PIERCE, POLK, PRICE, RICHLAND, RUSK, ST CROIX, SAWYER, TAYLOR, TREMPEALEAU, VERNON, AND WASHBURN COUNTIES

Rates Fringes
Electricians:.....\$34.21 20.46

ELEC0014-007 06/05/2018

REMAINING COUNTIES

Teledata System Installer
Installer/Technician.....\$ 26.25 13.92

Low voltage construction, installation, maintenance and removal of teledata facilities (voice, data, and video) including outside plant, telephone and data inside wire, interconnect, terminal equipment, central offices, PABX, fiber optic cable and equipment, micro waves, V-SAT, bypass, CATV, WAN (wide area networks), LAN (local area networks), and ISDN (integrated systems digital network).

-----

ELEC0127-002 06/01/2017

KENOSHA COUNTY

Rates Fringes

Electricians:.....\$38.50 30%+10.57

ELEC0158-002 06/04/2018

BROWN, DOOR, KEWAUNEE, MANITOWOC (except Schleswig), MARINETTE(Wausuakee and area South thereof), OCONTO, MENOMINEE (East of a ine 6 miles West of the West boundary of Oconto County), SHAWANO (Except Area North of Townships of Aniwa and Hutchins) COUNTIES

Rates Fringes

Rates Fringes

Electricians:	.\$ 32.50 	19.68
ELEC0159-003 06/01/2018		
COLUMBIA, DANE, DODGE (Area West Emmet Townships), GREEN, LAKE (e. Seneca, and St. Marie), IOWA, MA Neshkoka, Crystal Lake, Newton, COUNTIES	xcept Townships RQUETTE (except	of Berlin, Townships of
	Rates	Fringes
Electricians: ELEC0219-004 06/01/2016	.\$ 39.04	21.56
FLORENCE COUNTY (Townships of Au Florence and Homestead) AND MARI Niagara)	rora, Commonweal NETTE COUNTY (To	th, Fern, wnship of
	Rates	Fringes
Electricians:     Electrical contracts over \$180,000		18.63 18.42
ELEC0242-005 05/16/2018		
DOUGLAS COUNTY		
	Rates	Fringes
Electricians:		26.17
ELEC0388-002 06/03/2018		
ADAMS, CLARK (Colby, Freemont, L Sherwood, Unity), FOREST, JUNEA MARINETTE (Beecher, Dunbar, Good West of a line 6 miles West of to County), ONEIDA, PORTAGE, SHAWAN AND WOOD COUNTIES	U, LANGLADE, LIN man & Pembine), he West boundary	COLN, MARATHON, MENOMINEE (Area of Oconto
	Rates	Fringes
Electricians:	.\$ 32.55	19.02
ELEC0430-002 06/01/2018		
RACINE COUNTY (Except Burlington	Township)	
	Rates	Fringes
Electricians:	.\$ 38.78	21.49
ELEC0494-005 06/01/2018		
MILWAUKEE, OZAUKEE, WASHINGTON,	AND WAUKESHA COU	NTIES
,,	Rates	
Electricians:		2
ELEC0494-006 06/01/2018		
CALUMET (Township of New Holsteincluding Chester Township), FON (Schleswig), and SHEBOYGAN COUNT	D DU LAC, MANITO	of Hwy 26 WOC
	Rates	Fringes
Electricians:		22.08
* ELEC0494-013 06/01/2018		
PPPC0121 0TO 00/0T/70T0		

 $https://www.wdol.gov/wdol/scafiles/davisbacon/wi15.dvb [11/30/2018\ 11:04:27\ AM]$ 

DODGE (East of Hwy 26 including Chester Twp, excluding Emmet Twp), FOND DU LAC (Except Waupuin), MILWAUKEE, OZAUKEE, MANITOWOC (Schleswig), WASHINGTON, AND WAUKESHA COUNTIES

	Rates	Fringes
Sound & Communications		
Installer	\$ 19.56	15.78
Technician	\$ 28.99	16.25

Installation, testing, maintenance, operation and servicing of all sound, intercom, telephone interconnect, closed circuit TV systems, radio systems, background music systems, language laboratories, electronic carillion, antenna distribution systems, clock and program systems and low-voltage systems such as visual nurse call, audio/visual nurse call systems, doctors entrance register systems. Includes all wire and cable carrying audio, visual, data, light and radio frequency signals. Includes the installation of conduit, wiremold, or raceways in existing structures that have been occupied for six months or more where required for the protection of the wire or cable, but does not mean a complete conduit or raceway system. work covered does not include the installation of conduit, wiremold or any raceways in any new construction, or the installation of power supply outlets by means of which external electric power is supplied to any of the foregoing equipment or products

#### ELEC0577-003 06/01/2018

CALUMET (except Township of New Holstein), GREEN LAKE (N. part including Townships of Berlin, St Marie, and Seneca), MARQUETTE (N. part including Townships of Crystal Lake, Neshkoro, Newton, and Springfield), OUTAGAMIE, WAUPACA, WAUSHARA, AND WINNEBAGO COUNTIES

	Rates	Fringes	
Electricians:	\$ 32.18	18.59	
ELEC0890-003 06/01/2018			_

DODGE (Emmet Township only), GREEN, JEFFERSON, LAFAYETTE, RACINE (Burlington Township), ROCK AND WALWORTH COUNTIES

	Rates	Fringes	
Electricians:	\$ 34.15	19.63	
ELEC0953-001 07/01/2015			_

		Rates	Fringes
(1) (2) Ope (3) (4) (5)	struction: Lineman Heavy Equipment rator Equipment Operator Heavy Groundman Driver. Light Groundman Driver. Groundsman	40.03 .\$ 33.71 .\$ 26.78 .\$ 24.86	32% + 5.00 32% + 5.00 32% + 5.00 14.11 13.45 32% + 5.00

ENGI0139-001 06/01/2018

KENOSHA, MILWAUKEE, OZAUKEE, RACINE, WASHINGTON, AND WAUKESHA COUNTIES

	Rates	Fringes
Power Equipment Operator Group 1	\$ 45.11 \$ 44.61	21.40 21.40 21.40 21.40

Group	5\$	41.14	21.40
Group	6\$	35.99	21.40

HAZARDOUS WASTE PREMIUMS:

EPA Level "A" Protection: \$3.00 per hour EPA Level "B" Protection: \$2.00 per hour EPA Level "C" Protection: \$1.00 per hour

#### POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1: Cranes, Tower Cranes, Pedestal Tower Cranes and Derricks with or w/o attachments with a lifting capacity of over 100 tons; or Cranes, Tower Cranes, Pedestal Tower Cranes and Derricks with boom, leads, and/or jib lengths measuring 176 feet or longer; Self-Erecting Tower Cranes over 4000 lbs lifting capacity; All Cranes with Boom Dollies; Boring Machines (directional); Master Mechanic. \$0.50 additional per hour per 100 tons or 100 ft of boom over 200 ft or lifting capacity of crane over 200 tons to a maximum of 300 tons or 300 ft. Thereafter an increase of \$0.01 per ft or ton, whichever is greater.

GROUP 2: Cranes, Tower Cranes, Pedestal Tower Cranes and Derricks with or without attachments with a lifting capacity of 100 tons or less; or Cranes, Tower Cranes Portable Tower Cranes, Pedestal Tower Cranes and Derricks with boom, leadsand/or jib lengths measuring 175 feet or less; Backhoes (excavators) 130,000 lbs and over; Caisson Rigs; Pile Drivers; Boring Machines (vertical or horizontal), Versi-Lift, Tri-Lift, Gantry 20,000 lbs & over.

GROUP 3: Backhoe (excavator) under 130,000 lbs; Self-erecting Tower Crane 4000 lbs & under lifting capacity; Traveling Crane (bridge type); Skid Rigs; Dredge Operator; Mechanic; Concrete Paver (over 27E); Concrete Spreader and Distributor; Forklift/ Telehandler (machinery- moving / steel erection); Hydro Blaster, 10,000 psi and over

GROUP 4: Material Hoists; Stack Hoists; Hydraulic Backhoe (tractor or truck mounted); Hydraulic Crane, 5 tons or under (tractor or truck mounted); Hoist (tuggers 5 tons & over); Hydro-Excavators/Daylighters; Concrete Pumps Rotec type Conveyors; Tractor/Bulldozer/End Loader (over 40 hp); Motor Patrol; Scraper Operator; Sideboom; Straddle Carrier; Welder; Bituminous Plant and Paver Operator; Roller over 5 tons; Rail Leveling Machine (Railroad); Tie Placer; Tie Extractor; Tie Tamper; Stone Leveler; Rotary Drill Operator and Blaster; Percussion Drill Operator; Air Track Drill and/or Hammers; Gantrys (under 20,000 lbs); Tencher (wheel type or chain type having 8 inch or larger bucket); Milling Machine; Off-Road Material Haulers.

GROUP 5: Backfiller; Concrete Auto Breaker (large); Concrete Finishing Machines (road type); Rubber Tired Roller; Concrete Batch Hopper; Concrete Conveyor Systems; Grout Pumps; Concrete Mixers (14S or over); Screw Type Pumps and Gypsum Pumps; Tractor, Bulldozer, End Loader (under 40 hp); Trencher (chain type, bucket under 8 inch); Industrial Locomotives; Rollers under 5 tons; Stump Grinder/Chipper (Large); Timber Equipment; Firemen (pile drivers and derricks); Personnel Hoist, Telehandler over 8000 lbs; Robotic Tool Carrier with or without attachments

GROUP 6: Tampers - Compactors (riding type); Assistant Engineer; A-Frames and Winch Trucks; Concrete Auto Breaker; Hydrohammers (small); Brooms and Sweepers; Hoist (tuggers under 5 tons); Boats (Tug, Safety, Work Barges, Launch); Shouldering Machine Operator; Prestress Machines; Screed Operator; Stone Crushers and Screening Plants; Operators (milling machine), Farm or Industrial Tractor Mounted Equipment; Post Hole Digger; Fireman (asphalt plants); Air Compressors over 400 CFM; Generators, over 150 KW; Augers (vertical and horizontal); Air, Electric, Hydraulic Jacks (slipform); Skid Steer Loaders (with or without attachments); Boiler Operators (temporary heat); Refrigeration Plant/Freeze Machines; Power Pack Vibratory/Ultra Sound Drivers and Extractors; Welding Machines; Heaters (mechanical); Pumps; Winches (small electric); Oiler and Greaser; Rotary Drill Tender; Conveyor; Forklifts/Telehandler 8000 lbs & under; Elevators: Automatic Hoists; Pumps (well points);

-----

ENGI0139-003 06/04/2018

#### REMAINING COUNTIES

	Rates	Fringes
Power Equipment Operator Group 1	\$ 39.47 \$ 38.17 \$ 37.64 \$ 35.57	21.60 21.60 21.60 21.60 21.60 21.60
HAZARDOUS WASTE PREMIUMS: EPA Level "A" Protection: \$3.0 EPA Level "B" Protection: \$2.0 EPA Level "C" Protection: \$1.0	00 per hour	

POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1: Cranes, Tower Cranes and Derricks with or without attachments with a lifting capacity of over 100 tons; Cranes, Tower Cranes, and Derricks with boom, leads and/or jib lengths 176 ft or longer.

GROUP 2: Backhoes (Excavators) weighing 130,00 lbs and over; Cranes, Tower Cranes and Derricks with or without attachments with a lifting capacity of 100 tons or less; Cranes, Tower Cranes, and Derricks with boom, leads, and/or jib lengths 175 ft or less; Caisson Rigs; Pile Driver

GROUP 3: Backhoes (Excavators) weighing under 130,000 lbs; Travelling Crane (bridge type); Milling Machine; Concrete Paver over 27 E; Concrete Spreader and Distributor; Concrete Laser Screed; Concrete Grinder and Planing Machine; Slipform Curb and Gutter Machine; Boring Machine (Directional); Dredge Operator; Skid Rigs; over 46 meter Concrete Pump.

GROUP 4: Hydraulic Backhoe (tractor or truck mounted); Hydraulic Crane, 10 tons or less; Tractor, Bulldozer, or End Loader (over 40 hp); Motor Patrol; Scraper Operator; Bituminous Plant and Paver Operator; Screed-Milling Machine; Roller over 5 tons; Concrete pumps 46 meter and under; Grout Pumps; Rotec type machine; Hydro Blaster, 10,000 psi and over; Rotary Drill Operator; Percussion Drilling Machine; Air Track Drill with or without integral hammer; Blaster; Boring Machine (vertical or horizontal); Side Boom; Trencher, wheel type or chain type having 8 inch or larger bucket; Rail Leveling Machine (Railroad); Tie Placer; Tie Extractor; Tie Tamper; Stone Leveler; Straddle Carrier; Material Hoists; Stack Hoist; Man Hoists; Mechanic and Welder; Off Road Material Haulers.

GROUP 5: Tractor, Bulldozer, or Endloader (under 40 hp); Tampers -Compactors, riding type; Stump Chipper, large; Roller, Rubber Tire; Backfiller; Trencher, chain type (bucket under 8 inch); Concrete Auto Breaker, large; Concrete Finishing Machine (road type); Concrete Batch Hopper; Concrete Conveyor Systems; Concrete Mixers, 14S or over; Pumps, Screw Type and Gypsum); Hydrohammers, small; Brooms and Sweeeprs; Lift Slab Machine; Roller under 5 tons; Industrial Locomotives; Fireman (Pile Drivers and Derricks); Pumps (well points); Hoists, automatic; A-Frames and Winch Trucks; Hoists (tuggers); Boats (Tug, Safety, Work Barges and Launches); Assistant Engineer

GROUP 6: Shouldering Machine Operator; Farm or Industrial Tractor mounted equipment; Post Hole Digger; Auger (vertical and horizontal); Skid Steer Loader with or without attachments; Robotic Tool Carrier with or without attachments; Power Pack Vibratory/Ultra Sound Driver and Extractor; Fireman (Asphalt Plants); Screed Operator; Stone Crushers and Screening Plants; Air, Electric, Hydraulic Jacks (Slip Form); Prestress Machines; Air Compressor, 400 CFM or over; Refrigeration Plant/Freese Machine; Boiler Operators (temporary heat); Forklifts; Welding Machines;

Generators; Pumps over 3"; Heaters, Mechanical; Combination small equipment operator; Winches, small electric; Oiler; Greaser; Rotary Drill Tender; Conveyor; Elevator Operator

-----

IRON0008-002 06/01/2017

BROWN, CALUMET, DOOR, FOND DU LAC, KEWAUNEE, MANITOWOC, MARINETTE, OCONTO, OUTAGAMI, SHAWANO, SHEBOYGAN, AND WINNEBAGO COUNTIES:

	Rates	Fringes
IRONWORKER	\$ 31.24	26.97

Paid Holidays: New Year's Day, Memorial Day, July 4th, Labor Day, Thanksgiving Day & Christmas Day.

IRON0008-003 06/01/2017

KENOSHA, MILWAUKEE, OZAUKEE, RACINE, WALWORTH (N.E. 2/3), WASHINGTON, AND WAUKESHA COUNTIES

	Rates	Fringes
IRONWORKER\$	33.19	26.97

Paid Holidays: New Year's Day, Memorial Day, July 4th, Labor Day, Thanksgiving Day & Christmas Day.

IRON0383-001 06/01/2017

ADAMS, COLUMBIA, CRAWFORD, DANE, DODGE, FLORENCE, FOREST, GRANT, GREENE, (Excluding S.E. tip), GREEN LAKE, IOWA, JEFFERSON, JUNEAU, LA CROSSE, LAFAYETTE, LANGLADE, MARATHON, MARQUETTE, MENOMINEE, MONROE, PORTAGE, RICHLAND, ROCK (Northern area, vicinity of Edgerton and Milton), SAUK, VERNON, WAUPACA, WAUSHARA, AND WOOD COUNTIES

	Rates	Fringes
IRONWORKER	\$ 34.50	23.82

IRON0512-008 05/01/2017

BARRON, BUFFALO, CHIPPEWA, CLARK, DUNN, EAU CLAIRE, JACKSON, PEPIN, PIERCE, POLK, RUSK, ST CROIX, TAYLOR, AND TREMPEALEAU COUNTIES

	Rates	Fringes
IRONWORKER	\$ 36.50	26.45
IRON0512-021 05/01/2017		

ASHLAND, BAYFIELD, BURNETT, DOUGLAS, IRON, LINCOLN, ONEIDA, PRICE, SAWYER, VILAS AND WASHBURN COUNTIES

	Rates	Fringes
IRONWORKER	\$ 32.04	26.45
T 7 D 0 0 1 1 2 0 0 0 0 0 0 0 0 1 0 1 0		

LABO0113-002 06/04/2018

MILWAUKEE AND WAUKESHA COUNTIES

		Rates	Fringes
Group Group	1 2 3	\$ 28.03 \$ 28.23	21.76 21.76 21.76 21.76
Group		\$ 28.38	

#### LABORERS CLASSIFICATIONS

GROUP 1: General Laborer; Tree Trimmer; Conduit Layer; Demolition and Wrecking Laborer; Guard Rail, Fence, and Bridge Builder; Landscaper; Multiplate Culvert Assembler; Stone Handler; Bituminous Worker (Shoveler, Loader, and Utility Man); Batch Truck Dumper or Cement Handler; Bituminous Worker (Dumper, Ironer, Smoother, and Tamper); Concrete Handler

GROUP 2: Air Tool Operator; Joint Sawer and Filler (Pavement); Vibrator or Tamper Operator (Mechanical Hand Operated); Chain Saw Operator; Demolition Burning Torch Laborer

GROUP 3: Bituminous Worker (Raker and Luteman); Formsetter (Curb, Sidewalk, and Pavement); Strike Off Man

GROUP 4: Line and Grade Specialist

GROUP 5: Blaster and Powderman

GROUP 6: Flagperson; traffic control person

\_\_\_\_\_

LABO0113-003 06/04/2018

OZAUKEE AND WASHINGTON COUNTIES

		Rates	Fringes
LABORER			
Group	1	\$ 27.13	21.76
	2		21.76
	3		21.76
	4		21.76
	5		21.76
	6		21.76

#### LABORERS CLASSIFICATIONS

GROUP 1: General Laborer; Tree Trimmer; Conduit Layer; Demolition and Wrecking Laborer; Guard Rail, Fence, and Bridge Builder; Landscaper; Multiplate Culvert Assembler; Stone Handler; Bituminous Worker (Shoveler, Loader, and Utility Man); Batch Truck Dumper or Cement Handler; Bituminous Worker (Dumper, Ironer, Smoother, and Tamper); Concrete Handler

GROUP 2: Air Tool Operator; Joint Sawer and Filler (Pavement); Vibrator or Tamper Operator (Mechanical Hand Operated);

GROUP 3: Bituminous Worker (Raker and Luteman); Formsetter (Curb, Sidewalk, and Pavement); Strike Off Man

GROUP 4: Line and Grade Specialist

GROUP 5: Blaster; powderman

GROUP 6: Flagperson and Traffic Control Person

LABO0113-011 06/04/2018

KENOSHA AND RACINE COUNTIES

		Rates	Fringes
Group Group Group	1 2 3 4	.\$ 27.09 .\$ 27.29 .\$ 27.26	21.76 21.76 21.76 21.76
	5		21.76 21.76

LABORERS CLASSIFICATIONS:

GROUP 1: General laborer; Tree Trimmer; Conduit Layer; Demolition and Wrecking Laborer; Guard Rail, Fence, and Bridge Builder; Landscaper; Multiplate Culvert Assembler; Stone Handler; Bituminous Worker (Shoveler, Loader, and Utility Man); Batch Truck Dumper or Cement Handler; Bituminous worker (Dumper, Ironer, Smoother, and Tamper); Concrete Handler

GROUP 2: Air Tool Operator; Joint Sawer and Filler (Pavement); Vibrator or Tamper Operator (Mechanical Hand Operated); Chain Saw Operator; Demolition Burning Torch Laborer

GROUP 3: Bituminous Worker (Raker and Luteman); Formsetter (Curb, Sidewalk, and Pavement); Strike Off Man

GROUP 4: Line and Grade Specialist

GROUP 5: Blaster and Powderman

GROUP 6: Flagman; traffic control person

\_\_\_\_\_

#### LABO0140-002 06/04/2018

ADAMS, ASHLAND, BARRON, BAYFIELD, BROWN, BUFFALO, BURNETT, ADAMS, ASHLAND, BARRON, BAYFIELD, BROWN, BUFFALO, BURNETT, CALUMET, CHIPPEWA, CLARK, COLUMBIA, CRAWFORD, DODGE, DOOR, DOUGLAS, DUNN, EAU CLAIRE, FLORENCE, FOND DU LAC, FOREST, GRANT, GREEN, GREEN LAKE, IRON, JACKSON, JUNEAU, IOWA, JEFFERSON, KEWAUNEE, LA CROSSE, LAFAYETTE, LANGLADE, LINCOLN, MANITOWOC, MARATHON, MARINETTE, MARQUETTE, MENOMINEE, MONROE, OCONTO, ONEIDA, OUTAGAMIE, PEPIN, PIERCE, POLK, PORTAGE, PRICE, RICHLAND, ROCK, RUSK, SAUK, SAWYER, SHAWANO, SHEBOYGAN, ST. CROIX, TAYLOR, TREMPEALEAU, VERNON, VILLAS, WALWORTH, WASHBURN, WAUPACA, WAUSHARA, WINNEBAGO, AND WOOD COUNTIES

		Rates	Fringes
LABORER			
	1		17.20
	2		17.20
Group	3	.\$ 31.95	17.20
Group	4	.\$ 32.15	17.20
Group	5	.\$ 32.00	17.20
Group	6	.\$ 28.43	17.20

#### LABORER CLASSIFICATIONS

GROUP 1: General Laborer; Tree Trimmer; Conduit Layer; Demolition and Wrecking Laborer; Guard Rail, Fence, and Bridge Builder; Landscaper; Multiplate Culvert Assembler; Stone Handler; Bitminous Worker (Shoveler, Loader, and Utility Man); Batch Truck Dumper or Cement Handler; Bituminous Worker (Dumper, Ironer, Smoother and Tamper); Concrete Handler

GROUP 2: Air Tool Operator; Joint Sawer and Filler (Pavement); Vibrator or Tamper Operator (Mechanical Hand Operated); Chain Saw Operator, Demolition Burning Torch Laborer

GROUP 3: Bituminous Worker (Raker and Luteman); Formsetter (Curb, Sidewalk and Pavement); Strike Off Man

GROUP 4: Line and Grade Secialist

GROUP 5: Blaster; powderman

GROUP 6: Flagperson; Traffic Control

LABO0464-003 06/04/2018

DANE COUNTY

	I	Rates	Fringes
LABORER Group Group	1\$	32.08 32.18	1720 1720

Group 3	\$ 32.43 \$ 32.28	1720 1720 1720 1720
LABORERS CLASSIFICATIONS:		
GROUP 1: General Laborer; Tre Demolition and Wrecking Labore Bridge Builder; Landscaper; Mr Stone Handler; Bituminous Worldtility Man); Batch Truck Dump Bituminious Worker (Dumper, Inconcrete Handler	er; Guard Rai ultiplate Cul ker (Shoveler oer or Cement	il, Fence, and lvert Assembler; c, Loader, and t Handler;
GROUP 2: Air Tool Operator; (Pavement); Vibrator or Tampe: Operated); Chain Saw Operator; Laborer	r Operator (N	Mechanical Hand
GROUP 3: Bituminous Worker (I (Curb, Sidewalk, and Pavement)		
GROUP 4: Line and Grade Special	list	
GROUP 5: Blaster; Powderman		
GROUP 6: Flagperson and Traffic	c Control Per	rson
PAIN0106-008 05/01/2017		
ASHLAND, BAYFIELD, BURNETT, AND	DOUGLAS COUN	NTIES
	Rates	Fringes
Painters: New: Brush, Roller	\$ 30.33	17.27
Spray, Sandblast, Steel Repaint:		17.27
Brush, Roller Spray, Sandblast, Steel	\$ 28.83 \$ 29.43	17.27 17.27
PAIN0108-002 06/01/2017		
RACINE COUNTY		
	Rates	Fringes
Painters: Brush, Roller Spray & Sandblast	\$ 33.74 \$ 34.74	18.95 18.95
PAIN0259-002 05/01/2008		
BARRON, CHIPPEWA, DUNN, EAU CLA SAWYER, ST. CROIX, AND WASHBURN		PIERCE, POLK, RUSK,
	Rates	Fringes
PAINTER	\$ 24.11	12.15
PAIN0259-004 05/01/2015		
BUFFALO, CRAWFORD, JACKSON, LA (VERNON COUNTIES	CROSSE, MONRO	DE, TREMPEALEAU, AND
	Rates	Fringes
PAINTER	\$ 22.03	12.45
PAIN0781-002 06/01/2017		
JEFFERSON, MILWAUKEE, OZAUKEE, V	WASHINGTON, A	AND WAUKESHA COUNTIES
,	Rates	
		<u> </u>

Painters:

Bridge\$ Brush\$ Spray & Sandblast\$	30.60 30.25 31.00	22.80 22.80 22.80
PAIN0802-002 06/01/2017		
COLUMBIA, DANE, DODGE, GRANT, GREE ROCK, AND SAUK COUNTIES	N, IOWA, LAFAYE	CTTE, RICHLAND,
	Rates	Fringes
PAINTER Brush\$	28.25	17.72
PREMIUM PAY: Structural Steel, Spray, Bridges hour.	= \$1.00 addi	tional per
PAIN0802-003 06/01/2017		
ADAMS, BROWN, CALUMET, CLARK, DOOR LAKE, IRON, JUNEAU, KEWAUNEE, LANG MARATHON, MARINETTE, MARQUETTE, ME OUTAGAMIE, PORTAGE, PRICE, SHAWANC WAUSHARA, WAUPACA, WINNEBAGO, AND	LADE, LINCOLN, NOMINEE, OCONI , SHEBOYGAN, I	MANITOWOC,
	Rates	Fringes
PAINTER\$	24.89	12.05
PAIN0934-001 06/01/2017		
KENOSHA AND WALWORTH COUNTIES		
	Rates	Fringes
Painters: Brush	33.74 34.74 33.89	18.95 18.95 18.95
PAIN1011-002 06/01/2017		
FLORENCE COUNTY		
	Rates	Fringes
Painters:\$	24.86	12.23
PLAS0599-010 06/01/2017		
	Rates	Fringes
CEMENT MASON/CONCRETE FINISHER Area 1\$ Area 2 (BAC)\$ Area 3\$ Area 4\$ Area 5\$ Area 6\$	35.07 35.61 34.70 36.27	17.17 19.75 19.40 20.51 18.73 22.99
AREA DESCRIPTIONS		
AREA 1: BAYFIELD, DOUGLAS, PRICCOUNTIES	E, SAWYER, AND	WASHBURN
AREA 2: ADAMS, ASHLAND, BARRON, CHIPPEWA, CLARK, COLUMBIA, DODGE FOND DU LAC, FOREST, GREEN LAKE, LANGLADE, LINCOLN, MANITOWOC, MA MARQUETTE, MENOMINEE, OCONTO, ON PORTAGE, RUSK, ST CROIX, SAUK, S VILAS, WALWORTH, WAUPACA, WAUSHA	, DOOR, DUNN, E IRON, JEFFERSC RATHON, MARINET EIDA, OUTAGAMIE HAWANO, SHEBOYO	CLORENCE, ON, KEWAUNEE, CTE, C, POLK, GAN, TAYLOR,

VILAS, WALWORTH, WAUPACA, WAUSHARA, WINNEBAGO, AND WOOD COUNTIES

AREA 3: BUFFALO, CRAWFORD, EAU CLAIRE, JACKSON, JUNEAU, LA CROSSE MONROE, PEPIN, PIERCE, RICHLAND, TREMPEALEAU, AND VERNON COUNTIES

AREA 4: MILWAUKEE, OZAUKEE, W.	ASHINGTON, A	ND WAUKESHA COUNTIES
AREA 5: DANE, GRANT, GREEN, COUNTIES	IOWA, LAFAYE	TTE, AND ROCK
AREA 6: KENOSHA AND RACINE COU	NTIES	
PLUM0011-003 05/07/2018		
ASHLAND, BAYFIELD, BURNETT, DOU COUNTIES	GLAS, IRON,	SAWYER, AND WASHBURN
	Rates	Fringes
PLUMBER	\$ 40.63	20.72
PLUM0075-002 06/01/2016		
MILWAUKEE, OZAUKEE, WASHINGTON,	AND WAUKESH	A COUNTIES
	Rates	Fringes
PLUMBER	\$ 40.27	21.47
PLUM0075-004 06/01/2016		
DODGE (Watertown), GREEN, JEFFE COUNTIES	RSON, LAFAYE	TTE, AND ROCK
	Rates	Fringes
PLUMBER	\$ 40.52	21.47
PLUM0075-009 06/01/2016		
COLUMBIA, DANE, IOWA, MARQUETTE	, RICHLAND A	ND SAUK COUNTIES
	Rates	Fringes
PLUMBER	\$ 38.82	20.12
MARINETTE COUNTY (Niagara only)		
.ammail coomi (mragara omi,)	Rates	Fringes
PLUMBER/PIPEFITTER		24.48
PLUM0118-002 06/01/2018		24.40
KENOSHA, RACINE, AND WALWORTH C	OUNTIES	
		Fringes
Plumber and Steamfitter		20.95
PLUM0400-003 06/04/2018		
ADAMS, BROWN, CALUMET, DODGE (ex LAC, GREEN LAKE, KEWAUNEE, MANIT Niagara), MENOMINEE, OCONTO, OU WAUPACA, WAUSHARA, AND WINNEBAG	OWOC, MARINE TAGAMIE, SHA	TTE (except
	Rates	Fringes
PLUMBER/PIPEFITTER	\$ 36.74	19.06
PLUM0434-002 06/03/2018		
BARON, BUFFALO, CHIPPEWA, CLARK FLORENCE, FOREST, GRANT, JACKSO LINCOLN, MARATHON, MONROE, ONEI PORTAGE, PRICE, RUSK, ST. CROIX VILAS, AND WOOD COUNTIES	N, JUNEAU, L DA, PEPIN, P	A CROSSE, LANGLADE, IERCE, POLK,

	Rates	riinges
PIPEFITTER	\$ 40.15	18.57
PLUM0601-003 06/04/2018		
DODGE (Watertown), GREEN, JEFFE OZAUKEE, ROCK, WASHINGTON AND W.		
	Rates	Fringes
PIPEFITTER	\$ 45.52	24.54
PLUM0601-009 06/04/2017		
COLUMBIA, DANE, IOWA, MARQUETTE	, RICHLAND A	AND SAUK COUNTIES
	Rates	Fringes
PIPEFITTER	\$ 47.08	20.89
TEAM0039-002 06/01/2018		
	Rates	Fringes
TRUCK DRIVER  1 & 2 Axle Trucks  3 or more axles; Euclids	\$ 28.12	21.20
or Dumptor, Articulated Truck, Mechanic	\$ 28.27	21.20
SUWI2011-001 11/16/2011		
	Rates	Fringes
WELL DRILLER	\$ 16.52	
WELDERS - Receive rate prescrib operation to which welding is i	ed for craft ncidental.	t performing

Rates

Fringes

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017. If this contract is covered by the EO, the contractor must provide employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year. Employees must be permitted to use paid sick leave for their own illness, injury or other health-related needs, including preventive care; to assist a family member (or person who is like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of "identifiers" that indicate whether the particular rate is a union rate (current union negotiated rate for local), a survey rate (weighted average rate) or a union average rate (weighted union average rate).

#### Union Rate Identifiers

A four letter classification abbreviation identifier enclosed in dotted lines beginning with characters other than "SU" or "UAVG" denotes that the union classification and rate were prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2014. PLUM is an abbreviation identifier of the union which prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. 07/01/2014 is the effective date of the most current negotiated rate, which in this example is July 1, 2014.

Union prevailing wage rates are updated to reflect all rate changes in the collective bargaining agreement (CBA) governing this classification and rate.

#### Survey Rate Identifiers

Classifications listed under the "SU" identifier indicate that no one rate prevailed for this classification in the survey and the published rate is derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As this weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SULA2012-007 5/13/2014. SU indicates the rates are survey rates based on a weighted average calculation of rates and are not majority rates. LA indicates the State of Louisiana. 2012 is the year of survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. 5/13/2014 indicates the survey completion date for the classifications and rates under that identifier.

Survey wage rates are not updated and remain in effect until a new survey is conducted.

#### Union Average Rate Identifiers

Classification(s) listed under the UAVG identifier indicate that no single majority rate prevailed for those classifications; however, 100% of the data reported for the classifications was union data. EXAMPLE: UAVG-OH-0010 08/29/2014. UAVG indicates that the rate is a weighted union average rate. OH indicates the state. The next number, 0010 in the example, is an internal number used in producing the wage determination. 08/29/2014 indicates the survey completion date for the classifications and rates under that identifier.

A UAVG rate will be updated once a year, usually in January of each year, to reflect a weighted average of the current negotiated/CBA rate of the union locals from which the rate is based.

#### \_\_\_\_\_\_

#### WAGE DETERMINATION APPEALS PROCESS

- 1.) Has there been an initial decision in the matter? This can be:
- \* an existing published wage determination
- \* a survey underlying a wage determination
- \* a Wage and Hour Division letter setting forth a position on a wage determination matter
- \* a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations Wage and Hour Division U.S. Department of Labor 200 Constitution Avenue, N.W. Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator U.S. Department of Labor 200 Constitution Avenue, N.W. Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board U.S. Department of Labor 200 Constitution Avenue, N.W. Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

\_\_\_\_\_

END OF GENERAL DECISION

# NOTICE TO BIDDERS WAGE RATE DECISION

The wage rate decision of the Department of Labor which has been incorporated in these advertised specifications is incomplete in that the classifications may be omitted from the Department of Labor's decision.

Since the bidder is responsible, independently, for ascertaining area practice with respect to the necessity, or lack of necessity, for the use of these classifications in the prosecution of the work contemplated by this project, no inference may be drawn from the omission of these classifications concerning prevailing area practices relative to their use. Further, this omission will not, per se, be construed as establishing any governmental liability for increased labor cost if it is subsequently determined that such classifications are required.

There may be omissions and/or errors in the federal wage rates. The bidder is responsible for evaluating and determining the correct applicable rate.

If a project includes multiple types of construction (highway, bridge over navigable water, sanitary sewer and water main, building) and there is not a separate wage determination for this type of work included in the proposal, use the wage determination that is in the proposal.

If a project includes multiple types of construction, different wage rate determinations may be inserted into the contract (WI10/Highway = in all WisDOT highway contracts, WI15/Heavy = bridge over navigable water per USDOL and US Coast Guard designation, WI8/Heavy (Sewer & Water Line & Tunnel) = sanitary sewer and water main if the cost is more than 20% of the contract and/or at least \$1,000,000, and Building). If multiple wage rate determinations are inserted into the contract, use the classification in the wage determination for the work being done. Use WI15 wage rates when working on the bridge and/or structure from bank to bank. Use WI8 wage rates when working on any sanitary sewer or water main work. Use Building wage rates for all work done within the footprint of the building. Use WI10 wage rates for all other highway work in the contract and approaches to structures. For example, if a laborer is working within the footprint of a building, use the Laborer rate in the Building wage determination inserted in the contract. If a laborer is working on a bridge/structure within the banks, use the Laborer rate in the WI15/Heavy wage determination if inserted in the contract. If the laborer is working on the highway, use the Laborer rate in the WI10/Highway wage determination.



11/13/2018 08:17:21

Page 1 of 10



## Proposal Schedule of Items

Proposal ID: 20190115006 Project(s): 1660-03-67, 1660-03-68, 5580-00-82

Federal ID(s): N/A, WISC 2019070, N/A

SECTION: 0001 Contract Items

D				
Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0002	203.0210.S  Abatement of Asbestos Containing Material (structure) 01. B-12-29	LS	LUMP SUM	
0004	203.0210.S  Abatement of Asbestos Containing Material (structure) 02. B-12-30	LS	LUMP SUM	
0006	203.0225.S Debris Containment (structure) 01. B-12- 27	LS	LUMP SUM	·
8000	203.0225.S Debris Containment (structure) 02. B-12- 28	LS	LUMP SUM	
0010	203.0600.S Removing Old Structure Over Waterway With Minimal Debris (station) 01. 98+85	LS	LUMP SUM	·
0012	203.0600.S Removing Old Structure Over Waterway With Minimal Debris (station) 02. 141+80	LS	LUMP SUM	·
0014	203.0600.S Removing Old Structure Over Waterway With Minimal Debris (station) 03. 168+39	LS	LUMP SUM	·
0016	204.0100 Removing Pavement	90.000 SY		
0018	204.0110 Removing Asphaltic Surface	255.000 SY		
0020	204.0165 Removing Guardrail	980.000 LF	·	
0022	205.0100 Excavation Common	111.000 CY	·	
0024	206.1000 Excavation for Structures Bridges (structure) 01. B-22-59	LS	LUMP SUM	
0026	208.0100 Borrow	405.000 CY		
0028	210.1100 Backfill Structure Type A	369.000 CY		





Page 2 of 10



## Proposal Schedule of Items

Proposal ID: 20190115006 Project(s): 1660-03-67, 1660-03-68, 5580-00-82

Federal ID(s): N/A, WISC 2019070, N/A

SECTION: 0001 Contract Items

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0030	213.0100 Finishing Roadway (project) 01. 1660- 03-67	1.000 EACH		
0032	213.0100 Finishing Roadway (project) 01. 1660- 03-68	1.000 EACH		
0034	213.0100 Finishing Roadway (project) 01. 5580- 00-82	1.000 EACH	·	
0036	305.0110 Base Aggregate Dense 3/4-Inch	98.000 TON		
0038	305.0120 Base Aggregate Dense 1 1/4-Inch	80.000 TON		
0040	415.0410 Concrete Pavement Approach Slab	312.000 SY		
0042	416.1010 Concrete Surface Drains	28.000 CY		
0044	455.0605 Tack Coat	17.000 GAL		
0046	465.0105 Asphaltic Surface	45.000 TON		
0048	502.0100 Concrete Masonry Bridges	320.000 CY		
0050	502.0717.S Crack Sealing Epoxy	25.000 LF		
0052	502.3100 Expansion Device (structure) 01. B-12- 29	LS	LUMP SUM	·
0054	502.3100 Expansion Device (structure) 02. B-12-30	LS	LUMP SUM	
0056	502.3200 Protective Surface Treatment	4,049.000 SY		
0058	502.3210 Pigmented Surface Sealer	4,934.000 SY		·



11/13/2018 08:17:21

Page 3 of 10



## Proposal Schedule of Items


Proposal ID: 20190115006 Project(s): 1660-03-67, 1660-03-68, 5580-00-82

Federal ID(s): N/A, WISC 2019070, N/A

SECTION: 0001 Contract Items

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0060	502.4110 Adhesive Anchors 1 1/4-inch	26.000 EACH		
0062	502.4204 Adhesive Anchors No. 4 Bar	10,072.000 EACH		<u>-</u>
0064	502.4205 Adhesive Anchors No. 5 Bar	234.000 EACH	·	·
0066	505.0400 Bar Steel Reinforcement HS Structures	35,020.000 LB	·	·
0068	505.0600 Bar Steel Reinforcement HS Coated Structures	36,010.000 LB		
0070	505.0905 Bar Couplers No. 5	8.000 EACH	·	<u>-</u>
0072	506.0105 Structural Steel Carbon	1,100.000 LB	·	
0074	506.6000 Bearing Assemblies Expansion (structure) 01. B-12-29	6.000 EACH		
0076	506.6000 Bearing Assemblies Expansion (structure) 02. B-12-30	7.000 EACH		
0078	506.7050.S Removing Bearings (structure) 01. B-12- 29	6.000 EACH		
0080	506.7050.S Removing Bearings (structure) 02. B-12- 30	7.000 EACH	·	·
0082	509.0301 Preparation Decks Type 1	5,452.000 SY		·
0084	509.0302 Preparation Decks Type 2	2,579.000 SY		
0086	509.0310.S Sawing Pavement Deck Preparation Areas	43,600.000 LF	·	
0088	509.0500 Cleaning Decks	437.000 SY		





Page 4 of 10



## Proposal Schedule of Items

Proposal ID: 20190115006 Project(s): 1660-03-67, 1660-03-68, 5580-00-82

Federal ID(s): N/A, WISC 2019070, N/A

SECTION: 0001 Contract Items

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0090	509.0505.S Cleaning Decks to Reapply Concrete Masonry Overlay	3,563.000 SY	·	
0092	509.1000 Joint Repair	59.000 SY	·	
0094	509.1500 Concrete Surface Repair	1,246.000 SF		
0096	509.2000 Full-Depth Deck Repair	682.000 SY		
0098	509.2500 Concrete Masonry Overlay Decks	347.000 CY		
0100	509.3500.S HMA Overlay Polymer-Modified	2,201.000 TON		
0102	509.9005.S Removing Concrete Masonry Deck Overlay (structure) 01. B-12-27	11,487.000 SY		
0104	509.9005.S Removing Concrete Masonry Deck Overlay (structure) 02. B-12-28	8,516.000 SY	·	·
0106	509.9005.S Removing Concrete Masonry Deck Overlay (structure) 03. B-12-29	1,738.000 SY		
0108	509.9005.S Removing Concrete Masonry Deck Overlay (structure) 04. B-12-30	1,825.000 SY		
0110	509.9020.S Epoxy Crack Sealing	40.000 LF		·
0112	509.9025.S Epoxy Injection Crack Repair	960.000 LF	·	
0114	509.9026.S Cored Holes 2-Inch Diameter	8.000 EACH		
0116	509.9050.S Cleaning Parapets	10,961.000 LF		
0118	511.1200 Temporary Shoring (structure) 01. B-22- 59	1,513.000 SF		·





Page 5 of 10



## Proposal Schedule of Items


Proposal ID: 20190115006 Project(s): 1660-03-67, 1660-03-68, 5580-00-82

Federal ID(s): N/A, WISC 2019070, N/A

SECTION: 0001 Contract Items

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0120	603.8000 Concrete Barrier Temporary Precast Delivered	10,714.000 LF		
0122	603.8125 Concrete Barrier Temporary Precast Installed	21,779.000 LF		
0124	606.0300 Riprap Heavy	48.000 CY		
0126	614.0150 Anchor Assemblies for Steel Plate Beam Guard	4.000 EACH	·	·
0128	614.0905 Crash Cushions Temporary	1.000 EACH	·	·
0130	614.2300 MGS Guardrail 3	150.000 LF		
0132	614.2500 MGS Thrie Beam Transition	355.000 LF	·	
0134	614.2610 MGS Guardrail Terminal EAT	9.000 EACH	·	
0136	618.0100 Maintenance And Repair of Haul Roads (project) 01. 1660-03-67	1.000 EACH	·	·
0138	618.0100 Maintenance And Repair of Haul Roads (project) 01. 1660-03-68	1.000 EACH	·	·
0140	618.0100 Maintenance And Repair of Haul Roads (project) 01. 5580-00-82	1.000 EACH	·	
0142	619.1000 Mobilization	1.000 EACH	·	
0144	624.0100 Water	15.000 MGAL		
0146	625.0500 Salvaged Topsoil	691.000 SY		
0148	627.0200 Mulching	691.000 SY		





Page 6 of 10




## Proposal Schedule of Items


Proposal ID: 20190115006 Project(s): 1660-03-67, 1660-03-68, 5580-00-82

Federal ID(s): N/A, WISC 2019070, N/A

SECTION: 0001 Contract Items

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0150	628.1504 Silt Fence	487.000 LF		
0152	628.1520 Silt Fence Maintenance	487.000 LF		
0154	628.1905 Mobilizations Erosion Control	1.000 EACH		
0156	628.1910 Mobilizations Emergency Erosion Control	2.000 EACH		
0158	628.7010 Inlet Protection Type B	8.000 EACH		
0160	628.7015 Inlet Protection Type C	1.000 EACH		
0162	629.0210 Fertilizer Type B	0.580 CWT		
0164	630.0120 Seeding Mixture No. 20	23.100 LB		
0166	630.0200 Seeding Temporary	23.100 LB	·	
0168	638.2102 Moving Signs Type II	1.000 EACH		
0170	642.5201 Field Office Type C	1.000 EACH		
0172	643.0300 Traffic Control Drums	8,022.000 DAY		
0174	643.0420 Traffic Control Barricades Type III	589.000 DAY		
0176	643.0705 Traffic Control Warning Lights Type A	1,842.000 DAY	<u></u>	
0178	643.0715 Traffic Control Warning Lights Type C	4,405.000 DAY	<u> </u>	
0180	643.0800 Traffic Control Arrow Boards	73.000 DAY		
0182	643.0900 Traffic Control Signs	9,197.000 DAY		





Page 7 of 10



## Proposal Schedule of Items


Proposal ID: 20190115006 Project(s): 1660-03-67, 1660-03-68, 5580-00-82

Federal ID(s): N/A, WISC 2019070, N/A

SECTION: 0001 Contract Items

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0184	643.0920 Traffic Control Covering Signs Type II	15.000 EACH		
0186	643.1050 Traffic Control Signs PCMS	14.000 DAY		
0188	643.5000 Traffic Control	1.000 EACH		
0190	645.0111 Geotextile Type DF Schedule A	48.000 SY	<u></u> _	
0192	645.0120 Geotextile Type HR	96.000 SY	<u></u>	
0194	646.1020 Marking Line Epoxy 4-Inch	25,782.000 LF		
0196	646.5020 Marking Arrow Epoxy	7.000 EACH		
0198	646.7020 Marking Diagonal Epoxy 6-Inch	300.000 LF	<u></u> _	
0200	646.9000 Marking Removal Line 4-Inch	18,950.000 LF		
0202	646.9010 Marking Removal Line Water Blasting 4- Inch	1,365.000 LF		
0204	646.9300 Marking Removal Special Marking	300.000 EACH		·
0206	646.9310 Marking Removal Special Marking Water Blasting	5.000 EACH		
0208	649.0105 Temporary Marking Line Paint 4-Inch	14,250.000 LF	·	
0210	649.0150 Temporary Marking Line Removable Tape 4-Inch	49,613.000 LF		
0212	649.0550 Temporary Marking Arrow Removable Tape	6.000 EACH		





Page 8 of 10



## Proposal Schedule of Items

Proposal ID: 20190115006 Project(s): 1660-03-67, 1660-03-68, 5580-00-82

Federal ID(s): N/A, WISC 2019070, N/A

SECTION: 0001 Contract Items

Proposal Line Number	Item ID  Description	Approximate Quantity and Units	Unit Price	Bid Amount
0214	649.0850 Temporary Marking Stop Line Removable Tape 18-Inch	69.000 LF	·	·
0216	650.4500 Construction Staking Subgrade	60.000 LF		
0218	650.5000 Construction Staking Base	60.000 LF		
0220	650.7000 Construction Staking Concrete Pavement	60.000 LF		
0222	650.9910 Construction Staking Supplemental Control (project) 01. 5580-00-82	LS	LUMP SUM	·
0224	650.9920 Construction Staking Slope Stakes	533.000 LF		
0226	653.0210 Junction Boxes 10x10x6-Inch	4.000 EACH		
0228	661.0100 Temporary Traffic Signals for Bridges (structure) 01. B-22-59	LS	LUMP SUM	
0230	690.0150 Sawing Asphalt	188.000 LF		
0232	690.0250 Sawing Concrete	48.000 LF	·	
0234	715.0415 Incentive Strength Concrete Pavement	1,000.000 DOL	1.00000	1,000.00
0236	715.0502 Incentive Strength Concrete Structures	2,238.000 DOL	1.00000	2,238.00
0238	ASP.1T0A On-the-Job Training Apprentice at \$5.00/HR	1,200.000 HRS	5.00000	6,000.00
0240	ASP.1T0G On-the-Job Training Graduate at \$5.00/HR	800.000 HRS	5.00000	4,000.00
0242	SPV.0035 Special 01. Concrete Masonry Deck Repair - High Early Strength	480.000 CY		





Page 9 of 10



## Proposal Schedule of Items

Proposal ID: 20190115006 Project(s): 1660-03-67, 1660-03-68, 5580-00-82

Federal ID(s): N/A, WISC 2019070, N/A

SECTION: 0001 Contract Items

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0244	SPV.0035 Special 02. Cement Slurry Mixture	2.000 CY		
0246	SPV.0060 Special 01. Bearing Repairs B-12-27	2.000 EACH		
0248	SPV.0060 Special 02. Parapet Cover Plates	8.000 EACH		<u></u>
0250	SPV.0060 Special 03. Downspout Repair	5.000 EACH	·	
0252	SPV.0060 Special 04. Embedded Galvanic Anodes	8.000 EACH		
0254	SPV.0090 Special 01. Haunch Removal B-12-27	4,200.000 LF		
0256	SPV.0090 Special 02. Haunch Removal B-12-28	3,832.000 LF		
0258	SPV.0090 Special 03. Pipe Underdrain Wrapped 6- Inch Special	122.000 LF		
0260	SPV.0105 Special 01. Structure Spot Cleaning and Painting B-12-27	LS	LUMP SUM	·
0262	SPV.0105 Special 02. Strip Seal Gland Replacement B-12-27	LS	LUMP SUM	·
0264	SPV.0105 Special 03. Pier Cap Repairs B-12-27	LS	LUMP SUM	
0266	SPV.0105 Special 04. Cleaning and Caulking Floor Beams B-12-27	LS	LUMP SUM	
0268	SPV.0105 Special 05. Structure Spot Cleaning and Painting B-12-28	LS	LUMP SUM	·
0270	SPV.0105 Special 06. Pier Cap Repairs B-12-28	LS	LUMP SUM	
0272	SPV.0105 Special 07. Parapet Cover Plate Fastener Repairs	LS	LUMP SUM	



## Wisconsin Department of Transportation

11/13/2018 08:17:21

## Proposal Schedule of Items

Page 10 of 10

Proposal ID: 20190115006 Project(s): 1660-03-67, 1660-03-68, 5580-00-82

Federal ID(s): N/A, WISC 2019070, N/A

SECTION: 0001 Contract Items

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price	Bid Amount
0274	SPV.0105 Special 08. Access Hatch Repairs	LS	LUMP SUM	
0276	SPV.0165 Special 01. Geocomposite Drain Board	731.000 SF		
0278	SPV.0180 Special 01. Abutment Seat Cleaning and Sealing	67.000 SY		
	Section: 000	01	Total:	
			Total Bid:	

## PLEASE ATTACH SCHEDULE OF ITEMS HERE