PROJECT ID: 6130-02-71, 03-71, 03-72

COUNTY: SAUK & COLUMBIA

ORDER OF SHEETS

Sheet No.	1	Title
Sheet No.		Typical Sections and Details
Sheet No.		Estimate of Quantities
Sheet No.		Miscellaneous Quantities
~~Sheet No.~~		~~Right of Way Plat~~
Sheet No.		Plan and Profile
Sheet No.		Standard Detail Drawings
Sheet No.		Sign Plates
~~Sheet No.~~		~~Structure Plans~~
Sheet No.		Computer Earthwork Data
Sheet No.		Cross Sections

TOTAL SHEETS = 498

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

PLAN OF PROPOSED IMPROVEMENT

STATE PROJECT	FEDERAL PROJECT	
	PROJECT	CONTRACT
6130-02-71	MG 2004572	1
6130-03-71	MG 2004573	1
6130-03-72	STP 2004574	1

IH 90-WISCONSIN DELLS ROAD
(IH 90 TO WISCONSIN RIVER)
S.T.H. 13
SAUK COUNTY

STATE PROJECT NUMBER
6130-02-71

BROADWAY STREET, CITY OF WISCONSIN DELLS
(LACROSSE ST. TO S.T.H. 16)
S.T.H. 13
COLUMBIA COUNTY

STATE PROJECT NUMBER
6130-03-71

(IH 90 TO S.T.H. 16)
S.T.H. 13
COLUMBIA/SAUK COUNTY

STATE PROJECT NUMBER
6130-03-72

ACCEPTED FOR CITY OF WISCONSIN DELLS
DATE: 3/23/04 (Signature) Chairman - Robin Wicks (Title)
DATE: 03/23/04 (Signature) Dpty City Engineer (Title)

ORIGINAL PLANS PREPARED BY:

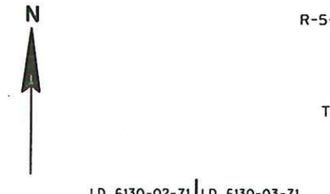

DESIGN DESIGNATION		I.H. 90 RAMPS	I.H. 90 TO C.T.H. H	C.T.H. H TO U.S.H. 12	U.S.H. 12 TO WISCONSIN RIVER BRIDGE	LACROSSE ST. CEDAR ST.	CEDAR ST. TO S.T.H. 16
		I.D. 6130-02-71	I.D. 6130-02-71	I.D. 6130-02-71	I.D. 6130-02-71	I.D. 6130-03-71	I.D. 6130-03-71
A.D.T. (2004)	=	3,925	10,450	20,250	34,275	32,150	14,675
A.D.T. (2024)	=	5,375	14,300	28,400	44,150	41,400	19,250
D.H.V. (2024)	=	527	1401	2783	4327	4057	1887
D.D.	=	100	50/50	50/50	50/50	50/50	50/50
T.	=	3	3	3	3	3	3
DESIGN SPEED	=	varies 45 mph	max. 40 mph	40 mph	30 mph	30 mph	35 mph
ESALS	=	N/A	N/A	N/A	N/A	N/A	N/A

CONVENTIONAL SYMBOLS

PLAN
- CORPORATE LIMITS
- PROPERTY LINE (PL + 58.1)
- LOT LINE
- LIMITED HIGHWAY EASEMENT
- EXISTING RIGHT OF WAY
- PROPOSED OR NEW R/W LINE
- SLOPE INTERCEPT
- REFERENCE LINE
- EXISTING CULVERT
- PROPOSED CULVERT (Box or Pipe)
- COMBUSTIBLE FLUIDS (CAUTION)
- MARSH AREA
- WOODED OR SHRUB AREA

PROFILE
- GRADE LINE
- ORIGINAL GROUND
- MARSH OR ROCK PROFILE (To be noted as such) (ROCK)
- SPECIAL DITCH (LABEL)
- GRADE ELEVATION (95.36)
- CULVERT (Profile View)

UTILITIES
- ELECTRIC (E)
- FIBER OPTIC (FO)
- GAS (G)
- SANITARY SEWER (SAN)
- STORM SEWER (SS)
- TELEPHONE (T)
- WATER (W)
- UTILITY PEDESTAL
- POWER POLE
- TELEPHONE POLE

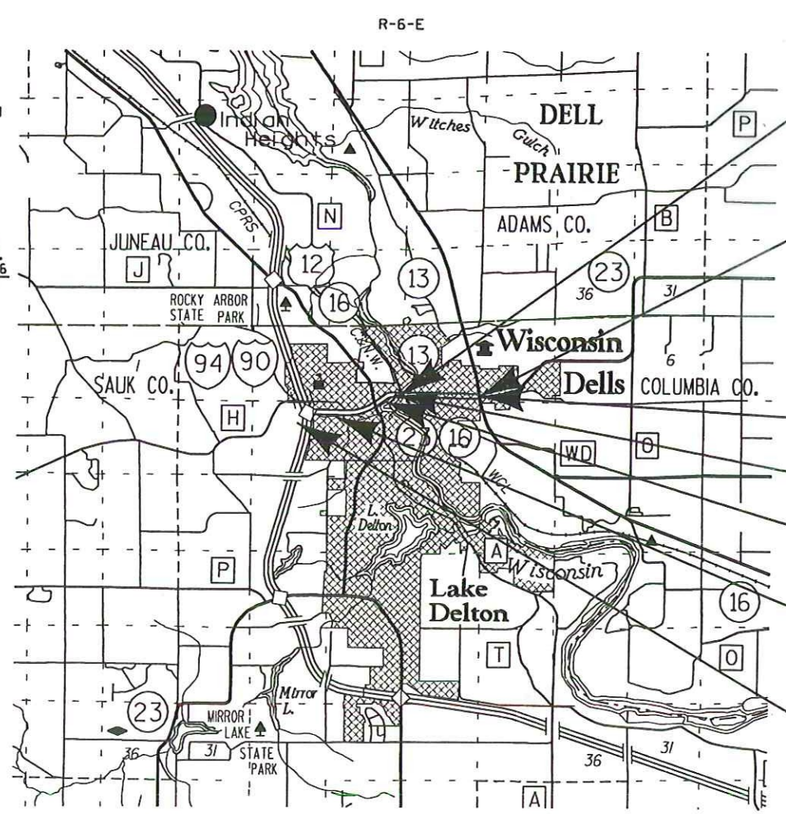

LAYOUT
SCALE 0 1 MI.

TOTAL NET LENGTH OF CENTERLINE = 1.310 MI. 6130-02-71
0.887 MI. 6130-03-71
0.000 MI. 6130-03-72
2.197 MI. TOTAL

BEGIN PROJECT 6130-03-71
STA. 33+65
Y = 426,485.21
X = 453,553.82

AS BUILT CONSTRUCTION PLAN
WORK TYPE CONCRETE PAVING GRADING BASE
CONTRACTOR THE ZIGNEGO COMPANIES
PROJECT MANAGER ROBERT LEX
WORK START-COMPLETED 9-13-04 To 4-13-06

END PROJECT 6130-03-72
STA. 80+50

END PROJECT 6130-02-71
STA. 149+73.52

BEGIN PROJECT 6130-03-72
STA. 131+00
Y = 293,767.57
X = 638,775.03

EQUATION
STA. 88'C'+18.28, 44'LT =
STA. 88+42.73

BEGIN PROJECT 6130-02-71
STA. 80'C'+34
Y = 293,335.36
X = 633,841.36

COORDINATES FOR I.D. 6130-02-00 ARE REFERENCED TO THE WISCONSIN COUNTY COORDINATE SYSTEM (WCCS), SAUK COUNTY

COORDINATES FOR I.D. 6130-03-00 ARE REFERENCED TO THE WISCONSIN COUNTY COORDINATE SYSTEM (WCCS), COLUMBIA COUNTY

MARK D. LILLEGARD E-29317 MADISON WI PROFESSIONAL ENGINEER
DATE: 3/31/04 (Signature)

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION

PREPARED BY
- Surveyor
- Designer
- Project Manager
- District Examiner
- District Supervisor ANNA WISNER
- C.O. Examiner Jane Engebretsen

APPROVED FOR DISTRICT OFFICE
DATE: 3/31/04 Anna Wisner (Signature)

E

FILE NAME : g:\20015022.01\ms\010101_ti.dgn PLOT DATE : 03/23/2004 PLOT BY : $$...plotuser...$$ PLOT NAME : ORG DATE : Originator : Dist PLOT SCALE : $$.....plotscale.....$$ WISDOT/CADDS SHEET 10